

## Sealed-Housing Weatherproof Keypads

**SK-1323-SDQ** *Stand-Alone Keypad*

**SK-1323-SPQ** *Stand-Alone Keypad with Built-In Proximity Reader*

### Features:

- ▶ 1,010 Users (Output #1: 1,000 users, Output #2: 10 users).
- ▶ 2 Form C relay outputs.
- ▶ Each relay has programmable output time from 1~99 seconds or toggle.
- ▶ Output #2 can be programmed for use with a doorbell.
- ▶ 2 Egress inputs and 1 door sensor input.
- ▶ Backlit keys for easy nighttime use.
- ▶ 2 Multi-colored status LEDs
- ▶ All features are programmed directly from the keypad—no need for an external programmer.
- ▶ EEPROM protects programmed information in case of power loss.
- ▶ Optical tamper sensor for added security.
- ▶ Circuitry is potted with epoxy for outdoor use.
- ▶ Weatherproof (IP65).
- ▶ Rugged aluminum construction.

### SK-1323-SPQ only:

- ▶ Built-in 125kHz proximity reader.
- ▶ 3 Programmable access modes for Output #1: Card Only, Card or Code, and Card with Code.
- ▶ Output #2 may have either a card or a code programmed for each user.



SK-1323-SPQ shown

### Specifications:

|                            | SK-1323-SDQ                   | SK-1323-SPQ                             |
|----------------------------|-------------------------------|-----------------------------------------|
| Operating voltage          | 12~15 VDC                     |                                         |
| Current draw               | Standby                       | 40mA@12VDC                              |
|                            | Active                        | 70mA@12VDC                              |
| Relay outputs              | Output #1                     | 1A@30VDC, Form C, NO/NC/COM             |
|                            | Output #2                     | 1A@30VDC, Form C, NO/NC/COM             |
| Egress inputs              | Input #1                      | N.O. ground                             |
|                            | Input #2                      | N.O. ground                             |
| Door sensor input          | N.C. ground                   |                                         |
| Tamper sensor              | Optical                       |                                         |
| Operating temperature      | -4 ~122 F (-20 ~50 C)         |                                         |
| Keypad LED life            | 60,000 hours (over 6.8 years) |                                         |
| Weight                     | 1-lb 2-oz (510g)              |                                         |
| Proximity reader frequency | N/A                           | 125kHz                                  |
| Proximity reader distance  | N/A                           | 1 <sup>15</sup> / <sub>16</sub> " (5cm) |

### Proximity Cards or Tags:

Sold separately in packs of 10

#### Proximity Cards



PR-K1S1-A

#### Proximity Tags



PR-K1K1-AQ

**SECO-LARM®**  
16842 Millikan Avenue  
Irvine, CA 92606

Tel: 1-949-261-2999  
1-800-662-0800  
Fax: 1-949-261-7326

Web: [www.seco-larm.com](http://www.seco-larm.com)  
Email: [info@seco-larm.com](mailto:info@seco-larm.com)




Copyright © 2010  
SECO-LARM U.S.A., Inc.  
All rights reserved


# Sealed-Housing Weatherproof Keypads



## Sample Wiring:

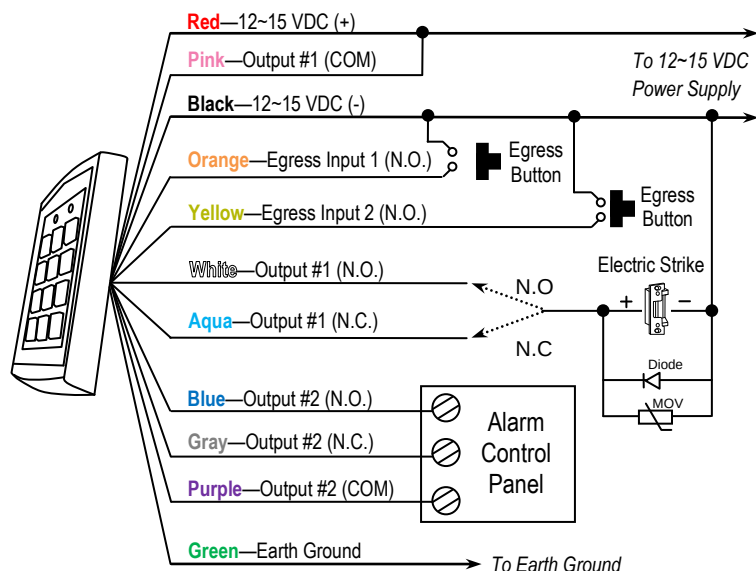


## Dimensions:

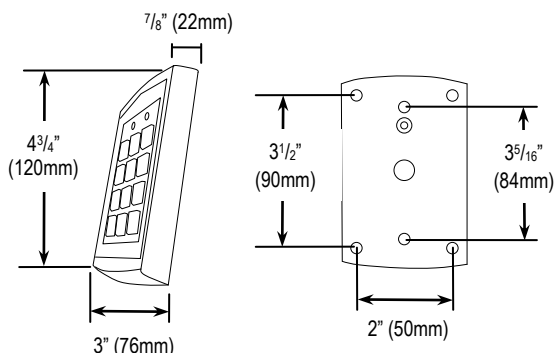

## Status LEDs:

| Left LED              | Right LED       | Keypad Status                                         |
|-----------------------|-----------------|-------------------------------------------------------|
| OFF                   | Green           | Power ON                                              |
| OFF                   | Orange          | Programming Mode                                      |
| Green                 | Orange flashing | Waiting to program code/card* (card+code access mode) |
| Red                   | Orange flashing | Code/card* already present                            |
| Green                 | Green           | Relay 1 activated                                     |
| Red                   | Green           | Relay 2 activated                                     |
| Orange                | Green           | Relay 1 and 2 both activated                          |
| Orange                | Orange          | Restoring factory defaults                            |
| Green/Yellow flashing | Green           | Waiting for code/card entry* (card+code access mode)  |
| OFF                   | OFF             | Power OFF / Clearing user codes                       |



\*Card operation with SK-1323-SPQ only.

## Also Available from SECO-LARM:

### SK-1123-SQ

Outdoor Stand-Alone Keypad

- ▶ Weatherproof
- ▶ 110 Users
- ▶ 2 Relays
- ▶ Surface mount



### SK-1123-FQ

Outdoor Stand-Alone Keypad

- ▶ Weatherproof
- ▶ 110 Users
- ▶ 1 Relay
- ▶ Flush mount



### SK-2323-SDQ

Mullion-Style Keypad

- ▶ Weatherproof
- ▶ 1,010 Users
- ▶ 2 Relays
- ▶ Prox-reader available



### SK-1011-SQ

Indoor Stand-Alone Keypad

- ▶ Indoor use
- ▶ 100 Users
- ▶ 1 Relays



### SK-1311-SQ

Illuminated Indoor Keypad

- ▶ Backlit Keys
- ▶ 120 Users
- ▶ 2 Relays



### Proximity Cards or Tags

(Sold in packs of 10)



PR-K1S1-A

PR-K1K1-AQ

## SECO-LARM®

16842 Millikan Avenue  
Irvine, CA 92606

Tel: 1-949-261-2999  
1-800-662-0800  
Fax: 1-949-261-7326

Web: [www.seco-larm.com](http://www.seco-larm.com)  
Email: [info@seco-larm.com](mailto:info@seco-larm.com)



Copyright © 2010  
SECO-LARM U.S.A., Inc.  
All rights reserved