

DOOR MUST
FACE AWAY
FROM OPENING

TYM-200-SW OPERATOR (TYP.)

A = CLEAR OPENING WIDTH

Ø OF FENCE

HINGE POST (SIZE ACCORDING TO GATE LENGTH)

GATE FRAME (TYP.)

PLAN VIEW

Scale: None

3/16" SS CABLE (TYP.)

BARB ARM (TYP.)

1" x 2" ALUM. TUBE (TYP.)

2" x 2" ALUM. TUBE (TYP.)

HINGE ASSEMBLY

TOP PRIMARY MEMBER

FABRIC (AS REQUIRED)

STANDARD PRIMARY (ENDS ONLY)

2" x 5" TUBE

3"

B = POST HEIGHT

C = NOMINAL GATE HEIGHT

2"

D = GATE FRAME WIDTH

3"

- NOTES:
1. FOR COMPLETE INFORMATION ON THE TYM-200-SW OPERATOR VISIT THE "GATE OPERATORS" SECTION OF THE WEB SITE.
 2. ALL FITTINGS STANDARDLY PROVIDED FOR 4" O.D. POSTS. OTHER SIZES AVAILABLE UPON REQUEST.
 3. GATE ELEVATION IS VIEWED FROM THE OUTSIDE OF THE SECURE AREA LOOKING IN.
 4. BARB ARMS ARE OPTIONAL.

ELEVATION

Scale: None

ELEVATION

Scale: None

CONCRETE FOOTING (SIZE AND DEPTH TO BE DETERMINED BY OTHERS)

3 1/2" DIA. GALVANIZED POST (2)

SIDE PLATE (TYP.)

U-BOLT (TYP.)

3/8" x 1 1/2" HHCS (TYP.)

HINGE MOUNTING STRAP

3/8" LOCK NUT (TYP.)

HINGE POST

HINGE ASSEMBLY (2000 LB. CAPACITY WITH SEALED BEARINGS)

3/8" x 2 3/4" HHCS (TYP.)

GATE FRAME

HINGE ASSEMBLY


Scale: None



678 WILBUR AVENUE
GREENWICH, N.Y. 12834
PH: (800) 328-4283 - FX: (518) 692-9404
www.Tymetal.com

PLAN VIEW

Scale: None

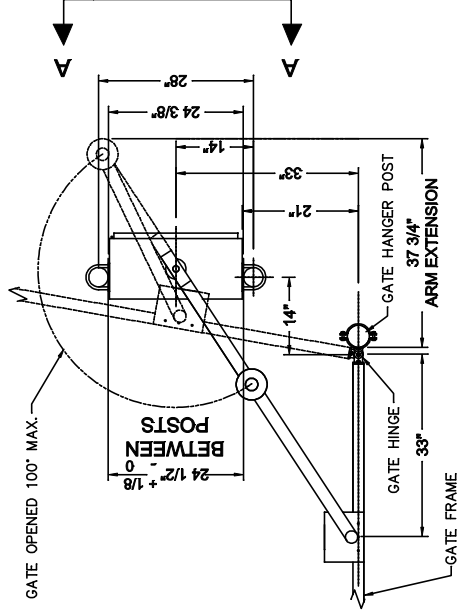

VIEW A-A

Scale: None

SIDE PLATE (4)

1"

30"

9"

3"

3"

2"

- NOTES:
1. CONCRETE FOOTING SIZE AND DEPTH TO BE DETERMINED BY OTHERS.
 2. SEE OPERATOR INSTALLATION GUIDE FOR COMPLETE INSTALLATION INSTRUCTIONS.