

TYM-HYD-VF2/3 Fortress Box Frame Cantilever Slide Gate & Operator System

Spans single clear opening widths up to 60 feet and double/bi-parting openings up to 120 feet.

FEATURES:



Design:

Dual enclosed tracks with trussed framework and ball bearing truck system. Requires no overhead track, ground track or ground wheels.



Construction:

Welded aluminum using custom heavy wall extrusions. Hardware to adapt and install gate operator included.



Durable:

Fabricated by AWS Certified Welders.



TYM-HYD Gate Operators:

Powered by an integrated soft start/stop Variable Frequency Drive hydraulic operator. Speed is 2.2 or 3.0 feet per second with Emergency Fast Operation (EFO) feature. Tamper proof motor box is 10-gauge steel with detention grade lock.



Diagonal Cables:

Adjustable 1/4" galvanized steel cables provide zero to minimal deflection.




Tested:

Gate and operator system cycle tested; performs reliably over time.



Fully integrated operator included.

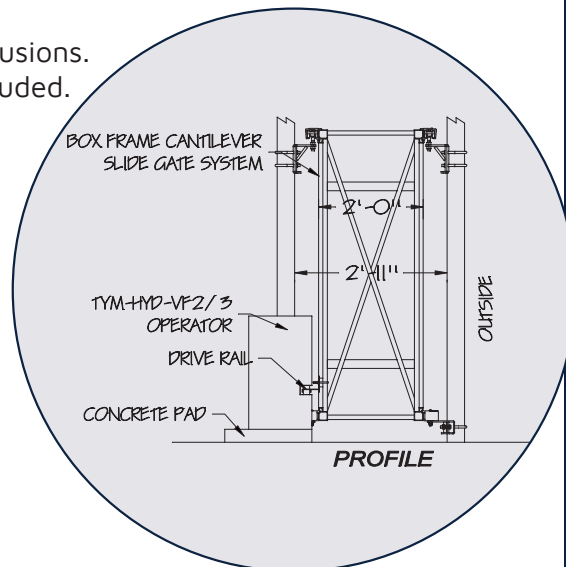

Visit Our Website for a Full Specification and Drawings

TYM-HYD-VF2/3 Fortress Box Frame Cantilever Slide Gate and Operator System

Maximum Clear Opening Width	Single gate: 60 feet; double/bi-parting gates: 120 feet
Maximum Height	Standard Height: up to 8 feet (Note: Contact manufacturer regarding sizes greater than those stated)
Gate Construction	▶ Trussed box frame with dual track design, supported by four posts. ▶ Gate track systems will be keyed to interlock into the primary upper horizontal gate frame member and then welded to form a composite structure. ▶ The gate frame counterbalance length will be a minimum of 50% of the clear opening width. ▶ Intermediate vertical members of the gate frame to be spaced less than 50% of the gate frame height. ▶ The gate frame includes two adjustable diagonal ¼" galvanized steel cables per bay for stability and to allow complete gate frame adjustment.
Gate Operator	▶ TYM-HYD-VF2/3 hydraulic Variable Frequency Drive operator. ▶ Features include SmartTouch 725 controller with 32 character OLED display and RS485 and Ethernet for network connections. ▶ Capacity: 5,000 pounds. ▶ Speed: Selectable speeds of 2.2 or 3.0 feet per second with Emergency Fast Operation (EFO) and soft start/stop features. ▶ Power Options: [208/230 VAC, Single Phase, 60 Hz] or [208/230/460 VAC Three Phase, 60 Hz]; 50 Hz options are available.
Safety	Meets ASTM F 1184 Type II, Class 2; ASTM F 2200 and UL 325 Classes III and IV compliant.
Infill Options	▶ Aluminized or galvanized steel 2" x 2" x 9-gauge fabric. ▶ 1" x 1" aluminum pickets – each welded in place. ▶ 1" x 1" extended smashed point pickets – punched through top member and welded in place. ▶ High security Anti-Climb welded wire mesh ½" x 3" x 8 gauge galvanized steel. Other welded wire mesh designs available. ▶ Custom horizontal or vertical louvers to block visibility. ▶ Perforated or expanded metal sheets. ▶ Ballistic rated panels. ▶ Custom infills – contact a TYMETAL Specification Team member.
Finish	▶ Mill finish aluminum or color/powder coating with polyester powder to color of choice (reference RAL color chart). ▶ If a galvanized steel component (such as infill and posts) color/powder coating is available.
Warranty	The TYM-HYD-VF2/3 Fortress Box Frame Cantilever Slide Gate and Operator System is warranted against manufacturing defects by the manufacturer for a period of three years from date of sale. The truck assemblies are warranted against manufacturing defects for a period of five years from date of sale.

Speak with Specifications & Design Support Directly

Contact TYMETAL at 1-800-328-GATE (4283) or gates@tymetal.com

Standard and Custom Solutions, Manufactured in New York and Texas.

678 Wilbur Avenue, Greenwich, NY 12834

4501 Dixie Farm Road, Pearland, TX 77581

VG_Fortress_Box_Frame_TYM_HYD_VF2_3_Operator_CS_08/06/2025

