



GENERAL INFORMATION

REVISION:

COMMENTS

STOCK

STOCK:	YES
SHAPE:	Solid
SIZE:	8.2935, 4.4555, 1.25
RADIUS:	
LENGTH:	
AXIS:	NA
FILE:	
IDN:	6949

C:\USERS\WESTONSHAKESPEAR\DOCUMENTS\MY

CYCLE TIME: 0 HOURS, 29 MINUTES, 54 SECONDS

OPERATION LIST


OPERATION INFO 1 - Surface Rough Pocket

CYCLE TIME: 0 HOURS, 11 MINUTES, 53 SECONDS
COMMENT:

PROGRAM NUMBER: 0
SPINDLE SPEED: 4966 RPM
FEEDRATE: 50.0 inch/min
CLEARANCE PLANE: 0.5
RETRACT PLANE: 0.25
FEED PLANE: 0.05
DEPTH: NA
STOCK TO LEAVE: 0.0 0.015
COMP TO TIP: YES
WORK OFFSET: 0

TOOL INFO 1/2 FLAT ENDMILL

TYPE: Flat endmill
NUMBER: 1
DIAMETER: 0.5
CORNER RADIUS: 0.0
LENGTH OFFSET: 1
DIAMETER OFFSET: 1
MATERIAL: HSS
NUMBER OF FLUTES: 4
FPT: 0.0025 SFM: 650.0
MFG CODE:
ASSEMBLY:
HOLDER: Default Holder
TIME: 00:11:53

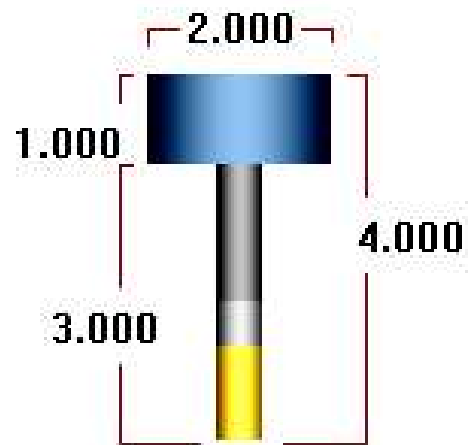


OPERATION INFO**2 - Surface Finish Contour**

CYCLE TIME: 0 HOURS, 17 MINUTES, 56 SECONDS
COMMENT:

PROGRAM NUMBER: 0
SPINDLE SPEED: 4966 RPM
FEEDRATE: 65.0 inch/min
CLEARANCE PLANE: 0.5
RETRACT PLANE: 0.25
FEED PLANE: 0.05
DEPTH: NA
STOCK TO LEAVE: 0.0
COMP TO TIP: YES
WORK OFFSET: 0

TOOL INFO**3/8 BULL ENDMILL 0.0625 RAD**

TYPE: Bull endmill
NUMBER: 2
DIAMETER: 0.375
CORNER RADIUS: 0.0625
LENGTH OFFSET: 2
DIAMETER OFFSET: 2
MATERIAL: HSS
NUMBER OF FLUTES: 4
FPT: 0.0015 SFM: 139.9869
MFG CODE:
ASSEMBLY:
HOLDER: Default Holder
TIME: 00:17:56

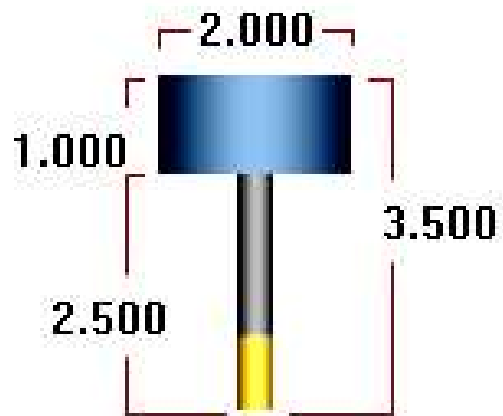

OPERATION INFO

3 - Contour (2D)


CYCLE TIME: 0 HOURS, 0 MINUTES, 4 SECONDS
COMMENT:

PROGRAM NUMBER: 0
SPINDLE SPEED: 10000 RPM
FEEDRATE: 35.0 inch/min
CLEARANCE PLANE: 2.0
RETRACT PLANE: 0.25
FEED PLANE: 0.2
DEPTH: -0.02
STOCK TO LEAVE: 0.0
COMP TO TIP: YES
WORK OFFSET: 0

TOOL INFO

1/8 SPOTDRILL

TYPE: Spot drill
NUMBER: 3
DIAMETER: 0.125
CORNER RADIUS: 0.0
LENGTH OFFSET: 3
DIAMETER OFFSET: 3
MATERIAL: HSS
NUMBER OF FLUTES: 2
FPT: 0.0024 SFM: 162.5
MFG CODE:
ASSEMBLY:
HOLDER: Default Holder
TIME: 00:00:04

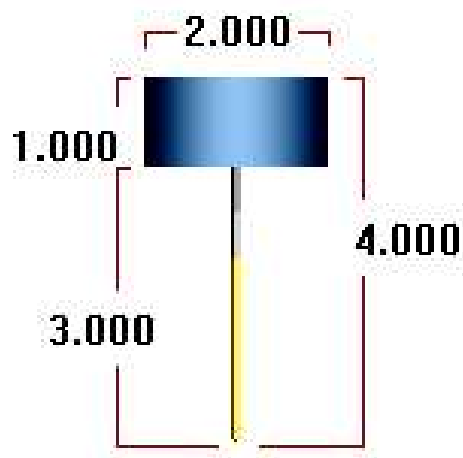


TOOL LIST

Sorted: NO

TOOL INFO**1/2 FLAT ENDMILL**


TYPE: Flat endmill
NUMBER: 1
DIAMETER: 0.5
CORNER RADIUS: 0.0
LENGTH OFFSET: 1
DIAMETER OFFSET: 1
MATERIAL: HSS
NUMBER OF FLUTES: 4
FPT: 0.0025 SFM: 650.0
MFG CODE:
ASSEMBLY:
HOLDER: Default Holder
TIME: 00:11:53

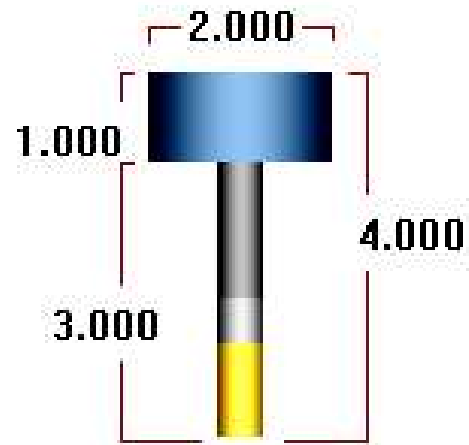

USED BY OPERATION: # 1 1 - Surface Rough Pocket

TOOL INFO**3/8 BULL ENDMILL 0.0625 RAD**


TYPE: Bull endmill
NUMBER: 2
DIAMETER: 0.375
CORNER RADIUS: 0.0625
LENGTH OFFSET: 2
DIAMETER OFFSET: 2
MATERIAL: HSS
NUMBER OF FLUTES: 4
FPT: 0.0015 SFM: 139.9869
MFG CODE:
ASSEMBLY:
HOLDER: Default Holder
TIME: 00:17:56

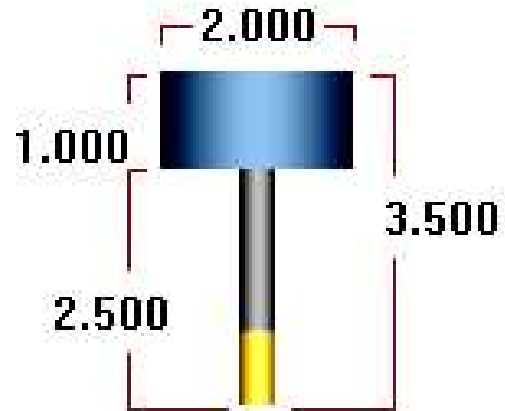

USED BY OPERATION: # 2 2 - Surface Finish Contour

TOOL INFO**1/8 SPOTDRILL**

TYPE:	Spot drill
NUMBER:	3
DIAMETER:	0.125
CORNER RADIUS:	0.0
LENGTH OFFSET:	3
DIAMETER OFFSET:	3
MATERIAL:	HSS
NUMBER OF FLUTES:	2
FPT: 0.0024	SFM: 162.5
MFG CODE:	
ASSEMBLY:	
HOLDER:	Default Holder
TIME:	00:00:04

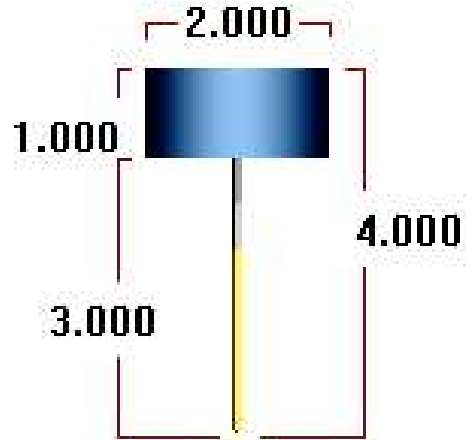

USED BY OPERATION:	# 3	3 - Contour (2D)
--------------------	-----	------------------

WORK OFFSETS**OFFSET INFO**

NUMBER: 0	PLANE: Top	ORIGIN: 0.0, 0.0, 0.0
-----------	------------	-----------------------

USED BY OPERATION:	# 1	1 - Surface Rough Pocket
USED BY OPERATION:	# 2	2 - Surface Finish Contour
USED BY OPERATION:	# 3	3 - Contour (2D)