Presence boost: If you want a brighter sound in the mid-range frequencies, push the right switch up. This can help improve vocal clarity.

ADDITIONAL TIPS

SM7B

- Shure Knowledge Base FAQs
- Training from the Shure Audio Institute
- Microphone Techniques for Recording
- Houses of Worship Systems Guide
- Shure Performance & Production YouTube channel
- Shure Creators YouTube channel

Download Shure Software

- Software and firmware archive

SPECIFICATIONS

Type

Dynamic (moving coil)

SM7B Frequency Response

50 to 20,000 Hz

Polar Pattern

Cardioid

Output Impedance

150 Ω

Sensitivity

(@ 1 kHz, open circuit voltage)

-59 dBV/Pa[1] (1.12 mV)

Hum Pickup


(typical, at 60 Hz, equivalent SPL/mOe)


11 dB

SM7B

0.764 kg (1.69 lbs)


[1] 1 Pa=94 dB SPL

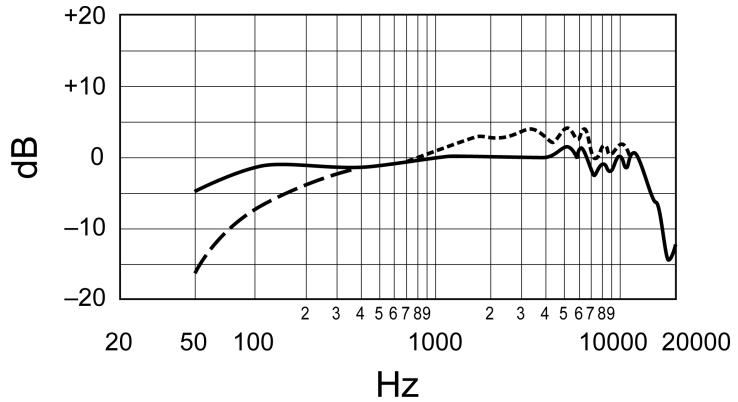


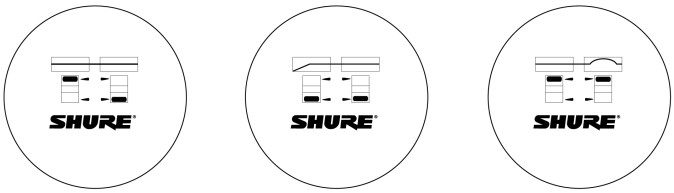

Flat Response Bass Rolloff Presence Boost


Typical SM7B Frequency Response

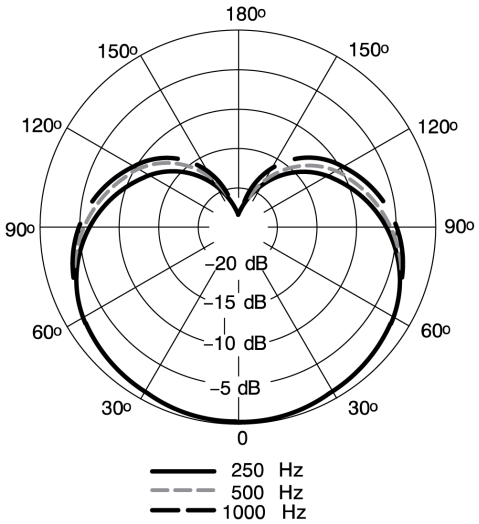

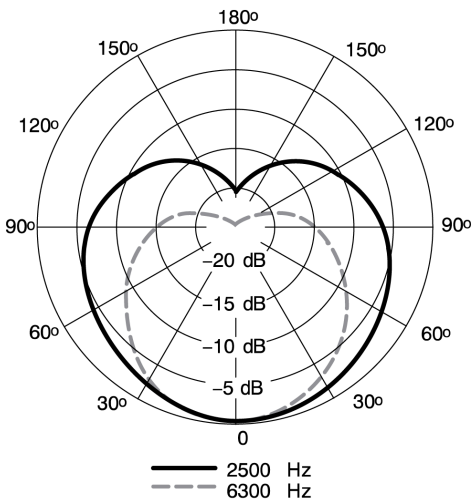


Typical SM7B Polar Pattern

SM7B

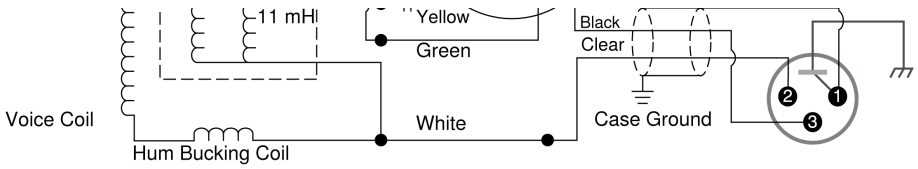

Internal Connections

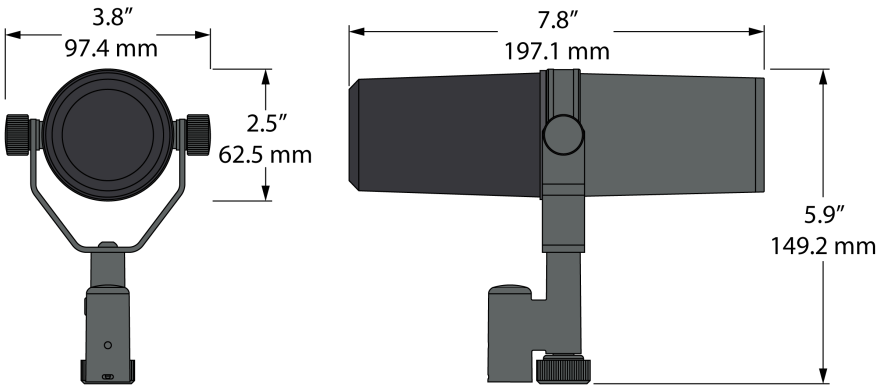

Overall Dimensions

ACCESSORIES

SHURE Search

Switch Cover Plate for SM7, SM7A and SM7B	RPM602
Large Black Foam Windscreen for SM7, also see RK345	A7WS
5/8" to 3/8" Thread Adapter	31A1856

OPTIONAL ACCESSORIES

25 foot (7.5m) Triple-Flex® Microphone XLR Cable with chrome connectors	C25F

REPLACEMENT PARTS