
Back to products

Home / Audio interfaces / UCA202


UCA202

USB audio interface with stereo RCA inputs and outputs, an optical S/PDIF output and a headphone output

Where to buy Share

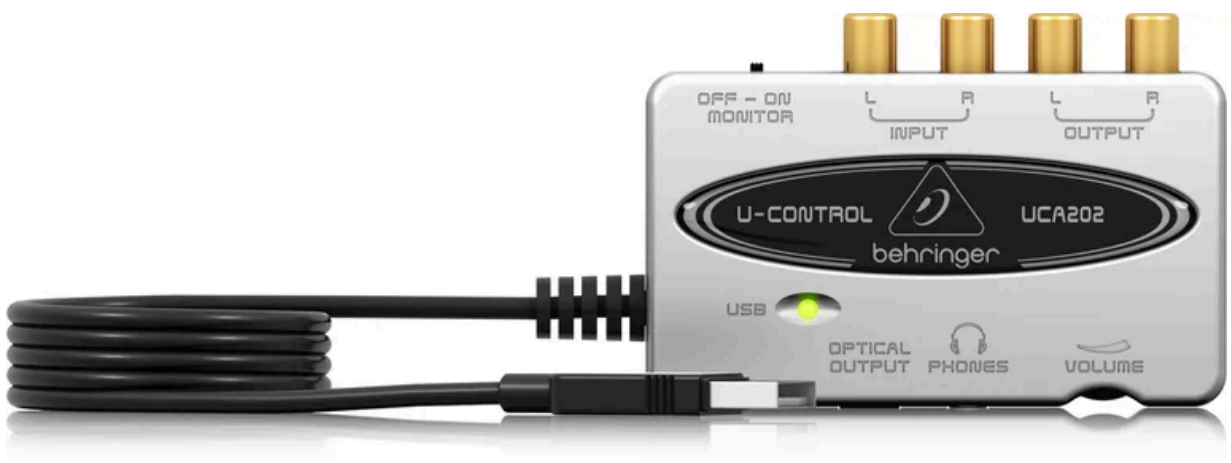

1 / 3



Overview Features Specifications Downloads Learning Support

Inputs

Line in connectors	RCA, unbalanced
Line in input impedance	approx. 27 kΩ
Line in max. input level	2 dBV

Outputs

Line out connectors	RCA, unbalanced
Line out output impedance	approx. 400 Ω
Line out max. output level	2 dBV
Digital output socket	Toslink, optical cable
Digital output format	S/PDIF
Phones out socket	⅛" TRS stereo jack
Phones out output impedance	approx. 50 Ω
Phones out max. output level	-2 dBu, 2 x 3.7 mW @ 100 Ω

Processing

Converter	16-bit converter
Sample rate	32.0 kHz, 44.1 kHz, 48.0 kHz
Frequency response @ 44.1 kHz sample rate	10 Hz to 20 kHz ±1 dB @ 44.1 kHz sample rate
Frequency response @ 48.0 kHz sample rate	10 Hz to 22 kHz ±1 dB @ 48.0 kHz sample rate
THD	0.05% typ. @ -10 dBV, 1kHz
Crosstalk	-77 dB @ 0 dBV, 1 kHz
Signal-to-noise ratio A/D	A/D 89 dB typ. @ 1 kHz, A-weighted
Signal-to-noise ratio D/A	D/A 96 dB typ. @ 1 kHz, A-weighted

Connectivity and control

USB 1.1 connectors	type A

Power

Power supply: USB connection	5V , 100 mA max.

behringer

Part of Music Tribe.

Support

Product registration

Pre-sales and technical support

Service centres

Store locator

Brands

Aston Microphones

Behringer

Bugera

Cool Audio

Klark Teknik

Lab Gruppen

Midas

Tannoy

TC Electronic

TC Helicon

Turbosound

About

Our story

Join us

Data and responsibility

Responsible technology

Fair use and rights

© 2026 Behringer. All rights reserved.