




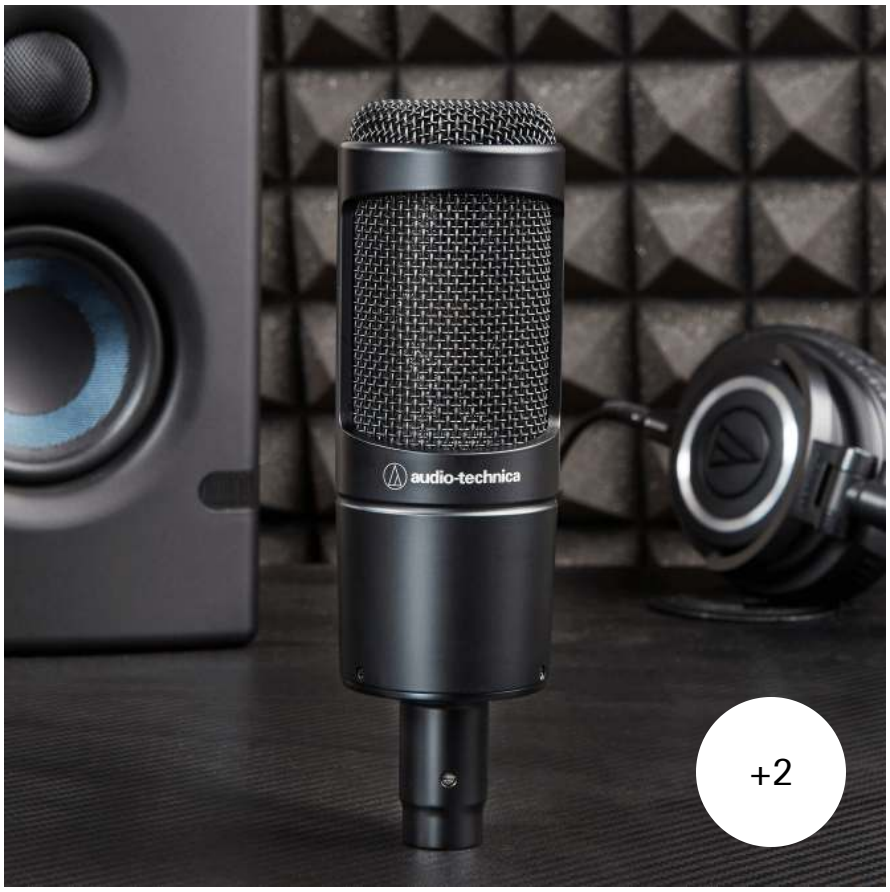

Features

Specifications

Microphones

Element	Fixed-charge back plate, permanently polarized condenser
Polar Pattern	Cardioid

Accessing our website tells us you agree to our use of cookies. However you can change your cookie settings at any time. Find out more.

Low Frequency Roll Off	80 Hz, 12 dB/octave
Open Circuit Sensitivity	-33 dB (22.4 mV) re 1V at 1 Pa
Maximum Input Sound Level	148 dB SPL, 1 kHz at 1% T.H.D.; 158 dB SPL, with 10 dB pad (nominal)
Dynamic Range	136 dB, 1 kHz at Max SPL
Signal-to-Noise Ratio	82 dB, 1 kHz at 1 Pa

AT2035 $ 199.00 BUY

Requirements	
Weight	403g
Dimensions	170.0 mm (6.69") long, 52.0 mm (2.05") maximum body diameter
Output Connector	Integral 3-pin XLRM-type
Accessories Included	AT8458 shock mount for 5/8"-27 threaded stands; 5/8"-27 to 3/8"-16 threaded adapter; soft protective pouch

SEE LESS

Accessing our website tells us you agree to our use of cookies. However you can change your cookie settings at any time. Find out more.