A: Euler + explicit PD
fitted: armature, K_P, K_D, d

B: RK4 + explicit PD (torque held)
fitted: armature, K_P, K_D

C: implicitfast + native PD
fitted: armature, K_P, K_D, d

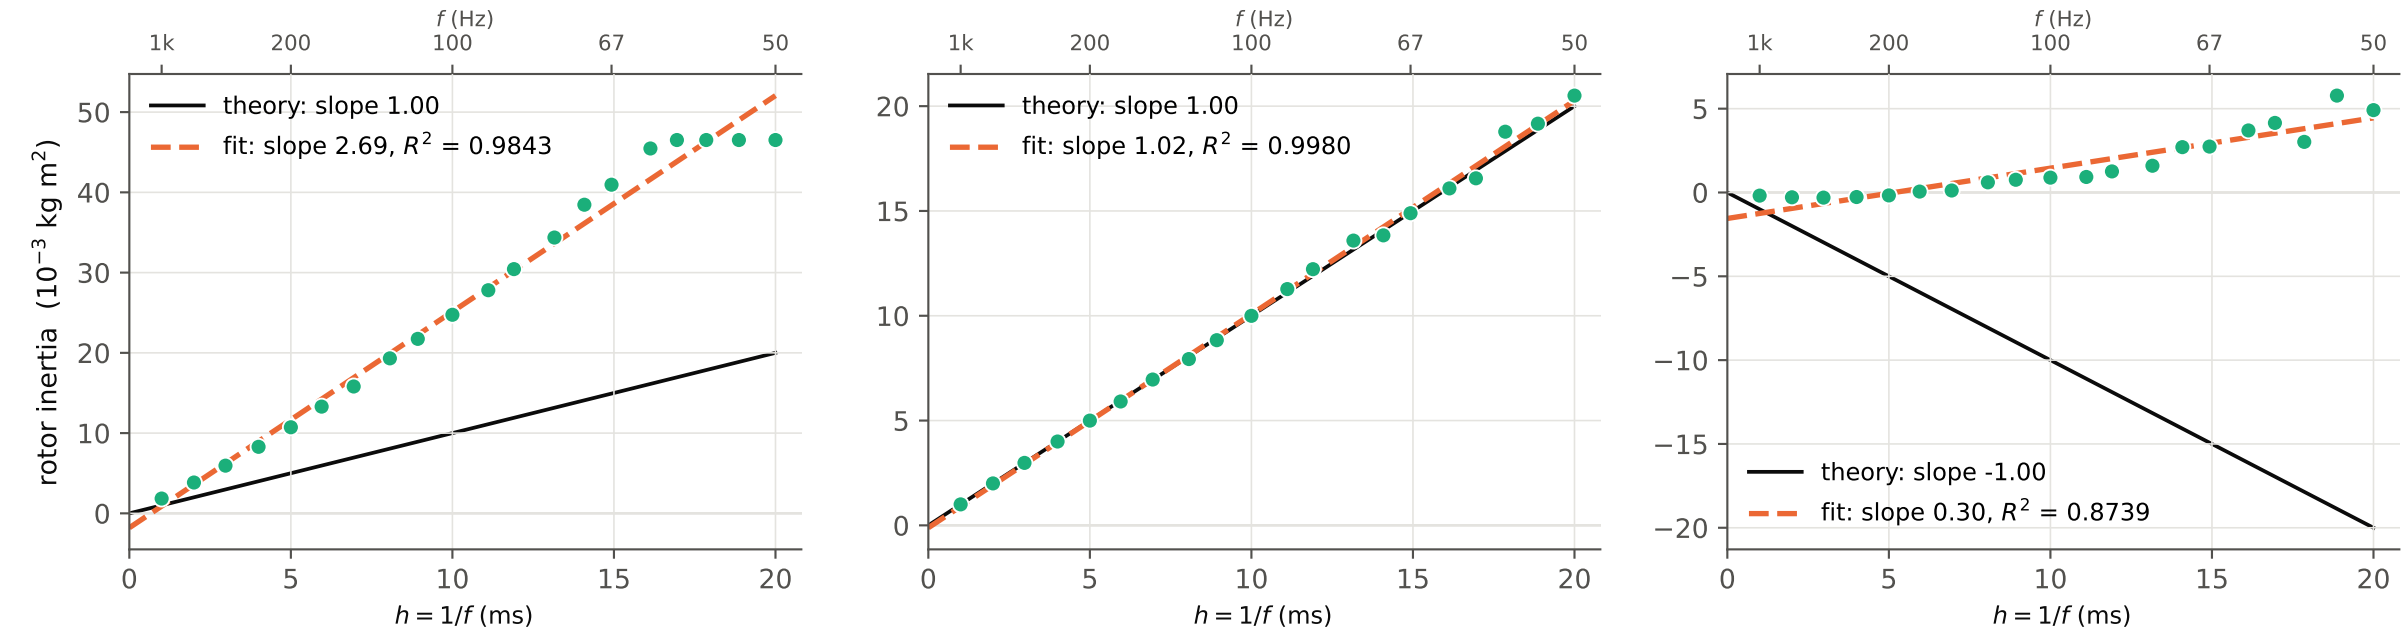

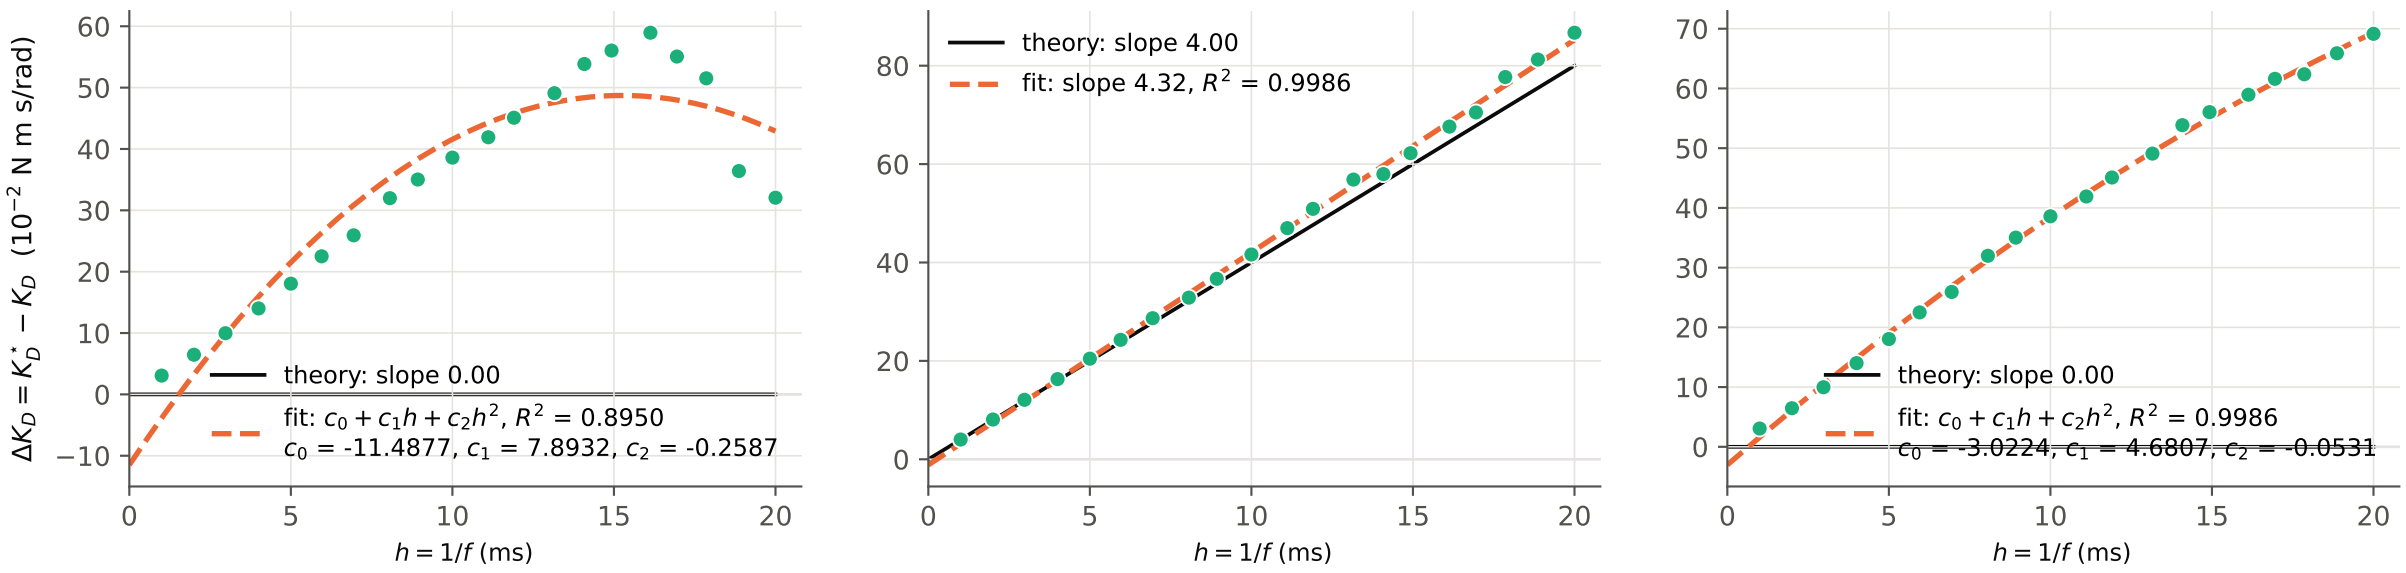

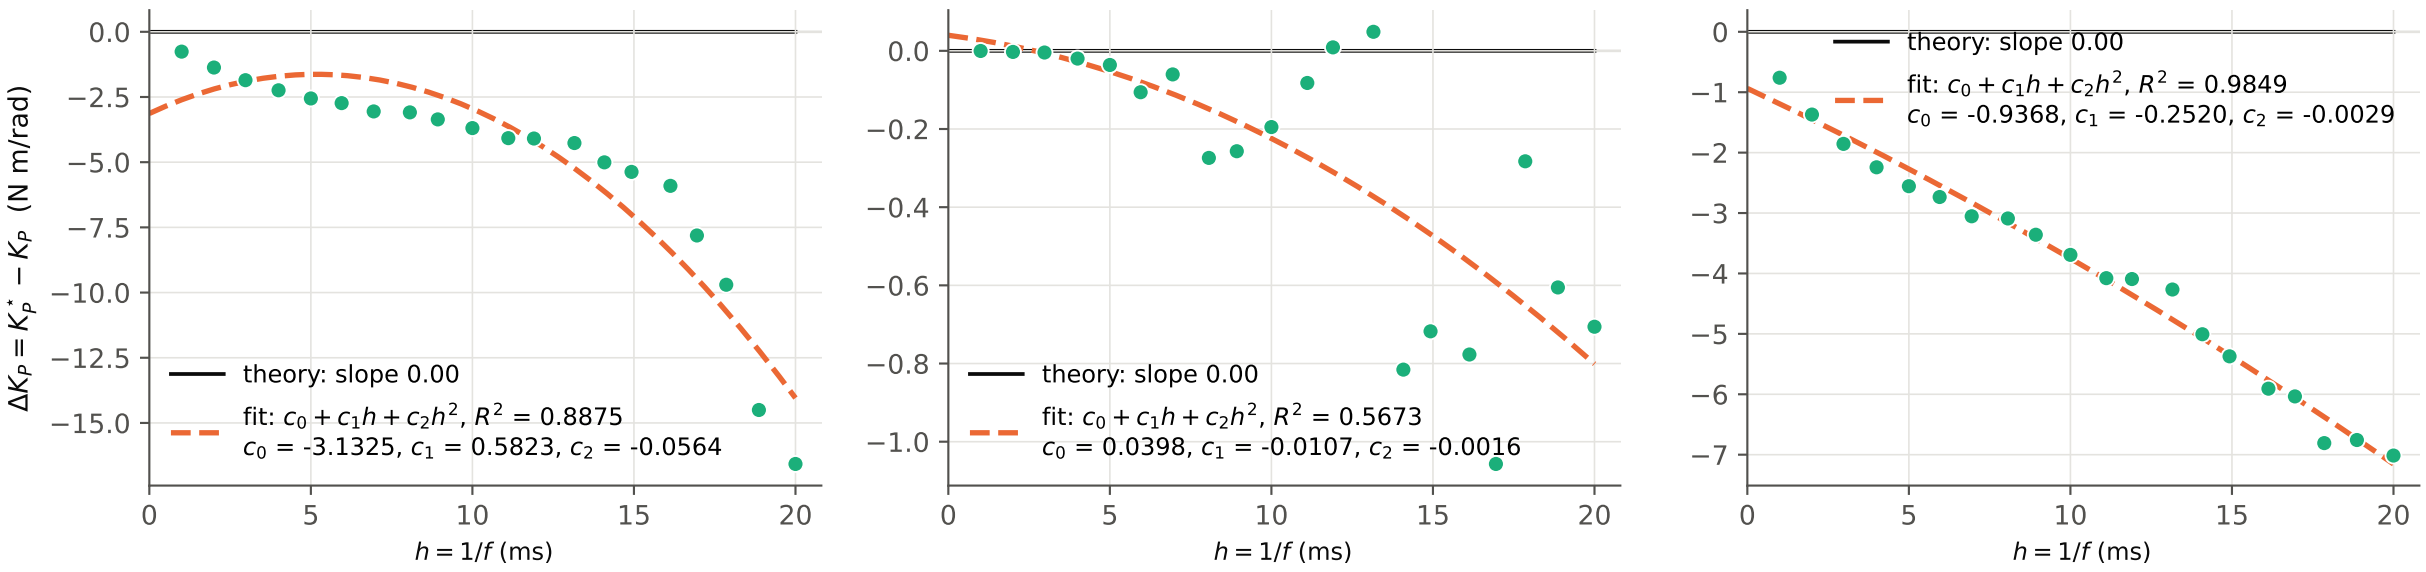

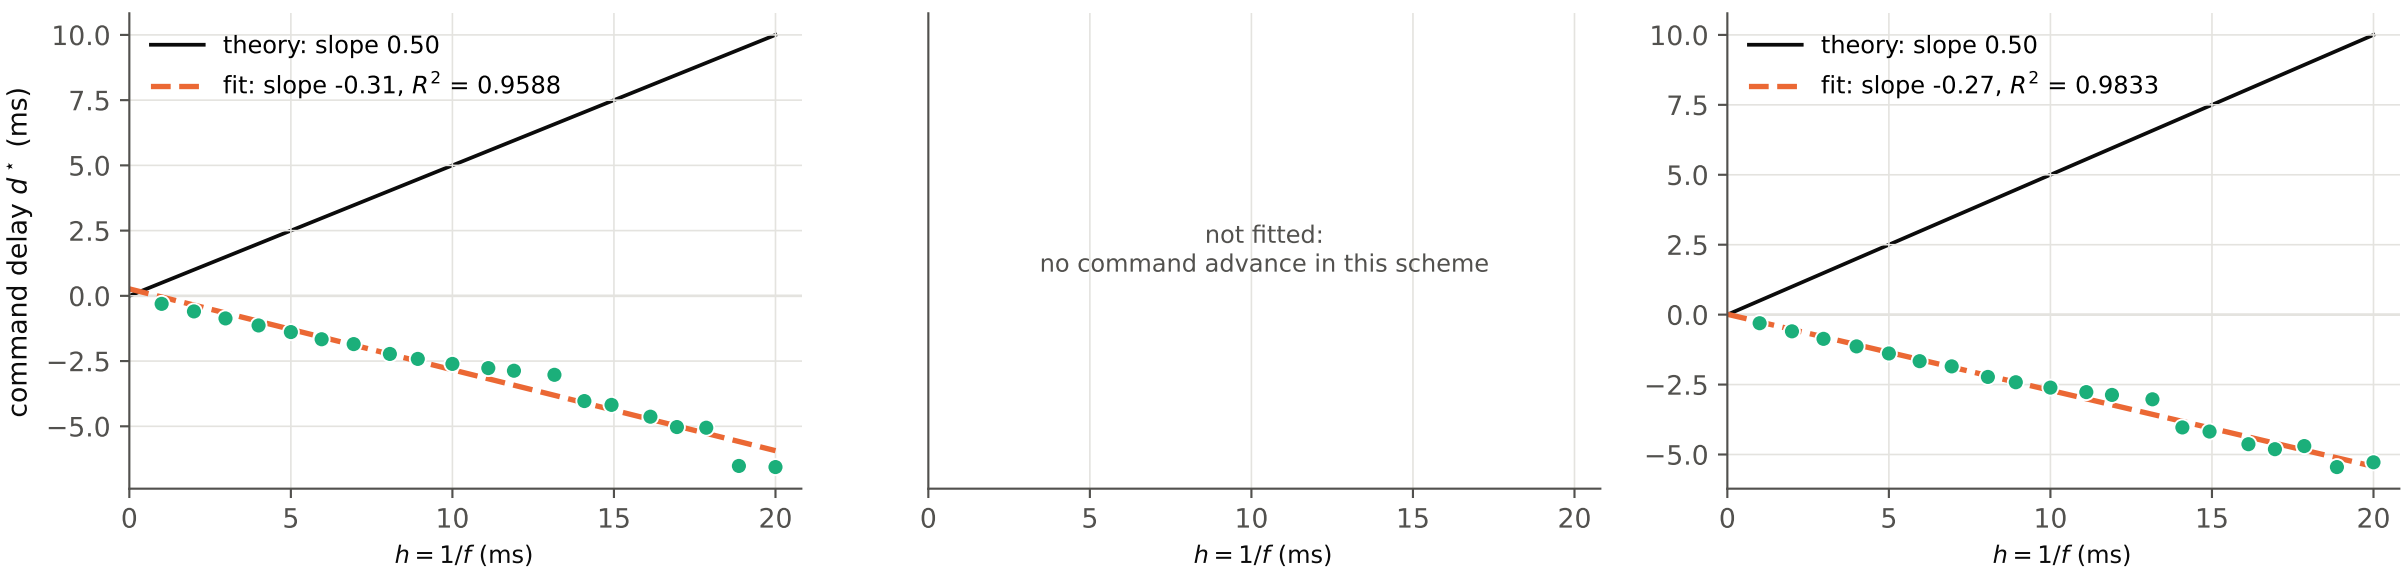

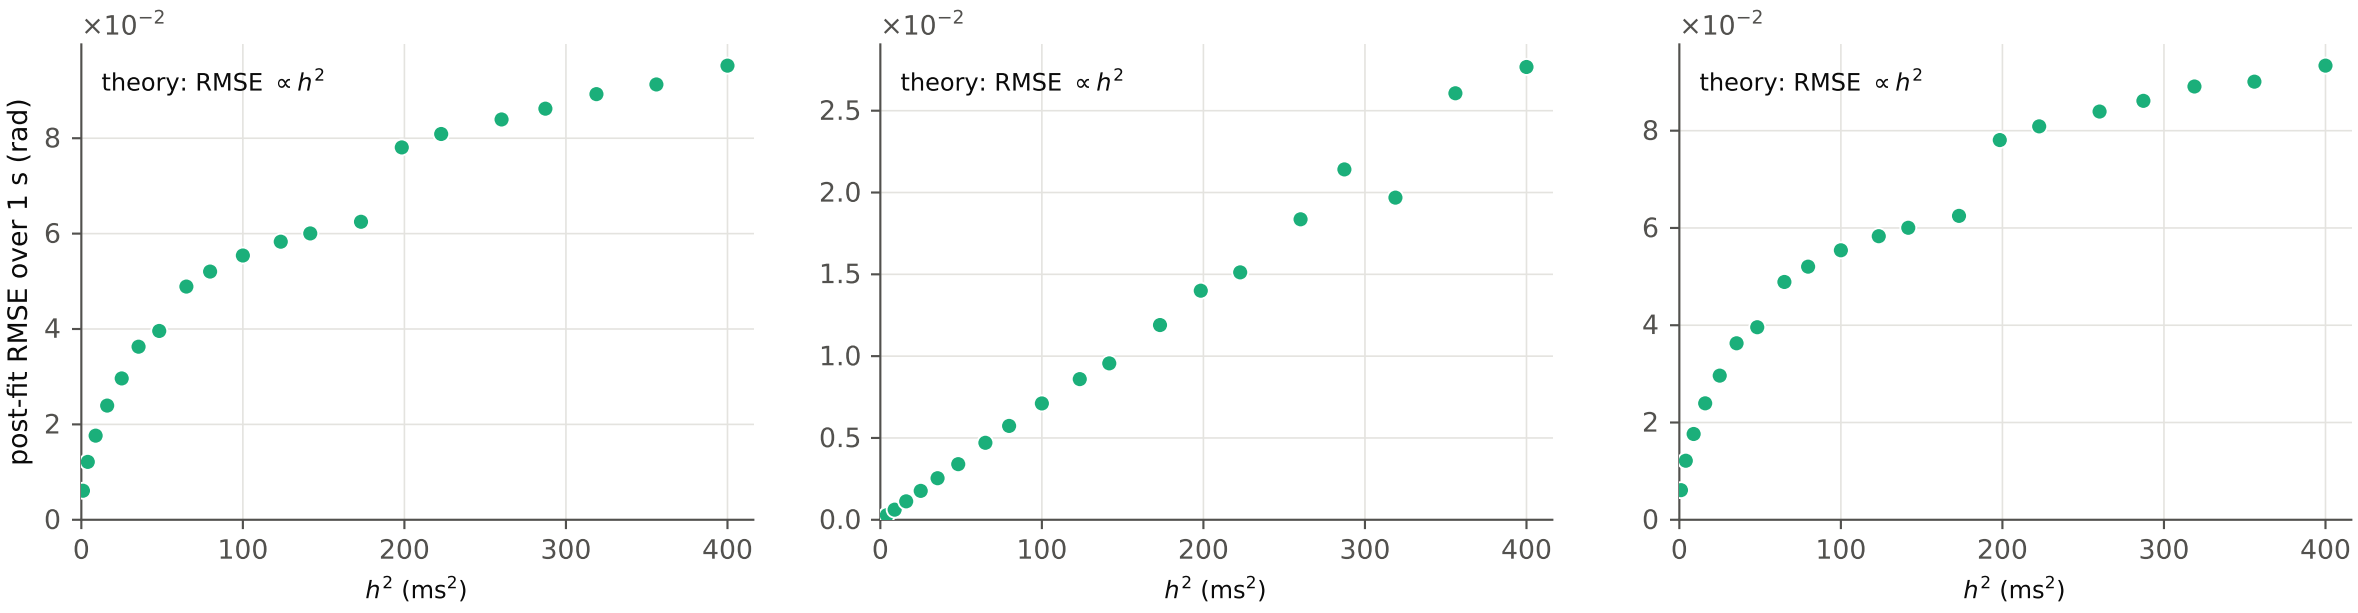

Target h = 1, 2, ..., 20 ms (f = 50-1000 Hz), realized with integer f_{ctrl} (Hz) and integer decimation.
Parameter rows: first-order theory (solid); fit (dashed), linear, or quadratic where the theory slope is 0. Last row: post-fit RMSE against h^2.