


#### **MV SPARES**

suitable for Nxair Panel VCB Type 3AE1 & 3AE5 12kV Rating 25 / 31.5 / 40kA 800A to 2500A

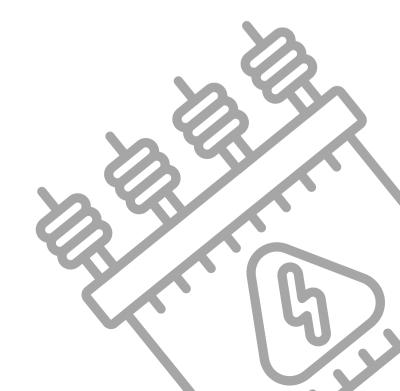

## Pole Spares 3AK6 12kV, 40/44kA, 1250 Amp for one VCB

| Sr. No. | Product Descriptions             | Rating                           | Images   |  |
|---------|----------------------------------|----------------------------------|--|--|
| 1       | Operating Solenoid<br>Coil 3AY15 | 24 V to 250V DC                  |  |  |
| 2       | Operating Solenoid<br>Coil 3AY15 | 100/125 V AC,<br>50/60Hz         |  |  |
| 3       | Drive Motor for 3AE 1<br>3AY17   | 24 / 30 / 32 V to<br>60V DC      |  |  |
| 4       | Drive Motor for 3AE 1<br>3AY17   | 100 / 110 / 125 V<br>DC / AC     |  |  |
| 5       | Drive Motor for 3AE 1<br>3AY17   | 220 V DC / 230 V<br>AC           | Constitution in the second sec |  |
| 6       | Agni Motor 110 VDC               | 110 – 127 V DC<br>100 – 125 V AC |  |  |
| 7       | Agni Motor 220 VDC               | 220 – 240 V DC<br>220 – 240 V AC |  |  |
| 8       |                                  |                                  |  |  |

### Electrical Components commonly used in 3AE5

| Sr. No. | Product Descriptions             | Rating  | Images |
|---------|----------------------------------|---|--------|
| 1       | Operating Solenoid<br>Coil 3AY14 | 24 V to<br>240V DC                                |        |
| 2       | Operating Solenoid<br>Coil 3AY14 | 100/125 V<br>AC and<br>230/240 V<br>AC<br>50/60Hz |        |
| 3       | Drive Motor for 3AE5<br>3AY14    | 24 V to 60V<br>DC                                 |        |
| 4       | Drive Notor for 3AE5<br>3AY14    | 100 / 110 /<br>125 V DC /<br>AC                   |        |
| 5       | Drive Motor for 3AE5<br>3AY14    | 220 V DC /<br>230 V AC                            |        |

# Electrical Components commonly used in 3AE1 & 3AE5 India make products

| Sr. No. | Product Descriptions                 | Rating                            | lmages   |
|---------|--------------------------------------|-----------------------------------|--|
| 1       | 2ND SHUNT REL 24 to<br>220 DC        | 3AX1101                           | THE MAXIMUM SIEMENS  The Advisor of the Vibrative of the Control o |
| 2       | 2ND SHUNT REL100-<br>110V AC 50Hz    | 3AX1101                           | Account to the second of the s |
| 3       | 2ND SHUNT REL 230V<br>AC 50Hz        | 3AX1101                           | ES PALLOPHOLOGICS AND  |
| 4       | CTOPERAT.<br>RELEASE0.5A             | 3AX1102                           |  |
| 5       | Under Voltage Coil 24V<br>to 220V DC | 3AX1103                           | SIEMENS TO LETTER TO LETTE |
| 6       | U/V REL 100V to 230V<br>AC, 50HZ     | 3AX1103                           |  |
| 7       | Limit (Snap) switch                  | Minimum<br>Order Qty<br>of 5 Nos. | SCHOOL COMMENTS  SCHOOL |

### Pole Spares 3AK6 12kV, 40/44kA, 2500/3150A Amp for one VCB

| Sr. No. | Product Descriptions              | Rating                             | Images   |
|---------|-----------------------------------|------------------------------------|--|
| 1       | Auxiliary switch<br>12NO+12NC     | nstallation At<br>Switch Off Block |  |
| 2       | Test / Service Position<br>switch | Installation at<br>Drive Box       |  |
| 3       | Male Pin for 64<br>Assembly       |                                    |  |
| 4       | Female Pin for 64<br>Assembly     |                                    | THE PROPERTY OF THE PROPERTY O |
| 5       | 64 Plug Pin Assembly              | 411                                |  |

# Pole Spares 3AK6 12kV, 40/44kA, 4000 Amp for one VCB

