

MQTT – Current Sensor – Module

Summary:

Module for the ESP32 S3 based modular controller board.
Module is designed to run 3 x 4–20mA Sensors, and read them at a resolution of 15 bit.

Table of Contents


- Page 2: Controller
- Page 3: Headers
- Page 4: SensorRecievers
- Page 5: AnalogDigitalConverter
- Page 6: SensorPowerConversion


Non BOM Items

—


Additional BOM Items


—

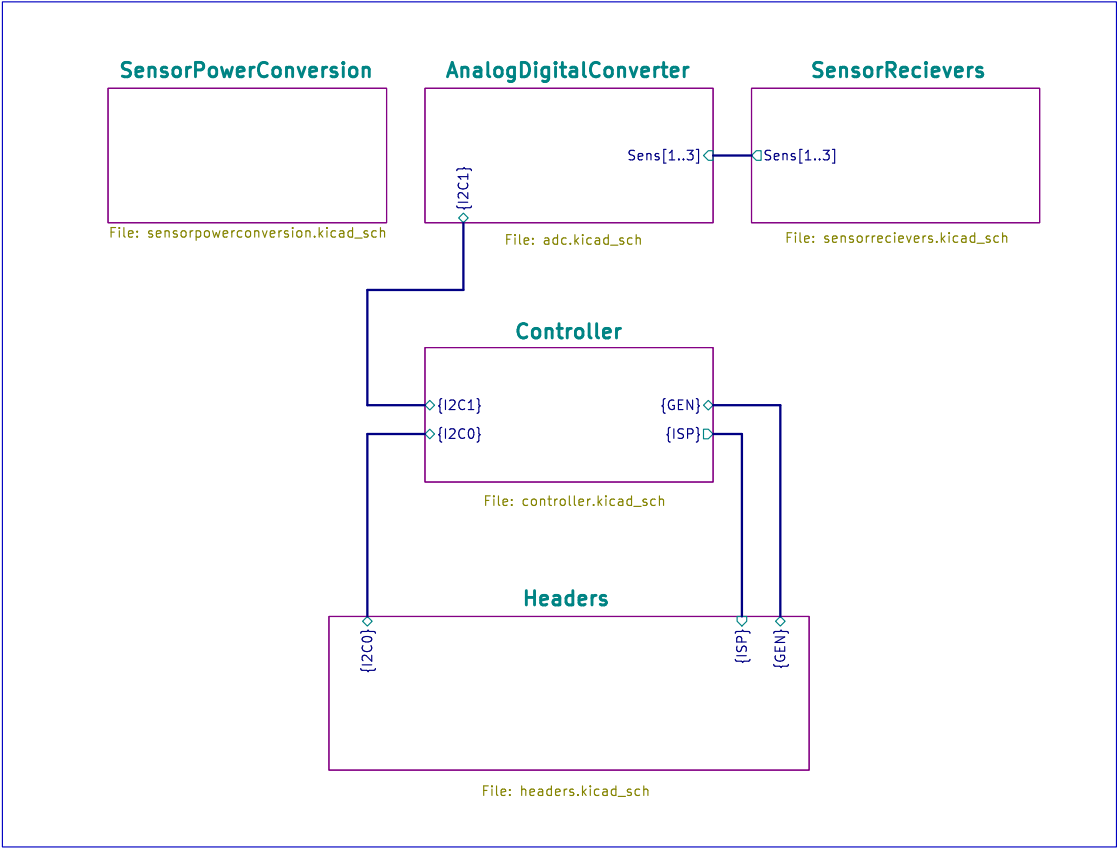


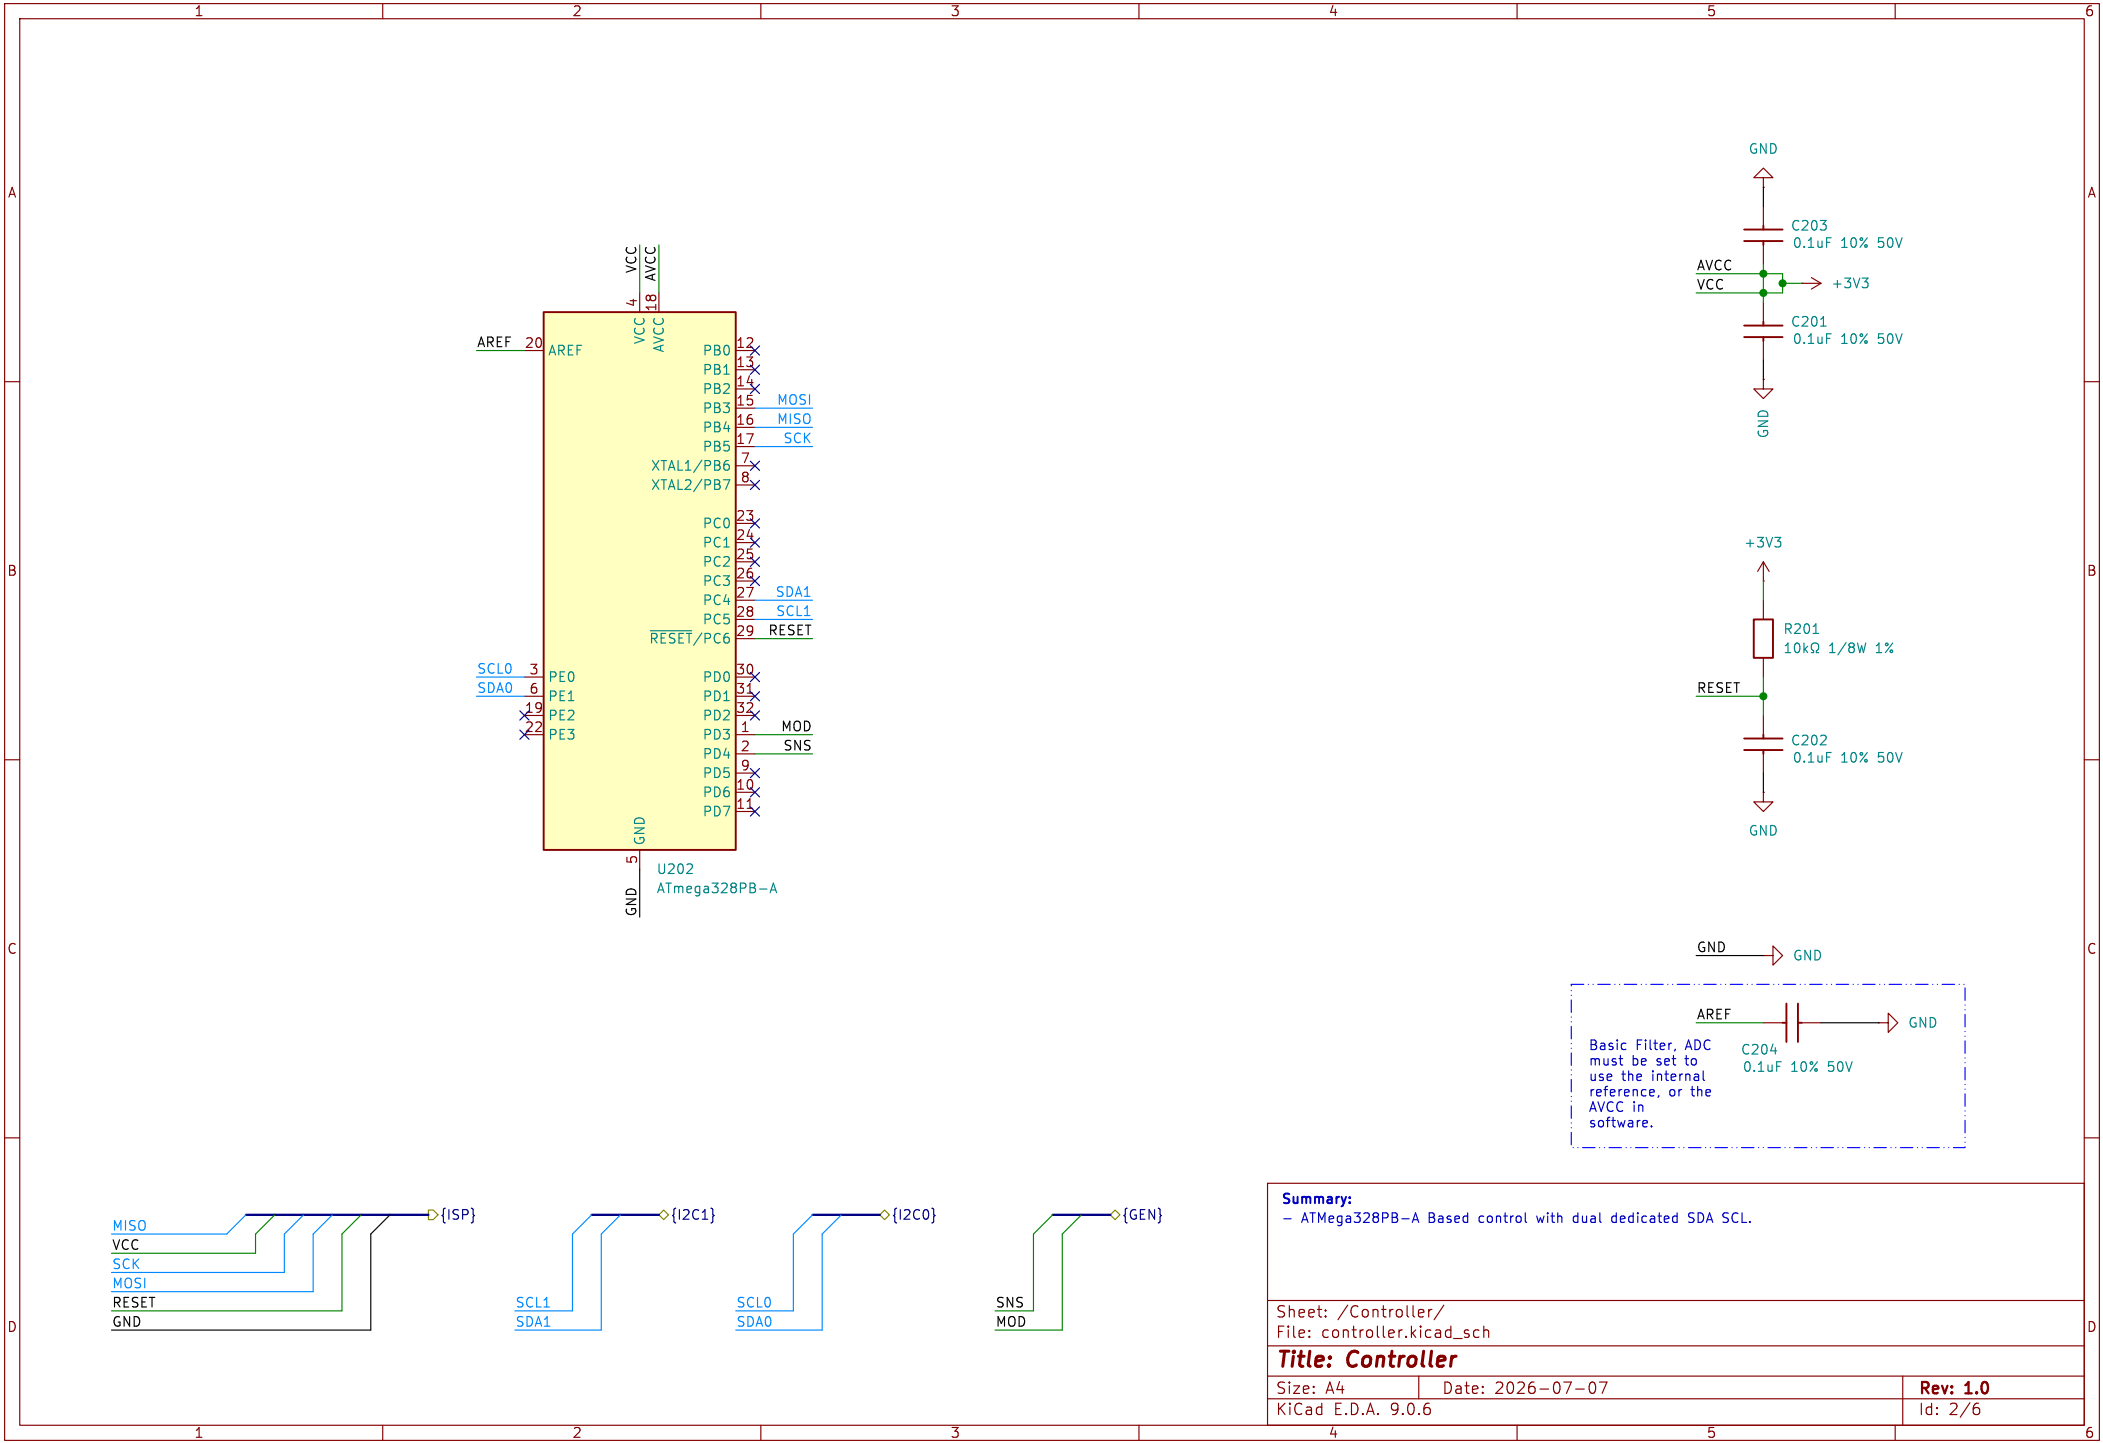

Summary: – ATmega328PB–A Based control with dual dedicated SDA SCL.		
Sheet: /Controller/ File: controller.kicad_sch		
Title: Controller		
Size: A4	Date: 2026–07–07	Rev: 1.0
KiCad E.D.A. 9.0.6		Id: 2/6

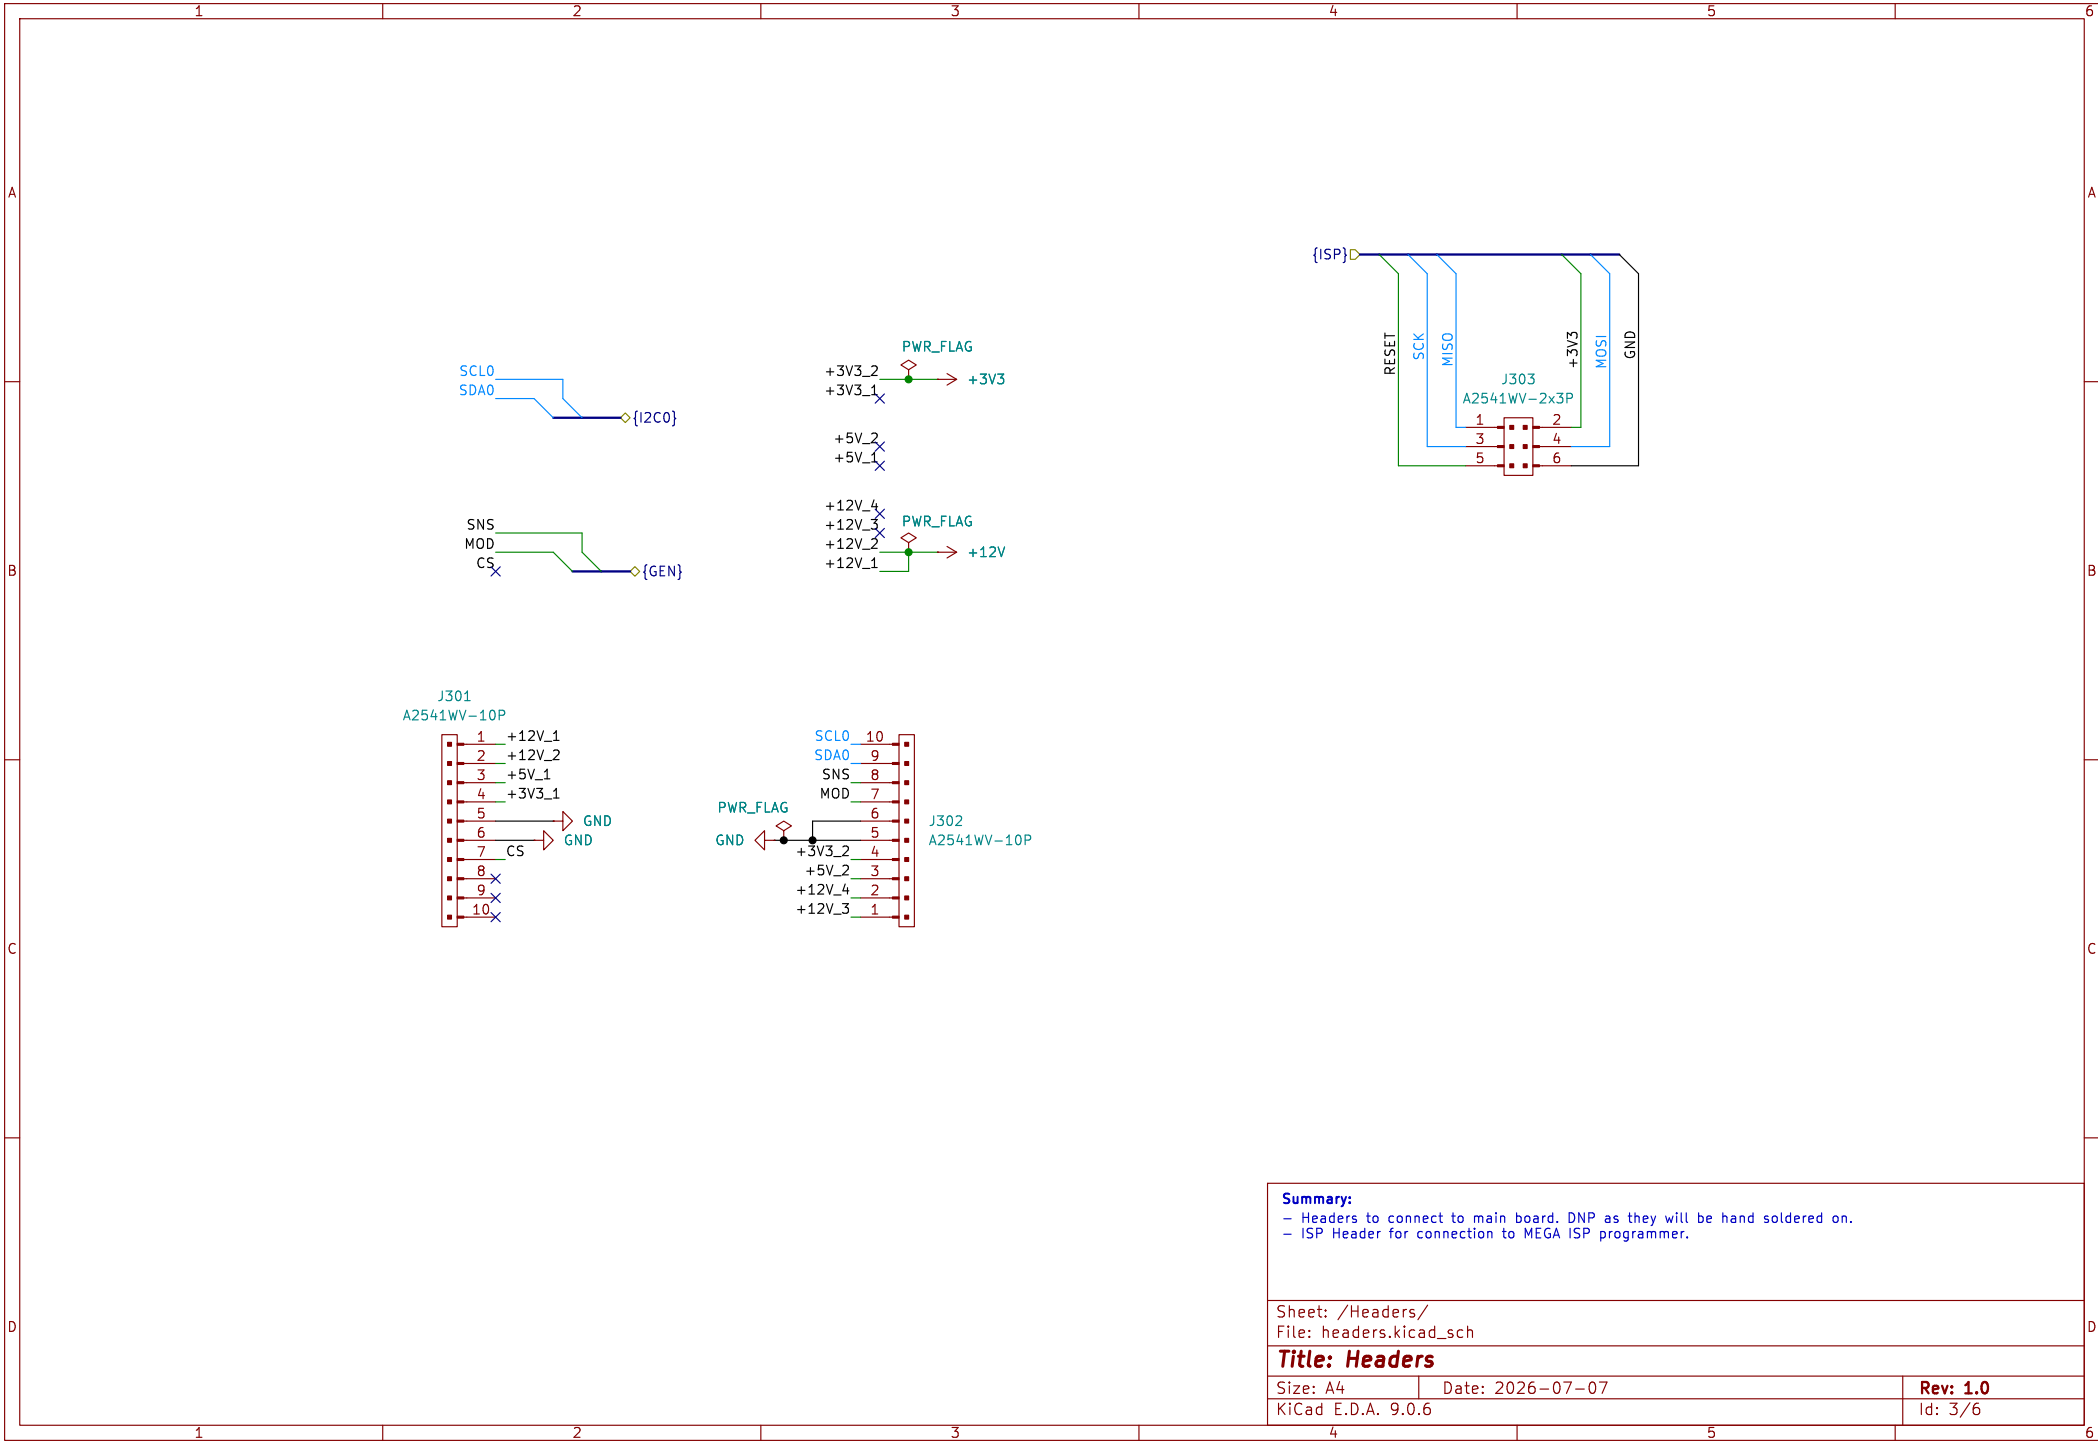

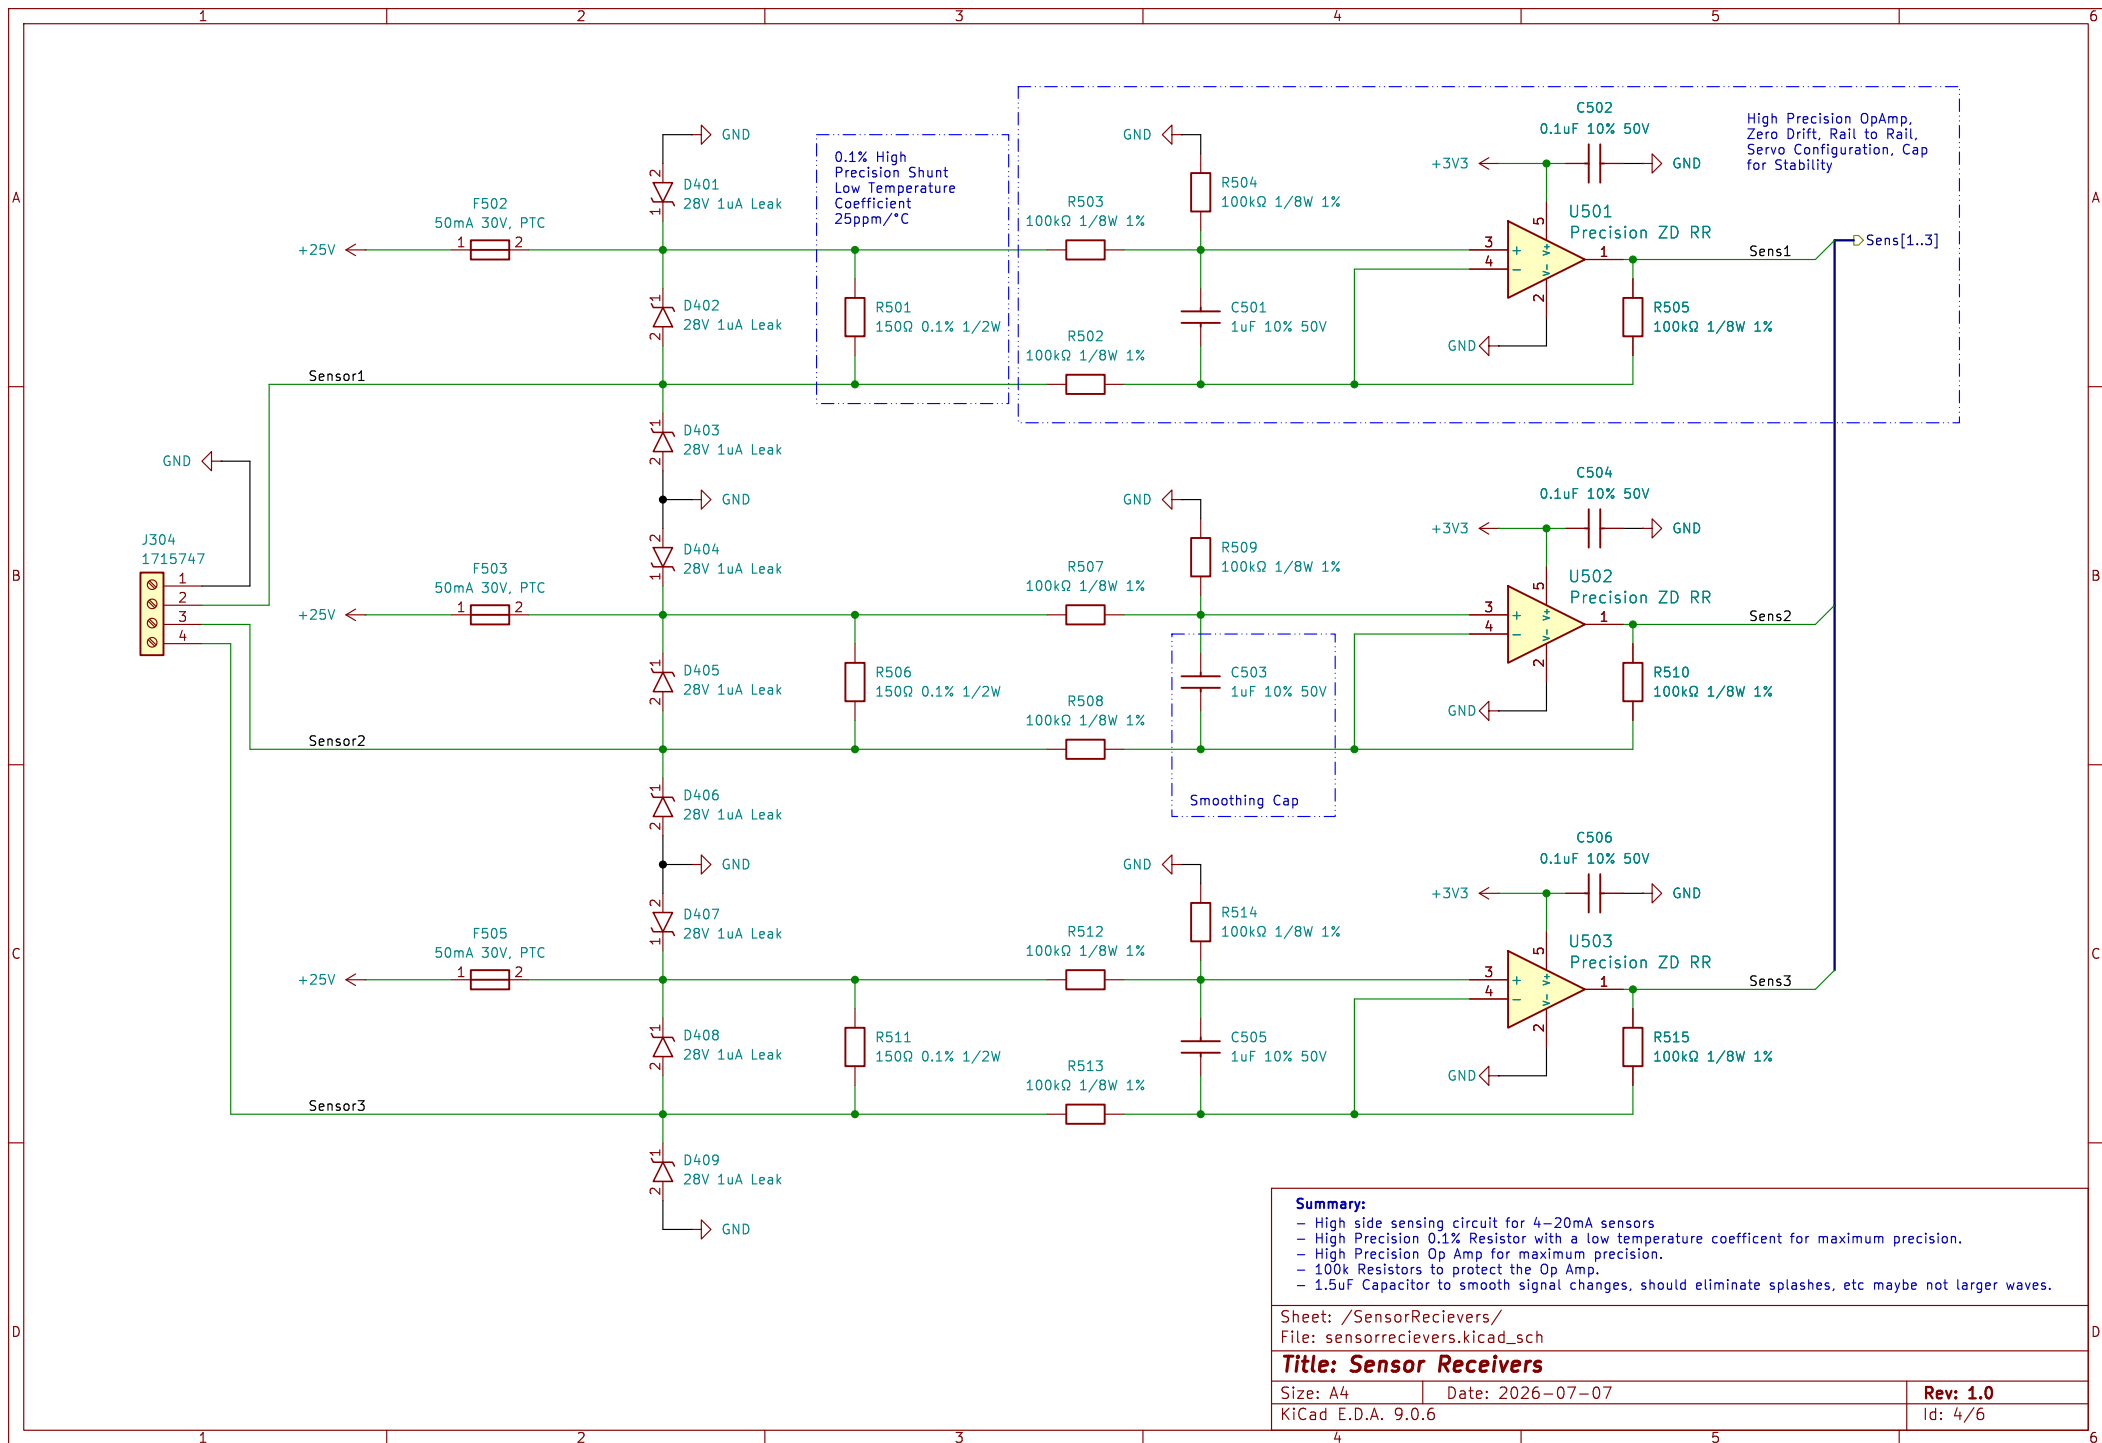

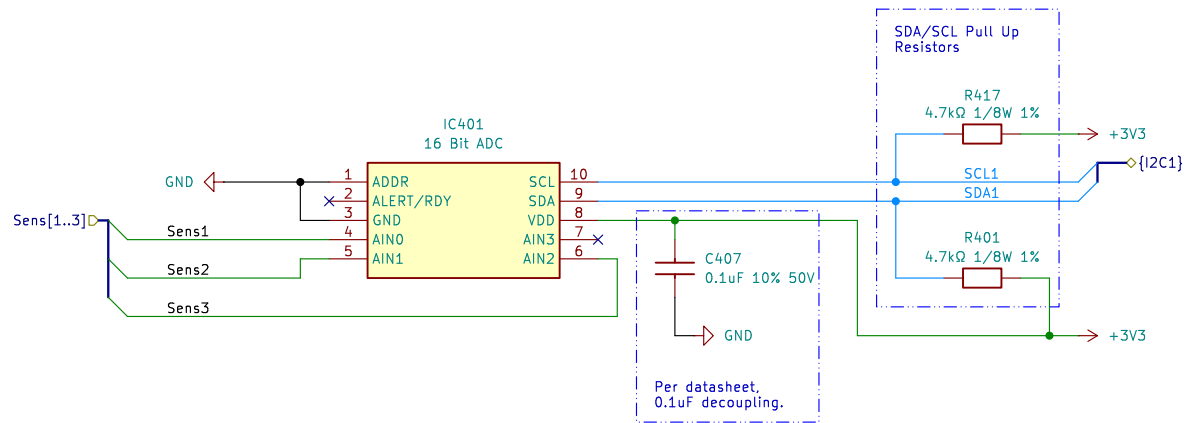


Summary:
– ADS1115 configured to use base address (0x48).

Sheet: /AnalogDigitalConverter/
File: adc.kicad_sch

Title: Analog Digital Converter

Size: A4	Date: 2026-07-07	Rev: 1.0
KiCad E.D.A. 9.0.6		Id: 5/6

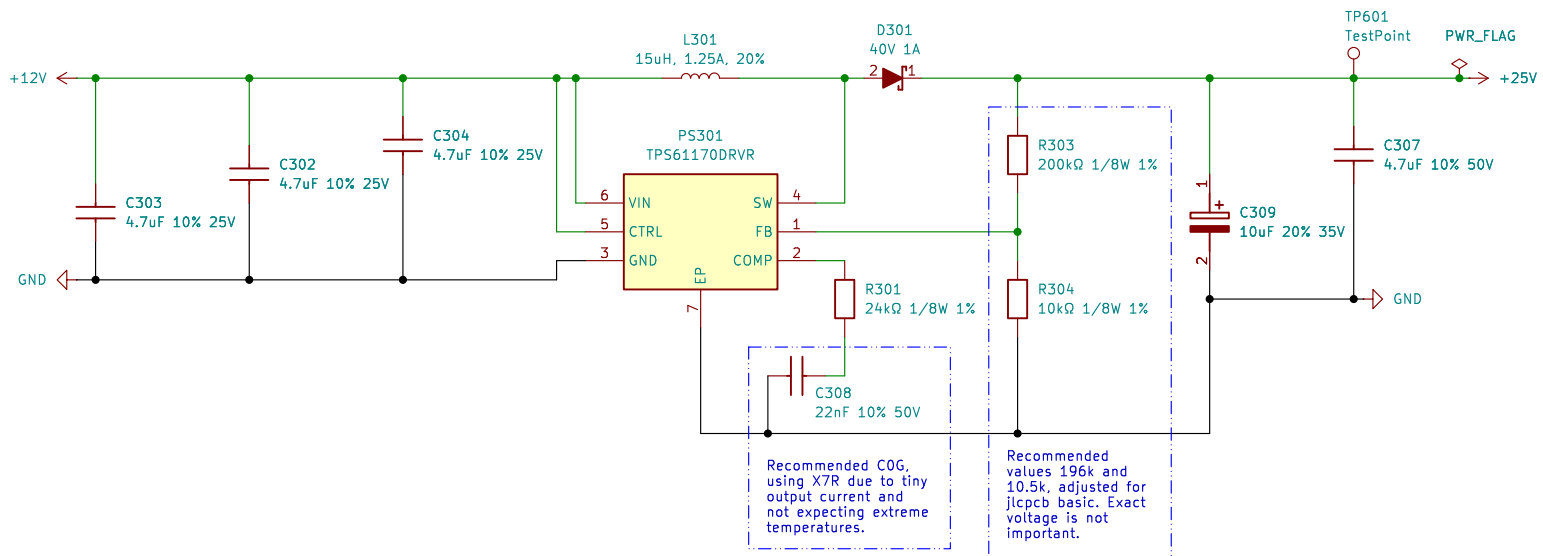

Summary:

- Texas Instruments generated Boost Converter, 12V to -25V
- Used a shielded inductor for minimal interference.

Sheet: /SensorPowerConversion/
File: sensorpowerconversion.kicad_sch

Title: Sensor Power Conversion

Size: A4	Date: 2026-07-07	Rev: 1.0
KiCad E.D.A. 9.0.6		Id: 6/6