



Eurobot^{Open} 2020 Rules

27th edition of the robotic contest - Eurobot
OFFICIAL version



NOTE: all images in this document are provided as a guide to illustrate the various paragraphs. In no case they can serve as a reference. Only the dimensions, colors and materials indicated in the appendix shall be taken into consideration.

Contents

A. NOTICE	3
B. CONTEST PRESENTATION	4
C. THEME PRESENTATION	6
D. PLAYING AREA AND ACTIONS	7
D.1. IMPORTANT INFORMATION	7
D.2. PLAYING AREA	8
D.3. STARTING AREAS	9
D.3.a. DESCRIPTION	9
D.3.b. CONSTRAINTS	9
D.4. CREATE FAIRWAYS	10
D.4.a. DESCRIPTION AND LAYOUT OF THE PLAYING ELEMENTS	10
D.4.b. ACTIONS AND CONSTRAINTS	11
D.4.c. POINTS	11
D.5. LIFT UP THE WINDSOCKS	12
D.5.a. DESCRIPTION AND LAYOUT OF THE PLAYING ELEMENTS	12
D.5.b. ACTIONS AND CONSTRAINTS	12
D.5.c. POINTS	12
D.6. TURN ON THE LIGHTHOUSE	13
D.6.a. DESCRIPTION AND LAYOUT OF THE PLAYING ELEMENTS	13
D.6.b. ACTIONS AND CONSTRAINTS	13
D.6.c. POINTS	14
D.7. ANCHOR SAFELY	15
D.7.a. DESCRIPTION AND LAYOUT OF THE PLAYING ELEMENTS	15
D.7.b. ACTIONS AND CONSTRAINTS	15
D.7.c. POINTS	16
D.8. HOIST FLAGS	17
D.8.a. ACTIONS AND CONSTRAINTS	17
D.8.b. POINTS	17
D.9. ESTIMATE THE PERFORMANCE	18
D.9.a. DESCRIPTION AND LAYOUT OF THE PLAYING ELEMENTS	18
D.9.b. ACTIONS AND CONSTRAINTS	18
D.9.c. POINTS	18
E. PROJECT PRESENTATION	19
F. THE ROBOTS	20
F.1. FOREWORDS	20
F.2. DIMENSIONS	20
F.3. ENERGY SOURCES	22
F.4. OTHER DESIGN CONSTRAINTS	22
F.5. SECURITY CONSTRAINTS	24
F.5.a. GENERAL ASPECTS	24
F.5.b. LASERS	24
F.5.c. HIGH POWER LIGHT SOURCES	25
F.5.d. COMPRESSED AIR SYSTEMS	25
G. BEACON TRACKING SYSTEM	26

G.1. GENERAL POINTS	26
G.2. EMBEDDED/ ON-BOARD BEACONS	27
G.3. FIXED BEACONS	27
G.3.a. DIMENSIONS	27
G.3.b. FIXATION	27
G.4. CENTRAL TRACKING DEVICE	27
G.5. CONNECTIONS	28
G.6. COMMUNICATION SIGNALS	29
G.7. ROBOT IDENTIFICATION	29
H. MATCHES	31
H.1. PREPARATION TIME	31
H.2. THE MATCH	31
H.3. COUNTING POINTS	32
H.3.a. CREATE FAIRWAYS	32
H.3.b. LIFT UP THE WINDSOCKS	32
H.3.c. TURN ON THE LIGHTHOUSE	32
H.3.d. ANCHOR SAFELY	32
H.3.e. HOIST FLAGS	33
H.3.f. ESTIMATE THE PERFORMANCE (BONUS POINTS)	33
H.3.g. THE PENALTIES	33
H.3.h. BONUS POINTS	33
H.3.i. FORFEIT CASES	33
I. THE CONTESTS	34
I.1. GENERAL INFORMATION	34
I.2. APPROVAL	34
I.2.a. STATIC APPROVAL	34
I.2.b. DYNAMIC APPROVAL	34
I.2.c. SIGNIFICANT TECHNICAL MODIFICATIONS AFTER THE APPROVAL	34
I.3. QUALIFICATION PHASE	34
I.4. THE PLAY-OFF PHASE	35
I.5. THE FINAL PHASE	35
I.6. QUALIFICATION FOR THE NATIONAL MEETING	36
I.7. QUALIFICATION FOR THE EUROPEAN MEETING	36
J. APPENDIX	38
J.1. GENERAL DRAWINGS	38
J.1.a. BUOYS	39
J.1.b. ROCKY AREA AND LIGHTHOUSE	40
J.1.c. WEATHERVANE	41
J.1.d. GROUNDED ZONES	43
J.1.e. WINDSOCKS	44
J.1.f. PORT PROTECTION CLEATS	45
J.1.g. BEACONS SUPPORTS	46
J.2. MATERIAL REFERENCES	48
J.3. MANUFACTURING TOLERANCES	48
J.4. COLOUR REFERENCES	49
J.5. MARITIME SIGNAL FLAGS	50

A. NOTICE

WARNING!

General remarks are annotated in the document. Please, pay special attention to these points.

This year the rules have been split up. Most parts remain the same for the Eurobot ^{Open} and Eurobot ^{Open} Junior contests, but to avoid confusion, each contest has its own rules as a single document.

Thus the particular cases specific to one of the competitions appear only in the document concerning it.

You will find the Eurobot ^{Open} and the Eurobot ^{Open} Junior rules and other information on the Eurobot ^{Open} website (<http://www.eurobot.org/>)

Please note that the version of this release is noted down at the end of this page. For any inquiry, only an official version should be considered.

Changes or clarifications to the rules may be made during the year. We therefore strongly encourage all participants to check our website regularly (<http://www.eurobot.org/>) as well as your NOC's own website for news. You can also follow discussions, ask questions or get further assistance on our forum (<http://www.planete-sciences.org/forums/>).

Possible changes of the technical specifications will be announced on the Eurobot website, (<http://www.eurobot.org/>) or on the website of the National Organization Committee (NOC) in your country.

The forum responses from a referee are official responses taken into account for match refereeing and homologation stages.

In case of doubt regarding any point of the rules or the approval of robots, the referee committee may also be contacted at referee@planete-sciences.org.

Have a good reading!

B. CONTEST PRESENTATION

Eurobot^{Open} and Eurobot^{Open} Junior are two events addressed to young people interested in robotics. Teams are usually composed of students involved in an Eurobot^{Open} school project, a group of friends, or independent robotics clubs. They share the same goal: to offer young people an active learning process, to put into practice their knowledge and soft skills during a fun and friendly event.

The rules for both events (Eurobot^{Open} and Eurobot^{Open} Junior) are based on the same concept. As organisers, we intend to provide a common platform for the Eurobot^{Open} event. This platform is dedicated to autonomous robots for Eurobot^{Open} while for Eurobot^{Open} Junior, the robots are remote controlled. In this way, a Eurobot^{Open} organiser can easily set up a Eurobot^{Open} Junior contest and vice versa. Remember this when you will be organizing your official or unofficial event.

You're currently reading version
Eurobot^{Open} OFFICIAL
of 2020rules
(this version concerns fully autonomous robots)

The age limit for participating in the Eurobot^{Open} finals is 30 years. However, each team may have a supervisor whose age limit exceeds 30. It is important to note that teams that do not respect the age limit, will not be allowed to participate in the Eurobot^{Open} finals.

The technical challenge of Eurobot^{Open} is to build an autonomous robot alongside with an optional secondary autonomous robot.

A team is a group of young people who have built one or two robots for the event. A person can only represent one team. However, we encourage teams to share their expertise and knowledge.

An organization (club, school, etc.) can supervise and register several teams, if allowed by the registration requirements set by your National Organizing Committee. The acceptance of these requirements is compulsory to validate your registration and your entry.

The project can be supervised by someone over the age limit (teacher, parent, group leader, etc.), but all elements of the robot(s) must be designed by the participants. In this context, robots manufactured from a commercially purchased chassis or rolling base will not be accepted.

In the event that a robot was imagined, built or modified by the tutor alone, organisers can disqualify or reject the participation of the team in the competition. Students must be capable of describing and explaining the manufacturing process of their robots. It is strictly forbidden that the tutor modifies the robot during the competition. He can in exchange advise the students and guide them.

Eurobot^{Open} and Eurobot^{Open} Junior must take place in a friendly, fair-play spirit. As for every sport event, referees' decisions are pronounced without a possible recourse, except if an agreement between all stakeholders is met.

Eurobot^{Open} and Eurobot^{Open} Junior European finals gather teams selected after national qualifications. European finals take place in Europe, but all countries can participate. Countries where more than three teams are registered have to organize a national qualification to select teams that will attend the European finals.

Common parameters can change from one year to another. Accordingly, please read the rules carefully even if the chapters may seem familiar to you (playing area dimensions, robots dimensions, starting area dimensions etc.).

Robotics contests are public events. Therefore, we ask the teams to respect our rules of decency and safety (electrical, sound level, manners, etc.). These rules apply to the participants, their supporters and all the equipment they bring.

C. THEME PRESENTATION

Prepare to set off on the high seas. In 2020, robots will explore the oceans and master the fine art of sailing.

You can rely on lighthouses and buoys to orient your ships. Plan your trip and bring us back stories of your journey.

May the winds blow in your sails!

Your missions will be:

- **Create fairways** to restore maritime traffic.
- **Lift up the windsocks** that have been swept away by the storm.
- **Switch on the lighthouse** so that lost boats can safely return to port.
- **Anchor safely** your robots in the mooring zones, safe from the wind, at the end of their journey.
- **Hoist your flags** to send messages to other ships.
- **Estimate your performance.**

Warning! All actions are independent from one another and no specific sequence is imposed whatsoever. No single action is compulsory. Give careful thoughts to your strategy. It is strongly recommended to design simple and reliable systems with a limited number of actions.



Figure 1 – Overview of the playing area

D. PLAYING AREA AND ACTIONS

D.1. IMPORTANT INFORMATION

Organisers are committed to building the playing area with as much accuracy as possible. Nevertheless, they reserve the right to do minor modifications and adjustments.

No complaints regarding dimensional deviations will be taken into account.

Teams are warned that the surface condition may differ from one playing area to another and may also degrade over time.

D.2. PLAYING AREA

The playing area is a horizontal rectangular plan of 3000 mm by 2000 mm with borders of 70 mm height on each side. Depending on the carpenters, it may consist of one or more pieces (eg 3 pieces of 1000 mm per 2000 mm).

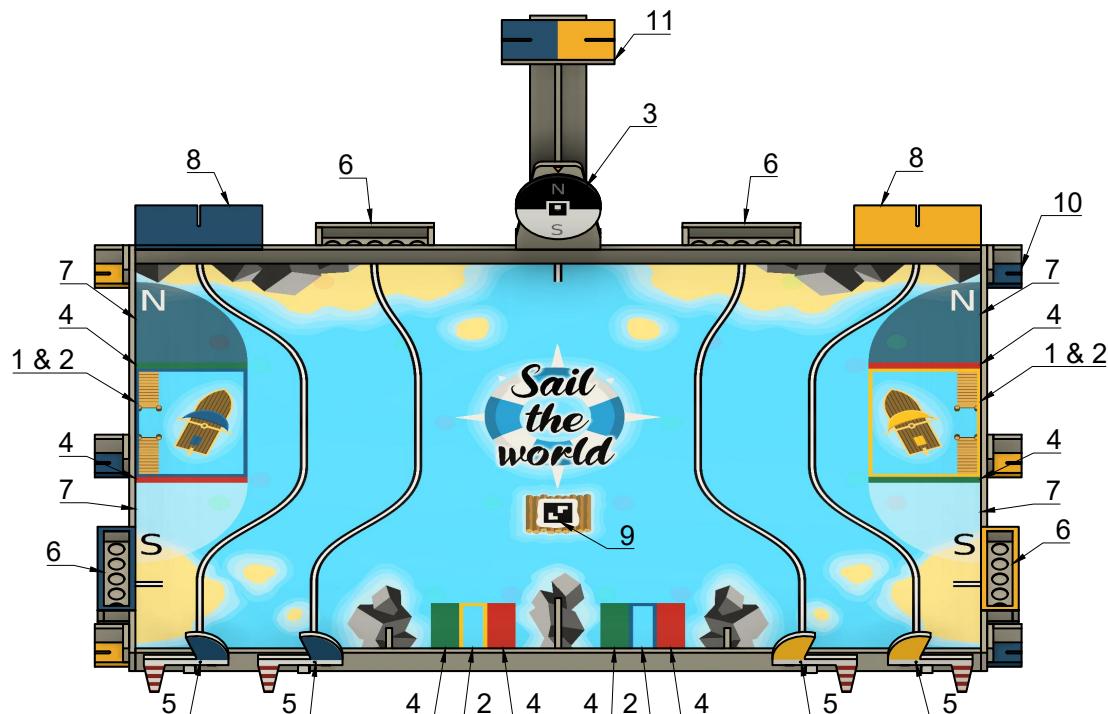


Figure 2 – Detailed view of the playing area

- | | |
|-------------------|-----------------------------|
| 1. Starting areas | 7. Mooring zone |
| 2. Port | 8. Rocky areas |
| 3. Weather vane | 9. ArUco marker number 42 |
| 4. Fairway lines | 10. Fixed beacon supports |
| 5. Windsocks | 11. Central tracking device |
| 6. Reefs | |

Full specifications of the playing area and game elements (dimensions, positions at the beginning of the match, colors and other references) are listed in the appendix.

In the remainder of this document, horizontal and vertical directions are stated relative to the playing area. Notions of “left”, “right”, “front” and “back” are stated with respect to the spectator’s point of view.

D.3. STARTING AREAS

D.3.a. DESCRIPTION

Each team has a starting area for their robots. It is a rectangular surface delimited by a border of the team's color (the border is included in this zone).



(a) Blue starting area



(b) Yellow starting area

D.3.b. CONSTRAINTS

Before the beginning of the match, the vertical projection of the robots must not exceed the limits of the starting area.

Make sure your robots can fully enter the starting area. Overtaking above the lateral border but not beyond the playing area is allowed.

The starting area does not include the fairway lines.

Robots are not allowed to enter the starting area of the opposing team during the entire match.

D.4. CREATE FAIRWAYS

Among marine navigational markers, buoys are essential safety elements for any sailor. They are used to indicate areas of risk and to guide boats in their operations. Before arriving in ports, rows of green buoys to starboard and red buoys to larboard may be placed in such a way as to form fairways that signal the safe shipping lane to be followed by incoming and outgoing vessels. After a storm these buoys drifted onto the playing area, leaving the signage in disarray. Your robot-ships are therefore called upon to recover them and reform the fairways leading to the ports.

D.4.a. DESCRIPTION AND LAYOUT OF THE PLAYING ELEMENTS



Figure 4 – Playing elements - The buoys

The buoys: There are 44 buoys on the table, represented by reusable plastic cups, half of them are red and the other half green. They are initially located on predefined places (cf. Figure 17):

- placed directly on the playing table, these buoys are called "adrift". The 4 buoys around each port are reserved to the owner of the port. The other 8 are available to everyone.
- either on:
 - reefs located along lateral borders, and reserved to the team with the closest starting area.
 - reefs in common for both teams, at the back of the table.

The buoys initially present in these reefs are called "grounded buoys". The sequence of the grounded buoys at the back is random (drawn from 3 possible combinations after the preparation phase). For the reefs located along the lateral edges, the order of the buoys is fixed (non-random), given by the Figure 17.

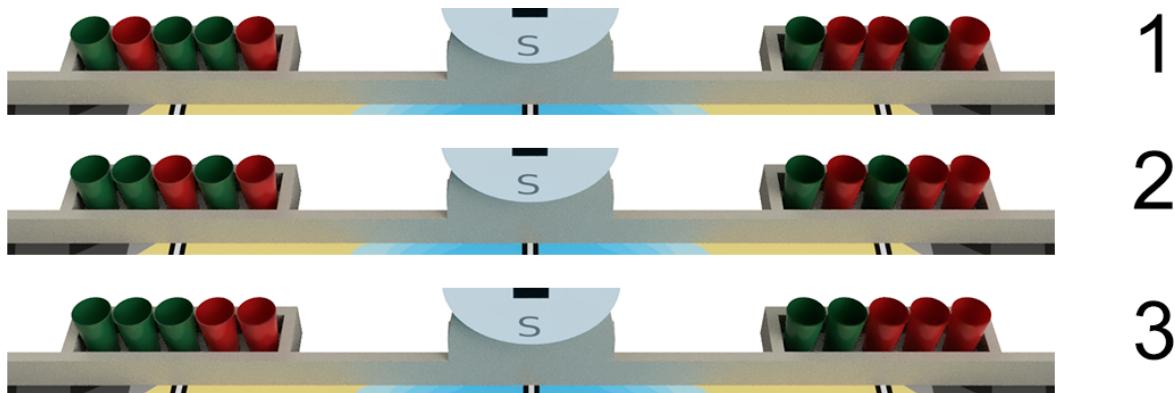


Figure 5 – Possible combinations of grounded buoys.

Harbours: these are areas that are the same colour as each team, each team has two:

- a "big" port, located along the lateral edge of the playing area;
- a "small" port, located at the front of the table.


Fairways: along each port, there are by two parallel lines, red and green respectively. They mark the fairways for each port. Note that these two lines are considered being included in the port.

D.4.b. ACTIONS AND CONSTRAINTS


Actions: Robots have to retrieve adrift or grounded buoys and place them in the fairways to restore the buoyage. Buoys must be placed on the fairways lines in the ports, and preferably sorted according to the colour of the line.

Constraints:

- For a buoy to be considered valid in a fairway line, at least one of its two circular planes (the "top" or "bottom" of the buoy) must be in full contact with the playing area and at least partially in contact with a fairway line (see Figure 6b).
- Each fairway is assigned to a team. It is therefore not accessible to the opposing team, which must under no circumstances move the buoys already positioned there.
- To be considered as being in the port, a buoy must be at least partially placed (by its vertical projection) in the port or on fairway lines, in any position with or without contact with the table (Cf. Figure 6a). A buoy still controlled by a robot after the end of the match will not be counted.

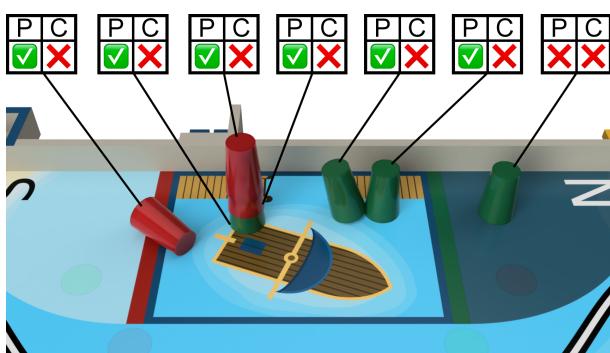

(a) Case of validity for buoys in ports and fairways. P=Port
C=Fairway

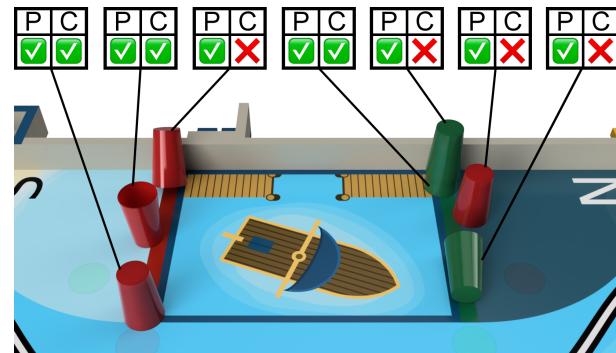

(b) Case of validity for buoys in harbour and channel. P=Port
C=Fairway

D.4.c. POINTS

- **1 point** per valid buoy in the port;
- **1 point** additionally per valid buoy on the fairway line of its color;
- **2 points** per pair of valid buoys on the fairway lines of one port. A valid pair includes one green buoy and one red;

D.5. LIFT UP THE WINDSOCKS

D.5.a. DESCRIPTION AND LAYOUT OF THE PLAYING ELEMENTS

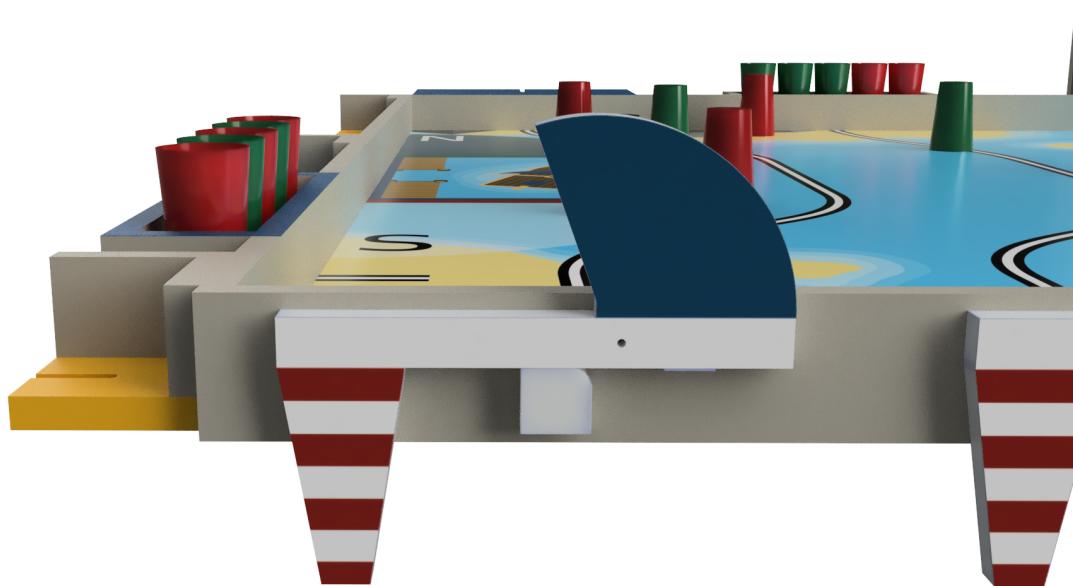


Figure 7 – Windsock

Windsock: located at the front of the table, on the side of the team's starting area. The windsocks was destabilized by the storm and must be lifted up. Each team has two dedicated windsocks.

D.5.b. ACTIONS AND CONSTRAINTS

Actions:

- Lift up the windsocks

Constraints:

- Windsocks are dedicated to each team, a team is not allowed to lift up or to put down the opposing team's windsocks.
- To be considered valid, the windsock mast has to be vertical at the end of the game.

D.5.c. POINTS

- **5 points** if only one windsock is lifted up by the end of the game;
- **15 points** if both windsocks are lifted up by the end of the game;

D.6. TURN ON THE LIGHTHOUSE

D.6.a. DESCRIPTION AND LAYOUT OF THE PLAYING ELEMENTS

The rocky area: is located at the back of the table, on the same side as the starting area of the team. The horizontal plane of the rocky area is at the level of the table border.

The lighthouse: is an element created by the team and locked on the rocky area during the preparation phase.

D.6.b. ACTIONS AND CONSTRAINTS

Actions:

- The team must place its lighthouse on the dedicated area during the preparation time.
- During the game, the lighthouse must be activated, by any system involving physical contact with one of the robots.
- Once the lighthouse is activated, it must deploy and turn on a sweeping light source to signal the rocky area.

Constraints:

- The lighthouse should not be activated by an element external to the table (i.e. team members, remote control from the public, etc.). A lighthouse is considered activated if it has changed significantly in shape or appearance compared to the beginning of the match.
- The lighthouse can only be activated during the game and through contact with one of the team's robots.
- The activation of the lighthouse must be done at the time of contact, but the activation mode can be done by any means, including wireless.
- At no time should the vertical projection of the lighthouse exceed the limits of the rocky area.
- As a result, the lighthouse will have the following dimensional constraints:
 - Maximum depth: 222 mm
 - Maximum width: 450 mm
 - Maximum initial height: 300 mm
 - Minimum height of the light source (deployed): 700 mm
 - Maximum deployed height: 900 mm
- The lighthouse weight must not exceed 3 kg.
- The lighthouse should deploy vertically during the match. This deployment can only take place after the lighthouse has been activated.
- The horizontal plane of the rocky area has a 10 mm wide groove from the centre of the support to the middle of the rear side. This groove must be used to secure the lighthouse on the rocky area using an 8 mm diameter threaded rod and a wing nut.
- The lighthouse must remain activated and deployed even after the game ends.
- The lighthouse may contain a power supply. In this case, an emergency stop button (meeting the same specifications as the robot emergency stop buttons) that directly cuts off the power supply must be installed on the lighthouse. It must be clearly visible, easily accessible and must remain at a constant height. The lighthouse can be powered before the start of the match but without being activated.
- This action must not be dangerous for either the public, people around the table, the table itself or robots.
- The lighthouse may have a screen but it is only allowed to display information about the current match. It must not display videos, images, photos or advertisements.


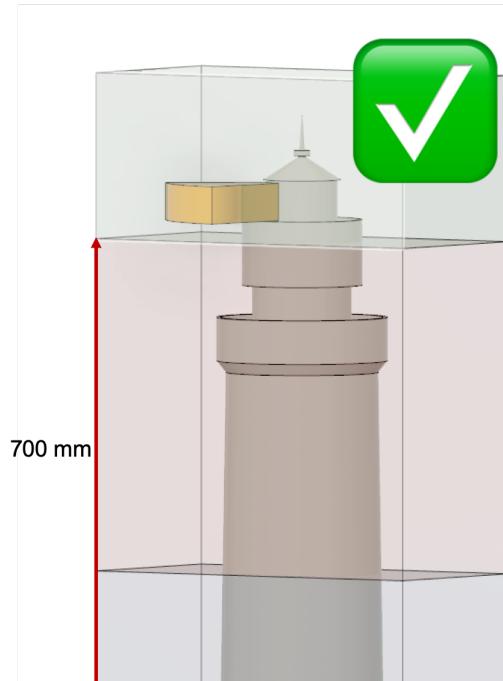


Figure 8 – Lighthouse deployment example

- Once turned on, the light from the lighthouse must be visible from the public, but must not dazzle anyone.
- The light of the lighthouse shall make an apparent or physical sweeping movement of the light source; the movement of a mask in front of the source is permitted. The sweep must be visible to the public by at least 180° of rotation with respect to the front of the table.

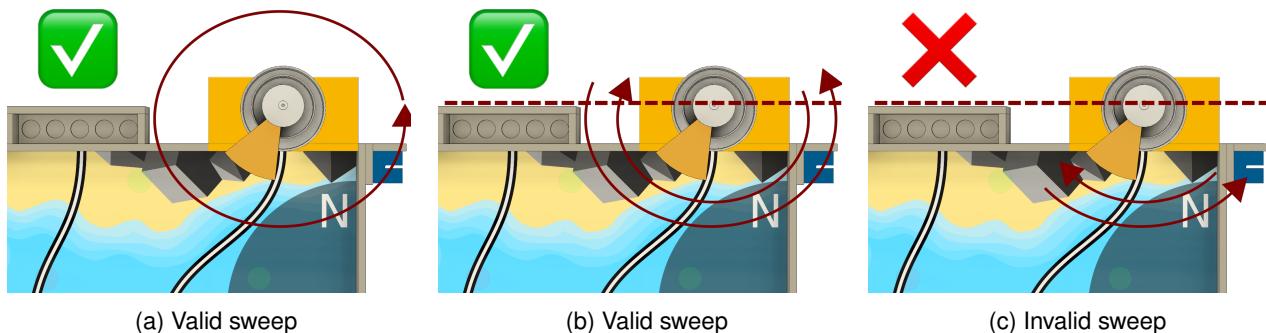


D.6.c. POINTS

- 2 points** for putting the lighthouse on the rocky area before the game starts;
- 3 points** additionally for activating the lighthouse during the game;
- 10 points** additionally if the lighthouse is deployed, valid and its light activated by the end of the game.

D.7. ANCHOR SAFELY


At the end of your journey, you need to go back to your mooring zone. Be careful to the wind direction before anchoring.

D.7.a. DESCRIPTION AND LAYOUT OF THE PLAYING ELEMENTS

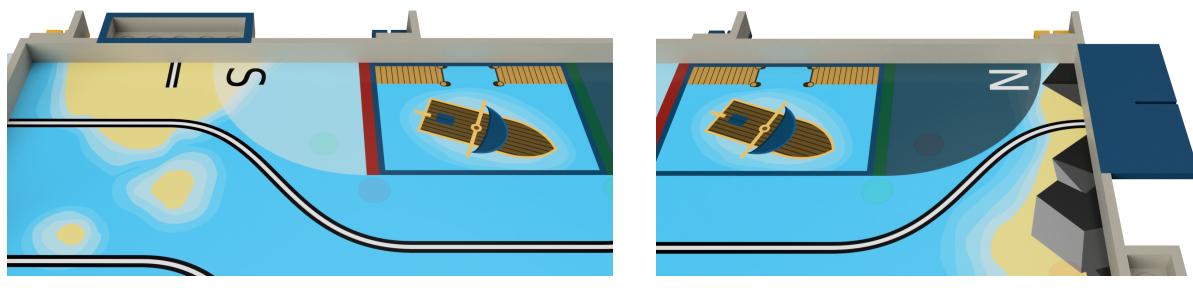

(a) South mooring zone

(b) North mooring zone

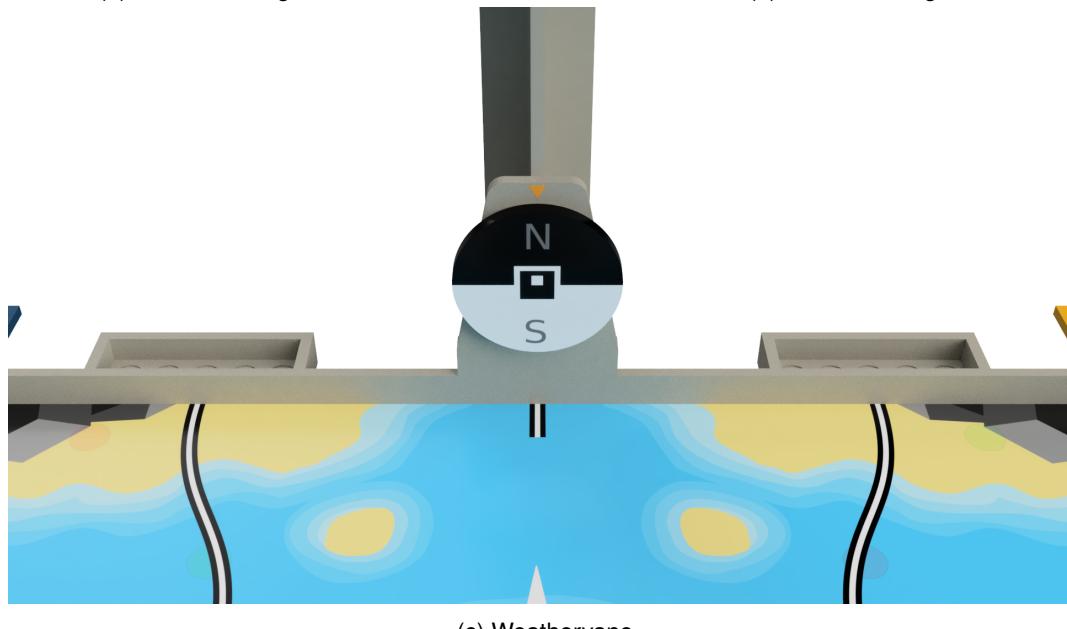

(c) Weathervane

The weathervane: Located at the center of the table, it stops rotating after the start of the match to indicate the wind direction. It is initiated by a referee at the very start of the game and stabilizes either on its North or South half. The rotation time is variable but will not exceed 25 seconds.

The weathervane is equipped at its centre of an ArUco label (4x4 number 17), 6 cm wide.

Mooring zones: Each team has two different mooring zones defined by arcs located on both sides of the starting area. These places are redundant of the weathervane compass points.

D.7.b. ACTIONS AND CONSTRAINTS

Actions: At the end of the game, robots should stop in the mooring area indicated by the weathervane.

Constraints:

- Robots may come in contact with the weathervane, but it is strictly forbidden to change the position or stop it early.
- To be valid, a robot must have all or part of its vertical projection in the mooring zone.

- A team with several robots does not validate this actions if the robots in different mooring zones.
- If the vertical projection of a robot exceeds in both mooring zones, the least advantageous zone will be counted.

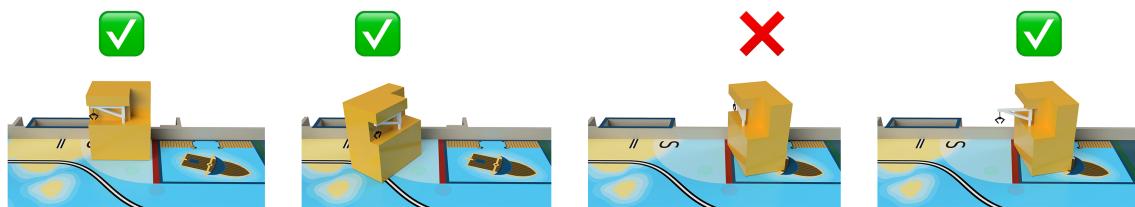


Figure 11 – Situation of validity in a mooring zone

D.7.c. POINTS

For this specific action, counting is different according to the number of robots per team at the beginning of the game.

Team with only one robot:

- **10 points** if the robot is valid in the mooring zone indicated by the weathervane;
- **5 points** if the robot is valid in the other mooring zone;

Team with two robots:

- **10 points** if both robots are valid in the mooring zone indicated by the weather vane;
- **5 points** if both robots are valid in the other mooring zone;
- **5 points** if only one of the robots is valid in the mooring zone indicated by the weather vane;
- **0 points** if both robots are valid but in different mooring zones;

D.8. HOIST FLAGS

D.8.a. ACTIONS AND CONSTRAINTS

Actions: At the end of the game, between the 95th and the 100th second, your robots must hoist flags.

Constraints:

- Flags shall be identified as specified in the international maritime signal code; the only accepted flags are the letters.
- Each flag must have at least a minimum usable area of 30cm^2 (representing the significant content of the flag); but the ratio/dimensions can be freely chosen as long as this constraint is met. Each flag must be two-sided.


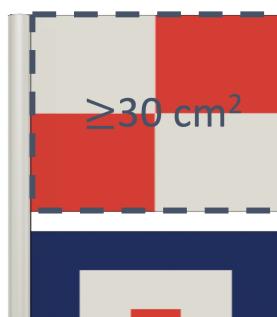


Figure 12 – Minimum dimensions for each flag

- At least two flags must be hoisted.
- When deployed, the flags must be easily identifiable by the public.
- The flags must be hoisted, fully at an altitude higher than 35 cm.

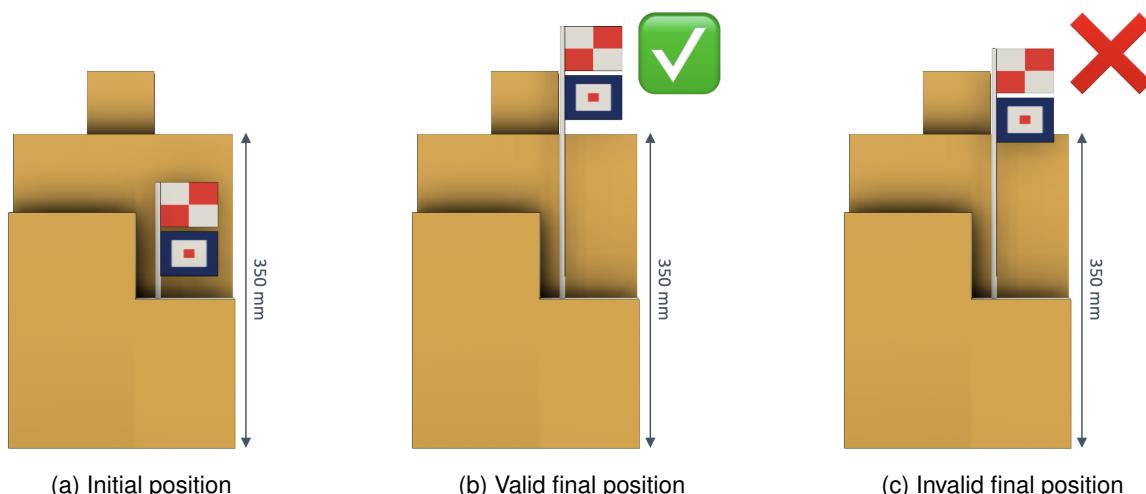

- During the last 5 seconds of the match, it's allowed that the flags and their actuators exceed the height limit of the robot, however not at any time they are allowed to cross the deployed perimeter of the robot.
- This action must not start before the 95th second and must be finished at the end of the match.

D.8.b. POINTS

- 10 points** if at least one robot has raised its flags;

D.9. ESTIMATE THE PERFORMANCE

D.9.a. DESCRIPTION AND LAYOUT OF THE PLAYING ELEMENTS

The device for displaying the score estimation during the match must be made by the team:

- It can be static (sheet of paper, slate, etc.).
- Or dynamic (electronic display); located either on the robot or on the lighthouse (please make sure that the lighthouse is activated).

D.9.b. ACTIONS AND CONSTRAINTS

- The team must evaluate the number of points scored in the match by its robot(s). For this, two exclusive options:
 - Pre-match evaluation on a static display: the team writes the score it intends to make during the match.
 - Evaluation during a match on a dynamic display device.
- The display area and its reading orientation must be easily visible and identifiable by the referees.
- The estimated score is an integer and must be expressed in decimal.
- It is allowed for a team with two robots to design a display for each robot. In this case, the score assessment will be the sum of the values of the two displays.
- In the case of dynamic displays, the estimated score must still be displayed after the end of the match.
- The score must not change after the match has finished, otherwise the bonus will be lost!

D.9.c. POINTS

The assessment is based on all the previous actions (Create fairways, Lift up the windsocks, Turn on the lighthouse, Anchor Safely, Hoist flags).

The estimation bonus is calculated as follows: **Bonus = (0.3 x Score) - Delta**

- The score is the one scored by the team during the match on standard actions.
- The delta is the difference between the score made by the team during the match and the score estimated by the team. This one is always positive (Absolute value).
- The bonus is an integer value (rounded up).
- The bonus is added to the points of the team.
- A negative bonus is reduced to 0.
- A score of zero cannot give right to any bonus.

E. PROJECT PRESENTATION

Both Eurobot^{Open} and Eurobot^{Open} Junior encourage participants to practice science in a funny and original way. Our main objective is to assist and value your projects conceived during the year. To achieve this, the teams must conceive a poster, and, organizers may require the teams to create a technical documentation of their robots.

We expect to see attractive, innovative robots that respect this edition's technical constraints and rules. Being creative and original will add value to your work as much as the performance of your robot(s) during the matches. By doing this presentation, you will increase the communication value of your project and the visual effect of your robots, for both the public coming to the events as well as for your own satisfaction. Having created something aesthetically and functionally complete, will strengthen your work attitude during and after the competition.

TECHNICAL POSTER

Each team is required to provide a technical poster of their robot. This poster should present information related to the design of the robot (drawings, technical references, design specifications, etc.). It should be at least size A1 (594x841 mm) and ideally it should be printed. This poster is intended to encourage exchange and communication between teams.

Special vulgarization efforts should be made to make the content of the poster accessible to the general public. Ideally, the poster should include pictures and charts to explain the concept.

The poster must also include:

- the name of the team.
- the names of team members.
- the country of the team.
- the country flag of the team.

This poster will be posted on the booth of each team during the competition. For the international Finals, an English version is requested. The chosen resolution must guarantee the legibility of all texts. The resulting PDF file must not exceed 25 MB. The PDF version of the poster may be sent to the organization prior to the meeting via your National Organizing Committee.

In general, the organization encourages teams to communicate around their projects on the Internet, social media, via forums, etc.

F. THE ROBOTS

F.1. FOREWORDS

Each team is allowed to register a maximum of two robots, called respectively "main robot" and "secondary robot". Each one have identical dimensional constraints. The set of both robots have additional dimensional constraints.

For Eurobot^{Open}, both robots are autonomous.

The construction of a secondary robot is optional. The aim is to allow teams with a large number of members to work on a second project. It is recommended for beginning teams to concentrate on building a single functional machine. Having one robot that works well is better than having two that do not move.

A secondary robot can compete only with the main robot with which it was designed and approved. However it can compete alone if the main robot cannot participate. It cannot be re-approved with another main robot.

A team's main or secondary robot must not block the other team's robots. In the event of a voluntary action of this type indicated by the referee, the team may be penalized.

A robot must not intentionally cause damage to the opposing robots or to the playing area and its elements.

Only two team members are allowed to enter the backstage and on stage. They transport all the equipment (robots, beacons, etc.). The path to the playground may include stairs, especially when entering the stage. It is therefore recommended to design easily transportable equipment.

The main and secondary robots must be made up of elements that are fixed to each other (so robots cannot leave parts or elements on the playing area), with the exception of the playing elements.

Robots must not attach themselves to the playing area (e.g. with a suction cup).

A robot must not prevent the opponent from scoring points. A robot that remains static (e.g. if it has finished all its actions) must move to a location that does not disturb the opponent, otherwise it risks getting penalties!

A game element can be moved:

- for the purpose of scoring points with;
- if justified by performing another game action (e.g. if a common game element is located on the robot's path). The number of elements that are then moved (especially from their position at the beginning of the game) must remain minimal.

Deliberately vibrating the table or any other irregular action exposes the team to a refusal of approval.

Each team must design a unique and original set of robots under risk of disqualification. It is therefore not allowed to design robots that are significantly similar to robots of other teams (e. g. identical rolling bases or actuators). In case of doubt, contact the refereeing committee.

Be imaginative! For example, as an innovation but also to offer the public and the media an attractive show, your robot can use sounds, display expressions, etc.!


F.2. DIMENSIONS

Warning: the dimensions of Eurobot^{Open} robots are identical to those of Eurobot^{Open} Junior. Eurobot^{Open} Junior participants can more easily access the Eurobot^{Open} meetings. The Eurobot^{Open} Junior robot will only need


modifications to make it autonomous.

Dimensions of the robots :

The perimeter of a robot is the perimeter of the convex shell of its vertical projection on the ground. It is measured by surrounding it as shown in the illustrations below:

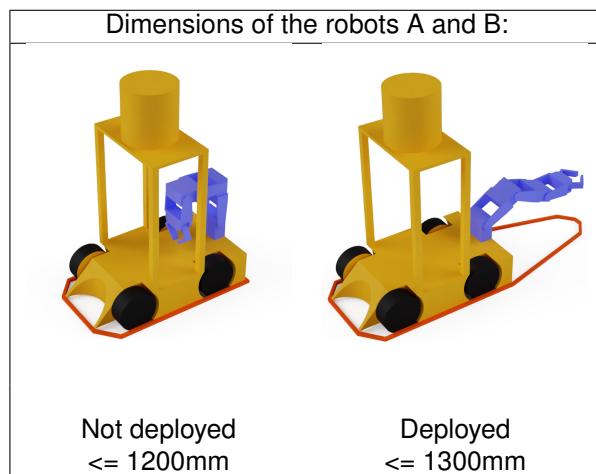

The perimeter of a robot must not exceed 1200 mm at the departure time. The perimeter of the fully deployed robot shall not exceed 1300 mm during the match. It is allowed to change the convex hull shape during the game, as long as the perimeter of this one always respects the maximum perimeter constraint.

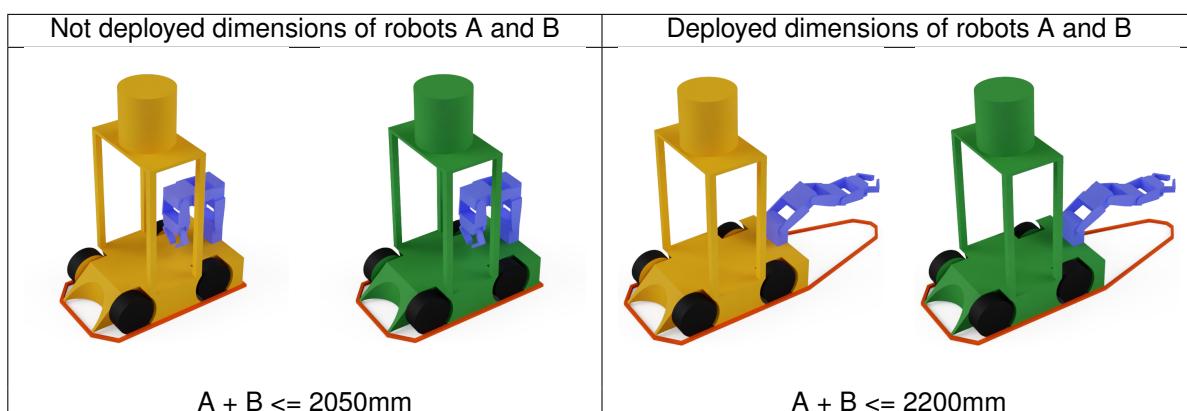

The sum of the perimeters of the two robots at the start of the match must not exceed 2050 mm. The sum of the deployed perimeters of the two robots must not exceed 2200 mm. Be careful, the sum of the deployed perimeters is equal to the sum of the maximum of the deployment perimeter of each of the two robots during the entire duration of the match. A robot cannot therefore reduce its perimeter during the match to allow a second robot to deploy more.

If a physical connection (mechanical, electrical, magnetic,...) exists between two robots of the same team, then the group formed by the two robots is in fact considered, for the perimeter constraints, as a single robot, until the group is dissociated. Note that a simple contact is not considered a physical connection.

At any time during the match the height of each robot must not exceed 350 mm. However, it can be tolerated that the emergency stop button exceeds this limit height to reach 375 mm. The flags are also allowed to exceed the 350 mm limit as long as they do not deploy before the 95th second.

This height excludes the beacon support mast, any sensors and electronic circuits integrated under the beacon holder mast.

When the robot manipulates an object, the height of this object cannot exceed 350mm in order not to disturb the use of beacons.

F.3. ENERGY SOURCES

All potential sources of energy stored in the robots and other secondary systems are permitted (batteries, springs, compressed air, gravitational energy, etc.), with the exception of sources of energy using chemical reactions such as combustion or pyrotechnics processes, which are prohibited for safety reasons. It is obvious that the use of living beings is strictly forbidden.

In addition, the use of corrosive products is strictly prohibited and liquid splashes are not permitted.

If you have any doubt about unconventional energy sources, ask the referees' committee as soon as possible, providing the corresponding datasheets.

In order to avoid any risk of fire, attention should be paid to the diameters of the wires, depending on the intensity of the currents flowing through them. It is also strongly advised to protect the electrical installation with a fuse, wired close to the batteries.

Batteries:

If the team chooses a battery power supply, we remind that only unmodified batteries can be used.

Teams must be able to play three games in a row. Note that this includes the time required to set up, during which the robot will be powered and awaiting the start.

Therefore, we strongly recommend that teams bring several sets of batteries and provide easy access to them in the robot for their replacement. Teams are reminded that it is essential to have a set of spare batteries, fully charged and available at all times.

Note on the use of Lithium-based batteries:

Lithium batteries are known for their lack of stability and can easily ignite when certain precautions are not taken.

This type of battery is therefore authorized under the following conditions:

- Suitable battery charger, which must be submitted for approval.
- Batteries kept in certified and unmodified fireproof bags (whether in the robot or on the stand, even in storage).
- A system for detecting underloads is highly recommended.
- Exception in the case of the following batteries, authorized without the conditions listed above:
 - Lithium batteries for LEGO Mindstorm / laptop / mobile phone, provided that they have not been dismantled and are used for the intended purpose of the manufacturer.
 - Lithium-Iron batteries (LiFePo4)

F.4. OTHER DESIGN CONSTRAINTS

Visibility: A rectangular space of 100 x 70 mm per robot must be left free on one of the side faces. As far as possible, this space must be visible from a camera located at the height of the playing field. It must also be visually accessible during the majority of the match. The teams will receive stickers printed by the organization (team number, sponsors etc), which they have to place on these open spaces.

Teams are strongly encouraged to make all element manipulations visible from the outside. By doing this, you allow the audience and the cameras that film the event to see how the transport of your game elements works. It is also highly recommended (but not mandatory) to close empty spaces inside the robots to facilitate their detection by other robots.

Starting cord of autonomous robots: Robots must be equipped with a starting device easily accessible. This device has to be triggered by pulling the end of a cord at least 500 mm long. This cord must not stay attached to the robot after departure.

No other starting system (remote control, manual rocker switch, etc.) will be approved.

The start of one robot can launch the other robot.

Emergency stop button of autonomous robots Autonomous robots must be equipped with a red emergency stop button of at least 20 mm in diameter. It must be placed on the top of the robot in a visible position and in a non-risking area to be immediately accessible by the referees at any time during the match.

In its higher state, the button may exceed the robot's height by 25 mm. The emergency stop button must be operated by a simple downward movement (for example, by hitting it with the fist).

Pressing this button must stop all robot actuators immediately !

Automatic shutdown Each robot must be equipped with a system that stops the movement of the robot and all its actuators automatically at the end of the 100 seconds (a match's duration). The dynamic displays that are present on the robots, can remain on.

Avoidance system (optional for Eurobot^{Open} Junior) All teams are required to equip their robot(s) with a system for detecting opposing team's robots.

This system is intended to prevent collisions between robots, during a match. This point will be systematically checked during the approval. Referees will pay special attention to non-fairplay teams that deliberately deactivate their avoidance systems after passing the approval stage.

Voluntary deactivation of robot avoidance systems may result in complete disqualification of the team !

Warning: As most of the events are filmed, please adapt your avoidance systems so that it is not disturbed by autofocus cameras and filming.

Embedded/ on-board bacon support system In order to facilitate robot identification in the field, robots must integrate an embedded beacon support system to identify the beacon of the opposing team. This support system must respect the following points:

- have a convex hull, in any altitude, with a minimal size of a 70 mm diameter circle and with a maximum size of a 100 mm square;
- be solid and opaque (a material able to intercept the light at least in the infrared spectrum; and opaque for the visible spectrum too, except in case of a justification needed);
- have its upper surface flat and positioned at a height of 430 mm above the playing area to allow the beacon of the opposing team to be placed in good conditions;
- the top of surface of the platform will be fully covered of VelcroTM (hook side);
- the vertical projection of the on-board beacon support must be located as centrally as possible and within a circle of 20 cm diameter around the center of the robot;

- the embedded beacon support must only accommodate sensor systems. The beacon support must be as hollow as possible. For teams using rotating devices, make sure that the portion of cylinder removed has a height of less than 2 cm (except for the minimum size of the envelope convex).
- the on-board beacon support must be stable and must be able to support a minimum weight of 300 g (the opposing team's beacon)

However, a team may choose not to equip their robot with an embedded beacon support system. In this case, if the opposing team requires a beacon support, and the use of it (either to detect the mast or to place a beacon), the team or the robot concerned may be revoked for that particular game.

Wifi networks:

At multiple contest locations, the number of active Wifi devices can disturb the robots implementing this technology for communication. To answer this issue, it's recommended (but not mandatory) to use the 5 GHz frequency rather than the 2.4 GHz one.

F.5. SECURITY CONSTRAINTS

F.5.a. GENERAL ASPECTS

All systems (robots, beacons and accessories) must comply with the European standards. This is also mandatory for the countries outside the EU that are organizing national meetings or send independent teams for the European Finals. Among other things, these security standards must respect safety rules and must not endanger participants, organizers nor public.

Robots must not have protruding or pointed parts that could be dangerous or cause damage.

The use of liquid, corrosive, pyrotechnic and living beings is prohibited.

All robots must comply with standard "low voltage" regulations. As a result, **the on-board voltages must not exceed 48 V.**

Potential differences greater than 48 V may exist, but only within closed commercial devices (eg lasers, LCD backlights, etc.) and only if these devices have not been modified and comply with national and European regulations.

In general, any system deemed by the referees' committee as dangerous will not be approved, and must be replaced, in order to be accepted in the competition.

F.5.b. LASERS

Only laser systems and classes defined according to the IEC60825 international standards are accepted. Teams using lasers must provide the manufacturer's document mentioning **the class of the device** (this information is normally always available on the system itself).

On the basis of this classification, class lasers:

- 1 and 1M are accepted without restriction
- 2 are tolerated only in case the laser beam do not exceed the play area
- 2M, 3R, 3B and 4 are strictly forbidden.

WARNING: Disassembling or modifying devices using laser sources often results in a change of class. Laser devices must not be altered and only be used in the state of their commercialization (laser device = source + optics + electronics).

F.5.c. HIGH POWER LIGHT SOURCES

When using a high intensity light source, the light intensity must not be dangerous to the human eye in case of direct contact. Note that some types of LEDs have warnings. Be responsible, as your machines are evolving in front of a general audience!

In the case of slightest doubt, the organization reserves the right to request the manufacturer's specifications to verify the non-dangerous nature of the lighting system used. If it turns out that the system is potentially dangerous, it may result in revocation of lasers class 2M and more.

F.5.d. COMPRESSED AIR SYSTEMS

Compressed air systems should not exceed 4 bars.

G. BEACON TRACKING SYSTEM

G.1. GENERAL POINTS

Teams can develop a complete beacon localisation system; in this extent there are specific zones on the playing area where these beacons can be fixed.

At the opponent's request and only if justified, the robots could be equipped with a flagpole to fix an opponent's beacon above (see subsection F.4.).

All beacons (fixed beacons, embedded beacons and central tracking device) must remain in place on their supports throughout the duration of the match. All robot safety instructions equally apply to beacons.

Fixed beacons, center marker, beacons, embedded beacons and their respective supports are described below.

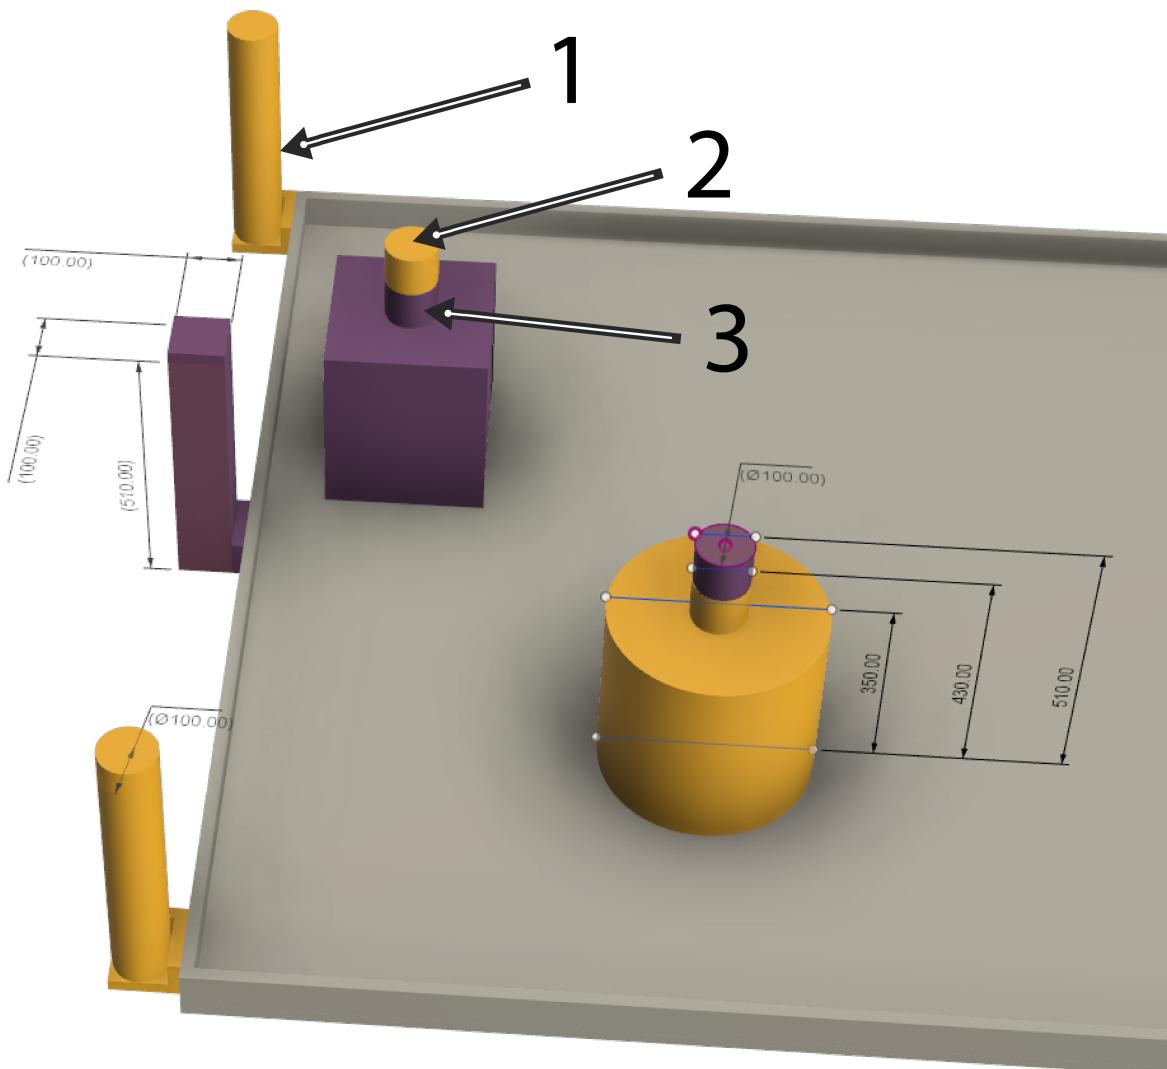


Figure 11 - Example of beacons positioning

Caption:

1. fixed beacons (maximum dimensions W x W x H: 100 x 100 x 510 mm)

2. embedded beacon (maximum dimensions L x W x H: 100 x 100 x 80 mm)
3. mast of the support (cf. subsection F.4.)

G.2. EMBEDDED/ ON-BOARD BEACONS

A beacon can be placed on each of the adverse robots, in order to locate it. It must be placed on a dedicated mast, at an height of 430 mm above the playing area. The maximum size for an on-board location beacon is a square based parallelepiped of 100 mm side and 80 mm height.

The upper side of the on-board beacon must be flat and covered with VelcroTM on the hook side in order to receive the identification mark of the robot, respecting the color of the team.

The underside of the beacons must be covered with velvet VelcroTM.

It is recommended that the color of the beacons be mainly white or very clear, so as to favor their detection on a dark background.

In the name of fair play, the elements used for this beacon must have real utility. Any "useless" or weighted beacon will be refused by the organization.

An embedded beacon must not exceed 300 g

G.3. FIXED BEACONS

Each team can place up to three fixed beacons on fixed supports. These fixed supports are allocated to the team upon demand and will be placed around the playing area.

Action-cams not useful for the course of the game are prohibited in fixed beacons.

G.3.a. DIMENSIONS

The fixed beacons shall be integrally contained in a square rectangular parallelepiped of 100 mm side and 510 mm height.

A fixed beacon must not exceed 1.5 kg.

G.3.b. FIXATION

Given the potential height of the fixed beacons, they must have a solid fixing system.

The fixed beacon supports are located at the level of the playing area.

The horizontal plane of the fixed beacon support has a 10 mm wide groove. This groove must be used to secure the fixed beacons using an 8 mm diameter threaded rod and a wing nut.

The absence of this fixing system will forbid the approval of the fixed beacons.

G.4. CENTRAL TRACKING DEVICE

In order to help identify the robots during the matches, a common platform located on the central symmetrical axis of the ground will be placed 1 m above the surface of the playing area (see plan). This platform can be used to place a robot tracking device with a top view.

The central tracking device should be placed on the area that corresponds to the color of the team. It must not exceed beyond a horizontal plane of 6 cm above the platform's upper surface. It must also not surpass

a horizontal plane of 60mm below the platform's lower surface. On the sides, an offset of 6 cm is allowed: forward, at the edge not shared with the opponent and at the back. This offset allows: placing sensors above the ground, connecting the parts situated above and underneath the platform and setting up a slid fixing for the central tracking device. Its weight must be less than 2 kg.

It is forbidden to overpass on the opponent's area.

Please note that the central tracking device can be subject to vibrations due to the movements of robots on the playing area.

In appendix, the drawing of a mast supporting the platform are represented. However, only the dimensions and the position of the platform are contractual, the mast itself may be different from one meeting to another. Its design is left free to the organizer of the meeting.

Fixation:

The thickness of the fixing platform for the central tracking device is 22 mm.

The fixing device can surround the fastening platform from above, from below and from all three sides of the support so that it can be assembled and positioned quickly and without the risk of falling.

The mounting platform has a 10 mm wide groove from the center of the beacon support to the middle of the side. This groove must be used to secure the central tracking device using an 8 mm diameter threaded rod and a wing nut.

The absence of this fastening system will prevent the approval of the tracking system.

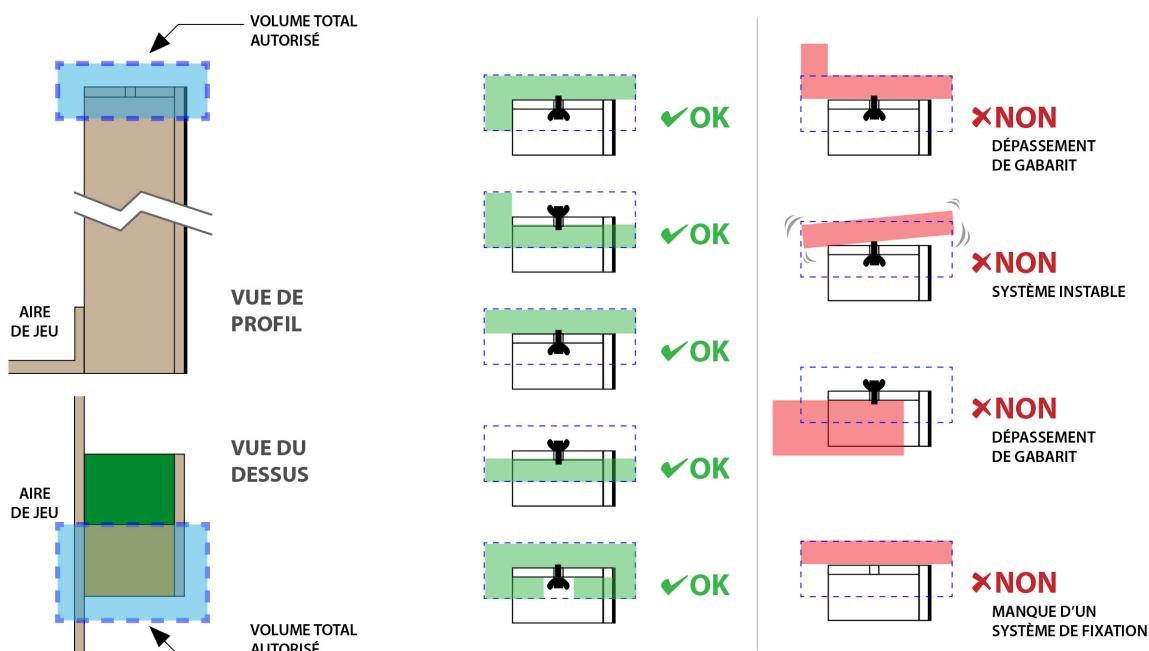


Figure 13 - How to install a central tracking device

G.5. CONNECTIONS

The fixed beacons and the central platform can be connected by a wired link. This connection must under no circumstances disturb the match. The installation of the whole system must be carried out before the match, during the preparation time. It should not disturb the opposing team's preparation.

During the preparation time, a temporary wired link may be pulled in between the robot and one or several beacons. This case scenario is accepted only if it doesn't cause any inconvenience for the opposing team.

G.6. COMMUNICATION SIGNALS

To avoid interference between teams, it is recommended to encode the communication signals. We strongly recommend teams using infrared devices, to take into account the strong ambient light used during the encounters. In addition, this luminosity may vary in time and according to the emplacement of the playground in the hall.

We also remind teams that the organizing staff uses high-frequency radio devices and under no circumstances can they be held responsible for the malfunctions encountered by the robots.

CAUTION: Beyond the edges of the playing area, there may be elements that may interfere with color detection or communications signals such as:

- decor, lights and objects of the playing area
- people (referees, teams, etc.)
- electronic systems (microphones, cameras, etc.)

It is strictly forbidden to ask people to go away or move away objects/decors around the playing area !.

G.7. ROBOT IDENTIFICATION

During each match, the robots will be assigned a marker (provided by the organizer) placed at the top of the beacon holder, or at the top of the on-board beacon (if present)(Figure 14b). This marker has two purposes:

- allow the public to identify the team to which a robot belongs;
- allow a vision system on the central mast to identify and locate each robot.


The marker is a square 10cm wide, 2cm thick ($\pm 2\text{mm}$) and with a mass less than or equal to 80g. Its upper side is covered with a vinyl with a 7cm ArUco 4x4 tag (centered). A 1cm wide white outline is drawn around the ArUco tag to facilitate its detection. A 0.5cm wide contour in the same colour as the team is drawn at the edge of the upper surface. The team's color also occupies the edge of the marker.(Figure 14a)

- Team blue robots will receive ArUco 4x4 tags between 1 and 5.
- Team yellow robots will receive ArUco 4x4 tags between 6 and 10.
- All robots will receive distinct markers. It will not be possible to choose them, nor to choose on which robot they will be placed.
- ArUco 4x4 tags from 11 to 50 are reserved for the playing area, but not all of them are necessarily used.


WARNING : to avoid visual disturbances, the teams are not allowed to use ArUco 4x4 tags from 0 to 50.

- ArUco 4x4 tags between 51 and 70 are reserved for team blue .
- ArUco 4x4 tags between 71 and 90 are reserved for team yellow .

However, other tag numbers over 90 and other dimensions than 4x4 are allowed.

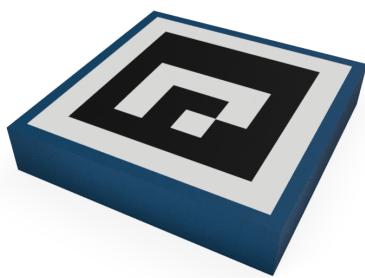

(a) Robot identification marker (Tag n1).

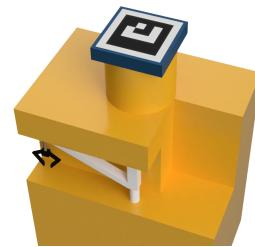

(b) Marker on the on-board beacon support.

H. MATCHES

The matches have a duration of 100 seconds.

Only two persons per team are permitted to go backstage and on stage to play the matches.

To ensure that the contest runs smoothly, we ask the teams to be present on their booth with the robot(s) and ready to go 30 minutes before the start of the series and until that the game is played.

In case of a problem, it is tolerated by the organization to ask for a delay to go to the match but this delay can never exceed the end of the current series. If the team cannot do its match before the end of the series, a forfeit will be applied. In case of abuse, a warning will be applied, and if the problem recurs in a subsequent series, a penalty may be awarded.

In any case, the team must be present on its booth when the organization comes to pick it up for a game. In the event of non-compliance with this rule, an official may initially give the team a warning, and if the absence is repeated on a subsequent series, a penalty may be awarded.

H.1. PREPARATION TIME

At the start of a match, the elements of the playing area and the playing area itself are installed as indicated in the diagrams in the appendix.

Upon arrival on the playing area, each team has a maximum of three minutes to proceed with the placement of the robots, the beacons and other equipment.

A robot which is not ready at the end of this period exposes the team to a forfeit for the match.

Besides, the other team's robots will still play their own game on the playing area. The team will have to score points to be declared the winner.

When both teams have finished setting up, or when the preparation time is over, the referee asks the participants if they are ready. From this moment, teams are no longer allowed to touch their robots. No dispute can be made on the disposition of the elements of play after the beginning of the match.

H.2. THE MATCH

At the signal of the referee, each robot is switched on. In no case may robots, playing elements and playing area be allowed to be touched during the match. In case of absolute necessity, the referee may authorize such action.

Any manual intervention on a robot, a playing element or the playing area, without the explicit authorization of the referee, may justify the application of a forfeit or a penalty for the match.

No elements taken out of the playing area can be put back on the table before the end of the match and the validation of the scores.

At the end of the match, the robots must stop and turn off all their actuators. It is allowed to keep on any dynamic displays.

At the end of the match, **no one except the referee** can touch the robots and the playing elements unless expressly indicated by the referees. The referees count the points; they give the result of the match, including the points to the teams. If they both agree, they validate the match sheet, can take back their robot(s) and join their booth. If the teams do not agree, they refer calmly to the referees. The robots remain in place until the dispute is resolved. Refereeing decisions are final.

In the event of a situation that is difficult to judge, the referees reserve the right to decide whether or not to

replay the match.

The referees are allowed to pronounce the end of a game in advance, before the end of the regular time if both teams agree (if the robots are blocked for example).

A team is considered to be **forfeit** for the match:

- if none of the robots have completely left the starting area during the match,
- following refereeing decisions.

Pressing the emergency button of a robot during a match may expose the team to a penalty or a forfeit.

H.3. COUNTING POINTS

At the end of the match, the referees count the points of each team according to the following.

Points summary

H.3.a. CREATE FAIRWAYS

- **1 point** per valid buoy in the port;
- **1 point** additionally per valid buoy on the fairway line of its color;
- **2 points** per pair of valid buoys on the fairway lines of one port. A valid pair includes one green buoy and one red;

H.3.b. LIFT UP THE WINDSOCKS

- **5 points** if only one windsock is lifted up by the end of the game;
- **15 points** if both windsocks are lifted up by the end of the game;

H.3.c. TURN ON THE LIGHTHOUSE

- **2 points** for putting the lighthouse on the rocky area before the game starts;
- **3 points** additionally for activating the lighthouse during the game;
- **10 points** additionally if the lighthouse is deployed, valid and its light activated by the end of the game.

H.3.d. ANCHOR SAFELY

For this specific action, counting is different according to the number of robots per team at the beginning of the game.

Team with only one robot:

- **10 points** if the robot is valid in the mooring zone indicated by the weathervane;
- **5 points** if the robot is valid in the other mooring zone;

Team with two robots:

- **10 points** if both robots are valid in the mooring zone indicated by the weather vane;
- **5 points** if both robots are valid in the other mooring zone;
- **5 points** if only one of the robots is valid in the mooring zone indicated by the weather vane;
- **0 points** if both robots are valid but in different mooring zones;

H.3.e. HOIST FLAGS

- **10 points** if at least one robot has raised its flags;

H.3.f. ESTIMATE THE PERFORMANCE (BONUS POINTS)

The assessment is based on all the previous actions (Create fairways, Lift up the windsocks, Turn on the light-house, Anchor Safely, Hoist flags).

The estimation bonus is calculated as follows: **Bonus = (0.3 x Score) - Delta**

- The score is the one scored by the team during the match on standard actions.
- The delta is the difference between the score made by the team during the match and the score estimated by the team. This one is always positive (Absolute value).
- The bonus is an integer value (rounded up).
- The bonus is added to the points of the team.
- A negative bonus is reduced to 0.
- A score of zero cannot give right to any bonus.

Warning! An element controlled by a robot, does not yield points. An element is considered to be controlled by a robot, if by moving the robot along its natural axis of movement the element is moved.

H.3.g. THE PENALTIES

A penalty is a **loss of 20 points** on the result of the match. Several penalties can be applied.

A negative score will be reset to 0.

RECALL:

The penalties are intended to compensate for damage after a possible incident during the course of the game. A penalty situation is considered as non-respect of the rules of the game, this type of situation must remain exceptional!!! A penalty may result in the team's forfeit. The referees' committee will also be attentive to the penalties distributed between several levels of meeting (regional/national/European).

H.3.h. BONUS POINTS

5 bonus points are awarded to all teams that are not "forfeit".

H.3.i. FORFEIT CASES

The score of a forfeit team is reset to zero.

I. THE CONTESTS

I.1. GENERAL INFORMATION

The Eurobot^{Open} meetings can be organized on three levels:

- regional: when they exist (e.g. in France, Eurobot^{Open} Junior), qualify a number of teams for the national meeting,
- national: it allows to qualify the teams for the European meeting,
- European: this last stage brings together, in the same friendly spirit, teams from different countries in Europe and elsewhere.

Each meeting has several successive steps:

- The static and dynamic approvals of all the robots;
- A qualification phase;
- An optional play-off phase;
- A final phase.

I.2. APPROVAL

I.2.a. STATIC APPROVAL

Before the start of the matches, robots are subject to the supervision of a referee who checks their compliance with the rules. Robots must be able to easily show all their mechanisms.

The ancillary systems (accessories, beacons, central tracking device, etc.) will also be subject to static control (size, mass, presence of mandatory elements, etc.).

I.2.b. DYNAMIC APPROVAL

The robots must, within 100 seconds, validate at least one action. The robots are put in a game situation but without the presence of an opposing team. Certain specific features provided for in the regulation can also be checked (timer, avoidance of opponents, etc.).

If the assembly consisting of the main robot and the secondary robot fulfills these conditions, it is declared approved. If one of the two robots is not approved, the other robot can play the match alone.

I.2.c. SIGNIFICANT TECHNICAL MODIFICATIONS AFTER THE APPROVAL

It is essential to inform the referees of any significant modifications (functional, structural, dimensional ...) brought to the robot(s) or any other element after approval. The referees will then check the modifications made and re-approve the robot if they deem it necessary. In the event of a breach, the team may be declared disqualified from the contest.

I.3. QUALIFICATION PHASE

During the qualification phase, the registered teams will have the possibility to play at least three games (often more, depending on the local organizers).

A ranking is established according to the accumulated points in order to select the qualified teams for the next phase.

The tied teams are tied by comparing their scores without taking into account their bonus points. Organizers may also use additional matches.

At the end of the qualifying phase, the 4, 8 or 16 first teams (according to the matches) are qualified for the next phase.

I.4. THE PLAY-OFF PHASE

An additional play-off phase may be set up in the event that a meeting hosts two contests, the first of which qualifies for the second. For example:

- a regional meeting (A) and its national meeting (B)
- or a national meeting (A) and the European meeting (B)

The organizer may carry out the qualifying phase of both matches (A) and (B) either in parallel fashion or in a mixed fashion. In this case, a play-off phase may be organised in order to allow teams from the match (A) to qualify for the match (B), exempting them from having to catch up on all the matches from the qualifying phase of (B) in favour of this play-off phase.

The teams participating in this play-off phase are:

- the teams of the match (A), in a number corresponding to its qualification quota, and chosen in the order of ranking at the end of the qualification phase of (A) or through the award of a jury prize.
- the teams of the match (B), in a number equivalent to the participants in this phase from (A), chosen from among the last teams normally qualified for the final phase of the match (B).

Example for a national meeting qualifying three teams for its European final with two teams qualified in the ranking and one per jury prize and whose European final phase has 16 teams. The teams participating in the play-off phase are:

- **the first two teams of the national meeting at the end of the final phase of the national meeting, as well as the team that received the jury prize;**
- **and the teams ranked 16th, 15th and 14th in the qualifying phase of the European meeting.**

In this play-off phase, one match will be played for each participating team. The participating teams from the match (A) qualified through the ranking will play, in order of their ranking, with the teams from the match (B) with the lowest ranking. And the team(s) of (A) qualified for this play-off phase through a jury prize will play against the top-ranked teams of (B) in a random order.

Each team that wins its play-off match will be included in the main draw of the final phase of the match (B). At the end of the play-off phase, the tree of the final phase of the match (B) presented in Figure 15 may be revised to more accurately represent the level of each team.

I.5. THE FINAL PHASE

At the end of the previous phase, the qualified teams form the table of the matches of the final phase.

Depending on the meeting, only the teams composed of members less than 30 years of age will be able to enter the final stages.

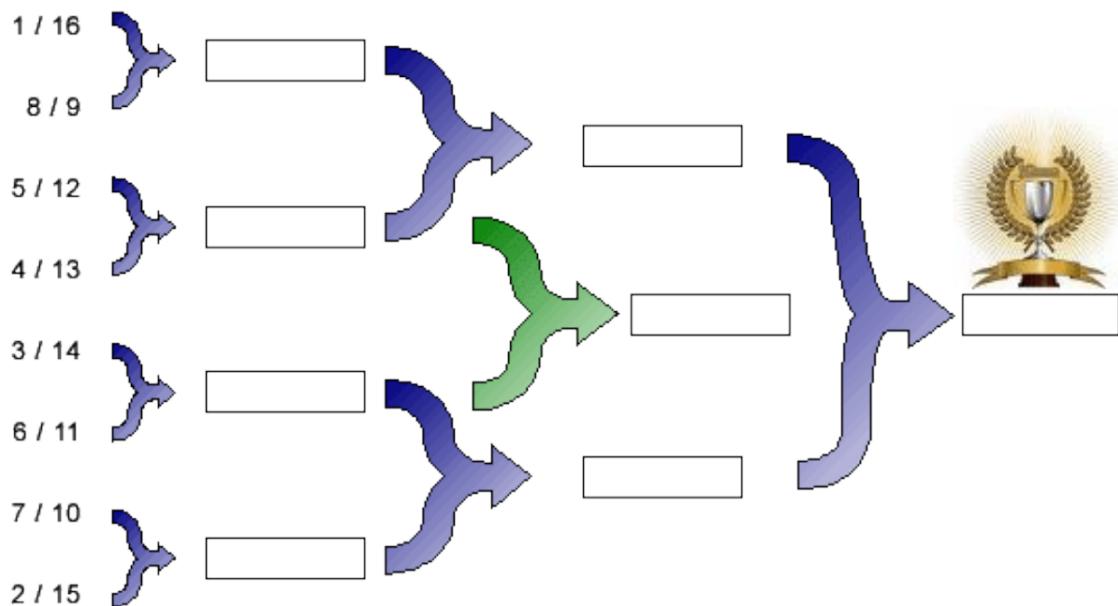


Figure 15 – Example of the tree for the final phase

The matches of the final phase are with knockout, unless otherwise organized on some meetings. In the event of double forfeit, double defeat or tie, the match is replayed immediately; if this second match is still a case of double forfeit, double defeat or equality, the winner is determined according to the points acquired at the end of the qualifying phase.

The final is played in two winning games. Be careful to provide batteries accordingly for autonomous robots.

I.6. QUALIFICATION FOR THE NATIONAL MEETING

When there are regional meetings, the number of teams qualified per regional meeting is proportional to the total number of teams registered at the national level.

The best teams in the ranking established at the end of the qualifying phase of each regional meeting, as well as at least one team chosen by the organizers from the special prizes (e.g. creativity, fair play, presentation, etc.).

I.7. QUALIFICATION FOR THE EUROPEAN MEETING

Each country participating in Eurobot^{Open} organizes a national meeting to determine the qualified teams for the international meeting.

The two finalist teams and a special jury award will qualify to take part in the European meeting.

For questions and comments, feel free to visit the Planète Sciences Forum.

<http://www.planete-sciences.org/forums/>

News and more information about Eurobot^{Open} and Eurobot^{Open} Junior are available on our website

www.eurobot.org

(It also contains links to your local organization)

The whole organization team of Eurobot^{Open} and Eurobot^{Open} Junior wishes you a lot of fun and success in the coming months, and looks forward to seeing you soon around our playing areas!

Robotic Regards,

The Eurobot^{Open} Eurobot^{Open} Junior organization committee.

J.1. GENERAL DRAWINGS

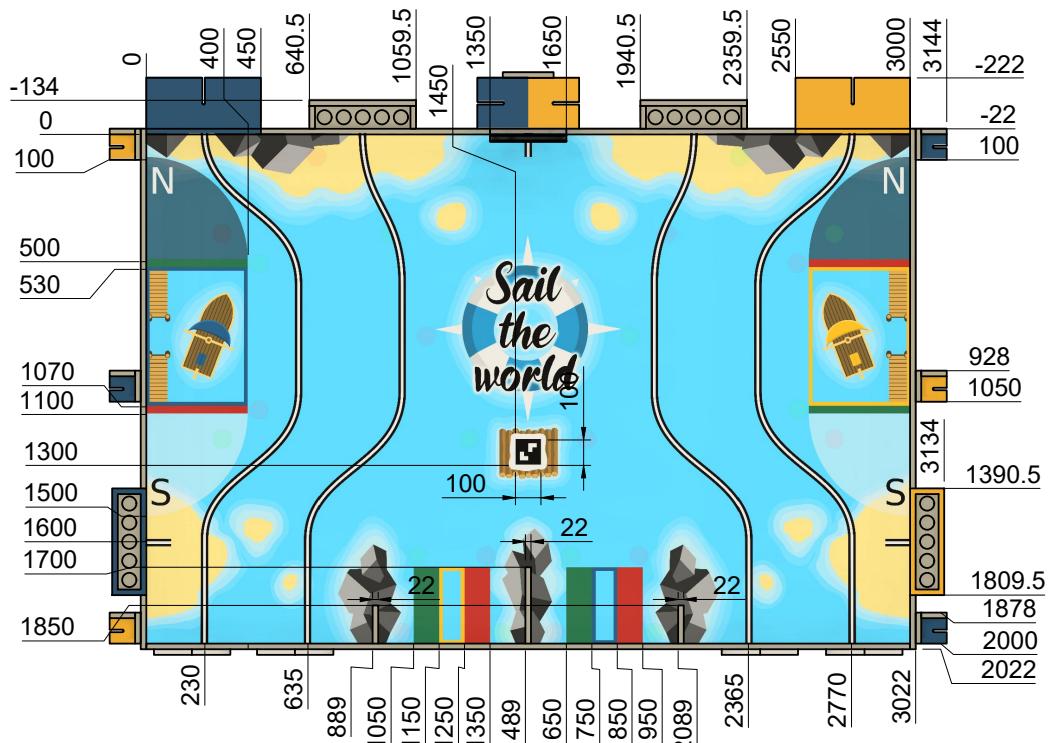


Figure 16 – Top view of the playing area without the buoys

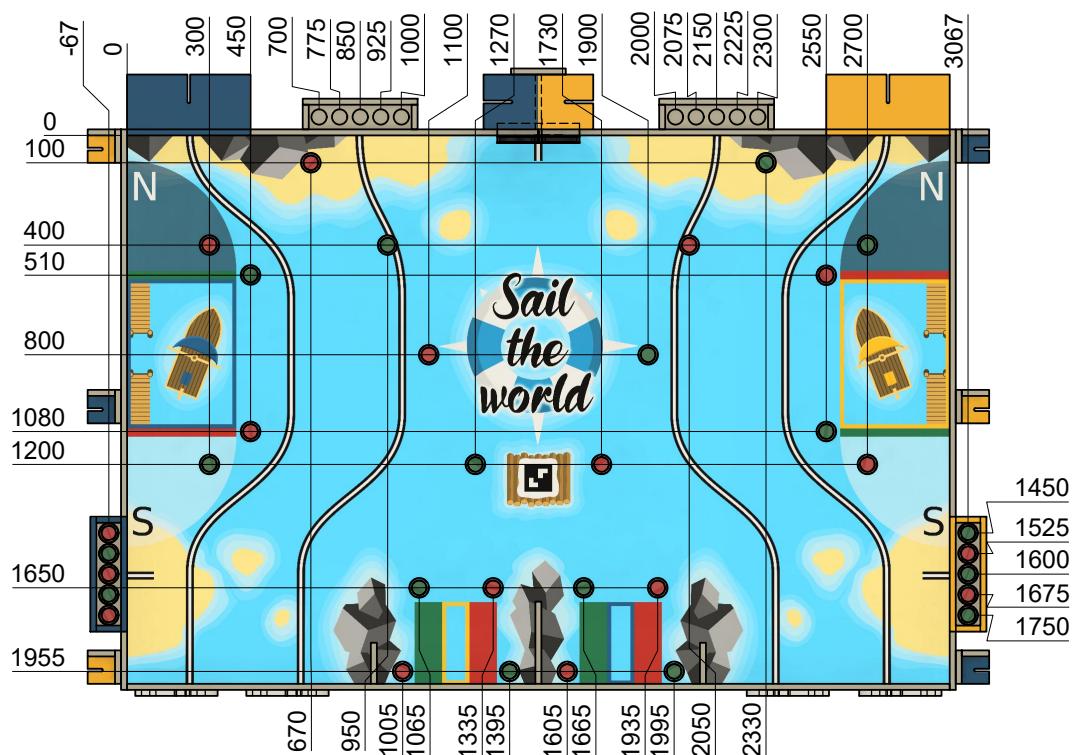


Figure 17 – Top view of the playing area with the fixed buoys at their initial positions

J.1.a. BUOYS

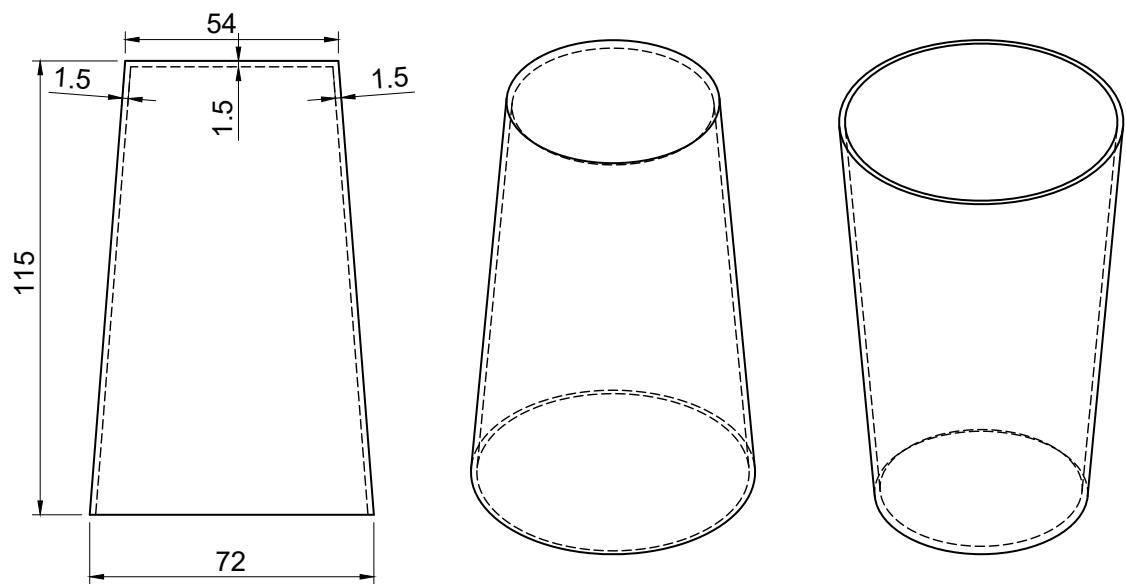


Figure 18 – Buoy

J.1.b. ROCKY AREA AND LIGHTHOUSE

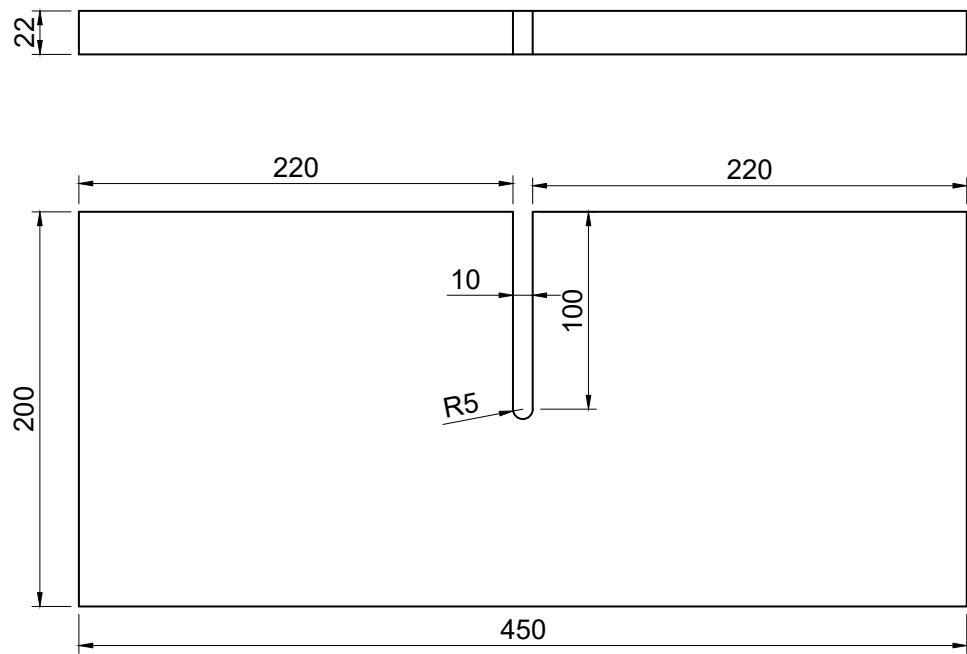


Figure 19 – Rocky area

J.1.c. WEATHERVANE

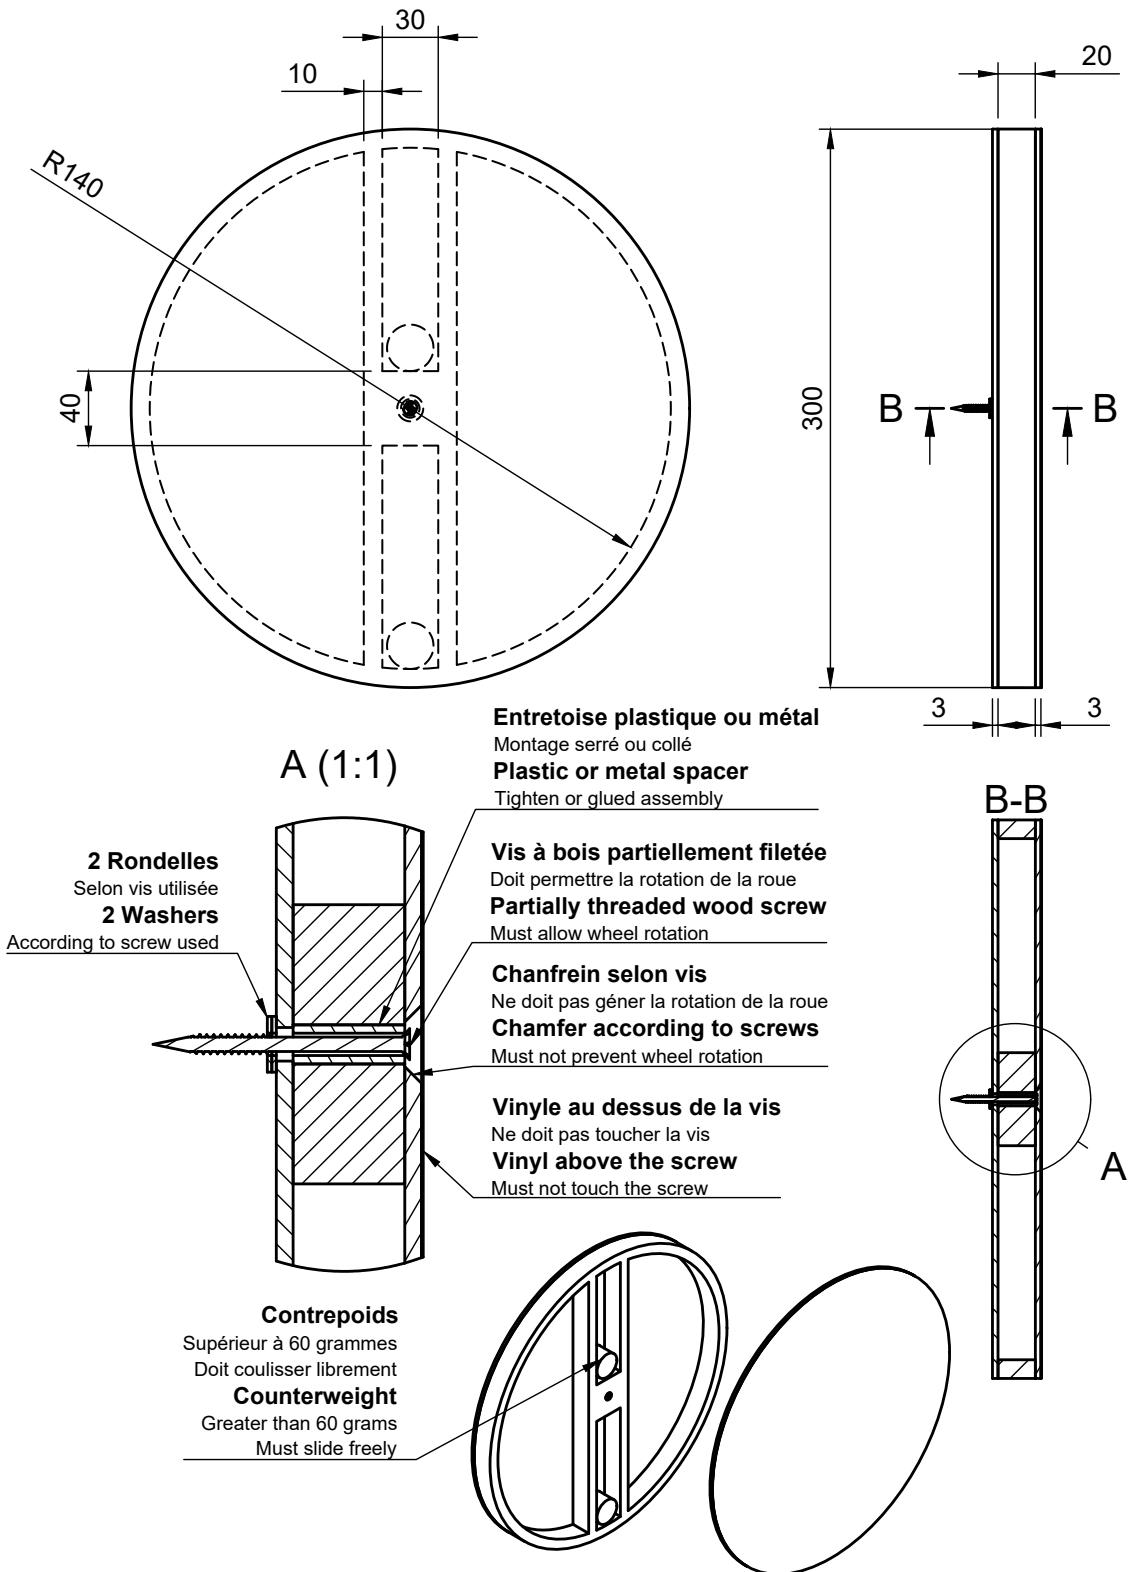


Figure 20 – Weathervane

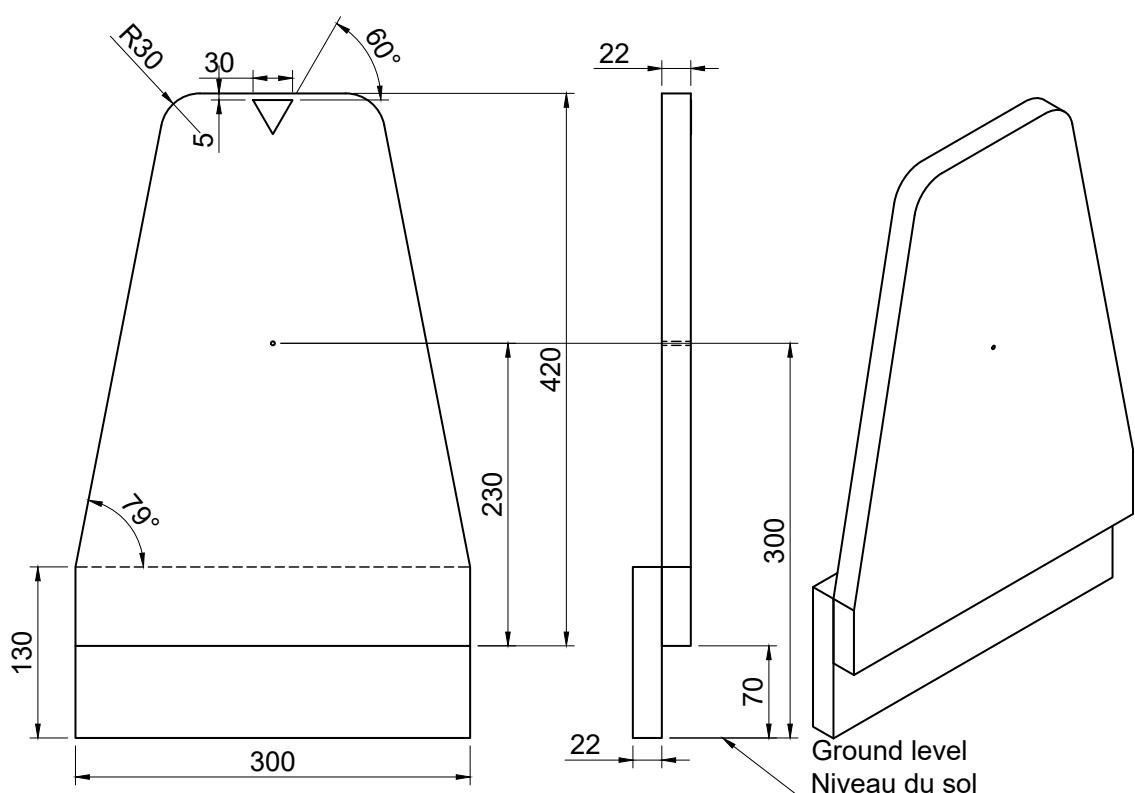


Figure 21 – Weathervane support

J.1.d. GROUNDED ZONES

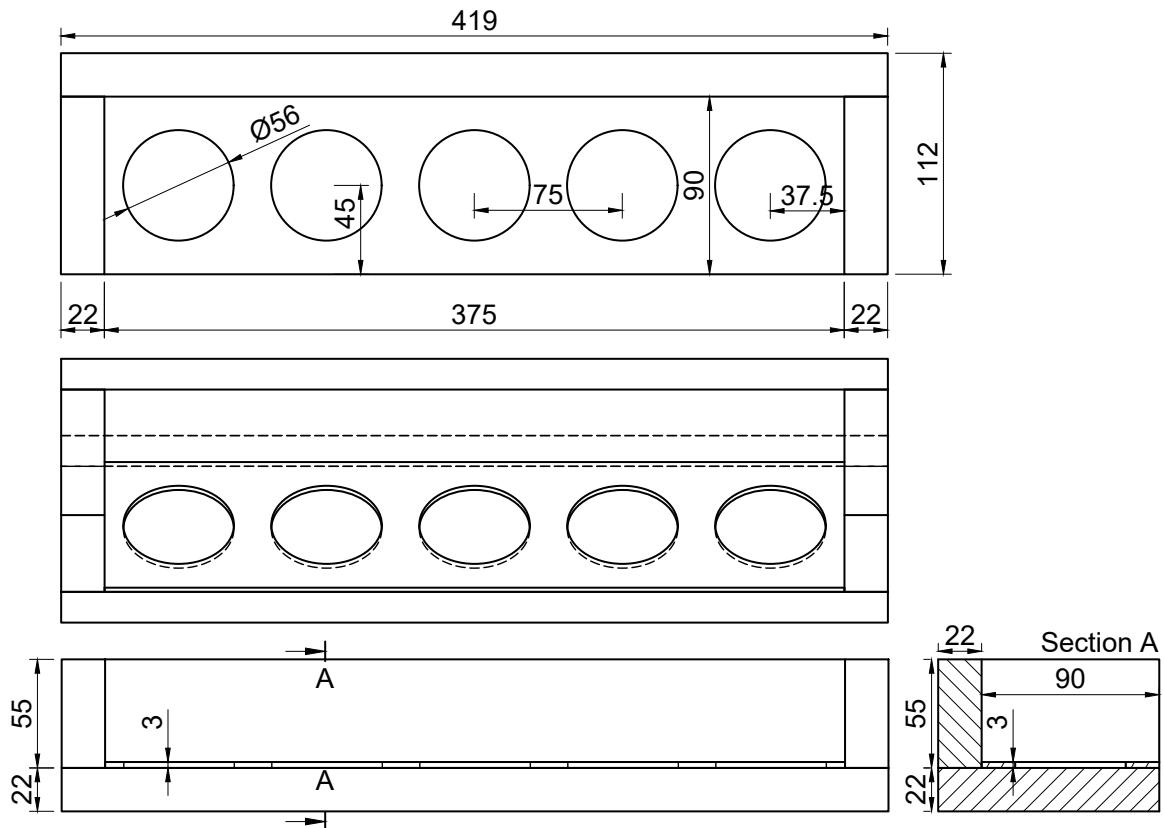


Figure 22 – Grounded Zone

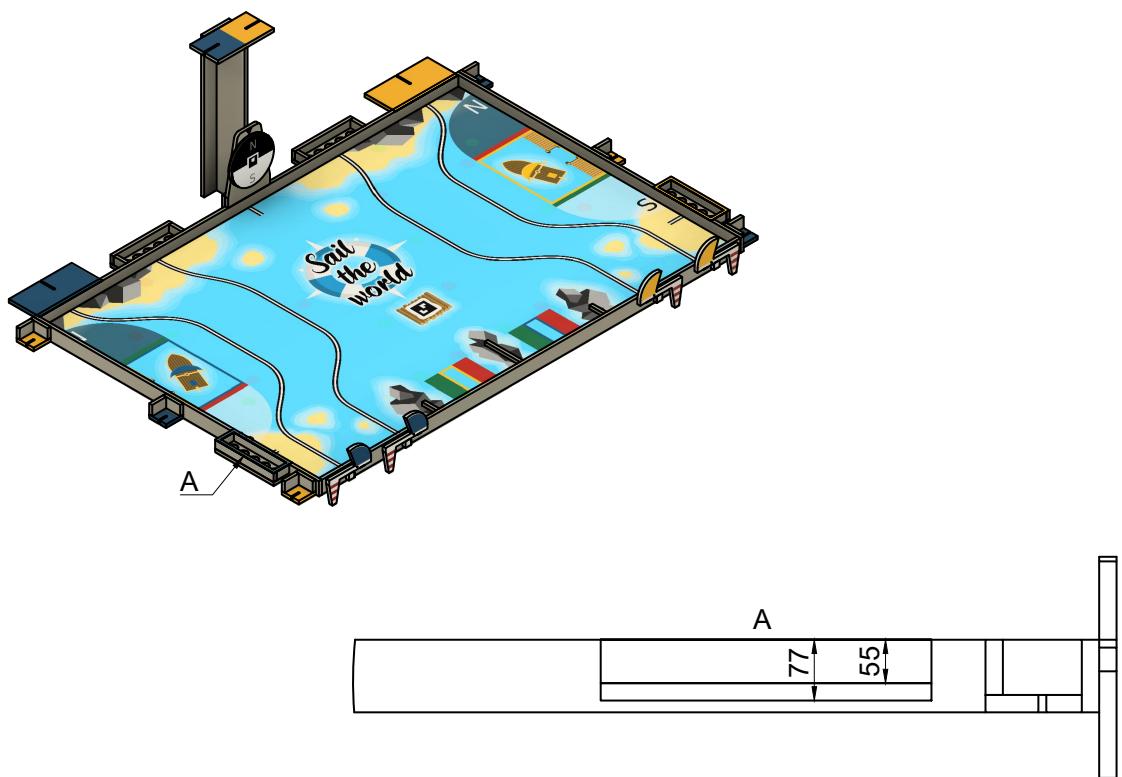


Figure 23 – Grounded Zone height

J.1.e. WINDSOCKS

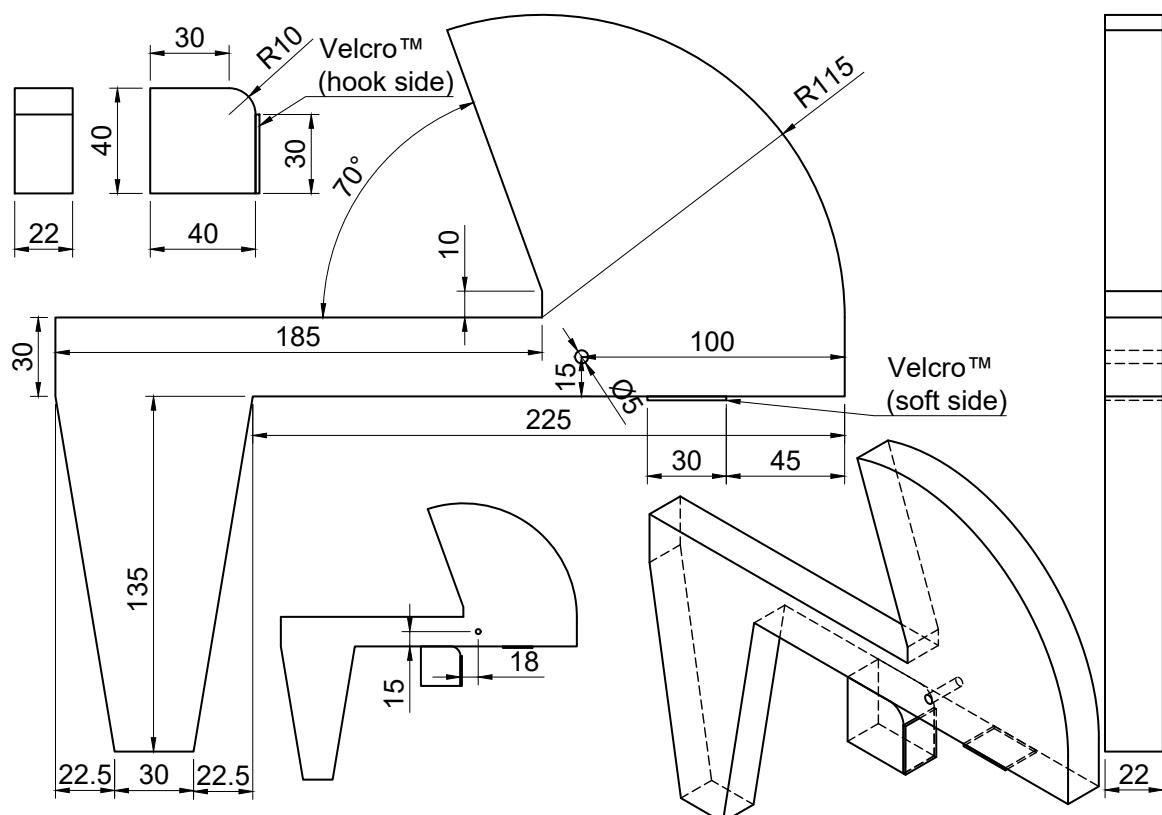


Figure 24 – Windsock

Notice: all the faces are covered by a vinyle whereas the slices are painted in white.

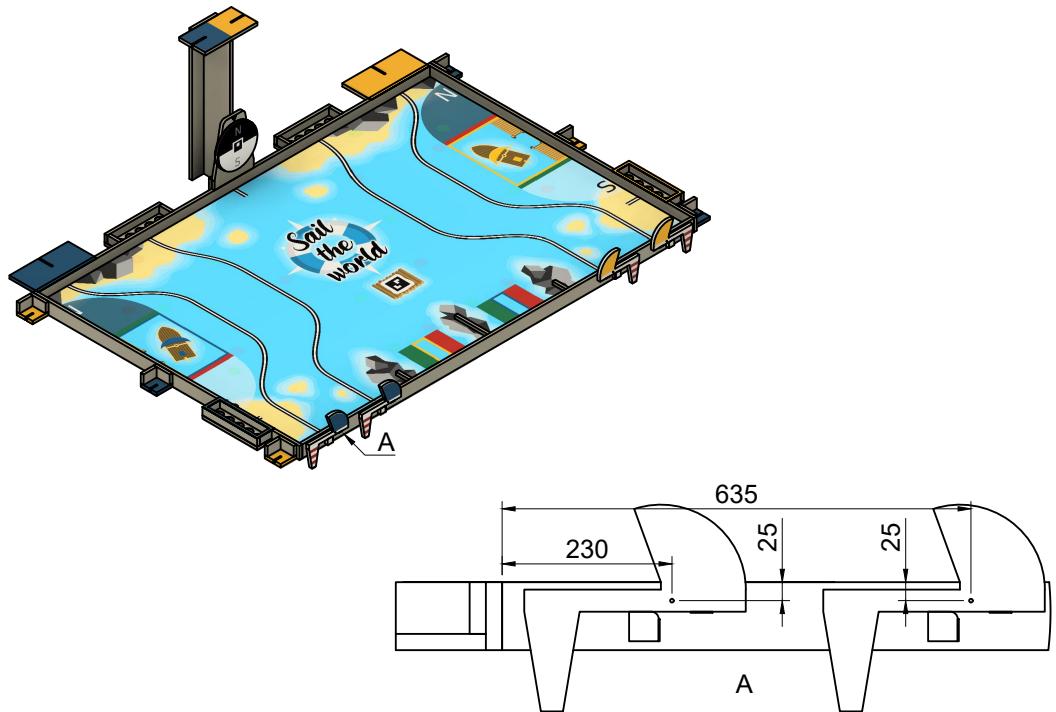


Figure 25 – Windsock height

J.1.f. PORT PROTECTION CLEATS

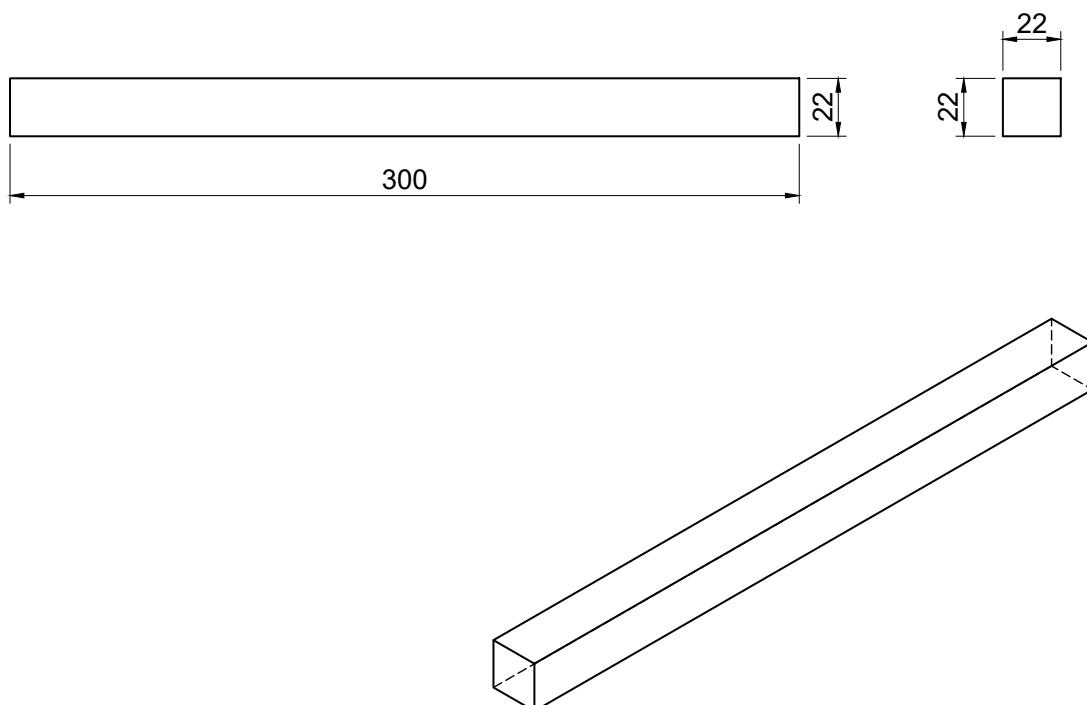


Figure 26 – Central cleat

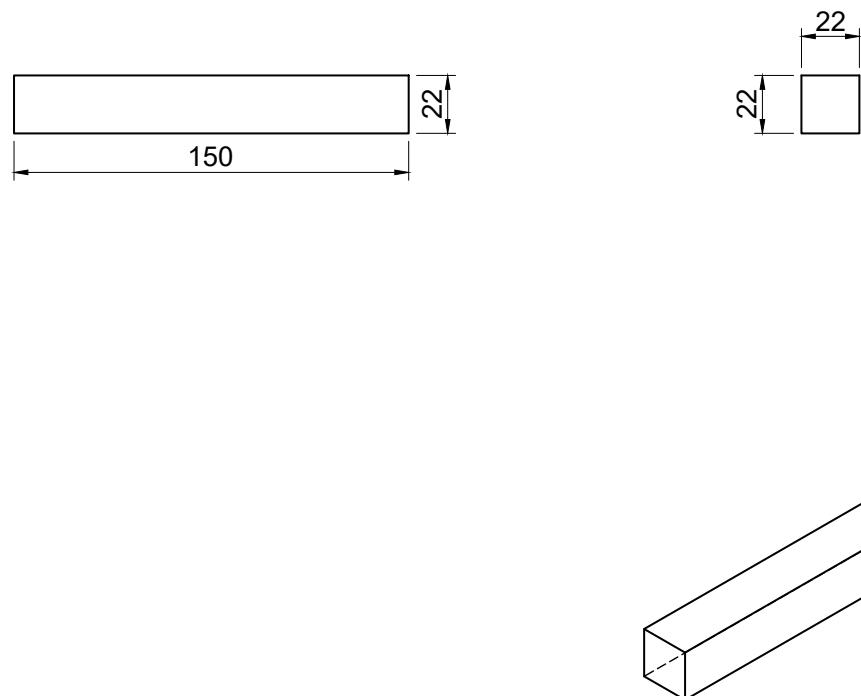


Figure 27 – Side cleat

J.1.g. BEACONS SUPPORTS

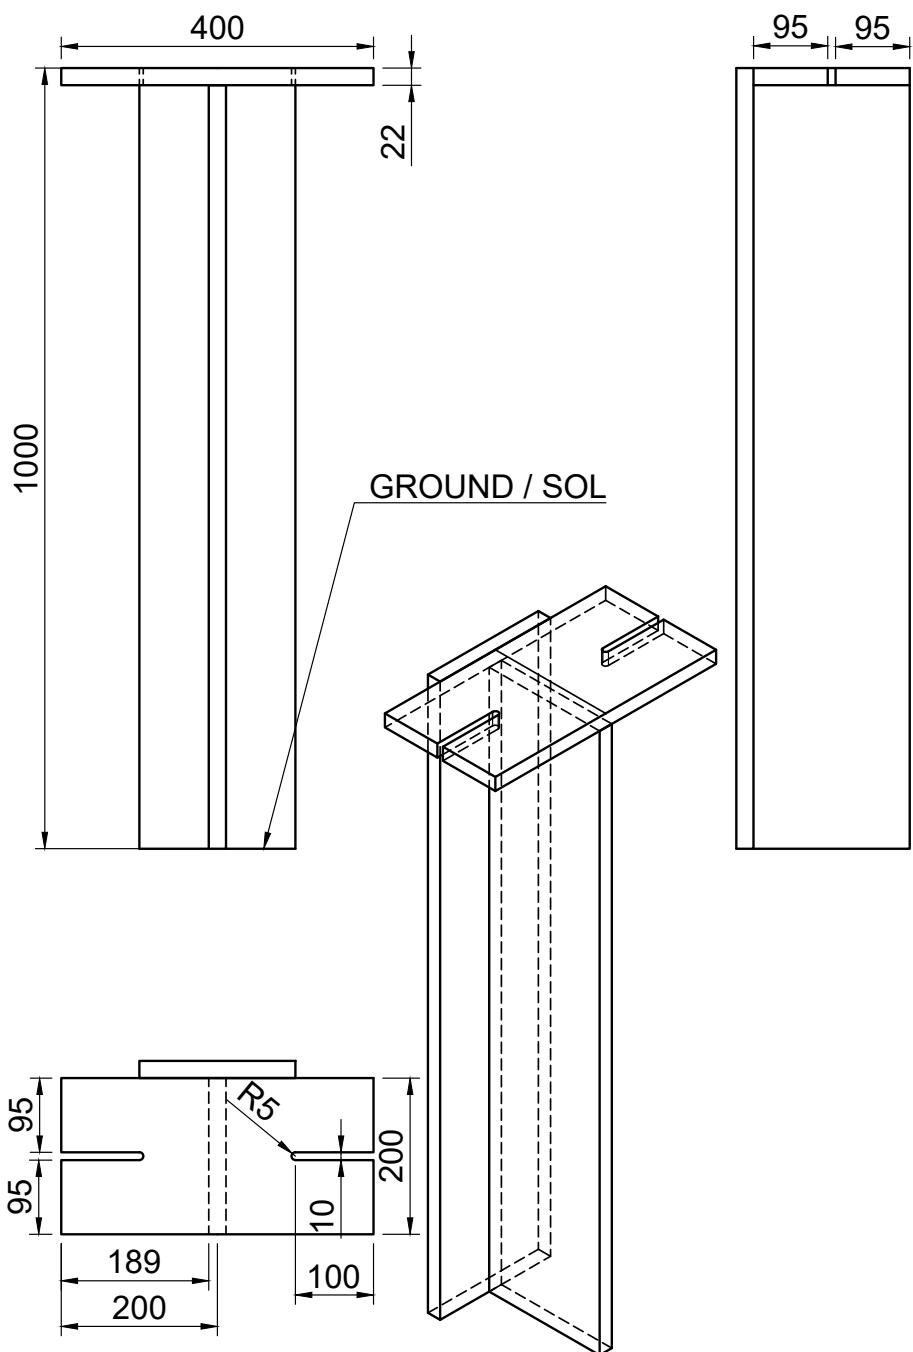


Figure 28 – Central tracking device platform

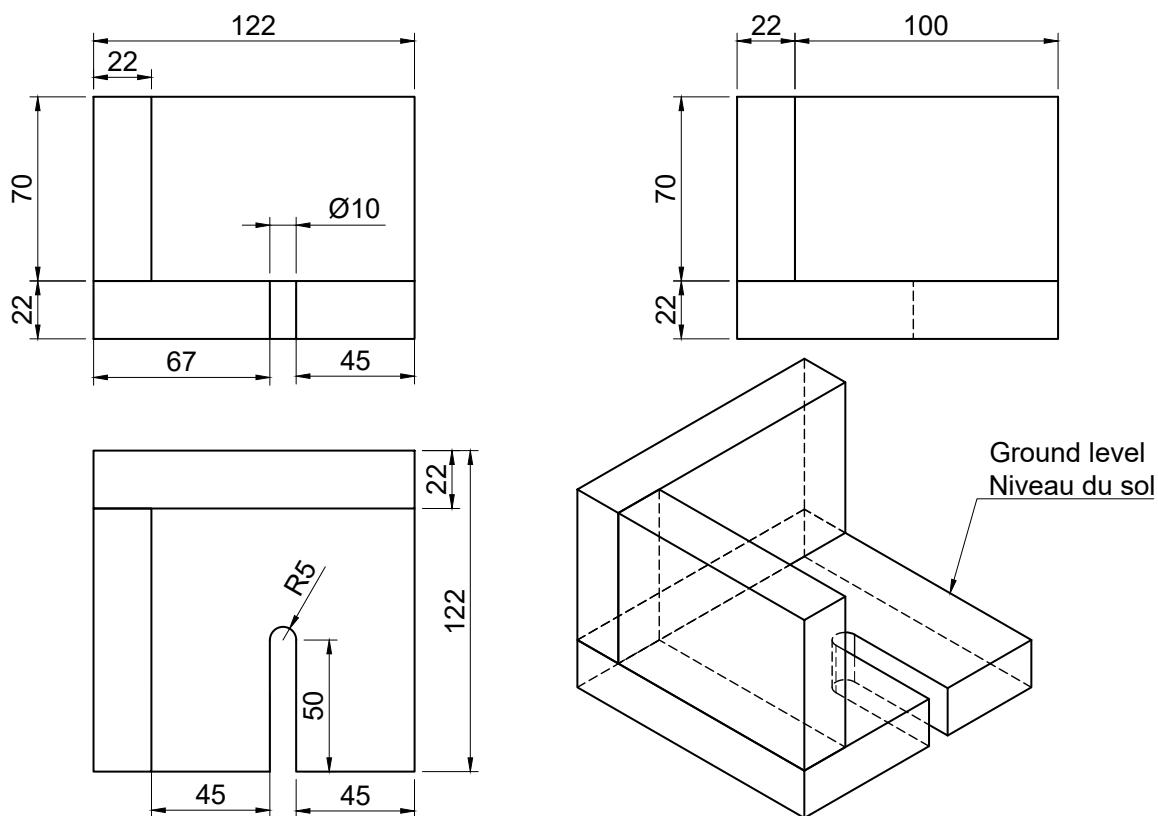


Figure 29 – Left fixed beacon support

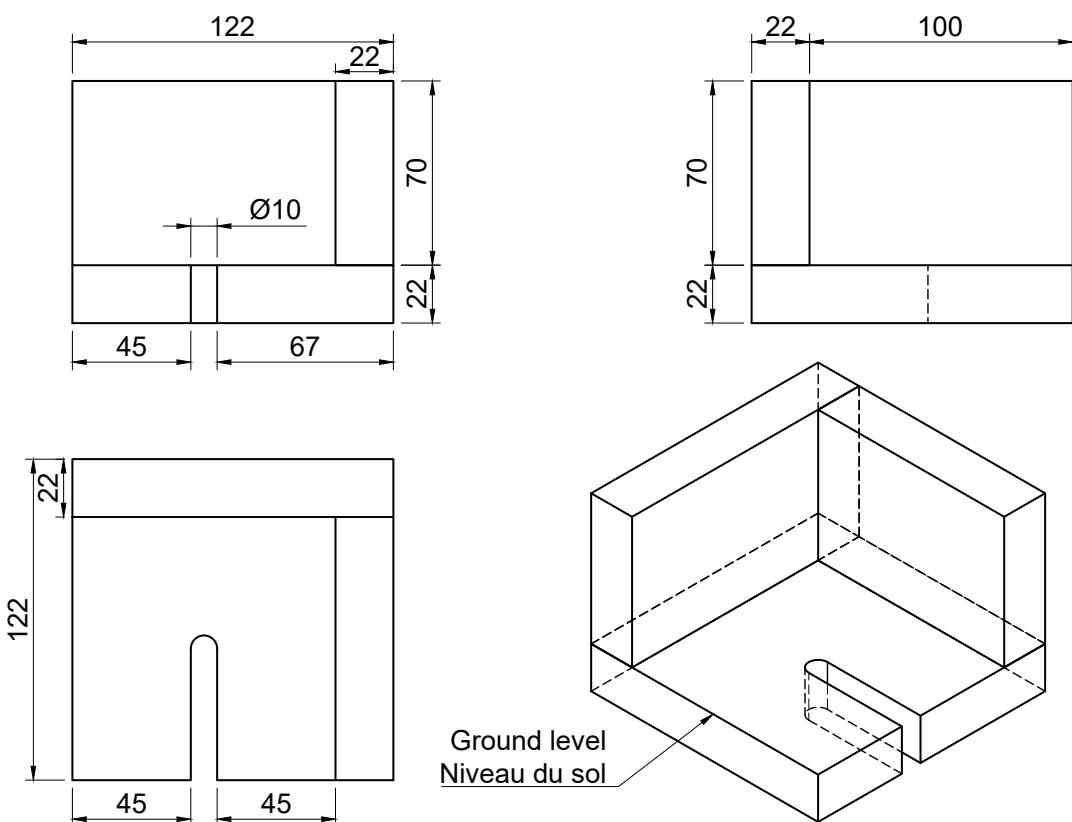


Figure 30 – Right fixed beacon support

J.2. MATERIAL REFERENCES

Elements	Material or reference	Comments
Buoys	Plastic	Blank reusable cup 25cl/33cl atelier-dugobelet.fr, dark green ("vert foncé") and red ("rouge"). ¹
Game floor	Printed monomeric gripping vinyl	Ordering information will be provided by Planète Sciences
Weathervane	Wood - Steel - Plexiglas	
Rocky area	Wood	
Central separators	Wood	
Grounded zones	Wood	
Windsocks	Wood - Velcro TM - Vinyl	
Robot identification marker	Polystyrene - Plastic - Vinyl - Velcro TM	

J.3. MANUFACTURING TOLERANCES

All dimensions are in millimeters (or mm). Manufacturing tolerances shall comply with the following rules, unless otherwise specified directly on the drawings.

Dimensions	General Tolerances
≤ 20	± 1.50
> 20 and ≤ 70	± 2.50
> 70 and ≤ 150	± 4.00
> 150	± 5.00

No objections regarding differences in dimensions will be taken into account.

The material's density can change from one country to another. It is highly recommended that the teams try different types of wood since the weight may differ significantly.

¹Cups & mugs > Reusable cups 25cl/33cl > Blank cup 25cl/33cl. Possible mix ("panachage") : <http://www.atelierdugobelet.fr/en/gobelets-25cl/622-gobelet-vierge-25cl.html>. In case of supply difficulties, contact your National Organizing Committee (NOC) to find out if they are doing a group order.


J.4. COLOUR REFERENCES

	Colors	References	CMYK
Team blue	Traffic blue	RAL 5017 Mat	100%, 60% , 0% , 10%
Team yellow	Traffic yellow	RAL 1023 Mat	0% , 25% , 100% , 0%
Buoys and fairways	Mint green	RAL 6029 Mat	100% , 5% , 90% , 30%
Buoys, fairways and windsocks	Traffic red	RAL 3020 Mat	0%, 100% , 100% , 10%
Borders and non-colored elements	Pebble grey	RAL 7032 Mat	15% , 10% , 25% , 20%
Windsocks	White	RAL 9010 Mat	0% , 0% , 5% , 0%


RAL hues can vary from a printed soil mat to another.

J.5. MARITIME SIGNAL FLAGS


All maritime flags must be taken from the International maritime signal flags. They are reproduced below. The dimensions and ratios can be freely chosen as long as the constraints in section D.8. are satisfied. Further notice: number flags are never used in 2-flags codes; that's why they are not included here. Nevertheless, they can be used when the hoisted codes have already two letters (and so with at least three flags).

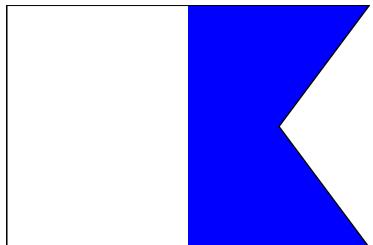

A - Alpha

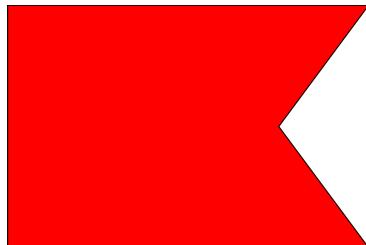

B - Bravo

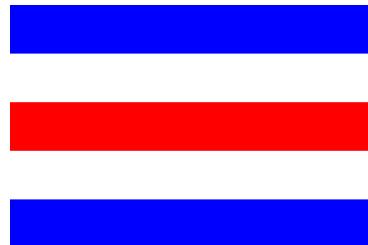


C - Charlie




D - Delta



E - Echo

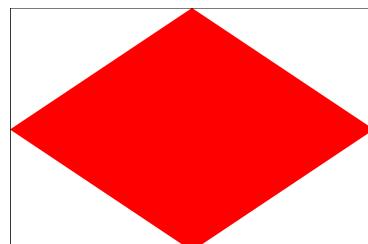


F - Fox-Trot

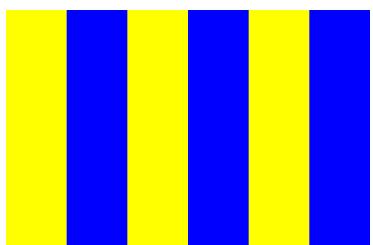

G - Golf




H - Hotel

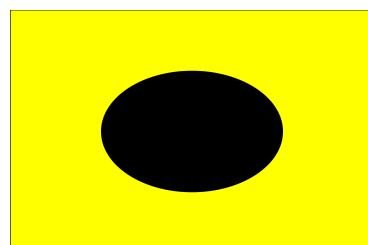


I - India





J - Juliett

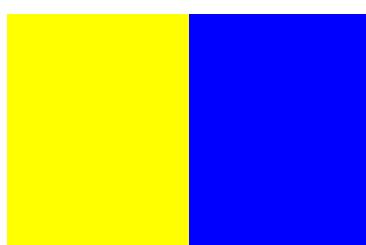


K - Kilo

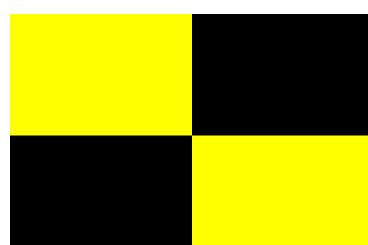

L - Lima

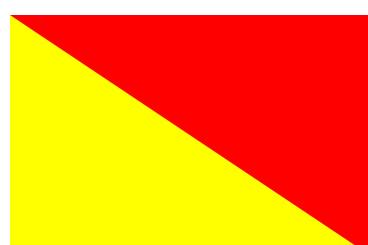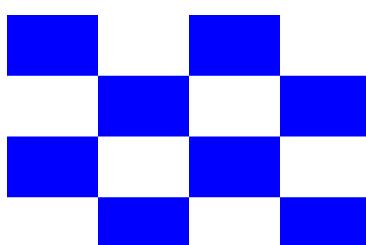


M - Mike

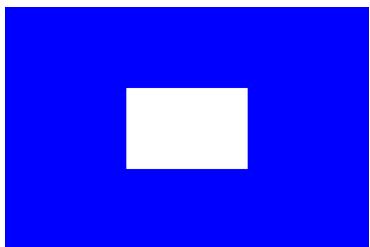


N - November




O - Oscar

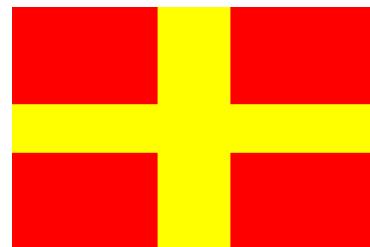


P - Papa

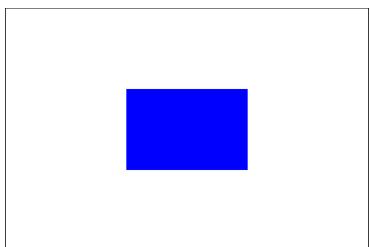


Q - Quebec

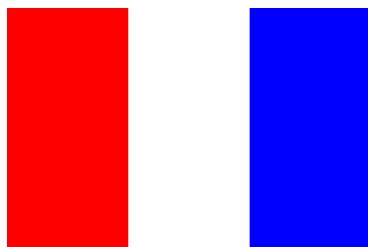


R - Romeo

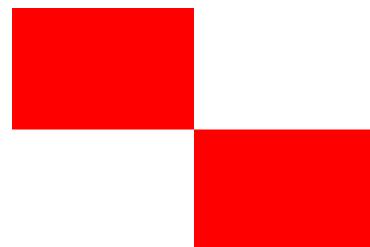


S - Sierra

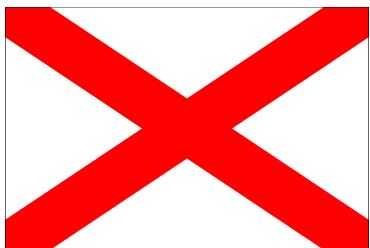

T - Tango

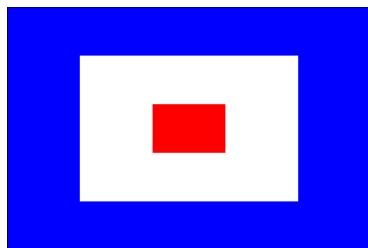


U - Uniform

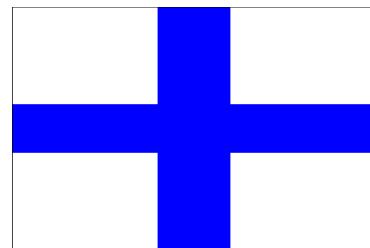

V - Victor



W - Whisky

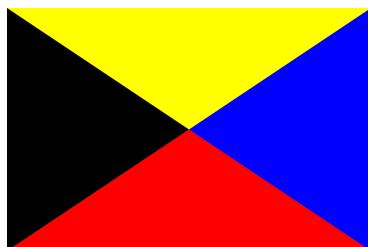

X - X-Ray

Y - Yankee

Z - Zulu

For your concern, the International code of signals can be found on: <https://www.eurobot.org/images/2020/international-code-of-signals.pdf>

It should be noted that the combination formed by the flags does not necessarily have to be meaningful.