

Exact Prescribed-Time Prescribed-Accuracy Control for Spacecraft under Dual Reaction Wheel Saturation

First A. Author ^{*} and Second B. Author Jr. [†]
Business or Academic Affiliation 1, City, State, Zip Code

Third C. Author [‡]
Business or Academic Affiliation 2, City, Province, Zip Code, Country

Fourth D. Author [§]
Business or Academic Affiliation 2, City, State, Zip Code

This paper develops an exact prescribed-time prescribed-accuracy control (EPTPAC) framework for rigid spacecraft actuated by reaction wheels, addressing the conservatism of existing prescribed-time controllers and the absence of a unified treatment of dual actuator saturation, namely, torque saturation and wheel angular-momentum saturation. The framework adopts a two-loop architecture: an outer-loop planner generates a constraint-feasible reference trajectory arriving at the target state precisely at the user-specified terminal time, and an inner-loop nonsingular controller drives tracking errors within the prescribed accuracy before that time. A systematic parameter-synthesis procedure coordinates both loops to guarantee feasibility under dual saturation. Numerical simulations validate exact terminal-time convergence with prescribed accuracy and full compliance with dual-saturation constraints in the presence of inertia uncertainties and external disturbances.

Nomenclature

Roman Symbols

$G(\sigma)$	MRP kinematic matrix [–]
h_w	reaction-wheel angular momentum (body frame) [kg · m ² /s]
$h_{w,i,\max}$	maximum allowable wheel momentum (axis i) [kg · m ² /s]
H	total angular momentum, $H = (J_0 + \Delta J)\omega + h_w$ [kg · m ² /s]
H_0	initial total angular momentum, $H_0 = H(0)$ [kg · m ² /s]
H_0	norm of initial total angular momentum, $H_0 = \ H_0\ $ [kg · m ² /s]

^{*}Insert Job Title, Department Name, Address/Mail Stop, and AIAA Member Grade (if any) for first author.

[†]Insert Job Title, Department Name, Address/Mail Stop, and AIAA Member Grade (if any) for second author.

[‡]Insert Job Title, Department Name, Address/Mail Stop, and AIAA Member Grade (if any) for third author.

[§]Insert Job Title, Department Name, Address/Mail Stop, and AIAA Member Grade (if any) for fourth author (etc.).

$H_{\max}$	bound on momentum drift $\ \mathbf{H}(t) - \mathbf{H}_0\ $ over $[0, T_f]$ [$\text{kg} \cdot \text{m}^2/\text{s}$]
$\mathbf{J}_0$	nominal spacecraft inertia matrix [$\text{kg} \cdot \text{m}^2$]
$\Delta \mathbf{J}$	model uncertainty with $\mathbf{J} = \mathbf{J}_0 + \Delta \mathbf{J}$ [$\text{kg} \cdot \text{m}^2$]
μ_i	row-sum coefficient of nominal inertia, $\mu_i = \sum_{j=1}^3 (J_0)_{ij} $ [$\text{kg} \cdot \text{m}^2$]
ν_i	row-sum coefficient of model uncertainty, $\nu_i = \sum_{j=1}^3 (\Delta J)_{ij} $ [$\text{kg} \cdot \text{m}^2$]
σ	Modified Rodrigues Parameters (MRPs) [–]
σ_d	reference MRPs [–]
σ_e	attitude tracking error in MRPs [–]
τ	control torque applied to spacecraft body [$\text{N} \cdot \text{m}$]
$\tau_{i,\max}$	maximum allowable torque (axis i) [$\text{N} \cdot \text{m}$]
$\mathbf{T}_d$	lumped perturbation term [$\text{N} \cdot \text{m}$]
$T_{d,\max}$	bound on $\ \mathbf{T}_d(t)\ $ [$\text{N} \cdot \text{m}$]
T_f	user-specified terminal time [s]
T_{p1}, T_{p2}	prescribed convergence times (attitude/sliding variable) [s]
ω	spacecraft angular velocity (body frame) [rad/s]
ω_d	reference angular velocity [rad/s]
ω_e	angular-velocity tracking error [rad/s]

Greek Symbols

α_1, α_2	tunable gains in prescribed-time laws [–]
$\varepsilon_1, \varepsilon_2$	prescribed accuracy tolerances (attitude/sliding variable) [–]
η	exponent in prescribed-time law, $0 < \eta < 1$ [–]
γ_u, γ_h	constraint-tightening margins (torque/momentum) [–]

I. Introduction

With the growing complexity of spacecraft missions, increasingly stringent requirements are imposed on the convergence time of attitude control. Numerous time-critical tasks, such as rendezvous, docking, and formation reconfiguration, necessitate that the spacecraft attitude reach a target state at a precise terminal time T_f dictated by orbital geometry, communication windows, or multi-vehicle coordination [1–3]. For spacecraft actuated by reaction wheels, fulfilling this requirement is further complicated by dual saturation, where torque saturation constrains the achievable angular acceleration and angular-momentum saturation restricts the attainable angular velocity. These two constraints are inherently coupled, as stringent terminal-time requirements drive high torques that accelerate momentum accumulation, potentially exhausting the wheel capacity and causing a complete loss of control authority prior to

maneuver completion. A unified framework addressing dual saturation is therefore indispensable.

Driven by these demanding timing constraints, finite-time control (FTC) has been extensively investigated [4–7]. Although FTC ensures convergence in finite time, the settling time heavily depends on initial conditions, making it difficult to coordinate with mission schedules. To remove this dependence, fixed-time control (FxTC) [8–10] provides a settling-time upper bound independent of initial states. Nevertheless, this bound is implicitly determined and generally conservative, preventing it from serving as a user-assignable parameter tied to a specific terminal time. These limitations have given rise to prescribed-time control (PTC) [11, 12], which incorporates the convergence time directly as an explicit design parameter.

Existing PTC paradigms broadly fall into two main categories. The first embeds the prescribed time into Lyapunov functions through time-dependent scaling terms [2, 13, 14]. This approach has been applied to spacecraft formation control [3] and launch vehicle attitude control with liquid sloshing [15]. Despite its conceptual simplicity, it induces premature convergence well before the specified time, resulting in unnecessarily aggressive control effort. The second relies on time-varying high-gain feedback with time-warping transformations [7, 12], and has been extended to multiagent consensus and robust tracking [16–18]. Although this strategy alleviates conservatism, it introduces rapid gain escalation as $t \rightarrow T_f$. Practical remedies such as gain truncation or smoothing can suppress the resulting singularity, but at the expense of terminal-time precision [17–19]. Other strategies, such as those based on periodic delayed feedback [20–22], circumvent high-gain growth but remain susceptible to disturbances and may induce adverse transients. Notwithstanding these advances, two fundamental shortcomings persist when PTC is applied to time-critical spacecraft missions under dual saturation.

First, existing PTC strategies exhibit pronounced conservatism [3, 12, 17]. For instance, in [3], actual convergence occurs at 250 s despite a prescribed $T_f = 500$ s. In single-spacecraft missions, such premature settling forces an extended idle phase at the terminal attitude, degrading overall mission efficiency; in multi-spacecraft operations, it can induce workspace conflicts or collision hazards. Moreover, this early convergence typically originates from aggressive initial control effort, which accelerates momentum accumulation in reaction wheels.

Second, physical realizability under dual saturation remains largely overlooked. Although torque saturation has been incorporated into certain PTC strategies [23–25], angular-momentum saturation is seldom treated as a coupled constraint. This omission is critical, as reaching the wheel angular-momentum limit leads to a complete loss of control authority, irrespective of whether torque commands remain within bounds. Furthermore, the prescribed time T_f is typically treated as a free design parameter without accounting for its minimum feasible value imposed by dual saturation and the required maneuver angle, potentially rendering large-angle reconfigurations infeasible.

One potential approach to addressing the above shortcomings is optimization-based trajectory planning, which can explicitly enforce saturation constraints and terminal-time boundary conditions [26–29]. However, such methods are inherently open-loop and therefore susceptible to disturbances and model uncertainties, producing tracking drift

that undermines terminal-time precision. Incorporating closed-loop feedback [30, 31] mitigates this vulnerability but still provides no formal guarantee on terminal-state accuracy. Model predictive control (MPC) [32, 33] similarly offers inherent constraint handling, yet it rarely incorporates angular-momentum limits and ensures only asymptotic convergence rather than arrival at a specified T_f .

Motivated by the above analysis, this paper proposes an exact prescribed-time prescribed-accuracy control (EPTPAC) framework with a two-loop architecture. The outer loop solves a constrained optimal control problem to generate a dual-saturation-feasible reference trajectory that reaches the target state precisely at T_f . The inner loop employs a nonsingular prescribed-time prescribed-accuracy controller that drives tracking errors to within a user-specified accuracy bound before T_f , despite inertia uncertainties and bounded disturbances. A systematic parameter-synthesis procedure is further developed to coordinate the two loops, ensuring closed-loop feasibility under dual saturation.

The main contributions are summarized as follows:

- 1) Exact terminal-time convergence with prescribed accuracy is achieved without premature settling.
- 2) Explicit component-wise feasibility conditions are derived to ensure dual saturation compliance throughout the maneuver, along with a minimum feasible time $T_{f,\min}$ that precludes physically unrealizable prescriptions.
- 3) A modular two-loop architecture that decouples constraint enforcement from tracking performance is established, coordinated by a systematic parameter-synthesis procedure requiring only three free designer choices.

The remainder of this paper is organized as follows. Section II formulates the spacecraft dynamics and dual saturation constraints, and reviews prescribed-time stability tools. Section III presents the two-loop framework, including trajectory planning, controller design, and parameter synthesis. Section IV validates the effectiveness of the proposed framework through large-angle maneuver simulations. Section V concludes the paper.

II. Problem Description and Preliminaries

A. Problem Description

Let $\mathbb{R}$ denote the set of real numbers. $\|\cdot\|$ denotes the 2-norm of a vector or matrix, and $\mathbf{I}_n$ denotes the $n \times n$ identity matrix. $\lambda_{\min}(\mathbf{A})$ and $\lambda_{\max}(\mathbf{A})$ denote the minimum and maximum eigenvalues of matrix $\mathbf{A}$, respectively. $\mathbf{a}^\times$ denotes the skew symmetric matrix related to a vector $\mathbf{a} = [a_1, a_2, a_3]^\top \in \mathbb{R}^3$:

$$\mathbf{a}^\times \triangleq \begin{bmatrix} 0 & -a_3 & a_2 \\ a_3 & 0 & -a_1 \\ -a_2 & a_1 & 0 \end{bmatrix}$$

The attitude kinematics and dynamics of a rigid spacecraft actuated by reaction wheels are governed by

$$\dot{\sigma} = G(\sigma)\omega, \quad G(\sigma) = \frac{1}{4} \left[(1 - \|\sigma\|^2)I_3 + 2\sigma^\times + 2\sigma\sigma^\top \right] \quad (1)$$

$$(J_0 + \Delta J)\dot{\omega} = -\omega^\times [(J_0 + \Delta J)\omega + h_w] + d + \tau, \quad \tau = -\dot{h}_w \quad (2)$$

where $\sigma \in \mathbb{R}^3$ denotes the modified Rodrigues parameters (MRPs) representing the spacecraft attitude, $\omega \in \mathbb{R}^3$ is the body angular velocity with respect to the inertial frame expressed in the body frame, $J_0 \in \mathbb{R}^{3 \times 3}$ is the nominal inertia matrix and $\Delta J \in \mathbb{R}^{3 \times 3}$ represents the model uncertainty with true inertia $J = J_0 + \Delta J$. $h_w \in \mathbb{R}^3$ is the reaction-wheel angular momentum expressed in the body frame, $\tau \in \mathbb{R}^3$ is the control torque applied to the spacecraft body, and $d \in \mathbb{R}^3$ denotes the external disturbance torque.

Without loss of generality, a three-axis reaction-wheel cluster aligned with the body principal axes is considered. For each axis $i \in \{1, 2, 3\}$, the reaction wheels are subject to the following dual saturation constraints:

$$|\tau_i(t)| \leq \tau_{i,\max} \quad (3)$$

$$|h_{w,i}(t)| \leq h_{w,i,\max} \quad (4)$$

where τ_i and $h_{w,i}$ denote the i th component of τ and h_w , with bounds $\tau_{i,\max} > 0$ and $h_{w,i,\max} > 0$, respectively.

Let $\sigma_d \in \mathbb{R}^3$ and $\omega_d \in \mathbb{R}^3$ denote the desired attitude and angular velocity, respectively. The tracking errors $\sigma_e \in \mathbb{R}^3$ and $\omega_e \in \mathbb{R}^3$ are defined as follows:

$$\sigma_e = \frac{(1 - \|\sigma_d\|^2)\sigma - (1 - \|\sigma\|^2)\sigma_d + 2\sigma_d^\times \sigma}{1 + \|\sigma\|^2 \|\sigma_d\|^2 + 2\sigma^\top \sigma_d} \quad (5)$$

$$\omega_e = \omega - R(\sigma_e)\omega_d \quad (6)$$

where $R(\sigma_e) \in \mathbb{R}^{3 \times 3}$ is the direction cosine matrix associated with σ_e , given by

$$R(\sigma_e) = I_3 + \frac{8\sigma_e^\times \sigma_e^\times - 4(1 - \sigma_e^\top \sigma_e)\sigma_e^\times}{(1 + \sigma_e^\top \sigma_e)^2} \quad (7)$$

To avoid the MRP singularity at 360° , shadow-set switching is applied whenever $\|\sigma_e(t)\| \geq 1$. Specifically, σ_e is replaced by its shadow set $\sigma_e^s = -\sigma_e / \|\sigma_e\|^2$, ensuring $\|\sigma_e(t)\| < 1$ throughout the maneuver.

Based on the above definitions, the tracking error kinematics and dynamics take the form

$$\dot{\sigma}_e = \mathbf{G}(\sigma_e)\omega_e, \quad \mathbf{G}(\sigma_e) = \frac{1}{4} \left[(1 - \|\sigma_e\|^2) \mathbf{I}_3 + 2\sigma_e^\times + 2\sigma_e \sigma_e^\top \right] \quad (8)$$

$$\mathbf{J}_0 \dot{\omega}_e = \boldsymbol{\tau} + \mathbf{T}_d + \mathbf{f} \quad (9)$$

where $\mathbf{f} = -\omega^\times(\mathbf{J}_0\omega + \mathbf{h}_w) + \mathbf{J}_0\omega_e^\times \mathbf{R}(\sigma_e)\omega_d - \mathbf{J}_0\mathbf{R}(\sigma_e)\dot{\omega}_d$ denotes the computable feedforward term, and $\mathbf{T}_d = -\Delta\mathbf{J}\dot{\omega}_e - \omega^\times\Delta\mathbf{J}\omega + \Delta\mathbf{J}(\omega_e^\times \mathbf{R}(\sigma_e)\omega_d - \mathbf{R}(\sigma_e)\dot{\omega}_d) + \mathbf{d}$ denotes the lumped perturbation term. The 2-norm of the kinematic matrix $\mathbf{G}(\sigma_e)$ satisfies $\|\mathbf{G}(\sigma_e)\| = \frac{1+\|\sigma_e\|^2}{4}$. Consequently, for all $\|\sigma_e\| < 1$, it follows that

$$\frac{1}{4} \leq \|\mathbf{G}(\sigma_e)\| < \frac{1}{2} \quad (10)$$

The following assumptions are adopted throughout this work.

Assumption 1. *The user-specified terminal time $T_f > 0$ satisfies*

$$T_f \geq T_{f,\min} \quad (11)$$

where $T_{f,\min} > 0$ is the minimum maneuver time required under constraints (3)–(4). Consequently, there exists a feasible reference trajectory (σ_d, ω_d) on $[0, T_f]$ with bounded derivatives: there exist known constants $\omega_{d,\max} > 0$ and $\dot{\omega}_{d,\max} > 0$ such that

$$\|\omega_d(t)\| \leq \omega_{d,\max}, \quad \|\dot{\omega}_d(t)\| \leq \dot{\omega}_{d,\max}, \quad \forall t \in [0, T_f] \quad (12)$$

Remark 1. *Assumption 1 implies the existence of a minimum feasible maneuver time $T_{f,\min}$ under the dual saturation constraints. A feasible estimate can be obtained via a time-optimal bang-bang construction detailed in Appendix A.*

Assumption 2. *The lumped perturbation term $\mathbf{T}_d$ is bounded by a known constant $T_{d,\max} > 0$ such that*

$$\|\mathbf{T}_d(t)\| \leq T_{d,\max}, \quad \forall t \in [0, T_f] \quad (13)$$

Assumption 3. *Let $\mathbf{H}(t) = \mathbf{J}\omega(t) + \mathbf{h}_w(t)$ denote the total angular momentum in the body frame, and $\mathbf{H}_0 = \mathbf{H}(0)$ denote the initial total angular momentum. The momentum drift induced by external disturbances over $[0, T_f]$ satisfies*

$$\|\mathbf{H}(t) - \mathbf{H}_0\| \leq H_{\max}, \quad \forall t \in [0, T_f] \quad (14)$$

where $H_{\max} > 0$ is a known bound.

Assumptions 1–3 underpin the controller design and saturation compliance analysis presented hereafter. Assumption 1

requires that the prescribed terminal time exceeds the minimum feasible maneuver time under dual saturation, thereby ensuring time feasibility of the maneuver. Assumption 2 follows from the inherent boundedness of the reference motion, the inertia uncertainty, and the external disturbance that compose the lumped perturbation, ensuring that the perturbation level does not exceed the available actuator authority. Assumption 3 reflects the fact that dominant external disturbance torques, such as gravity-gradient and aerodynamic torques, are periodic or slowly varying, so that the cumulative momentum drift over a finite maneuver remains bounded and does not exhaust the wheel momentum storage.

Based on the above model and assumptions, the design objective is to develop an EPTPAC framework for a given terminal time $T_f > 0$ and mission-required accuracy $\varepsilon_{\text{mission}} > 0$ such that: (i) the dual saturation constraints (3)–(4) are satisfied for all $t \in [0, T_f]$; and (ii) the tracking errors (σ_e, ω_e) converge to a neighborhood of the origin with radius no larger than $\varepsilon_{\text{mission}}$ before T_f and remain in it thereafter, ensuring that the spacecraft reaches the specified terminal state within the prescribed accuracy at $t = T_f$. The architecture of the proposed framework is illustrated in Fig. 1.

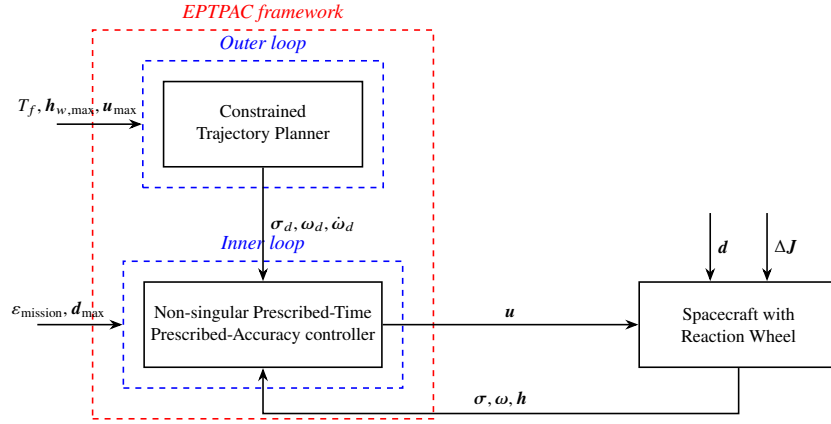


Fig. 1 The EPTPAC framework

B. Preliminaries

Consider the nonlinear system

$$\dot{x} = g(x, t) \quad (15)$$

where $x \in \mathbb{R}^n$ and $g(x, t) \in \mathbb{R}^n$ is locally Lipschitz in x , with $g(0, t) \equiv 0$.

The origin of system (15) is said to be prescribed-time stable if there exists a prescribed constant $T_p > 0$ such that for any $x_0 \in \mathbb{R}^n$ and all $t \geq T_p$, the solution $x(t, x_0)$ of system (15) satisfies $x(t, x_0) = 0$ [11]. The origin of system (15) is said to be prescribed-time prescribed-accuracy stable if there exist prescribed constants T_p and ε such that for any $x_0 \in \mathbb{R}^n$ and all $t \geq T_p$, the solution $x(t, x_0)$ of system (15) satisfies $\|x(t, x_0)\| \leq \varepsilon$ [34].

Lemma 1 ([35]). Suppose there exists a Lyapunov function $V(\mathbf{x})$ for system (15) such that

$$\dot{V} \leq -\frac{\pi}{\eta T_p} \left(V^{1-\frac{\eta}{2}} + V^{1+\frac{\eta}{2}} \right) \quad (16)$$

where $0 < \eta < 1$ and $T_p > 0$ are given constants. Then the origin is prescribed-time stable.

Theorem 1. Suppose there exists a Lyapunov function $V(\mathbf{x})$ for system (15) such that

$$\dot{V} \leq \delta V^{\frac{1}{2}} - \frac{\pi}{\eta T_p} \left[(1 + \alpha) V^{1-\frac{\eta}{2}} + V^{1+\frac{\eta}{2}} \right] \quad (17)$$

where $\delta > 0$, $\alpha > 0$, $0 < \eta < 1$, and $T_p > 0$ are constants. Then, for any initial condition, the trajectory enters the set

$$V \leq V_\delta^*, \quad V_\delta^* = \left(\frac{\delta \eta T_p}{\pi \alpha} \right)^{\frac{2}{1-\eta}} \quad (18)$$

in no more than T_p and remains in it thereafter.

Proof. Let $K = \frac{\pi}{\eta T_p} > 0$. It follows from (17) that

$$\dot{V} \leq \delta V^{1/2} - K \left[(1 + \alpha) V^{1-\frac{\eta}{2}} + V^{1+\frac{\eta}{2}} \right] \quad (19)$$

By definition, the threshold $V = V_\delta^*$ satisfies the equality $\delta V^{1/2} = K \alpha V^{1-\eta/2}$. For all $V \geq V_\delta^*$, since the function $V^{-(1-\eta)/2}$ is monotonically decreasing, the inequality $\delta V^{1/2} \leq K \alpha V^{1-\eta/2}$ holds. Consequently, the Lyapunov derivative (17) can be bounded as

$$\dot{V} \leq -K \left(V^{1-\frac{\eta}{2}} + V^{1+\frac{\eta}{2}} \right), \quad \forall V \geq V_\delta^* \quad (20)$$

By Lemma 1, any trajectory with $V(0) > V_\delta^*$ converges to the set $\{V \leq V_\delta^*\}$ within T_p . Furthermore, at the boundary $V = V_\delta^*$, the condition $\dot{V} \leq -K \left(V^{1-\frac{\eta}{2}} + V^{1+\frac{\eta}{2}} \right)$ ensures that the set $\{V \leq V_\delta^*\}$ is forward invariant. $\square$

Lemma 2. For any vector $\mathbf{x} \in \mathbb{R}^n$ satisfying $\|\mathbf{x}\| \geq \varepsilon$ with $\varepsilon > 0$, and any $0 < \eta < 1$, the following inequalities hold:

$$\frac{\|\mathbf{x}\|^2}{(\|\mathbf{x}\| + \varepsilon)^\eta} \geq \frac{1}{2\eta} \|\mathbf{x}\|^{2-\eta}, \quad \frac{\|\mathbf{x}\|^2}{(\|\mathbf{x}\| + \varepsilon)^{-\eta}} \geq \|\mathbf{x}\|^{2+\eta} \quad (21)$$

III. Main Results

A. Outer-Loop Trajectory Planning Under Dual Saturation

To ensure convergence at the user-specified terminal time T_f , a reference trajectory $(\sigma_d(t), \omega_d(t))$ is constructed offline by solving a constrained optimal control problem (OCP) over the interval $[0, T_f]$. The OCP incorporates

the spacecraft kinematics and dynamics (1)–(2), while accounting for the dual saturation constraints (3)–(4). This formulation ensures that the resulting reference trajectory is both dynamically consistent and dual-saturation compliant.

Specifically, the OCP is formulated as:

$$\begin{aligned}
\min_{\tau_{\text{ref}}(\cdot), \Delta\sigma_0} \quad & \mathcal{J} = \int_0^{T_f} \left(\|\tau_{\text{ref}}(t)\|^2 + \lambda \|\dot{\tau}_{\text{ref}}(t)\|^2 \right) dt \\
\text{s.t.} \quad & \dot{\sigma}(t) = \mathbf{G}(\sigma(t))\omega(t), \\
& \mathbf{J}_0 \dot{\omega}(t) + \omega(t)^\times (\mathbf{J}_0 \omega(t) + \mathbf{h}_w(t)) = \tau_{\text{ref}}(t), \\
& \dot{\mathbf{h}}_w(t) = -\tau_{\text{ref}}(t), \quad \mathbf{h}_w(0) = \mathbf{h}_{w,0}, \\
& \sigma(0) = \sigma_0, \quad \omega(0) = \omega_0, \\
& \sigma(T_f) = \sigma_{\text{target}}, \quad \omega(T_f) = \omega_{\text{target}}, \\
& |\tau_{\text{ref},i}(t)| \leq (1 - \gamma_u)\tau_{i,\max}, \quad i \in \{1, 2, 3\}, \\
& |h_{w,i}(t)| \leq (1 - \gamma_h)h_{w,i,\max}, \quad i \in \{1, 2, 3\}
\end{aligned} \tag{22}$$

where $\lambda > 0$ denotes a weight factor that balances control effort and smoothness, while $\gamma_u, \gamma_h \in (0, 1)$ represent safety margins reserved for inner-loop tracking and disturbance rejection.

The OCP is solved using GPOPS-II [36], which returns nodal torques $\{\tau_i\}_{i=0}^N$ at nodes $\{t_i\}_{i=0}^N$. A continuous-time torque command is obtained via piecewise-linear interpolation:

$$\tilde{\tau}(t) = \tau_i + \frac{t - t_i}{t_{i+1} - t_i} (\tau_{i+1} - \tau_i), \quad t \in [t_i, t_{i+1}], \quad i = 0, \dots, N-1 \tag{23}$$

The interpolated torque $\tilde{\tau}(t)$ is then integrated through (1)–(2) to yield the reference trajectory $(\sigma_d(t), \omega_d(t))$. Since linear interpolation preserves component-wise bounds, the constraint $|\tilde{\tau}_i(t)| \leq (1 - \gamma_u)\tau_{i,\max}$ is strictly satisfied for all $t \in [0, T_f]$ and $i \in \{1, 2, 3\}$.

Remark 2. *The outer loop embeds dual saturation and exact terminal-time conditions into reference generation, enabling the inner-loop tracker to focus on tracking performance within the reserved actuator margin. This decoupling of constrained trajectory planning from tracking control is the key to satisfying dual saturation, exact timing, and prescribed accuracy, while mitigating the conservatism inherent in existing PTC methods.*

B. Inner-Loop Nonsingular Prescribed-Time Prescribed-Accuracy Tracking Control

This subsection presents the inner-loop controller that drives the tracking errors to the prescribed-accuracy sets within prescribed time. Define the sliding mode surface as

$$s = \omega_e + \mathbf{Q}(\sigma_e) \quad (24)$$

where the nonlinear coupling term $\mathbf{Q}(\sigma_e)$ is defined as

$$\mathbf{Q}(\sigma_e) = c_1 k_1 \frac{\sigma_e}{(\|\sigma_e\| + \varepsilon_1)^\eta} + c_1 k_2 \frac{\sigma_e}{(\|\sigma_e\| + \varepsilon_1)^{-\eta}} \quad (25)$$

where $0 < \eta < 1$, $\varepsilon_1 > 0$, $T_{p1} > 0$, and $\alpha_1 > 0$ are design parameters. The constant gains are configured as

$$c_1 = \frac{\pi}{\eta T_{p1}}, \quad k_1 = (1 + \alpha_1) 2^{1+\frac{3}{2}\eta}, \quad k_2 = 2^{1-\frac{\eta}{2}}$$

Theorem 2. Consider the attitude error kinematics (8) with the sliding mode surface (24), and suppose that the sliding mode variable $s(t)$ remains within the bounded set $\|s(t)\| \leq s_{\max}$. Then the attitude error $\sigma_e(t)$ converges to the bounded set

$$\|\sigma_e(t)\| \leq \max \{ \varepsilon_{\delta_1}, \varepsilon_1 \} \quad (26)$$

within T_{p1} and remains therein for all $t \geq T_{p1}$, where the practical convergence accuracy of $\|\sigma_e\|$ is given by

$$\varepsilon_{\delta_1} = \sqrt{2} \left(\frac{\delta_1 \eta T_{p1}}{\pi \alpha_1} \right)^{\frac{1}{1-\eta}}, \quad \delta_1 = \frac{\sqrt{2}}{2} s_{\max} \quad (27)$$

Proof. Consider the Lyapunov function candidate

$$V_1 = \frac{1}{2} \|\sigma_e\|^2 \quad (28)$$

Differentiating along the error kinematics (8) and substituting $\omega_e = s - \mathbf{Q}(\sigma_e)$, the Lyapunov derivative $\dot{V}_1$ can be expressed as

$$\begin{aligned} \dot{V}_1 &= \sigma_e^\top \mathbf{G}(\sigma_e) (s - \mathbf{Q}(\sigma_e)) \\ &\leq \|\mathbf{G}(\sigma_e)\| \|\sigma_e\| s_{\max} - \sigma_e^\top \mathbf{G}(\sigma_e) \mathbf{Q}(\sigma_e) \end{aligned} \quad (29)$$

Invoking (10), we have $\|\mathbf{G}(\sigma_e)\| < \frac{1}{2}$ for $\|\sigma_e\| < 1$. For the case $\|\sigma_e\| \geq \varepsilon_1$, applying Lemma 2 yields

$$\frac{\|\sigma_e\|^2}{(\|\sigma_e\| + \varepsilon_1)^\eta} \geq \frac{1}{2^\eta} \|\sigma_e\|^{2-\eta}, \quad \frac{\|\sigma_e\|^2}{(\|\sigma_e\| + \varepsilon_1)^{-\eta}} \geq \|\sigma_e\|^{2+\eta}$$

Consequently,

$$\begin{aligned}\dot{V}_1 &\leq \frac{1}{2}\|\sigma_e\|s_{\max} - \frac{c_1}{4} \left[k_1 \frac{\|\sigma_e\|^2}{(\|\sigma_e\| + \varepsilon_1)^\eta} + k_2 \frac{\|\sigma_e\|^2}{(\|\sigma_e\| + \varepsilon_1)^{-\eta}} \right] \\ &\leq \frac{\sqrt{2}}{2}V_1^{1/2}s_{\max} - \frac{c_1}{4} \left[k_1 2^{-\eta}(2V_1)^{1-\eta/2} + k_2(2V_1)^{1+\eta/2} \right]\end{aligned}\quad (30)$$

Substituting $c_1 = \frac{\pi}{\eta T_{p1}}$, $k_1 = (1 + \alpha_1)2^{1+\frac{3}{2}\eta}$, and $k_2 = 2^{1-\frac{\eta}{2}}$ into the above inequality yields

$$\dot{V}_1 \leq \delta_1 V_1^{1/2} - \frac{\pi}{\eta T_{p1}} \left[(1 + \alpha_1)V_1^{1-\eta/2} + V_1^{1+\eta/2} \right] \quad (31)$$

which satisfies the condition in Theorem 1. According to Theorem 1, $V_1(t)$ converges to the set $V_1 < V_{\delta_1}^*$ before T_{p1} and remains therein for all $t \geq T_{p1}$, where $V_{\delta_1}^* = \left(\frac{\delta_1 \eta T_{p1}}{\pi \alpha_1} \right)^{\frac{2}{1-\eta}}$. Recalling that $V_1 = \frac{1}{2}\|\sigma_e\|^2$, we have

$$\|\sigma_e(t)\| \leq \sqrt{2V_{\delta_1}^*} = \sqrt{2} \left(\frac{\delta_1 \eta T_{p1}}{\pi \alpha_1} \right)^{\frac{1}{1-\eta}} = \varepsilon_{\delta_1} \quad (32)$$

Moreover, the regularization ensures that the set $\{\|\sigma_e\| \leq \varepsilon_1\}$ is positively invariant. Combining both cases yields the stated bound $\|\sigma_e(t)\| \leq \max\{\varepsilon_{\delta_1}, \varepsilon_1\}$. $\square$

To stabilize the sliding mode surface (24) in prescribed time, the inner-loop torque command combines a feedforward cancellation term with a prescribed-time stabilizing term. The control law is designed as

$$\tau = -f(t) - J_0 \dot{Q}(\sigma_e) + \tau_c \quad (33)$$

where $f(t)$ is the known nonlinear term defined in (9), and the prescribed-time stabilizing term τ_c is designed as

$$\tau_c = -c_2 \left[k_3 \frac{s}{(\|s\| + \varepsilon_2)^\eta} + k_4 \frac{s}{(\|s\| + \varepsilon_2)^{-\eta}} \right] \quad (34)$$

where $0 < \eta < 1$ and $\varepsilon_2 > 0$. The control gains are chosen as

$$c_2 = \frac{\pi}{\eta T_{p2}}, \quad k_3 = (1 + \alpha_2)2^{-1+\frac{3}{2}\eta} \lambda_{\max}(J_0)^{1-\frac{\eta}{2}}, \quad k_4 = 2^{-1-\frac{\eta}{2}} \lambda_{\max}(J_0)^{1+\frac{\eta}{2}}$$

Here, $T_{p2} > 0$ is the prescribed convergence time for the sliding mode surface, and $\alpha_2 > 0$ is a tunable gain.

Substituting the control law (33) into the error dynamics (9) and noting that $\dot{\omega}_e = \dot{s} - \dot{Q}(\sigma_e)$ leads to the closed-loop sliding surface dynamics:

$$J_0 \dot{s} = \tau_c + T_d(t) \quad (35)$$

Theorem 3. Consider the spacecraft tracking error system described by (8) and (9), and suppose that Assumption 2 is satisfied. If the control law (33) is applied, then the sliding mode variable $s(t)$ converges to the bounded set

$$\|s(t)\| \leq \max \{\varepsilon_{\delta_2}, \varepsilon_2\} \quad (36)$$

within T_{p2} and remains therein for all $t \geq T_{p2}$, where the practical convergence accuracy of $\|s\|$ is given by

$$\varepsilon_{\delta_2} = \sqrt{\frac{2}{\lambda_{\min}(\mathbf{J}_0)} \left(\frac{\delta_2 \eta T_{p2}}{\pi \alpha_2} \right)^{\frac{1}{1-\eta}}}, \quad \delta_2 = T_{d,\max} \sqrt{\frac{2}{\lambda_{\min}(\mathbf{J}_0)}} \quad (37)$$

Proof. Consider the Lyapunov function candidate

$$V_2 = \frac{1}{2} s^\top \mathbf{J}_0 s \quad (38)$$

Calculating the time derivative of V_2 along the closed-loop dynamics (35) yields

$$\dot{V}_2 = s^\top \tau_c + s^\top T_d \quad (39)$$

With the inequality $\|s\| \leq \sqrt{2V_2/\lambda_{\min}(\mathbf{J}_0)}$, an upper bound on the disturbance term is

$$s^\top T_d \leq \|s\| T_{d,\max} \leq \delta_2 V_2^{1/2}, \quad \delta_2 = T_{d,\max} \sqrt{\frac{2}{\lambda_{\min}(\mathbf{J}_0)}} \quad (40)$$

For the case $\|s\| \geq \varepsilon_2$, applying Lemma 2 results in

$$\frac{\|s\|^2}{(\|s\| + \varepsilon_2)^\eta} \geq \frac{1}{2\eta} \|s\|^{2-\eta}, \quad \frac{\|s\|^2}{(\|s\| + \varepsilon_2)^{-\eta}} \geq \|s\|^{2+\eta}$$

By substituting the control law (33) and utilizing the upper bound $\|s\|^2 \leq 2V_2/\lambda_{\min}(\mathbf{J}_0)$, it follows that

$$\begin{aligned} s^\top \tau_c &= -c_2 \left[k_3 \frac{\|s\|^2}{(\|s\| + \varepsilon_2)^\eta} + k_4 \frac{\|s\|^2}{(\|s\| + \varepsilon_2)^{-\eta}} \right] \\ &\leq -c_2 \left[k_3 2^{-\eta} \|s\|^{2-\eta} + k_4 \|s\|^{2+\eta} \right] \\ &\leq -\frac{\pi}{\eta T_{p2}} \left[(1 + \alpha_2) V_2^{1-\eta/2} + V_2^{1+\eta/2} \right] \end{aligned} \quad (41)$$

where the parameters are $c_2 = \pi/(\eta T_{p2})$, $k_3 = (1 + \alpha_2) 2^{-1+\frac{3}{2}\eta} \lambda_{\max}(\mathbf{J}_0)^{1-\eta/2}$, $k_4 = 2^{-1-\frac{\eta}{2}} \lambda_{\max}(\mathbf{J}_0)^{1+\eta/2}$.

Combining the bounds (40) and (41), the Lyapunov derivative $\dot{V}_2$ can be bounded as

$$\dot{V}_2 \leq \delta_2 V_2^{1/2} - \frac{\pi}{\eta T_{p2}} \left[(1 + \alpha_2) V_2^{1-\frac{\eta}{2}} + V_2^{1+\frac{\eta}{2}} \right] \quad (42)$$

This inequality satisfies the conditions of Theorem 1. Consequently, $V_2(t)$ is guaranteed to converge to the set $V_2 \leq V_{\delta_2}^*$ within T_{p2} , where the steady-state bound is $V_{\delta_2}^* = \left(\frac{\delta_2 \eta T_{p2}}{\pi \alpha_2} \right)^{\frac{2}{1-\eta}}$. From the relation $\|s\| \leq \sqrt{2V_2/\lambda_{\min}(J_0)}$, one has

$$\|s(t)\| \leq \sqrt{\frac{2V_{\delta_2}^*}{\lambda_{\min}(J_0)}} = \sqrt{\frac{2}{\lambda_{\min}(J_0)}} \left(\frac{\delta_2 \eta T_{p2}}{\pi \alpha_2} \right)^{\frac{1}{1-\eta}} = \varepsilon_{\delta_2} \quad (43)$$

Furthermore, the regularization term ensures the positive invariance of the set $\{\|s\| \leq \varepsilon_2\}$. Combining both cases, we conclude that $\|s(t)\| \leq \max\{\varepsilon_{\delta_2}, \varepsilon_2\}$ for all $t \geq T_{p2}$, which completes the proof. $\square$

Remark 3. The parameters ε_{δ_1} and ε_{δ_2} depend inversely on $\alpha_1^{1/(1-\eta)}$ and $\alpha_2^{1/(1-\eta)}$, respectively. By appropriately selecting $\alpha_1, \alpha_2 > 0$, the designer can ensure $\varepsilon_{\delta_1} < \varepsilon_1$ and $\varepsilon_{\delta_2} < \varepsilon_2$, so that the user-specified tolerances ε_1 and ε_2 govern the ultimate convergence bounds. Moreover, the regularization parameters $\varepsilon_1, \varepsilon_2 > 0$ eliminate singularities as $\|\sigma_e\| \rightarrow 0$ and $\|s\| \rightarrow 0$, providing direct interfaces for mission-level accuracy requirements.

Remark 4. The convergence of the inner-loop system occurs in two stages: Theorem 3 ensures $\|s(t)\| \leq s_{\max} = \max\{\varepsilon_{\delta_2}, \varepsilon_2\}$ for all $t \geq T_{p2}$, and Theorem 2 then guarantees $\|\sigma_e(t)\| \leq \max\{\varepsilon_{\delta_1}, \varepsilon_1\}$ for all $t \geq T_{p2} + T_{p1}$. Setting $T_{p1} + T_{p2} < T_f$ ensures the tracking errors settle before the terminal time.

Theorems 2 and 3 jointly ensure that the closed-loop tracking errors converge to bounded sets $\{\|\sigma_e\| \leq \varepsilon_1, \|s\| \leq \varepsilon_2\}$ within prescribed time $T_{p1} + T_{p2}$ and remain therein thereafter. The following theorems verify that the inner-loop control law strictly complies with the dual saturation constraints, provided the tracking errors satisfy

$$\|\sigma_e(t)\| \leq \varepsilon_1, \quad \|s(t)\| \leq \varepsilon_2 \quad (44)$$

Theorem 4. Consider the inner-loop control law (33). Under the condition (44), if the safety margin γ_u and prescribed-accuracy set $(\varepsilon_1, \varepsilon_2)$ are selected such that

$$\Delta_{f,i,\max}(\varepsilon_1, \varepsilon_2) + \overline{(J_0 \dot{Q})}_i(\varepsilon_1, \varepsilon_2) + \bar{\tau}_c(\varepsilon_2) \leq \gamma_u \tau_{i,\max}, \quad i = 1, 2, 3 \quad (45)$$

where $\Delta_{f,i,\max}(\varepsilon_1, \varepsilon_2)$, $\overline{(J_0 \dot{Q})}_i(\varepsilon_1, \varepsilon_2)$, and $\bar{\tau}_c(\varepsilon_2)$ are explicit bounds derived in the proof, then the actuator torques satisfy $|\tau_i(t)| \leq \tau_{i,\max}$ for all $i = 1, 2, 3$.

Proof. The negative feedforward term $-\mathbf{f}(t)$ in the control law (33) can be decomposed as

$$-\mathbf{f}(t) = \boldsymbol{\tau}_{\text{ref}}(t) + \boldsymbol{\Delta}_f(t) \quad (46)$$

where $\boldsymbol{\Delta}_f(t) = -\mathbf{f}(t) - \boldsymbol{\tau}_{\text{ref}}(t)$ represents the deviation of the actual feedforward cancellation from the reference torque, and its component-wise bound is given in Appendix B. Substituting this decomposition into the control law (33) and applying the triangle inequality yields, for each axis $i \in \{1, 2, 3\}$,

$$|\tau_i| \leq |\tau_{\text{ref},i}| + |\Delta_{f,i}| + |(\mathbf{J}_0 \dot{\mathbf{Q}})_i| + |\tau_{c,i}| \quad (47)$$

The outer loop ensures that $|\tau_{\text{ref},i}(t)| \leq (1 - \gamma_u) \tau_{i,\max}$ for all $t \in [0, T_f]$. To verify that $|\tau_i(t)| \leq \tau_{i,\max}$, we now derive explicit bounds for the remaining three terms on the right-hand side of (47).

Under the condition (44), the angular velocity error can be bounded as

$$\|\boldsymbol{\omega}_e(t)\| \leq \varepsilon_2 + \bar{Q} \quad (48)$$

where $\bar{Q}$ is given by

$$\bar{Q} = \sup_{\|\boldsymbol{\sigma}_e\| \leq \varepsilon_1} \|\mathbf{Q}(\boldsymbol{\sigma}_e)\| \leq c_1 \left(k_1 2^{-\eta} \varepsilon_1^{1-\eta} + k_2 2^\eta \varepsilon_1^{1+\eta} \right) \quad (49)$$

(i) *Bound on $|\Delta_{f,i}|$.* From Appendix B and applying the bounds (49) and (12), the deviation term satisfies, for each $i = 1, 2, 3$,

$$\begin{aligned} |\Delta_{f,i}(t)| &\leq \Delta_{f,i,\max}(\varepsilon_1, \varepsilon_2) = (\varepsilon_2 + \bar{Q} + \omega_{d,\max}) H_{\max} + \mu_i (\varepsilon_2 + \bar{Q}) H_0 + 4\varepsilon_1 \omega_{d,\max} H_0 \\ &\quad + \nu_i (\varepsilon_2 + \bar{Q} + \omega_{d,\max})^2 + \mu_i (\varepsilon_2 + \bar{Q}) \omega_{d,\max} + 4\mu_i \varepsilon_1 \dot{\omega}_{d,\max} \end{aligned} \quad (50)$$

where $\mu_i = \sum_{j=1}^3 |(J_0)_{ij}|$, $\nu_i = \sum_{j=1}^3 |(\Delta J)_{ij}|$, $H_0 = \|\mathbf{H}_0\| \geq 0$, and $H_{\max}$ is given in Assumption 3.

(ii) *Bound on $|\tau_{c,i}|$.* Since $\|\mathbf{s}(t)\| \leq \varepsilon_2$, the control term is bounded as

$$|\tau_{c,i}(t)| \leq \bar{\tau}_c(\varepsilon_2) = c_2 \left(k_3 2^{-\eta} \varepsilon_2^{1-\eta} + k_4 2^\eta \varepsilon_2^{1+\eta} \right) \quad (51)$$

(iii) *Bound on $|(\mathbf{J}_0 \dot{\mathbf{Q}})_i|$.* By $\dot{\mathbf{Q}} = \frac{\partial \mathbf{Q}}{\partial \boldsymbol{\sigma}_e} \mathbf{G}(\boldsymbol{\sigma}_e) \boldsymbol{\omega}_e$ and (10), we have

$$\|\dot{\mathbf{Q}}(t)\| \leq \left\| \frac{\partial \mathbf{Q}}{\partial \boldsymbol{\sigma}_e} \right\| \frac{1 + \varepsilon_1^2}{4} (\varepsilon_2 + \bar{Q})$$

For $\rho = \|\sigma_e\| \leq \varepsilon_1$, the Jacobian norm can be bounded by

$$\left\| \frac{\partial \mathcal{Q}}{\partial \sigma_e} \right\| \leq \Psi(\varepsilon_1), \quad \Psi(\rho) = c_1 \left[k_1(\rho + \varepsilon_1)^{-\eta} + k_2(\rho + \varepsilon_1)^\eta + \rho(k_1\eta(\rho + \varepsilon_1)^{-\eta-1} + k_2\eta(\rho + \varepsilon_1)^{\eta-1}) \right] \quad (52)$$

Noting that $|(J_0 \mathbf{v})_i| \leq \mu_i \|\mathbf{v}\|$, the coupling term satisfies

$$|(J_0 \dot{\mathcal{Q}}(t))_i| \leq \overline{(J_0 \dot{\mathcal{Q}})_i}(\varepsilon_1, \varepsilon_2) = \mu_i \Psi(\varepsilon_1) \frac{1 + \varepsilon_1^2}{4} (\varepsilon_2 + \bar{\mathcal{Q}}) \quad (53)$$

Finally, substituting the bounds (i)–(iii) into (47), for each axis i , the control torque satisfies

$$|\tau_i(t)| \leq (1 - \gamma_u) \tau_{i,\max} + \Delta_{f,i,\max}(\varepsilon_1, \varepsilon_2) + \overline{(J_0 \dot{\mathcal{Q}})_i}(\varepsilon_1, \varepsilon_2) + \bar{\tau}_c(\varepsilon_2)$$

Consequently, provided that condition (45) is satisfied, the control torque strictly adheres to the saturation limits

$$|\tau_i(t)| \leq \tau_{i,\max} \text{ for all } i \in \{1, 2, 3\}. \quad \square$$

Theorem 5. *Consider the inner-loop control law (33). Under the condition (44), if the safety margin γ_h and prescribed-accuracy set $(\varepsilon_1, \varepsilon_2)$ are selected such that*

$$H_{\max} + (\mu_i + \nu_i)(\varepsilon_2 + \bar{\mathcal{Q}}) + \nu_i \omega_{d,\max} \leq \gamma_h h_{w,i,\max}, \quad i = 1, 2, 3 \quad (54)$$

where $\bar{\mathcal{Q}}$ is defined in (49), $\mu_i = \sum_{j=1}^3 |(J_0)_{ij}|$, and $\nu_i = \sum_{j=1}^3 |(\Delta J)_{ij}|$, then the wheel angular momentum satisfy $|h_{w,i}(t)| \leq h_{w,i,\max}$ for all $i = 1, 2, 3$.

Proof. The wheel momentum $\mathbf{h}_w = \mathbf{H} - (\mathbf{J}_0 + \Delta \mathbf{J})\boldsymbol{\omega}$ can be related to the reference momentum $\mathbf{h}_{w,d} = \mathbf{H}_0 - \mathbf{J}_0 \boldsymbol{\omega}_d$ as

$$\mathbf{h}_w = \mathbf{h}_{w,d} + (\mathbf{H} - \mathbf{H}_0) - \mathbf{J}_0 \boldsymbol{\omega}_e - \Delta \mathbf{J} \boldsymbol{\omega}$$

Noting that $\boldsymbol{\omega} = \boldsymbol{\omega}_e + \boldsymbol{\omega}_d$, we have

$$\mathbf{h}_w = \mathbf{h}_{w,d} + (\mathbf{H} - \mathbf{H}_0) - (\mathbf{J}_0 + \Delta \mathbf{J})\boldsymbol{\omega}_e - \Delta \mathbf{J} \boldsymbol{\omega}_d$$

By the condition (44), the angular-velocity error satisfies $\|\boldsymbol{\omega}_e\| \leq \varepsilon_2 + \bar{\mathcal{Q}}$ from (48). Together with $\|\boldsymbol{\omega}_d\| \leq \omega_{d,\max}$ from (12), $\|\mathbf{H} - \mathbf{H}_0\| < H_{\max}$ from Assumption 3, and the outer-loop constraint $|h_{w,d,i}| \leq (1 - \gamma_h) h_{w,i,\max}$, applying

the triangle inequality to each axis i yields

$$\begin{aligned}
|h_{w,i}| &\leq |h_{w,d,i}| + \|\mathbf{H} - \mathbf{H}_0\| + (\mu_i + \nu_i)\|\omega_e\| + \nu_i\|\omega_d\| \\
&\leq |h_{w,d,i}| + H_{\max} + (\mu_i + \nu_i)(\varepsilon_2 + \bar{Q}) + \nu_i\omega_{d,\max} \\
&\leq (1 - \gamma_h)h_{w,i,\max} + H_{\max} + (\mu_i + \nu_i)(\varepsilon_2 + \bar{Q}) + \nu_i\omega_{d,\max}
\end{aligned} \tag{55}$$

Therefore, if (54) holds, the wheel angular momentum satisfy $|h_{w,i}(t)| \leq h_{w,i,\max}$ for all $i = 1, 2, 3$. $\square$

The preceding theorems provide the theoretical foundation for the inner-loop control performance. Theorems 2 and 3 ensure prescribed-time convergence of attitude and sliding variable errors to prescribed accuracy sets. Theorems 4 and 5 guarantee dual-saturation compliance.

Remark 5. *The planned reference trajectory is initialized to coincide with the actual initial state, i.e., $\sigma_d(0) = \sigma(0)$ and $\omega_d(0) = \omega(0)$, hence $\sigma_e(0) = \mathbf{0}$ and $s(0) = \mathbf{0}$. By Theorems 2 and 3, the regularized neighborhoods $\{\|\mathbf{s}\| \leq \varepsilon_2\}$ and $\{\|\sigma_e\| \leq \varepsilon_1\}$ are forward invariant; once the errors enter these sets, they do not leave. Consequently, the conditions in Theorems 4 and 5 hold over the entire interval $[0, T_f]$, ensuring dual-saturation compliance throughout the maneuver.*

Remark 6. *Combining (33), (35), and (24) yields $\tau = -\mathbf{f} + \mathbf{J}_0\dot{\omega}_e - \mathbf{T}_d$. By applying the decomposition (46), we obtain $\tau = \tau_{\text{ref}} + \Delta_f + \mathbf{J}_0\dot{\omega}_e - \mathbf{T}_d$. Since Δ_f and $\mathbf{J}_0\dot{\omega}_e$ remain relatively small within the prescribed accuracy sets, the torque margin is predominantly dictated by $\mathbf{T}_d$. A practical guideline for selecting γ_u is to ensure $\gamma_u > T_{d,\max}/\tau_{i,\max}$ for each axis i .*

Remark 7. *Similarly, the selection of the momentum margin γ_h can be guided by condition (54). Within the prescribed accuracy sets, the term $(\mu_i + \nu_i)(\varepsilon_2 + \bar{Q})$ remains relatively small. Thus, the momentum margin is primarily influenced by $H_{\max}$ and the disturbance-induced term $\nu_i\omega_{d,\max}$. A practical guideline is $\gamma_h > (H_{\max} + \nu_i\omega_{d,\max})/h_{w,i,\max}$ for each axis i .*

C. Systematic Parameter-Synthesis Procedure

This subsection summarizes a mission-driven systematic parameter-synthesis procedure for the proposed EPTPAC framework, which is illustrated in Fig. 2.

- 1) **Mission inputs and physical limits.** Specify $T_f > 0$, $\varepsilon_{\text{mission}} > 0$, nominal inertia $\mathbf{J}_0$, actuator limits $\tau_{\max}$, $h_{w,\max}$, and disturbance bound $T_{d,\max}$.
- 2) **Margins and temporal feasibility.** Choose safety margins $\gamma_u, \gamma_h \in (0, 1)$ following Remarks 6–7. Verify $T_f \geq T_{f,\min}$ (Assumption 1) via the time-optimal procedure in Appendix A. If T_f is insufficient, it should be increased to restore feasibility.

- 3) **Inner-loop parameter synthesis.** Set $\varepsilon_1 = \varepsilon_{\text{mission}}$, pick $\eta \in (0, 1)$, allocate $T_{p1}, T_{p2} > 0$ such that $T_{p1} + T_{p2} < T_f$, and select $\varepsilon_2 > 0$ (a balanced synthesis approach is provided in Remark 8). Choose $\alpha_1, \alpha_2 > 0$ such that $\varepsilon_{\delta_1} \leq \varepsilon_1$ and $\varepsilon_{\delta_2} \leq \varepsilon_2$ in Theorems 2–3. With $s_{\max} = \varepsilon_2$, $\delta_1 = \frac{\sqrt{2}}{2} s_{\max}$, and $\delta_2 = T_{d,\max} \sqrt{2/\lambda_{\min}(\mathbf{J}_0)}$, sufficient lower bounds are

$$\alpha_1 \geq \alpha_{1,\min} = \frac{\delta_1 \eta T_{p1}}{\pi} \left(\frac{\sqrt{2}}{\varepsilon_1} \right)^{1-\eta}, \quad \alpha_2 \geq \alpha_{2,\min} = \frac{\delta_2 \eta T_{p2}}{\pi} \left(\frac{\sqrt{2}}{\varepsilon_2 \sqrt{\lambda_{\min}(\mathbf{J}_0)}} \right)^{1-\eta} \quad (56)$$

- 4) **Verify saturation feasibility.** Verify the sufficient conditions in Theorems 4–5. If violated, increase T_f , relax ε_1 , or increase γ_u, γ_h .

A key advantage of the proposed EPTPAC framework is that it requires minimal manual tuning. For a given set of mission-specified inputs $(T_f, \varepsilon_{\text{mission}}, \tau_{\max}, h_{w,\max}, T_{d,\max}, \mathbf{J}_0)$, the designer only needs to select three intuitive parameters: the exponent $\eta \in (0, 1)$ (which trades off smoothness and transient aggressiveness) and the convergence times T_{p1}, T_{p2} (subject to $T_{p1} + T_{p2} < T_f$). All remaining parameters—including margins γ_u, γ_h , prescribed accuracy ε_2 , and gains α_1, α_2 —are systematically derived via the analytical conditions in this study.

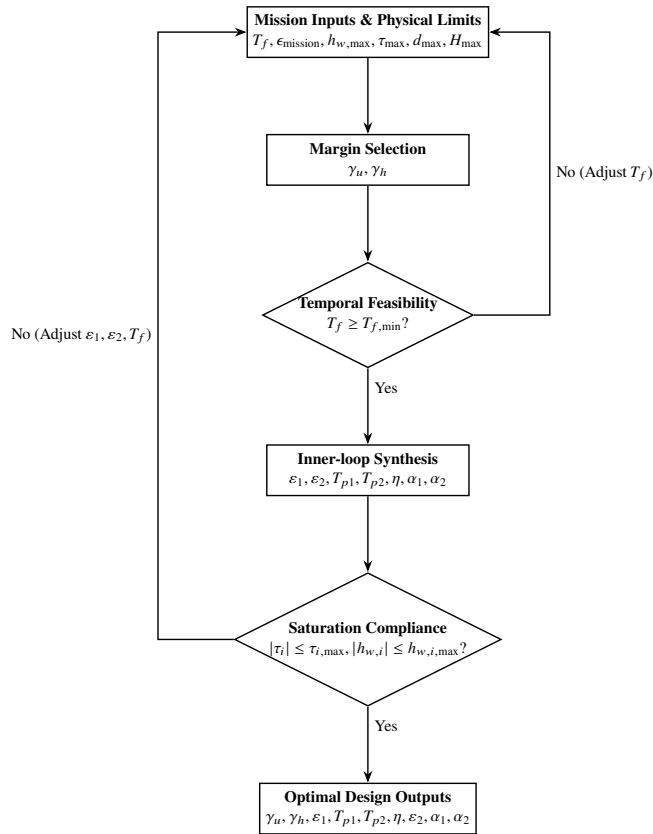


Fig. 2 Systematic parameter-synthesis procedure.

Remark 8. To avoid unbalanced gains, enforce $\alpha_1 = \alpha_2 = \kappa \alpha$ with $\kappa > 1$ by solving $\alpha_{1,\min} = \alpha_{2,\min}$ in (56). This yields

$$\varepsilon_2 = \left(\frac{2T_{d,\max} T_{p2}}{T_{p1} \lambda_{\min}(\mathbf{J}_0)^{1-\frac{\eta}{2}}} \right)^{\frac{1}{2-\eta}} \varepsilon_1^{\frac{1-\eta}{2-\eta}}, \quad \alpha = \frac{\delta_1 \eta T_{p1}}{\pi} \left(\frac{\sqrt{2}}{\varepsilon_1} \right)^{1-\eta} \quad (57)$$

followed by $\alpha_1 = \alpha_2 = \kappa \alpha$. This provides a unique parameter set from mission inputs.

IV. Simulation Results

In this section, numerical simulations are presented to validate the proposed EPTPAC framework under dual reaction-wheel saturation. Table 2 summarizes the spacecraft parameters, actuator limits, disturbance model, and boundary conditions. To demonstrate post-maneuver behavior, the simulation horizon is extended to $T_{\text{sim}} > T_f$, with the reference attitude held constant at the target state for $t \geq T_f$.

Table 2 Common simulation settings and boundary conditions

Symbol	Value
$\mathbf{J}_0$	$\text{diag}([200, 250, 300]) \text{ kg} \cdot \text{m}^2$
$\Delta \mathbf{J}$	$5\% \mathbf{J}_0$
$\tau_{i,\max}$	$0.2 \text{ N} \cdot \text{m}$
$h_{w,i,\max}$	$4.0 \text{ kg} \cdot \text{m}^2/\text{s}$
$\mathbf{h}_{w,0}$	$[0, 0, 0]^\top \text{ kg} \cdot \text{m}^2/\text{s}$
$\mathbf{d}(t)$	$0.01 [\sin(2t), \cos(t), \cos(t+2)]^\top \text{ N} \cdot \text{m}$
$T_{d,\max}$	$0.03 \text{ N} \cdot \text{m}$
$H_{\max}$	$0.1 \text{ kg} \cdot \text{m}^2/\text{s}$
$\boldsymbol{\sigma}(0)$	$[0.2, 0.3, -0.3]^\top$
$\boldsymbol{\sigma}_{\text{target}}$	$[0, 0, 0]^\top$
$\boldsymbol{\omega}(0)$	$[0, 0, 0]^\top \text{ rad/s}$
$\boldsymbol{\omega}_{\text{target}}$	$[0, 0, 0]^\top \text{ rad/s}$

The nominal trajectory reference $(\boldsymbol{\sigma}_d, \boldsymbol{\omega}_d)$ is generated offline by solving the constrained OCP (22) via GPOPS-II with $\lambda = 0.1$ and $N = 20$. The discrete nodal torques are subsequently reconstructed into continuous-time commands via piecewise-linear interpolation (23). Adhering to the guidelines in Remarks 6–7, the safety margins are selected as follows. Specifically, for the torque margin, the maximum disturbance torque is $T_{d,\max} = 0.03 \text{ N} \cdot \text{m}$ and the actuator limit is $\tau_{i,\max} = 0.2 \text{ N} \cdot \text{m}$, yielding a practical choice of $\gamma_u > 0.15$, thus, the torque margin is set to $\gamma_u = 0.2$. Regarding the momentum margin, with $H_{\max} = 0.1 \text{ kg} \cdot \text{m}^2/\text{s}$, $\nu_i = 0.05 \sum_{j=1}^3 (J_0)_{ij}$, and $h_{w,i,\max} = 4.0 \text{ kg} \cdot \text{m}^2/\text{s}$, a practical choice is $\gamma_h > 0.075$, hence, the momentum margin is set to $\gamma_h = 0.1$. The theoretical minimum terminal time $T_{f,\min}$ is computed via the time-optimal procedure in Appendix A, yielding $T_{f,\min} \approx 95 \text{ s}$. Thus, the terminal time for all cases is set to $T_f \geq 110 \text{ s}$ to ensure feasibility.

Four comprehensive cases are conducted to validate different aspects of the framework: Case 1 verifies baseline

performance with dual-saturation compliance; Case 2 examines exact terminal-time convergence across different T_f ; Case 3 evaluates prescribed accuracy tunability; and Case 4 benchmarks the proposed framework against a representative torque-saturated prescribed-time controller from [24] (hereafter Ref [24]) to demonstrate the advantages of the proposed framework in achieving exact terminal-time convergence and dual-saturation feasibility.

A. Case 1: Baseline Maneuver

This scenario is designed to validate the fundamental performance of the EPTPAC framework. The mission parameters are specified as follows: terminal time $T_f = 120$ s, mission accuracy $\varepsilon_1 = 10^{-5}$, prescribed-time exponent $\eta = 0.2$, and time allocations $T_{p2} = 15$ s, $T_{p1} = 100$ s. Following the synthesis procedure in Section III.C with $\kappa = 1.2$, the inner-loop parameters are determined to be $\varepsilon_2 = 6.43 \times 10^{-5}$ and $\alpha_1 = \alpha_2 = 6.34$. The practical convergence bounds $\varepsilon_{\delta_1} = 7.96 \times 10^{-6}$ and $\varepsilon_{\delta_2} = 5.13 \times 10^{-5}$ satisfy $\varepsilon_{\delta_i} < \varepsilon_i$, and the sufficient conditions in Theorems 4–5 are verified.

The simulation results are shown in Figs. 3–5. As shown in Fig. 3, the spacecraft attitude and angular velocity closely track the reference trajectory, which reaches the target state exactly at $t = T_f$ by construction of the outer-loop planner. All tracking errors remain within the prescribed-accuracy sets throughout the maneuver, as illustrated in Fig. 4, owing to the fact that the initial conditions $\sigma(0) = \sigma_d(0)$ and $\omega(0) = \omega_d(0)$ result in zero initial errors. Moreover, both control torques and wheel momenta remain strictly within their respective limits over $[0, T_f]$, as depicted in Fig. 5, thereby confirming the effectiveness of the proposed framework.

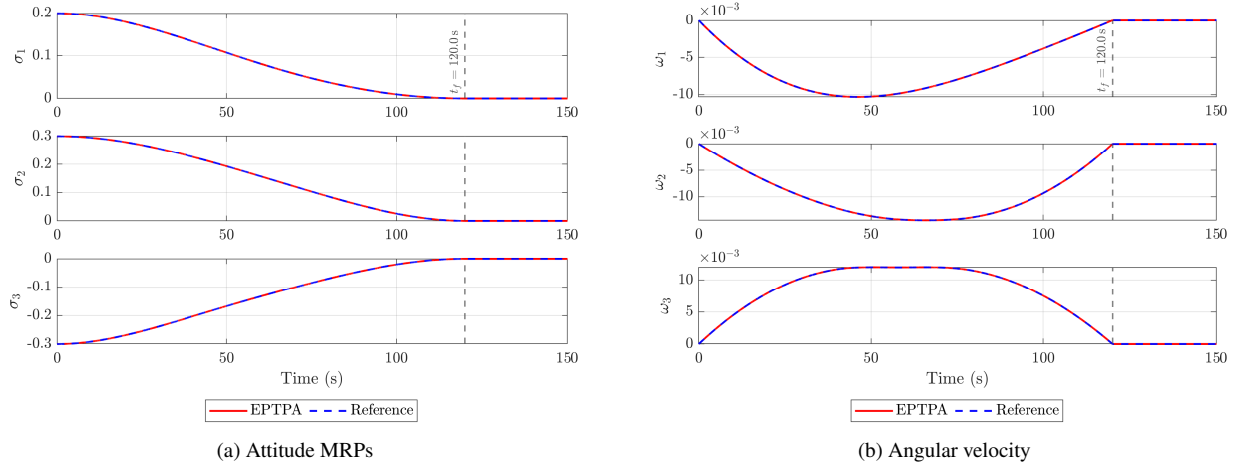


Fig. 3 Case 1: Reference tracking in MRPs and angular rates.

To assess robustness, a severe step disturbance $\mathbf{d}(t) = 0.06 [1, 1, 1]^T \text{ N} \cdot \text{m}$ is injected during $t \in [0, 1)$ s, which significantly exceeds the design bound $T_{d,\max} = 0.03 \text{ N} \cdot \text{m}$, then the disturbance reverts to the nominal profile. Despite this beyond-bound perturbation, Figs. 6–7 show that the tracking errors rapidly recover to the prescribed accuracy upon disturbance removal, and both torque and wheel momentum remain within saturation limits throughout the maneuver.

In summary, Case 1 validates the fundamental performance of the EPTPAC framework, demonstrating exact

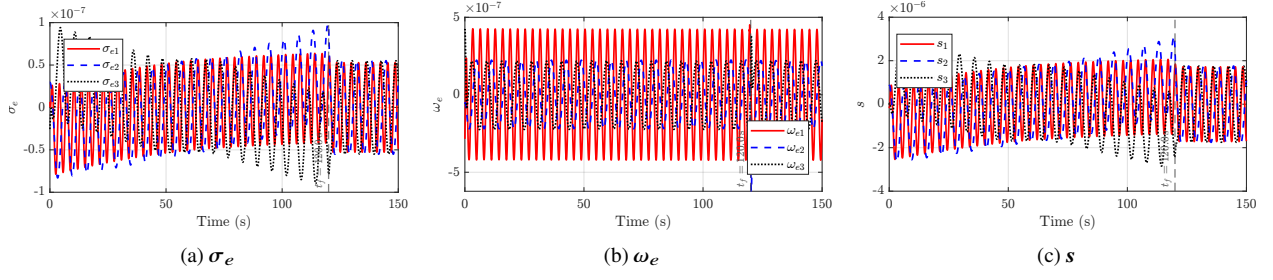


Fig. 4 Case 1: Error responses

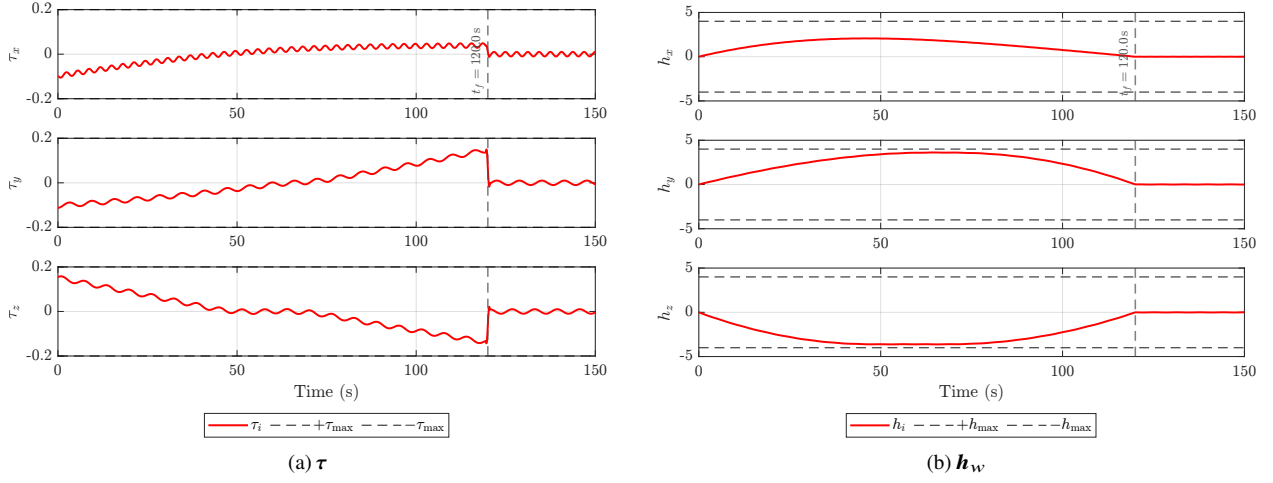


Fig. 5 Case 1: Torque and wheel momentum.

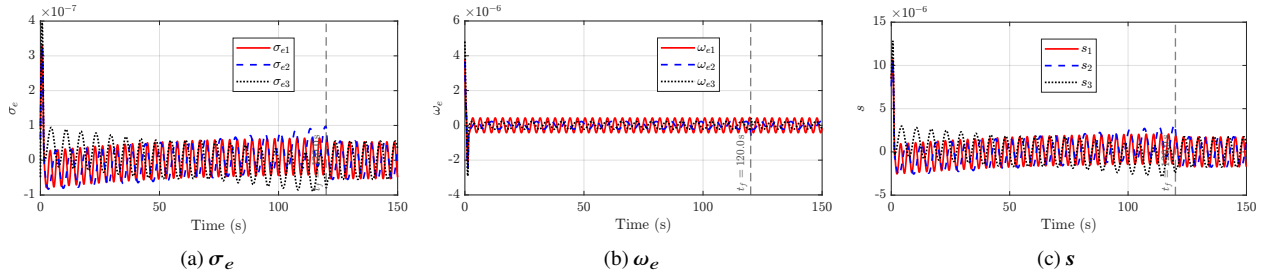


Fig. 6 Case 1: Error convergence under beyond-bound transient disturbance.

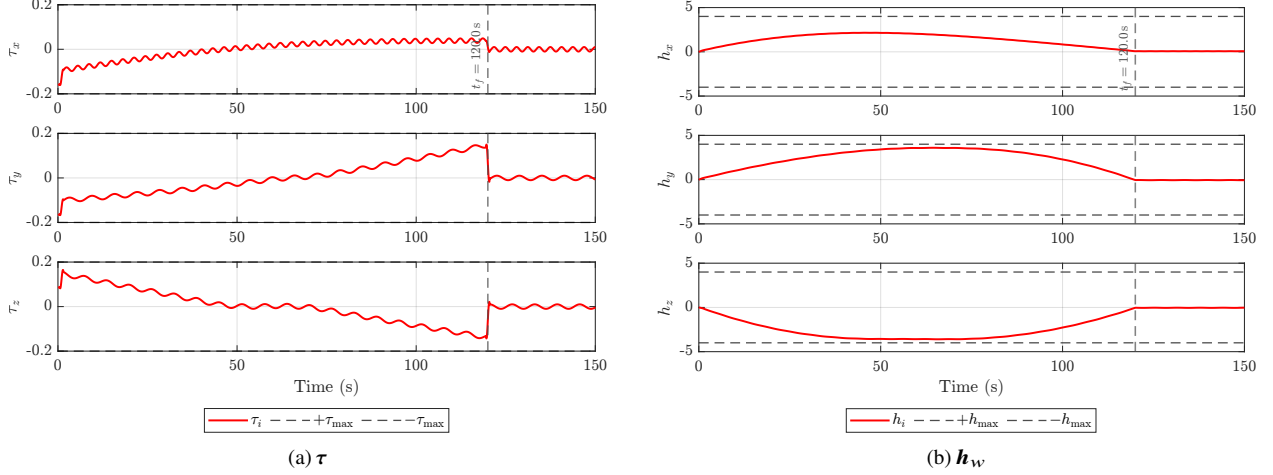


Fig. 7 Case 1: Torque and wheel momentum under the beyond-bound transient disturbance.

terminal-time convergence under dual-saturation constraints and inherent robustness against transient disturbances that significantly exceed the design bound.

B. Case 2: Time-Flexibility Assessment

The objective of this case is to examine exact terminal-time convergence across different terminal times T_f while maintaining dual-constraint feasibility. To clearly distinguish the tracking performance, the target-pointing MRP error $\sigma_{e,\text{tar}}$, defined between $\sigma(t)$ and the target σ_{target} , is reported separately from the reference-tracking error σ_e .

The terminal time is swept over $T_f \in \{110, 120, 130, 140\}$ s, with $\varepsilon_1 = 10^{-5}$, $\eta = 0.2$, and $T_{p2} = 15$ s, $T_{p1} = T_f - 20$ s. For each T_f , the outer-loop OCP generates a constraint-feasible reference trajectory, and the corresponding inner-loop parameters are synthesized via the balanced rule with $\kappa = 1.2$, as summarized in Table 3.

Table 3 Case 2: Synthesized parameters for terminal-time sweep

T_f	T_{p1}	T_{p2}	ε_2	$\alpha_1 = \alpha_2$
110 s	90 s	15 s	6.81×10^{-5}	6.04
120 s	100 s	15 s	6.43×10^{-5}	6.34
130 s	110 s	15 s	6.10×10^{-5}	6.62
140 s	120 s	15 s	5.81×10^{-5}	6.87

The simulation responses are presented in Figs. 8–10. As illustrated in Fig. 8, the target-pointing errors $\sigma_{e,\text{tar}}$ converge at their respective terminal times, thereby confirming exact terminal-time convergence for all tested scenarios. Furthermore, Figs. 9 and 10 reveal the anticipated trade-off between maneuver agility and actuation effort: shorter T_f necessitates more aggressive control actions, yet both torque and momentum remain strictly within their prescribed limits for all T_f values, thus validating dual-saturation compliance across the entire time range.

Table 4 quantifies the temporal precision of the EPTPAC framework by comparing the prescribed terminal time

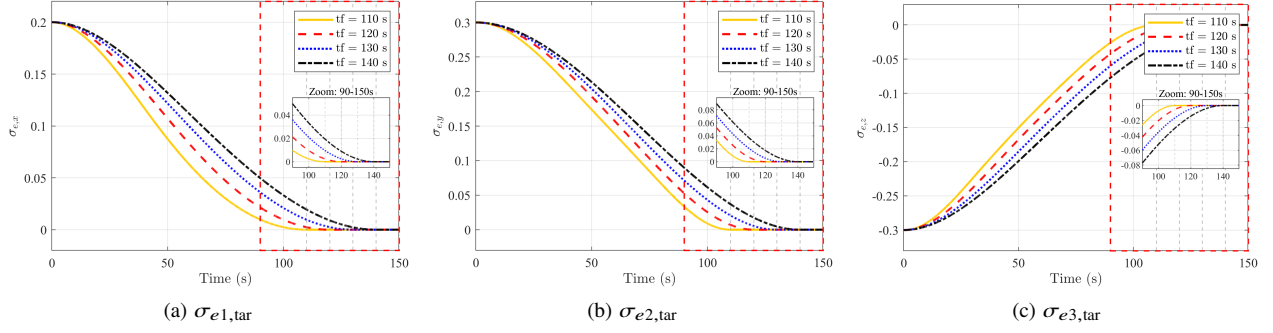


Fig. 8 Case 2: MRP error components for different T_f

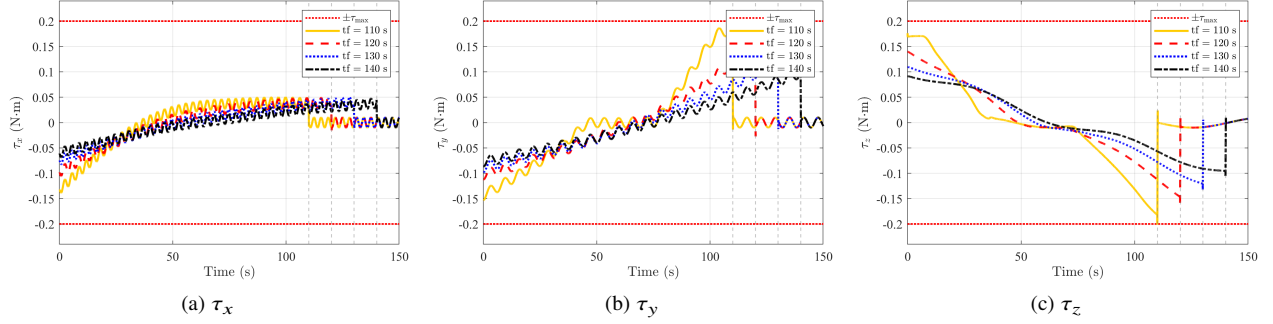


Fig. 9 Case 2: Control torque components for different T_f

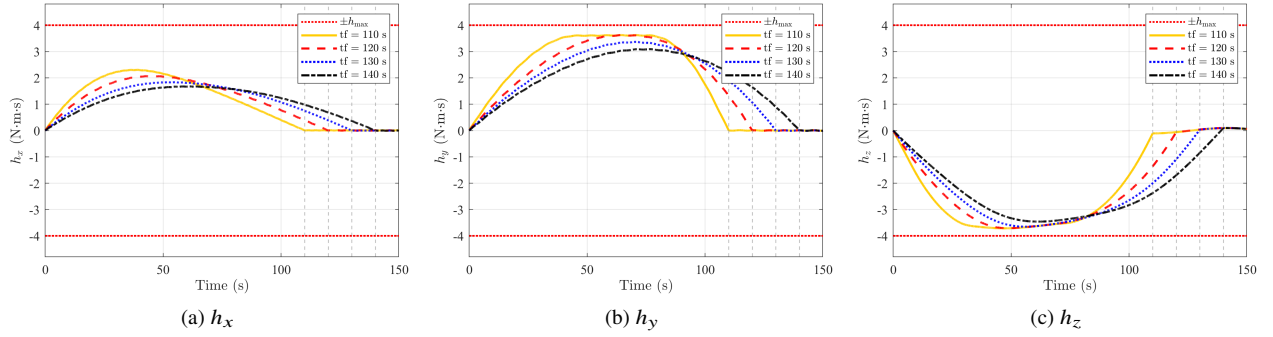


Fig. 10 Case 2: Wheel momentum components for different T_f

T_f with the actual convergence time. For a prescribed accuracy $\|\sigma_{e,\text{tar}}\| = 10^{-5}$, the attitude tracking error enters the target accuracy only 0.24–0.25 s prior to T_f . This slight lead is a consequence of the robust parameter synthesis (using $\kappa = 1.2$) designed to accommodate worst-case disturbance bounds. Notably, the actual steady-state error settles at a much finer level of approximately 10^{-6} . The actual convergence times for this tighter accuracy occur only 0.06–0.07 s before T_f , corresponding to a relative timing error below 0.06%.

Table 4 Case 2: Actual convergence time of $\|\sigma_{e,\text{tar}}\|$ into prescribed accuracy

T_f (s)	Actual convergence time at 10^{-5} (s)	Actual convergence time at 10^{-6} (s)
110	109.75	109.94
120	119.76	119.93
130	129.75	129.94
140	139.75	139.94

In summary, Case 2 confirms that the framework achieves exact terminal-time convergence across a range of T_f values with minimal conservatism (temporal precision $< 0.25\%$), while maintaining dual-constraint feasibility through two-loop co-design.

C. Case 3: Precision-Sweep Assessment

To evaluate the accuracy tunability of the framework, this case examines the system performance across a range of prescribed accuracies with the terminal time fixed at $T_f = 120$ s, with $\eta = 0.2$ and $T_{p2} = 15$ s, $T_{p1} = 100$ s. The prescribed accuracy is swept over $\varepsilon_1 \in \{10^{-4}, 10^{-5}, 10^{-6}, 10^{-7}\}$, and the corresponding inner-loop parameters are synthesized via the balanced rule with $\kappa = 1.2$, as listed in Table 5.

Table 5 Case 3: Synthesized parameters for accuracy sweep

ε_1	ε_2	$\alpha_1 = \alpha_2$
1×10^{-4}	4.67×10^{-5}	4.30
1×10^{-5}	1.68×10^{-5}	7.71
1×10^{-6}	6.04×10^{-6}	13.82
1×10^{-7}	2.17×10^{-6}	24.78

As demonstrated in Fig. 11, all four precision settings successfully achieve their respective prescribed accuracies within T_f : the attitude error $\|\sigma_e(t)\|$ converges below ε_1 and the sliding variable $\|s(t)\|$ is regulated below ε_2 . As anticipated, higher precision requirements necessitate higher control gains. When ε_1 is tightened from 10^{-4} to 10^{-7} , the gains $\alpha_1 = \alpha_2$ increase from 4.30 to 24.78. It is worth noting that larger gains lead to increased control effort and amplified sensitivity to measurement noise and unmodeled dynamics.

In summary, Case 3 confirms that the framework provides tunable steady-state precision through the design parameter

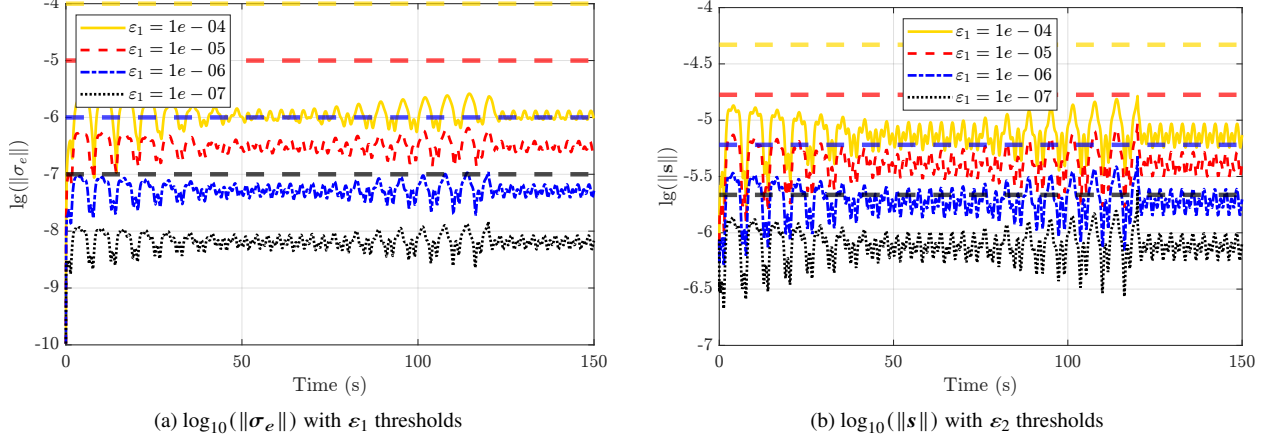


Fig. 11 Case 3: Log-scale comparison of $\|\sigma_e\|$ and $\|s\|$ for different ε_1

ε_1 . In practice, ε_1 should be matched to the actual sensor resolution. Pursuing an accuracy beyond sensing capability yields no practical benefit while unnecessarily increasing control gains.

D. Case 4: Comparison with Ref. [24]

To benchmark the advantage of the proposed framework against existing methods, this case compares EPTPAC with the representative torque-saturated prescribed-time controller from Ref [24], which addresses torque limits but does not account for wheel-momentum constraints. Two scenarios are conducted: Case 4.1 considers torque saturation only, thereby providing a fair comparison under identical constraint assumptions; Case 4.2 enforces dual saturation to assess how the additional momentum constraint affects controller performance.


1. Case 4.1: Comparison under torque-only saturation

This scenario evaluates terminal-time tracking performance under torque saturation only ($\tau_{i,\max} = 0.2 \text{ N} \cdot \text{m}$) with two prescribed terminal times: $T_f = 300 \text{ s}$ and $T_f = 150 \text{ s}$.


The comparative results are illustrated in Fig. 12. For the $T_f = 300 \text{ s}$ case, as depicted in Figs. 12a and 12b, Ref. [24] exhibits pronounced conservatism, with the tracking error converging around 150 s. Such premature convergence—occurring at only 50% of the prescribed duration—necessitates unnecessarily aggressive control action in the early stage, leading to inefficient resource utilization.

A more critical performance breakdown is observed when T_f is reduced to 150 s, approaching the minimum feasible time $T_{f,\min}$. As shown in Figs. 12c and 12d, Ref. [24] loses its prescribed-time convergence property. This failure occurs because its high-gain feedback mechanism does not account for the physical feasibility under tight actuator constraints. The resulting torque saturation compromises the nominal stability guarantees of the PTC law, causing the actual convergence to lag significantly until approximately 230 s.


In contrast, the proposed EPTPAC framework consistently achieves exact convergence at the specified terminal

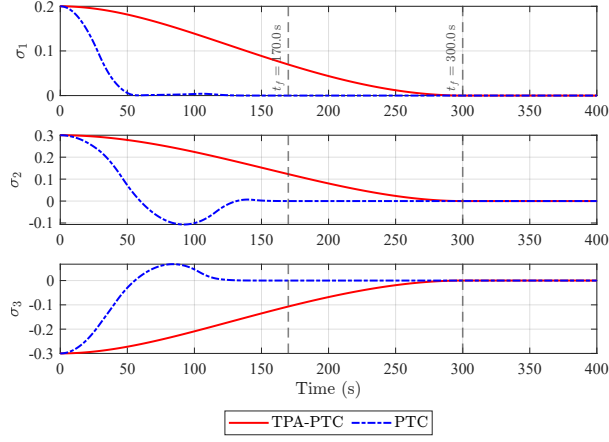


(a) Attitude error ($T_f = 300$ s)

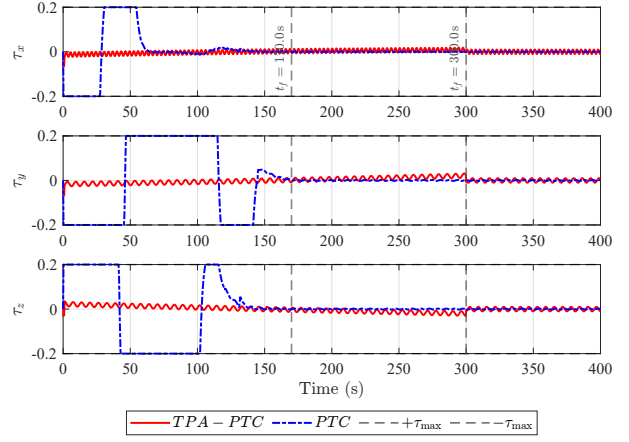

(b) Control torque ($T_f = 300$ s)

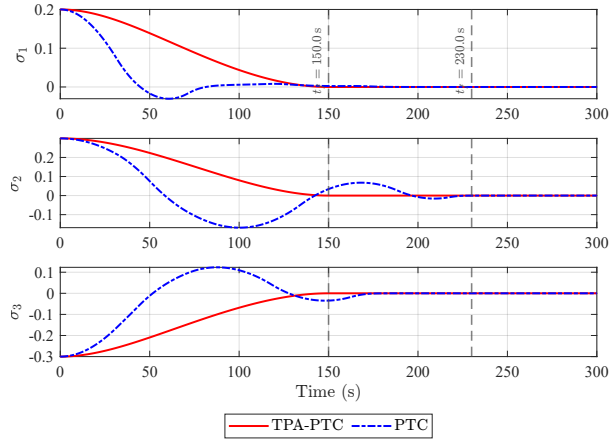

(c) Attitude error ($T_f = 150$ s)

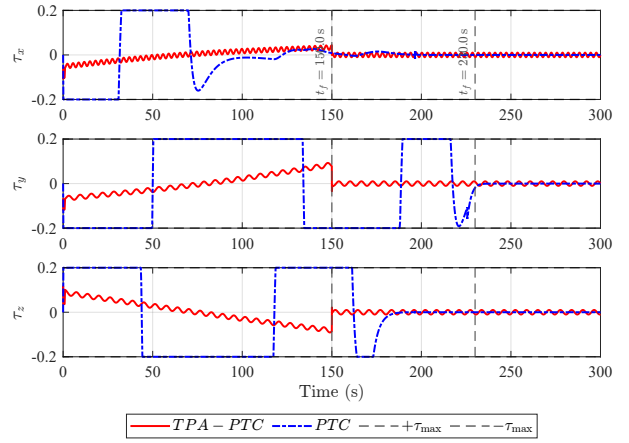

(d) Control torque ($T_f = 150$ s)

Fig. 12 Case 4.1: Performance comparison under torque-only saturation

times with smooth, feasible control profiles. These results underscore that incorporating physical realizability into the design of prescribed-time controllers is not merely an enhancement but a fundamental requirement for ensuring reliable terminal-time tracking in time-critical missions.

2. Case 4.2: Comparison under dual saturation

This scenario further examines the controller robustness under dual saturation constraints with $T_f = 300$ s.

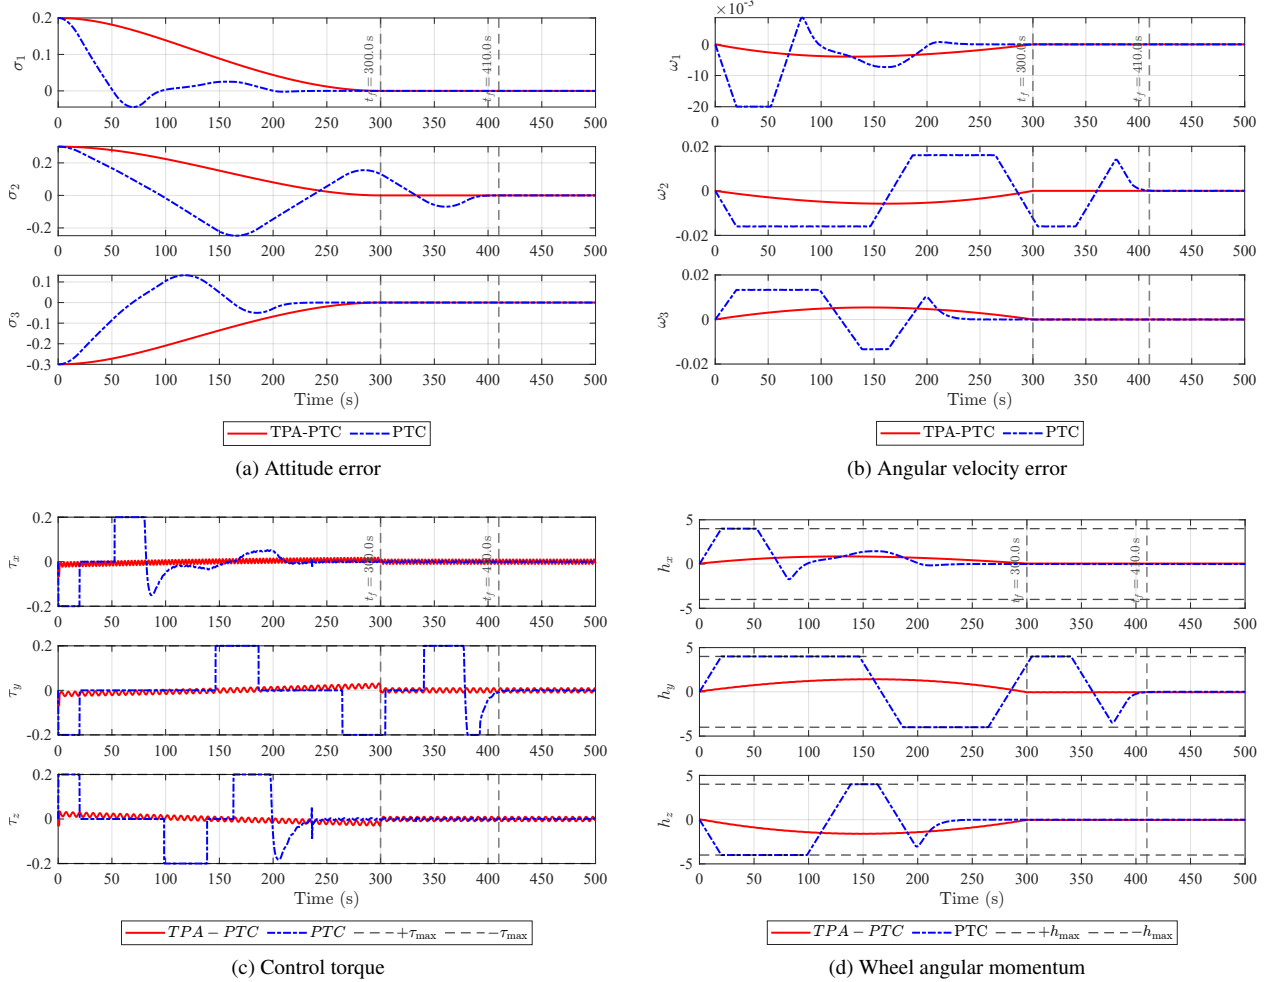


Fig. 13 Case 4.2: Performance comparison under dual saturation

The comparative results for the dual-saturation scenario are presented in Fig. 13. As depicted in Figs. 13c and 13d, since the controller in Ref. [24] neglects angular-momentum constraints in its design, it commands impulsive torques at the onset of the maneuver. This leads to rapid momentum accumulation, eventually driving the reaction wheels into saturation. Once saturated, the spacecraft suffers a complete loss of control authority and enters an uncontrollable drift phase. Control is only regained when the attitude error eventually reverses sign to permit restorative torque, as illustrated in Figs. 13a and 13b. Beyond the massive waste of actuator capacity, this phenomenon leaves the spacecraft

in a hazardous, uncontrollable state for extended periods. Consequently, the convergence is severely delayed to 410 s, significantly exceeding the prescribed 300 s requirement. In stark contrast, EPTPAC strategically modulates the torque profile to prevent angular-momentum saturation, thereby enabling exact convergence precisely at $t = 300$ s.

In summary, Case 4 underscores the critical necessity of physical realizability awareness in prescribed-time control. Case 4.1 demonstrates that without considering actuator limits, existing PTC methods exhibit either excessive conservatism or a fundamental compromise of their convergence guarantees when T_f approaches the physical limit $T_{f,\min}$. Case 4.2 further reveals that unmanaged momentum accumulation exacerbates these limitations, leading to prolonged intervals of uncontrolled dynamics. By incorporating constraint-aware co-design into both the planning and control layers, the EPTPAC framework successfully circumvents these pitfalls and ensures exact terminal-time convergence regardless of the constraint complexity.

V. Conclusion

This paper proposed a two-loop EPTPAC framework for spacecraft actuated by reaction wheels to achieve prescribed accuracy at a user-specified terminal time under dual saturation. The outer loop employs a constrained optimal control problem to generate a reference trajectory that respects dual saturation constraints, while the inner loop utilizes a robust prescribed-time prescribed-accuracy controller to track the reference within the desired accuracy by the terminal time. Through this decoupled architecture, the proposed framework effectively overcomes the fundamental shortcomings of existing PTC methods—namely, the inherent conservatism and insufficient consideration of dual saturation. Furthermore, by identifying the minimal feasible maneuver time $T_{f,\min}$ and establishing a systematic parameter-synthesis procedure, the proposed framework significantly strengthens engineering realizability while streamlining the design process. Numerical simulations validated the effectiveness of the proposed framework in achieving exact terminal-time convergence, tunable precision, and dual-saturation compliance. Future work will focus on online trajectory planning and multi-spacecraft cooperative maneuvers.

A. Bang-Bang Estimate of Minimum Feasible Maneuver Time

This appendix provides a bang-bang estimate of the minimum feasible maneuver time $T_{f,\min}$ under component-wise torque and wheel-momentum limits. Based on time-optimal control theory, this estimate establishes a necessary lower bound for selecting T_f in Assumption 1.

Let $\sigma_e(0)$ denote the initial attitude error in MRPs. The associated principal rotation angle $\theta \in [0, \pi]$ and axis $e = [e_1, e_2, e_3]^\top$ are

$$\theta = 4 \arctan(\|\sigma_e(0)\|), \quad e = \begin{cases} \frac{\sigma_e(0)}{\|\sigma_e(0)\|}, & \sigma_e(0) \neq \mathbf{0}, \\ \text{any unit vector}, & \sigma_e(0) = \mathbf{0}. \end{cases} \quad (58)$$

Define the effective inertia $J_e = \mathbf{e}^\top \mathbf{J}_0 \mathbf{e}$. With $|\tau_i| \leq \tau_{i,\max}$, the maximum torque projection along $\mathbf{e}$ is

$$\tau_{e,\max} = \max_{|\tau_i| \leq \tau_{i,\max}} \mathbf{e}^\top \boldsymbol{\tau} = \sum_{i=1}^3 |e_i| \tau_{i,\max} \quad (59)$$

Assume $\mathbf{h}_w(0) = \mathbf{0}$ and $|h_{w,i}| \leq h_{w,i,\max}$. Under the bang-bang allocation $\tau_i = \text{sgn}(e_i) \tau_{i,\max}$, the maximum duration before wheel-momentum saturation is

$$t_h = \min_{i \in \{1,2,3\}} \frac{h_{w,i,\max}}{\tau_{i,\max}} \quad (60)$$

For a nominal rest-to-rest rotation about $\mathbf{e}$, the peak rate and the corresponding no-coast angle are

$$\omega_{\max} = \frac{\tau_{e,\max}}{J_e} t_h, \quad \theta_h = \frac{\tau_{e,\max}}{J_e} t_h^2 \quad (61)$$

The resulting minimum-time estimate is

$$T_{f,\min} \approx \begin{cases} 2\sqrt{\frac{J_e \theta}{\tau_{e,\max}}}, & \theta \leq \theta_h, \\ 2t_h + \frac{\theta - \theta_h}{\omega_{\max}}, & \theta > \theta_h \end{cases} \quad (62)$$

B. Bound on the Feedforward Mismatch

Let $\mathbf{H}_d(t) = \mathbf{J}_0 \boldsymbol{\omega}_d(t) + \mathbf{h}_{w,d}(t)$ denote the total angular momentum of the reference trajectory. Since the reference is generated under disturbance-free dynamics and initialized with the same total momentum as the actual spacecraft ($\mathbf{H}_d(0) = \mathbf{H}(0) =: \mathbf{H}_0$), the reference total angular momentum is conserved, namely,

$$\mathbf{H}_d(t) \equiv \mathbf{H}_0, \quad \forall t \in [0, T_f]$$

Therefore, the reference control torque can be expressed as

$$\boldsymbol{\tau}_{\text{ref}}(t) = \mathbf{J}_0 \dot{\boldsymbol{\omega}}_d(t) + \boldsymbol{\omega}_d(t)^\times \mathbf{H}_0 \quad (63)$$

The feedforward mismatch is defined as $\boldsymbol{\Delta}_f(t) = -\mathbf{f}(t) - \boldsymbol{\tau}_{\text{ref}}(t)$. Substituting $\mathbf{f}(t)$ from (9) yields

$$\begin{aligned} \boldsymbol{\Delta}_f(t) = & \boldsymbol{\omega}(t)^\times (\mathbf{J}_0 \boldsymbol{\omega}(t) + \mathbf{h}_w(t)) - \mathbf{J}_0 \boldsymbol{\omega}_e(t)^\times \mathbf{R}(\boldsymbol{\sigma}_e(t)) \boldsymbol{\omega}_d(t) + \mathbf{J}_0 \mathbf{R}(\boldsymbol{\sigma}_e(t)) \dot{\boldsymbol{\omega}}_d(t) \\ & - \mathbf{J}_0 \dot{\boldsymbol{\omega}}_d(t) - \boldsymbol{\omega}_d(t)^\times \mathbf{H}_0 \end{aligned} \quad (64)$$

Using $\mathbf{J}_0 \boldsymbol{\omega} + \mathbf{h}_w = \mathbf{H} - \Delta \mathbf{J} \boldsymbol{\omega}$, $\mathbf{H} = \mathbf{H}_0 + (\mathbf{H} - \mathbf{H}_0)$, and $\boldsymbol{\omega} = \boldsymbol{\omega}_e + \mathbf{R} \boldsymbol{\omega}_d$, the expression can be grouped as

$$\Delta_f(t) = \boldsymbol{\omega}(t)^\times (\mathbf{H}(t) - \mathbf{H}_0) + \boldsymbol{\omega}_e(t)^\times \mathbf{H}_0 + [(\mathbf{R}(\boldsymbol{\sigma}_e) - \mathbf{I}) \boldsymbol{\omega}_d(t)]^\times \mathbf{H}_0 - \boldsymbol{\omega}(t)^\times \Delta \mathbf{J} \boldsymbol{\omega}(t) - \mathbf{J}_0 \boldsymbol{\omega}_e(t)^\times \mathbf{R}(\boldsymbol{\sigma}_e(t)) \boldsymbol{\omega}_d(t) + \mathbf{J}_0 (\mathbf{R}(\boldsymbol{\sigma}_e(t)) - \mathbf{I}) \dot{\boldsymbol{\omega}}_d(t)$$

From Assumption 3, the momentum drift satisfies

$$\|\mathbf{H}(t) - \mathbf{H}_0\| \leq H_{\max}, \quad \forall t \in [0, T_f] \quad (65)$$

Invoking the properties $\|\mathbf{a}^\times \mathbf{b}\| \leq \|\mathbf{a}\| \|\mathbf{b}\|$, $\|\mathbf{R}(\boldsymbol{\sigma}_e)\| = 1$, and the inequalities $\|\mathbf{I} - \mathbf{R}(\boldsymbol{\sigma}_e)\| \leq 4\|\boldsymbol{\sigma}_e\|$ (valid for $\|\boldsymbol{\sigma}_e\| < 1$), each axis component of $\Delta_f(t)$ satisfies

$$\begin{aligned} |\Delta_{f,i}(t)| &\leq \|\boldsymbol{\omega}(t)\| H_{\max} + \mu_i \|\boldsymbol{\omega}_e(t)\| H_0 + 4\|\boldsymbol{\sigma}_e(t)\| \|\boldsymbol{\omega}_d(t)\| H_0 + \nu_i \|\boldsymbol{\omega}(t)\|^2 \\ &\quad + \mu_i \|\boldsymbol{\omega}_e(t)\| \|\boldsymbol{\omega}_d(t)\| + 4\mu_i \|\boldsymbol{\sigma}_e(t)\| \|\dot{\boldsymbol{\omega}}_d(t)\| \end{aligned} \quad (66)$$

where $\nu_i = \sum_{j=1}^3 |(\Delta J)_{ij}|$. Since $\|\boldsymbol{\omega}(t)\| \leq \|\boldsymbol{\omega}_e(t)\| + \|\boldsymbol{\omega}_d(t)\|$, taking the supremum over $[0, T_f]$ and using the bounds $\|\boldsymbol{\omega}_e(t)\| \leq \omega_{e,\max}$, $\|\boldsymbol{\sigma}_e(t)\| \leq \sigma_{\max}$, $\|\boldsymbol{\omega}_d(t)\| \leq \omega_{d,\max}$, $\|\dot{\boldsymbol{\omega}}_d(t)\| \leq \dot{\omega}_{d,\max}$, we obtain the component-wise envelope

$$\begin{aligned} \Delta_{f,i,\max} &= (\omega_{e,\max} + \omega_{d,\max}) H_{\max} + \mu_i \omega_{e,\max} H_0 + 4\sigma_{\max} \omega_{d,\max} H_0 + \nu_i (\omega_{e,\max} + \omega_{d,\max})^2 \\ &\quad + \mu_i \omega_{e,\max} \omega_{d,\max} + 4\mu_i \sigma_{\max} \dot{\omega}_{d,\max} \quad i = 1, 2, 3 \end{aligned} \quad (67)$$

References

- [1] Alex Pothén, A., Crain, A., and Ulrich, S., “Pose Tracking Control for Spacecraft Proximity Operations Using the Udwadia–Kalaba Framework,” *Journal of Guidance, Control, and Dynamics*, Vol. 45, No. 2, 2022, pp. 296–309. <https://doi.org/10.2514/1.G005169>, URL <https://doi.org/10.2514/1.G005169>, publisher: American Institute of Aeronautics and Astronautics _eprint: <https://doi.org/10.2514/1.G005169>.
- [2] Das, G., and Sinha, M., “Predefined-Time Hybrid Tracking Control of Flexible Satellites with Conditional Anti-Unwinding,” *Journal of Guidance, Control, and Dynamics*, Vol. 47, No. 11, 2024, pp. 2426–2434. <https://doi.org/10.2514/1.G008286>, URL <https://doi.org/10.2514/1.G008286>.
- [3] Xu, C., Zelazo, D., and Wu, B., “Distributed prescribed-time coordinated control of spacecraft formation flying under input saturation,” *Advances in Space Research*, Vol. 74, No. 5, 2024, pp. 2302–2315. <https://doi.org/10.1016/j.asr.2024.05.077>, URL <https://www.sciencedirect.com/science/article/pii/S027311772400543X>.
- [4] Hong, Y., and Jiang, Z.-P., “Finite-Time Stabilization of Nonlinear Systems With Parametric and Dynamic Uncertainties,” *IEEE Transactions on Automatic Control*, Vol. 51, No. 12, 2006, pp. 1950–1956. <https://doi.org/10.1109/TAC.2006.886515>, URL <https://ieeexplore.ieee.org/document/4026648/>.
- [5] Zhao, L., Yu, J., and Yu, H., “Adaptive Finite-Time Attitude Tracking Control for Spacecraft With Disturbances,” *IEEE Transactions on Aerospace and Electronic Systems*, Vol. 54, No. 3, 2018, pp. 1412–1421. <https://doi.org/10.1109/TAES.2017.2764472>.
- [6] Shi, X.-N., Zhou, Z.-G., and Zhou, D., “Finite-Time Attitude Trajectory Tracking Control of Rigid Spacecraft,” *IEEE Transactions on Aerospace and Electronic Systems*, Vol. 53, No. 6, 2017, pp. 2913–2923. <https://doi.org/10.1109/TAES.2017.2710398>.
- [7] Zhou, B., “Finite-time stability analysis and stabilization by bounded linear time-varying feedback,” *Automatica*, Vol. 121, 2020, p. 109191. <https://doi.org/10.1016/j.automatica.2020.109191>, URL <https://www.sciencedirect.com/science/article/pii/S0005109820303897>.
- [8] Polyakov, A., “Nonlinear Feedback Design for Fixed-Time Stabilization of Linear Control Systems,” *IEEE Transactions on Automatic Control*, Vol. 57, No. 8, 2012, pp. 2106–2110. <https://doi.org/10.1109/TAC.2011.2179869>, URL <https://ieeexplore.ieee.org/document/6104367/>.
- [9] Polyakov, A., Efimov, D., and Perruquetti, W., “Finite-time and fixed-time stabilization: Implicit Lyapunov function approach,” *Automatica*, Vol. 51, 2015, pp. 332–340. <https://doi.org/10.1016/j.automatica.2014.10.082>, URL <https://www.sciencedirect.com/science/article/pii/S0005109814004634>.
- [10] del Valle, S. C., Urrutxua, H., and Solano-López, P., “Generalized Potter–Stern Algorithm for Impulsive Minimum-Fuel Fixed-Time Rendezvous,” *Journal of Guidance, Control, and Dynamics*, Vol. 48, No. 12, 2025, pp. 2744–2762. <https://doi.org/10.2514/1.G009164>, URL <https://doi.org/10.2514/1.G009164>.

- [11] Sánchez-Torres, J. D., Sanchez, E. N., and Loukianov, A. G., “Predefined-time stability of dynamical systems with sliding modes,” *2015 American Control Conference (ACC)*, 2015, pp. 5842–5846. <https://doi.org/10.1109/ACC.2015.7172255>, URL <https://ieeexplore.ieee.org/document/7172255>, iSSN: 2378-5861.
- [12] Song, Y., Wang, Y., Holloway, J., and Krstic, M., “Time-varying feedback for regulation of normal-form nonlinear systems in prescribed finite time,” *AUTOMATICA*, Vol. 83, 2017, pp. 243–251. <https://doi.org/10.1016/j.automatica.2017.06.008>, URL <https://linkinghub.elsevier.com/retrieve/pii/S000510981730290X>, num Pages: 9 Place: Oxford Publisher: Pergamon-Elsevier Science Ltd Web of Science ID: WOS:000408288800028.
- [13] Sánchez-Torres, J. D., Gómez-Gutiérrez, D., López, E., and Loukianov, A. G., “A class of predefined-time stable dynamical systems,” *IMA Journal of Mathematical Control and Information*, Vol. 35, No. Supplement_1, 2018, pp. i1–i29. <https://doi.org/10.1093/imamci/dnx004>, URL <https://doi.org/10.1093/imamci/dnx004>.
- [14] Xiao, Y., Wang, Y., Ye, D., and Sun, Z., “Predefined-time robust attitude tracking control of flexible spacecraft with continuous and nonsingular performance,” *Aerospace Science and Technology*, Vol. 159, 2025, p. 110000. <https://doi.org/10.1016/j.ast.2025.110000>, URL <https://www.sciencedirect.com/science/article/pii/S1270963825000720>.
- [15] Meng, Y., Zhu, Y., Cui, Y., and Qiao, J., “Predefined-Time Enhanced Antidisturbance Attitude Control for Rigid-Liquid Coupled Launch Vehicles,” *Journal of Guidance Control and Dynamics*, Vol. 48, No. 4, 2025, pp. 870–884. <https://doi.org/10.2514/1.G008397>, num Pages: 15 Place: Reston Publisher: Amer Inst Aeronautics Astronautics Web of Science ID: WOS:001403479000001.
- [16] Wang, Y., Song, Y., Hill, D. J., and Krstic, M., “Prescribed-Time Consensus and Containment Control of Networked Multiagent Systems,” *IEEE Transactions on Cybernetics*, Vol. 49, No. 4, 2019, pp. 1138–1147. <https://doi.org/10.1109/TCYB.2017.2788874>, URL <https://ieeexplore.ieee.org/document/8272410>.
- [17] Cao, Y., Cao, J., and Song, Y., “Practical prescribed time tracking control over infinite time interval involving mismatched uncertainties and non-vanishing disturbances,” *Automatica*, Vol. 136, 2022, p. 110050. <https://doi.org/10.1016/j.automatica.2021.110050>, URL <https://www.sciencedirect.com/science/article/pii/S0005109821005781>.
- [18] Xiao, Y., Yang, Y., Ye, D., and Zhao, Y., “Scaling-Transformation-Based Attitude Tracking Control for Rigid Spacecraft With Prescribed Time and Prescribed Bound,” *IEEE Transactions on Aerospace and Electronic Systems*, Vol. 61, No. 1, 2025, pp. 433–442. <https://doi.org/10.1109/TAES.2024.3451454>.
- [19] Ye, D., Zou, A.-M., and Sun, Z., “Predefined-Time Predefined-Bounded Attitude Tracking Control for Rigid Spacecraft,” *IEEE Transactions on Aerospace and Electronic Systems*, Vol. 58, No. 1, 2022, pp. 464–472. <https://doi.org/10.1109/TAES.2021.3103258>, URL <https://ieeexplore.ieee.org/abstract/document/9512481>.
- [20] Zhou, B., Michiels, W., and Chen, J., “Fixed-Time Stabilization of Linear Delay Systems by Smooth Periodic Delayed Feedback,” *IEEE Transactions on Automatic Control*, Vol. 67, No. 2, 2022, pp. 557–573. <https://doi.org/10.1109/TAC.2021.3051262>, URL <https://ieeexplore.ieee.org/document/9321518>.

- [21] Ding, Y., Zhou, B., Zhang, K.-K., and Michiels, W., “Strong Prescribed-Time Stabilization of Uncertain Nonlinear Systems by Periodic Delayed Feedback,” *IEEE Transactions on Automatic Control*, Vol. 69, No. 6, 2024, pp. 4072–4079. <https://doi.org/10.1109/TAC.2023.3347703>, URL <https://ieeexplore.ieee.org/document/10375772>.
- [22] Zhou, B., Ding, Y., Zhang, K.-K., and Duan, G.-R., “Prescribed time control based on the periodic delayed sliding modesurface without singularities,” *SCIENCE CHINA Information Sciences*, Vol. 67, No. 7, 2024. <https://doi.org/10.1007/s11432-023-4052-4>, URL <https://www.sciengine.com/10.1007/s11432-023-4052-4>, publisher: Science China Press.
- [23] Sun, H.-J., Wu, Y.-Y., and Zhang, J., “Attitude synchronization control for multiple spacecraft: A preassigned finite-time scheme,” *Advances in Space Research*, Vol. 73, No. 12, 2024, pp. 6094–6110. <https://doi.org/10.1016/j.asr.2024.02.001>, URL <https://www.sciencedirect.com/science/article/pii/S0273117724001303>.
- [24] Xu, C., Wu, B., and Wang, D., “Distributed Prescribed-Time Attitude Coordination for Multiple Spacecraft With Actuator Saturation Under Directed Graph,” *IEEE Transactions on Aerospace and Electronic Systems*, Vol. 58, No. 4, 2022, pp. 2660–2672. <https://doi.org/10.1109/TAES.2021.3135484>, URL <https://ieeexplore.ieee.org/document/9650527/>.
- [25] Zhao, S., Zheng, J., Yi, F., Wang, X., and Zuo, Z., “Exponential Predefined Time Trajectory Tracking Control for Fixed-Wing UAV With Input Saturation,” *IEEE Transactions on Aerospace and Electronic Systems*, Vol. 60, No. 5, 2024, pp. 6406–6419. <https://doi.org/10.1109/TAES.2024.3402656>, URL <https://ieeexplore.ieee.org/document/10534850/>.
- [26] Kobayashi, H., Shoji, Y., and Yamada, K., “Optimal Attitude Trajectory of Spacecraft with Pyramid-Type CMGs Using a Pseudo-Spectral Method,” *AEROSPACE TECHNOLOGY JAPAN, THE JAPAN SOCIETY FOR AERONAUTICAL AND SPACE SCIENCES*, Vol. 16, No. 0, 2017, pp. 55–63. <https://doi.org/10.2322/astj.16.55>, URL https://www.jstage.jst.go.jp/article/astj/16/0/16_JSASS-D-16-00034/_article/-char/ja/.
- [27] Spiller, D., Melton, R. G., and Curti, F., “Inverse dynamics particle swarm optimization applied to constrained minimum-time maneuvers using reaction wheels,” *Aerospace Science and Technology*, Vol. 75, 2018, pp. 1–12. <https://doi.org/10.1016/j.ast.2017.12.038>, URL <https://www.sciencedirect.com/science/article/pii/S1270963817308684>.
- [28] Celani, F., and Lucarelli, D., “Spacecraft Attitude Motion Planning Using Gradient-Based Optimization,” *Journal of Guidance, Control, and Dynamics*, Vol. 43, No. 1, 2020, pp. 140–145. <https://doi.org/10.2514/1.G004531>, URL <https://arc.aiaa.org/doi/10.2514/1.G004531>, publisher: American Institute of Aeronautics and Astronautics.
- [29] Fan, Y., Xu, R., Li, Z., Zhu, S., Shang, H., Gao, A., and Gao, Y., “Polynomial Attitude Trajectory Planning for Spacecraft with Movable Parts Using Decoupled Strategy,” *Journal of Guidance, Control, and Dynamics*, Vol. 47, No. 1, 2024, pp. 72–86. <https://doi.org/10.2514/1.G007645>, URL <https://doi.org/10.2514/1.G007645>.
- [30] Chai, R., Tsourdos, A., Savvaris, A., Chai, S., Xia, Y., and Chen, C. L. P., “Six-DOF Spacecraft Optimal Trajectory Planning and Real-Time Attitude Control: A Deep Neural Network-Based Approach,” *IEEE Transactions on Neural Networks and Learning Systems*, Vol. 31, No. 11, 2020, pp. 5005–5013. <https://doi.org/10.1109/TNNLS.2019.2955400>, URL <https://ieeexplore.ieee.org/document/8939337>.

- [31] Gong, P., Yan, Z., Zhang, W., and Tang, J., “Lyapunov-based model predictive control trajectory tracking for an autonomous underwater vehicle with external disturbances,” *Ocean Engineering*, Vol. 232, 2021, p. 109010. <https://doi.org/10.1016/j.oceaneng.2021.109010>, URL <https://www.sciencedirect.com/science/article/pii/S0029801821004455>.
- [32] Mammarella, M., Lee, D. Y., Park, H., Capello, E., and Ghiglino, P., “Attitude Control of a Small Spacecraft via Tube-Based Model Predictive Control,” *Journal of Spacecraft and Rockets*, Vol. 56, No. 6, 2019, pp. 1585–1597. <https://doi.org/10.2514/1.A34394>.
- [33] Yang, Y., “Attitude Model Predictive Control with Actuator Saturation Using an Arc-Search Interior-Point Method,” *Journal of Guidance, Control, and Dynamics*, Vol. 46, No. 5, 2023, pp. 969–978. <https://doi.org/10.2514/1.G007179>.
- [34] Xiao, Y., Yang, Y., Ye, D., and Zhao, Y., “Scaling-Transformation-Based Attitude Tracking Control for Rigid Spacecraft With Prescribed Time and Prescribed Bound,” *IEEE Transactions on Aerospace and Electronic Systems*, Vol. 61, No. 1, 2025, pp. 433–442. <https://doi.org/10.1109/TAES.2024.3451454>, URL <https://ieeexplore.ieee.org/document/10659135>.
- [35] Anguiano-Gijón, C. A., Muñoz-Vázquez, A. J., Sánchez-Torres, J. D., Romero-Galván, G., and Martínez-Reyes, F., “On predefined-time synchronisation of chaotic systems,” *Chaos, Solitons & Fractals*, Vol. 122, 2019, pp. 172–178. <https://doi.org/10.1016/j.chaos.2019.03.015>, URL <https://www.sciencedirect.com/science/article/pii/S0960077919300864>.
- [36] Patterson, M. A., and Rao, A. V., “GPOPS-II: A MATLAB Software for Solving Multiple-Phase Optimal Control Problems Using hp-Adaptive Gaussian Quadrature Collocation Methods and Sparse Nonlinear Programming,” *ACM Trans. Math. Softw.*, Vol. 41, No. 1, 2014, pp. 1:1–1:37. <https://doi.org/10.1145/2558904>, URL <https://dl.acm.org/doi/10.1145/2558904>.