




USB/Boot/Reset

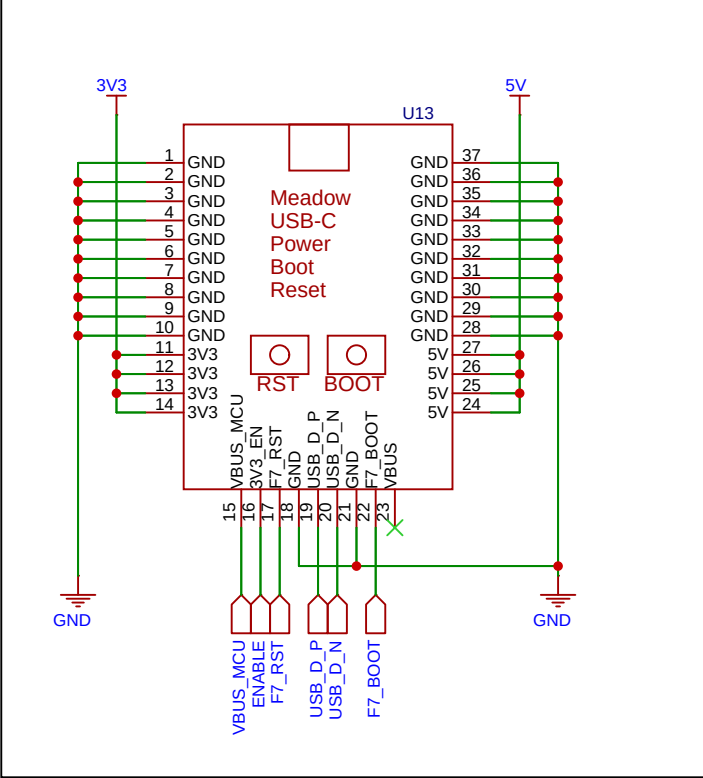


PWM LED Driver

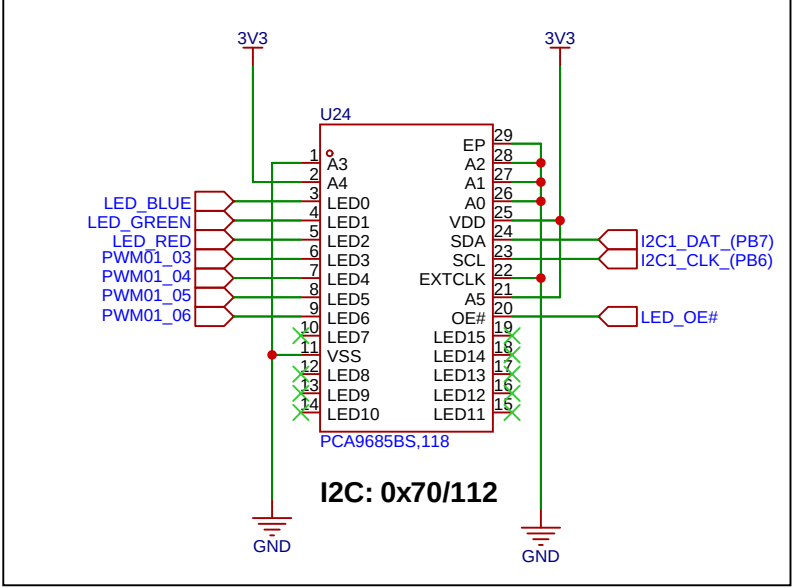


External Cell Antenna




External GNSS Antenna

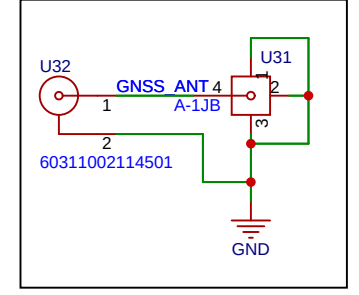


COM1 Debugging Grove

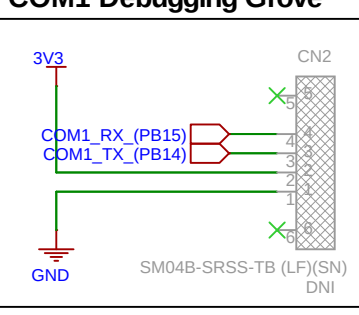


mikroBUS

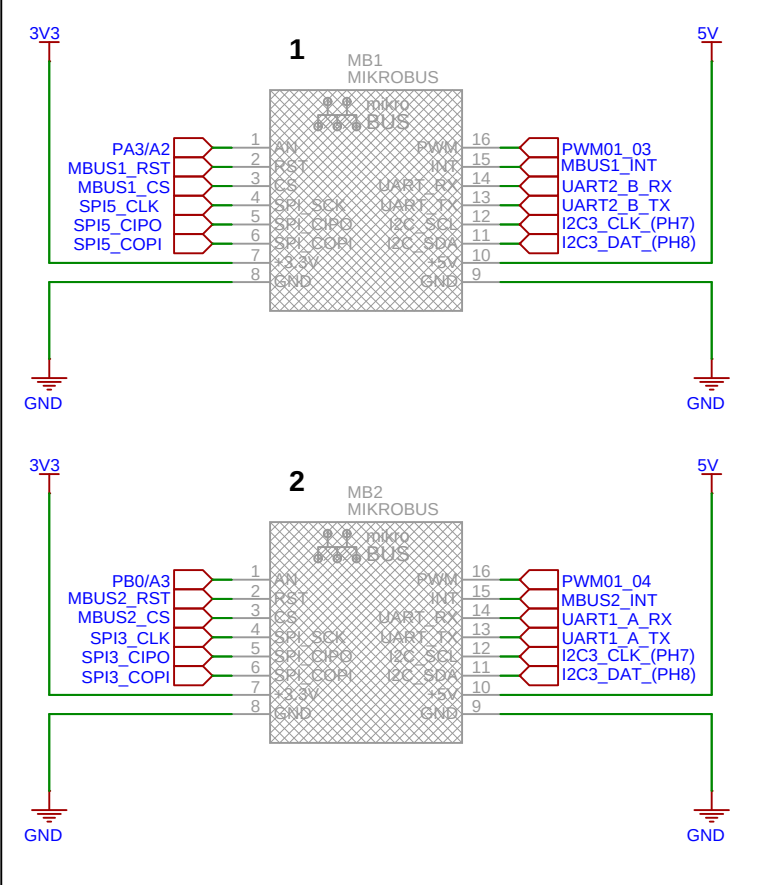


MCP23008 IO Expanders

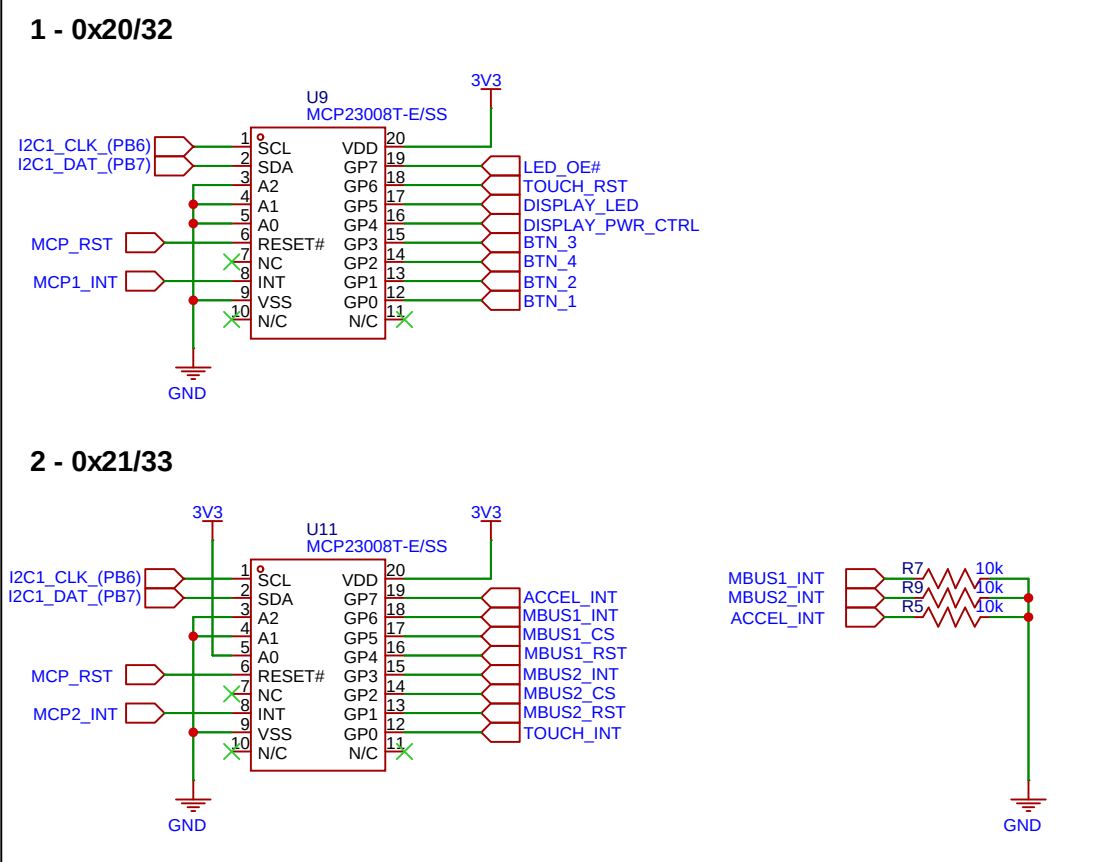


I2C -> UART Bridge 1

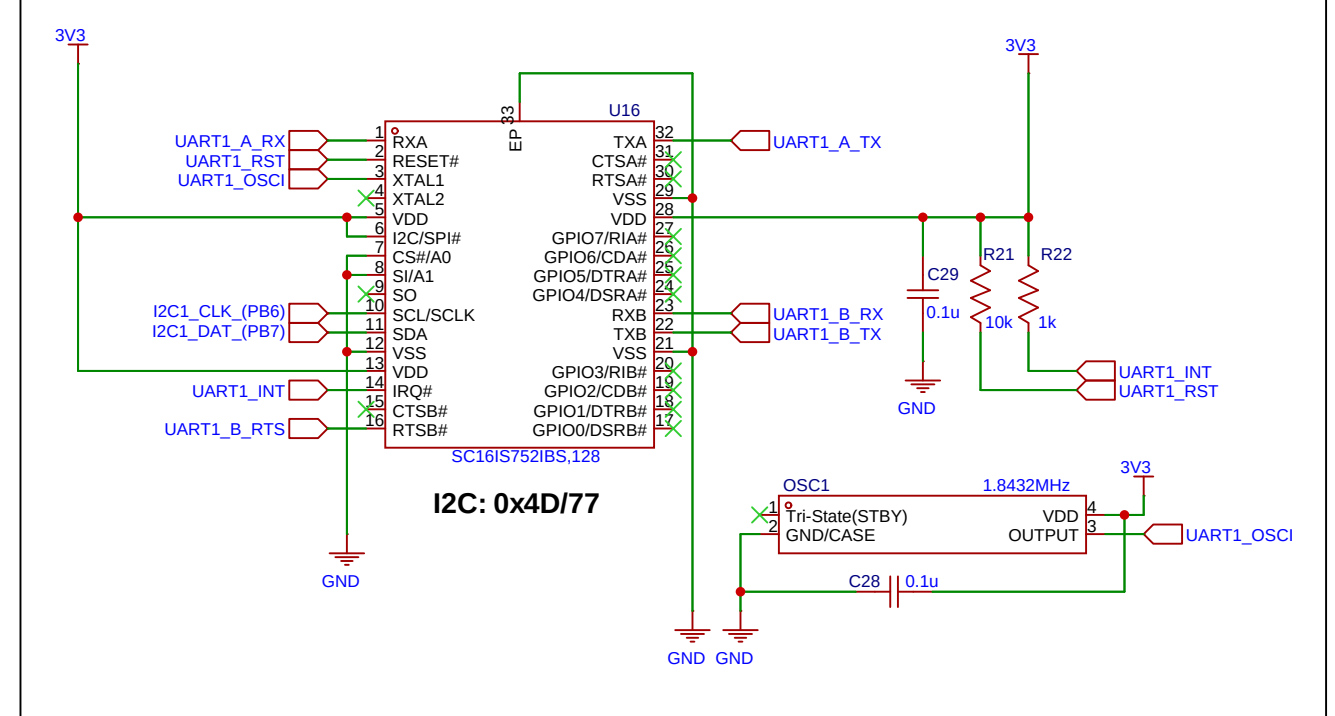


I2C -> UART Bridge 2

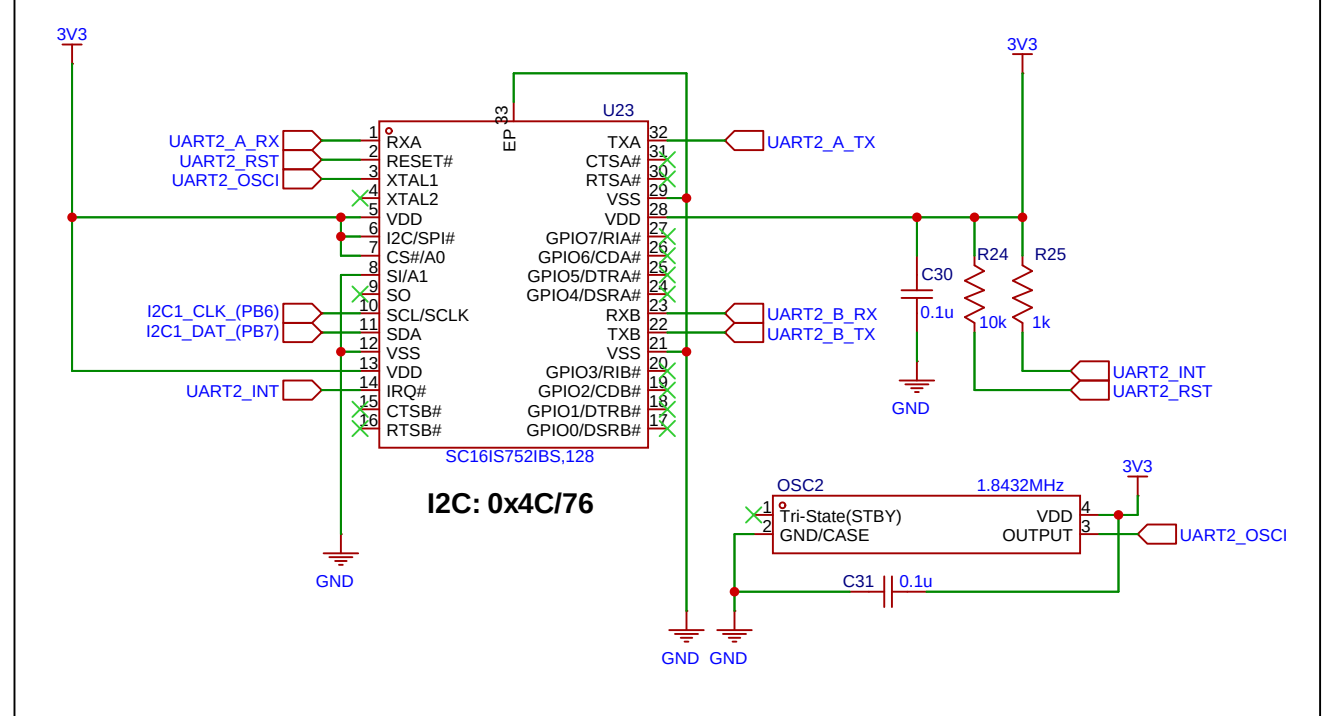


RS-485 Termination Resistors

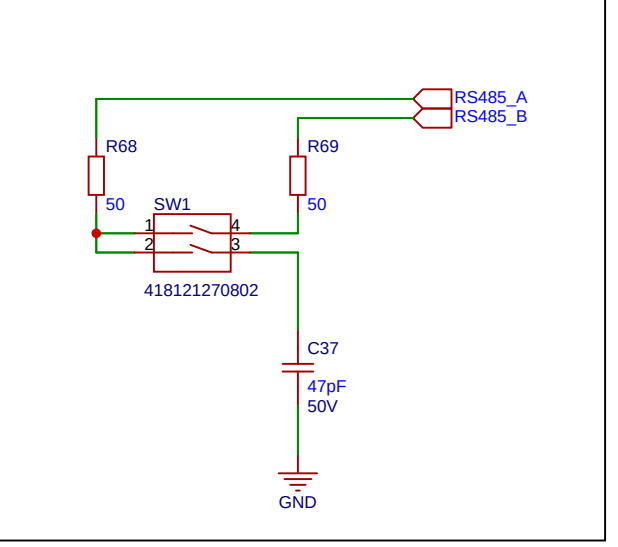


RS-485

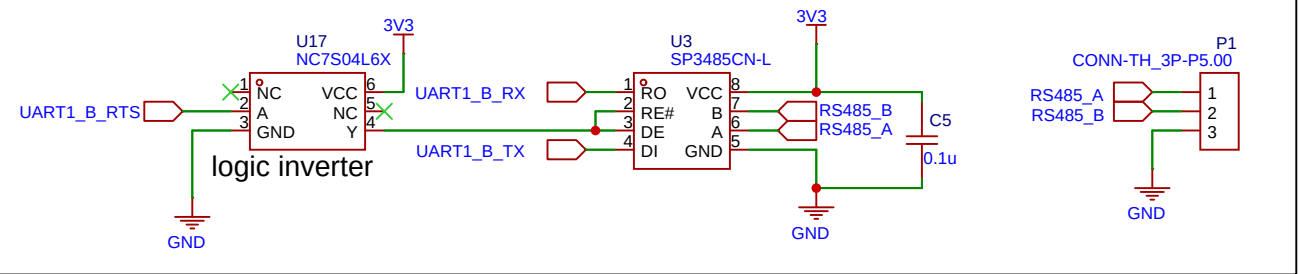


I2C1 Accelerator + Pull-ups

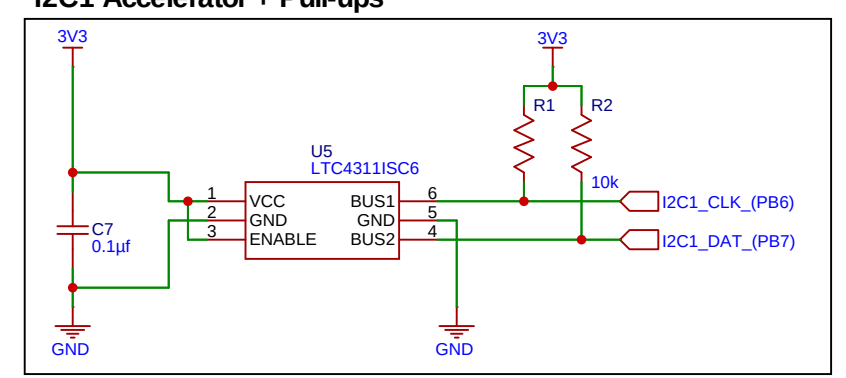


I2C3 Accelerator + Pull-ups

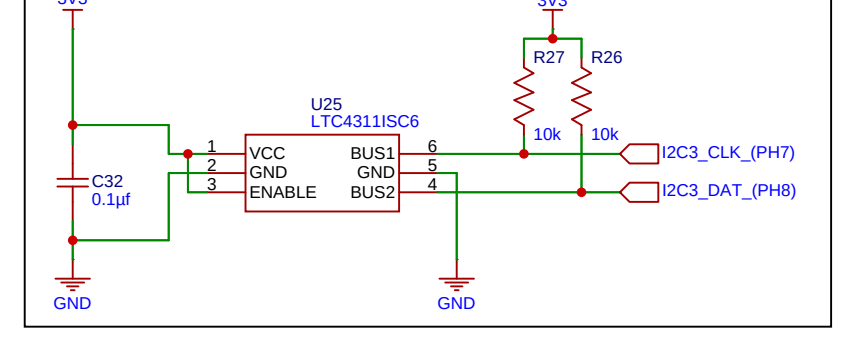


Grove Analog/Digital

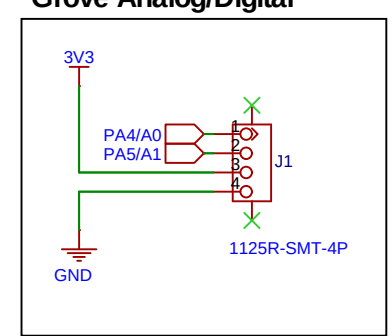


Grove Digital OUT + PWM

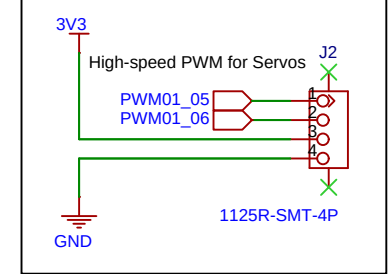


Grove UART/Digital

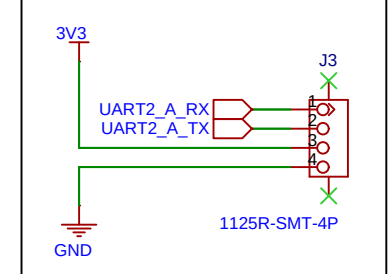


Qwiic/Stemma QT I2C

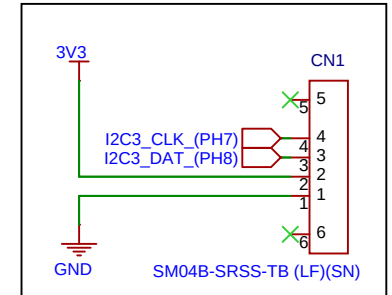


IO Header

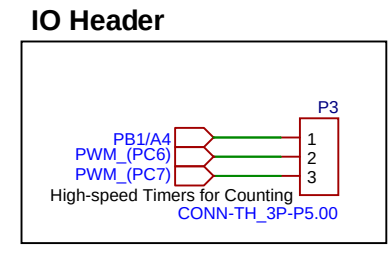


Power Header

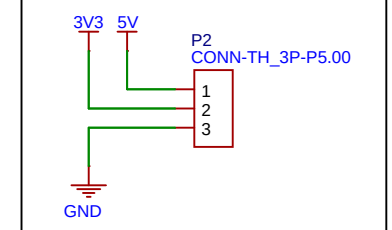


Input Buttons

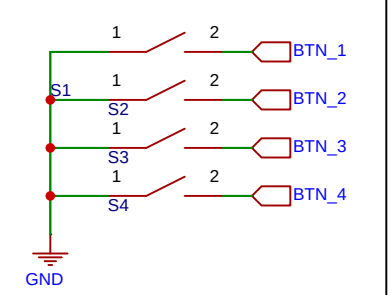


Enable Switch

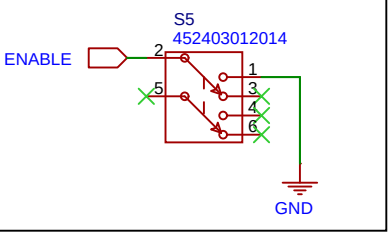


AHT10 Temp + Humidity

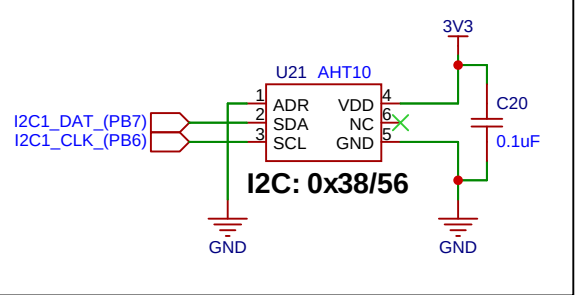


BMI270

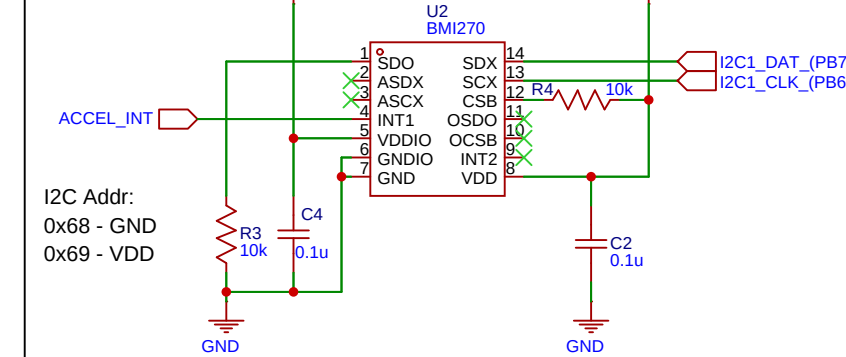


BH1750

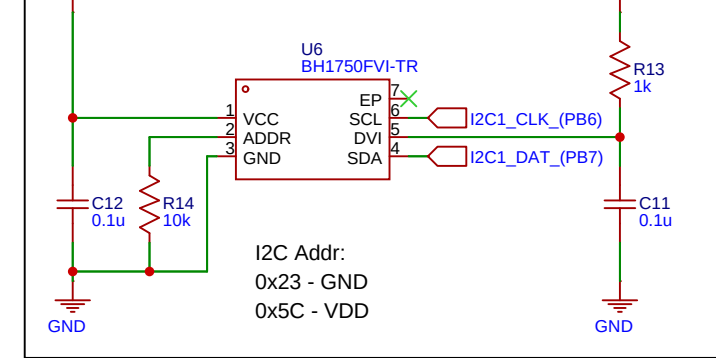


Noisemaker

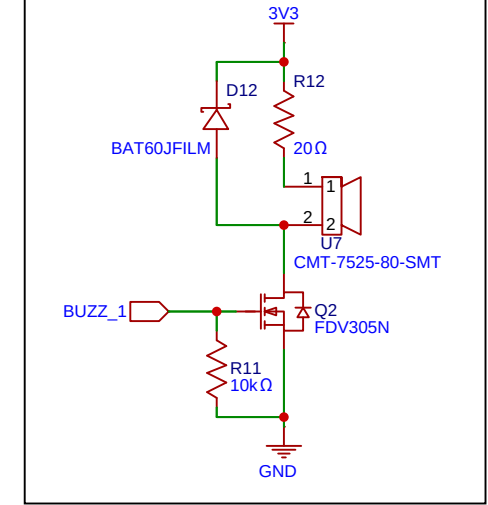


RGB LED

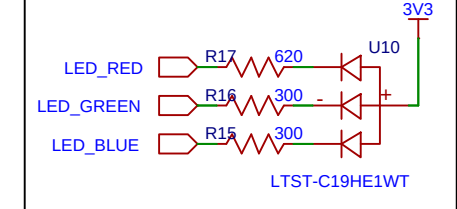

3.2" TFT Display

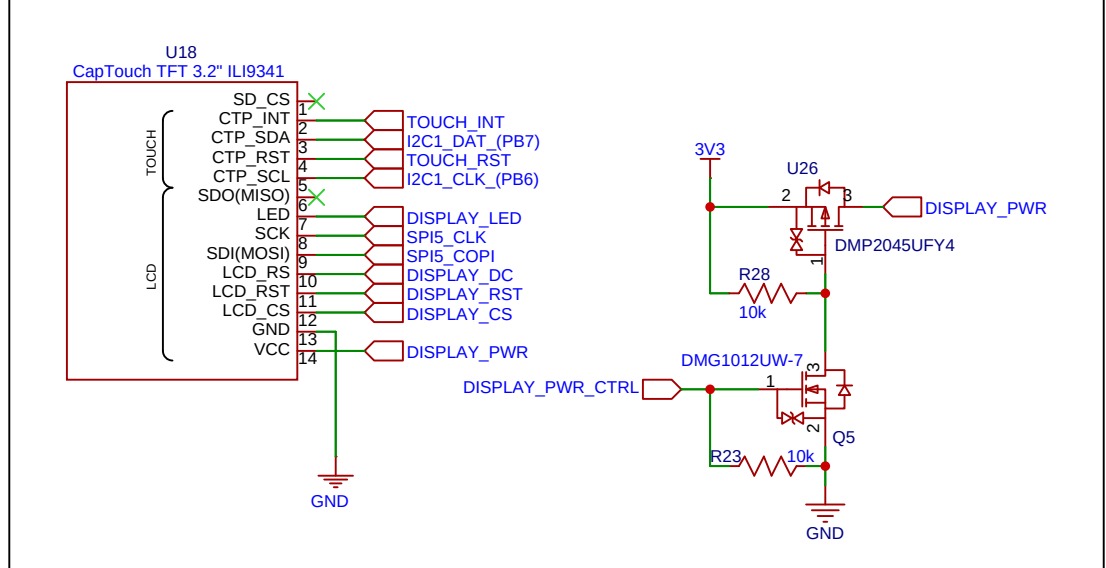

MCP23008 Version Info

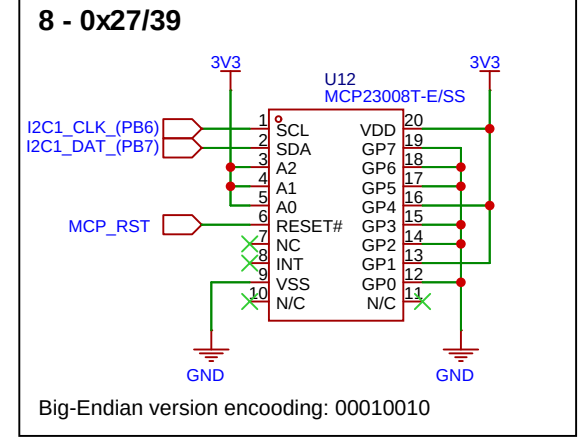

Stackup/Controlled Impedance (JLC7628 Stackup):
USB: 90 Ω, Diff Pair
Outer layer: 0.19mm width, 0.11mm spacing
Inner layer: 0.13mm width, 0.11mm spacing