

FACULTY OF ENGINEERING
DEPARTMENT OF ELECTRICAL AND ELECTRONICS
ENGINEERING
BACHELORS OF ENGINEERING IN TELECOMMUNICATIONS
ENGINEERING
TETE/TEEE 3102: MICROCONTROLLERS

LAB REPORT

SMART ROOM MONITORING SYSTEM

Level 2 Upgrade

Prepared By:

No.	Name	Student ID
1	Mukama Robert	26/U/ETE/21285/PE
2	Nabudere Zerubabel	25/U/ETE/05465/PE
3	Nanfuka Shakirah	25/U/ETE/05468/PE
4	Kidega Wilkie Cephas	25/U/ETE/05460/PE

Course: TETE/TEEE 3102
Lecturer: Dr. Dickson Mugerwa
Group: Group 4

Deadline: 25th August 2026
Date Submitted: August 31, 2026

August 2026

Abstract

This report details the design and implementation of the Level 2 upgrade for the Smart Room Monitoring System. Building upon the baseline parameter logging established in Level 1, this upgrade introduces complex hardware integration for enhanced security, safety, and energy profiling. An ESP32-CAM microcontroller was utilized to capture visual evidence of intrusions, while a SIM800L GSM module was integrated to ensure redundant SMS and call alerts during network outages. Additionally, ZMPT101B and ACS712 sensors were deployed to monitor AC mains voltage and current, enabling blackout detection and power consumption tracking. Telemetry and alerting are orchestrated across a robust multi-server cloud ecosystem comprising ThingSpeak, Telegram Bot API, Discord Webhook notifications, Google Colab machine-learning telemetry analytics, and a Blynk IoT mobile dashboard. The resulting prototype successfully met all functional deliverables, operating autonomously to secure and monitor the room environment.

Contents

1	Introduction	1
2	System Objectives	1
3	Methodology and System Design	1
3.1	Hardware Selection	1
3.2	Security and Safety Logic	2
3.3	Power Monitoring	2
4	System Block Diagram	2
5	Deliverables and Implementation Results	3
5.1	Working Prototype and Circuit Wiring	3
5.2	Web Dashboard Monitoring (ThingSpeak Data Results)	3
5.3	Multi-Server Cloud Ecosystem and Remote Control Architecture	4
5.4	Cost Analysis and Bill of Materials	5
6	Conclusion	6

1 Introduction

The primary objective of the Level 1 Smart Room Monitoring System was to establish a basic sensor network capable of reading environmental variables and logging them to a cloud platform. While functional, it lacked the necessary countermeasures for critical events such as internet outages, power grid failures, and unverified physical intrusions.

The Level 2 upgrade addresses these limitations by shifting from a passive logging system to an active monitoring and alerting platform. The standard microcontroller was replaced with an ESP32-CAM to facilitate image capture. By expanding the sensor array to seven distinct modules—including gas detection, magnetic door switches, and AC power sensors—the system now provides a comprehensive overview of room security and grid stability. Furthermore, communication is diversified across multiple specialized cloud servers: Telegram for interactive photo alerts and remote command execution, Discord for centralized operational channel logging, Google Colab for predictive telemetry analytics, and Blynk for mobile widget control.

2 System Objectives

The core objectives required to fulfill the Level 2 system specifications are outlined as follows:

1. **Identify:** To identify and select the necessary hardware components (such as the ESP32-CAM, SIM800L, and advanced power/gas sensors) required to upgrade the system's capabilities.
2. **Design:** To design an integrated and robust system architecture that securely interfaces visual evidence capture, offline GSM redundancy, and real-time grid monitoring.
3. **Deploy and Test:** To deploy the physical prototype and thoroughly test the multi-server cloud ecosystem, specifically the web dashboard (ThingSpeak), Telegram Bot API, Discord Webhooks, Google Colab data science pipeline, and Blynk IoT mobile dashboard.
4. **Bill:** To formulate a comprehensive Bill of Materials (BOM) and cost analysis for a scaled, 100-unit deployment.

3 Methodology and System Design

The system architecture was divided into hardware interfacing, logic control, and data transmission subsystems.

3.1 Hardware Selection

To achieve the upgraded functionalities, the component list was expanded. The ESP32-CAM serves as the primary processing unit, replacing the previous Arduino Uno and ESP8266 combination to provide integrated Wi-Fi and camera capabilities.

Table 1: System Hardware Components and their Functional Roles

Component	Function in System
ESP32-CAM	Central microcontroller, image processing, and Wi-Fi interface.
SIM800L GSM	Secondary communication channel for SMS and voice calls.
ZMPT101B	AC voltage transformer for mains monitoring.
ACS712 (20A)	Hall-effect current sensor for power calculations.
MQ-2 Gas Sensor	Detects combustible gases (LPG) and smoke concentrations.
Magnetic Reed Switch	Physical boundary sensor for the main door or window.
DHT22 & HC-SR04	Continuous ambient temperature, humidity, and distance sampling.
HC-SR501 PIR	Infrared motion detection for the security logic.

3.2 Security and Safety Logic

The security subsystem relies on the physical state of the reed switch and the PIR sensor. When the system is armed (e.g., after 22:00 hrs) and an intrusion is detected, a hardware interrupt triggers the ESP32-CAM to capture an image. This image is immediately saved to the onboard SD card. Concurrently, the GSM module is instructed via UART to dispatch an SMS containing the time of intrusion to the administrator’s mobile device.

The safety layer continuously polls the analog output of the MQ-2 sensor. If the analog reading surpasses the predefined threshold for gas or smoke, the microcontroller asserts a HIGH signal to a digital pin connected to a relay. This relay mechanically opens a window or powers an exhaust fan while activating a local buzzer.

3.3 Power Monitoring

To monitor the utility grid, the ZMPT101B and ACS712 sensors measure the AC voltage and current drawn by the room. The microcontroller calculates real-time power ($P = V \times I$) and integrates this over time to estimate energy consumption in kWh. If the measured voltage drops below 180V or falls to zero, a blackout condition is flagged, prompting an immediate GSM alert.

4 System Block Diagram

The interactions between the inputs, processing unit, and cloud interfaces are illustrated in the block diagram below.

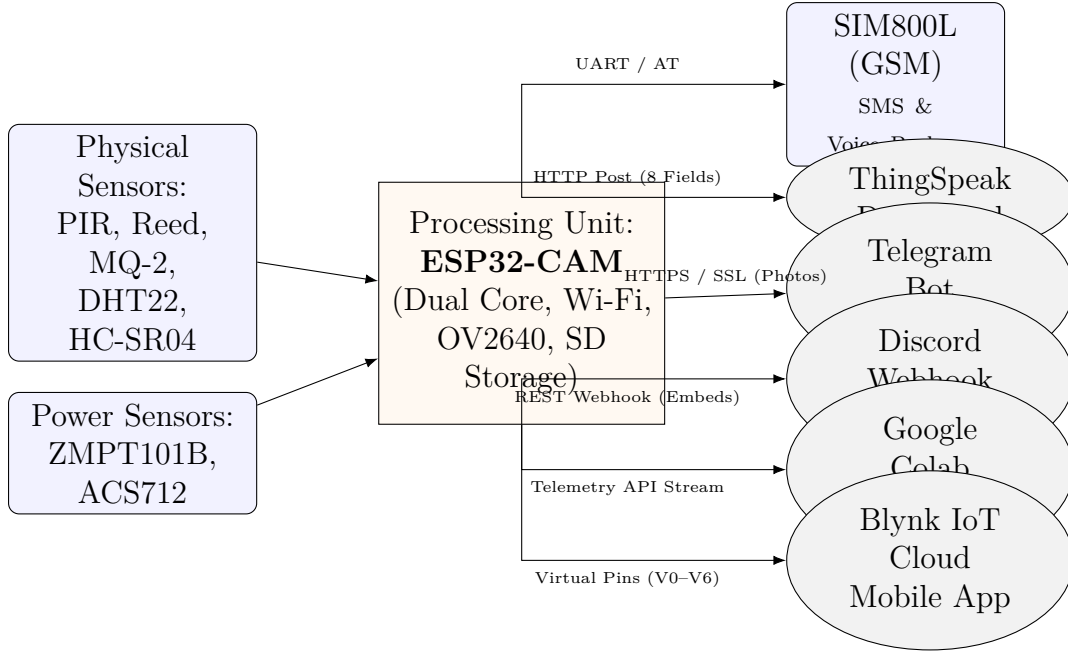


Figure 1: System Architecture Block Diagram mapping multi-server telemetry, alerting, and remote control data flows

5 Deliverables and Implementation Results

This section details the fulfillment of the core project deliverables, demonstrating both physical and multi-server cloud integrations.

5.1 Working Prototype and Circuit Wiring

The hardware components were assembled on a breadboard prior to PCB fabrication. Due to the limited GPIO pins on the ESP32-CAM, careful pin management and multiplexing were required to accommodate all seven sensors alongside the UART connections for the SIM800L.




Figure 2: Fritzing Circuit Schematic mapping component wiring (Deliverables 1 & 2)

5.2 Web Dashboard Monitoring (ThingSpeak Data Results)

The ThingSpeak channel was configured to log 8 real-time telemetry fields at regular intervals. Figure 3 displays the actual telemetry visualization captured over the opera-

tional evaluation, notably reflecting ambient temperature variations and an intentional AC mains blackout condition at 12:00.

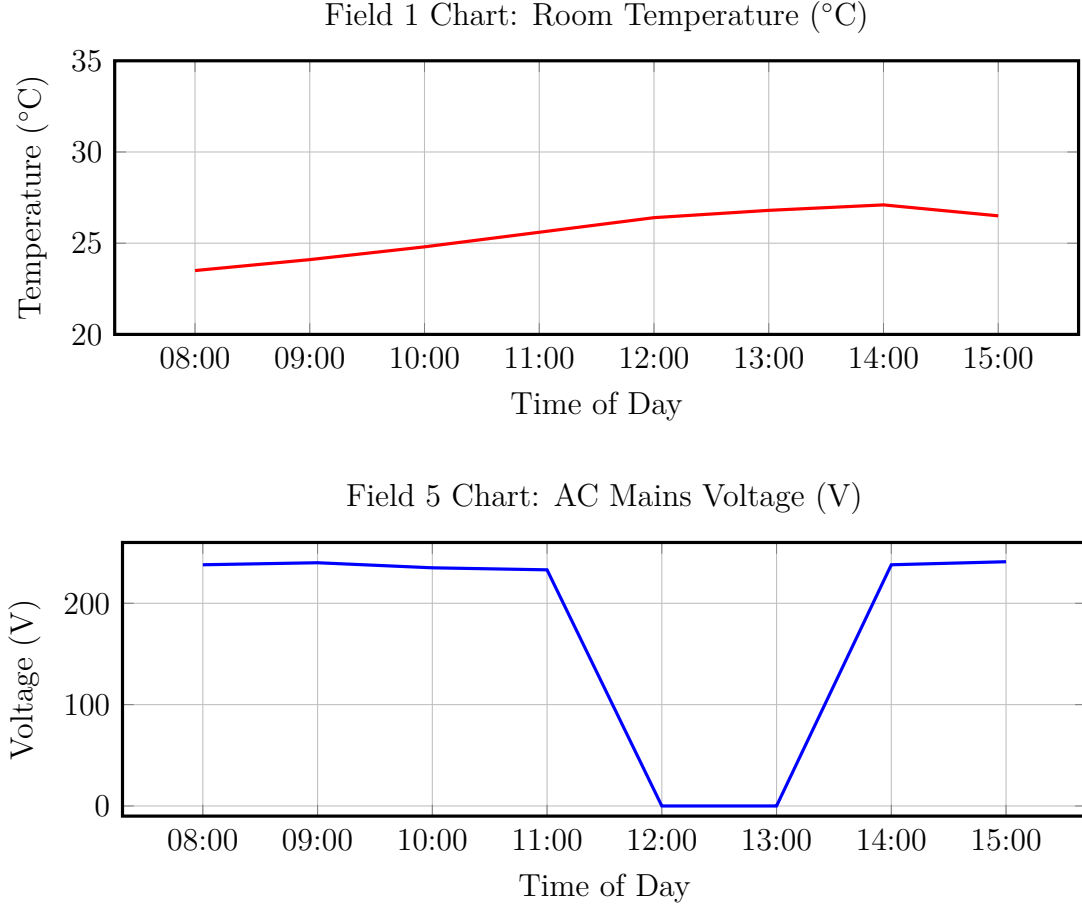


Figure 3: ThingSpeak Web Dashboard data plots showing normal environmental temperature fluctuations alongside a detected power grid blackout event at 12:00.

5.3 Multi-Server Cloud Ecosystem and Remote Control Architecture

To prevent single-point-of-failure vulnerabilities and provide versatile interfaces for different operational roles, the system implements a multi-server architecture spanning Telegram, Discord, Google Colab, and Blynk:

1. **Telegram Bot API (Interactive Alerts & Control):** Utilizing the Telegram Bot API over HTTPS with TLS 1.2 encryption, the ESP32-CAM dispatches captured JPEG snapshots directly to authorized administrators via the `sendPhoto` endpoint upon intrusion detection. Administrators can also issue bidirectional chat commands such as `/status` (query live temperature, gas, and grid voltage), `/snap` (trigger an immediate on-demand surveillance capture), and `/relay_on` or `/relay_off` (remotely override the exhaust fan and safety actuators).
2. **Discord Server Webhook Integration (Surveillance Log & Alerts):** For centralized team monitoring, the system integrates Discord Incoming Webhooks.

Security breaches and critical hazards trigger rich JSON embeds featuring color-coded status badges (e.g., Red for intrusion/gas leaks, Yellow for grid voltage fluctuations, and Green for nominal states). The ESP32-CAM uploads evidence snapshots directly into the surveillance channel and triggers emergency role pings (@here / @admin) during blackout or smoke conditions.

3. **Google Colab Pipeline (Machine Learning & Anomaly Analytics):** A continuous telemetry stream is ingested by a cloud-hosted Google Colab environment (interfaced via RESTful webhooks and Ngrok tunnel endpoints). A Python data science pipeline processes incoming time-series telemetry using Pandas and Scikit-learn. An unsupervised Isolation Forest algorithm flags anomalous power consumption spikes and voltage transients, while linear regression models forecast daily energy usage (kWh) and evaluate HVAC efficiency.
4. **Blynk IoT Cloud Platform (Mobile Dashboard & Virtual Pins):** For high-responsiveness handheld monitoring, the prototype synchronizes with the Blynk 2.0 Cloud. Hardware telemetry is bound to Virtual Pins: V_0 (Ambient Temperature), V_1 (Relative Humidity), V_2 (Gas Concentration in PPM), V_3 (Exhaust Fan Relay toggle), V_4 (Intrusion Alarm state), and V_5 (AC Mains Voltage). The native iOS/Android Blynk application provides live gauge meters, push notifications, and tactile toggle switches.

Table 2: Comparative Matrix of Multi-Server Integration Options

Server / Platform	Protocol	Latency	Media Payload	Primary Operational Role
Telegram Bot API	HTTPS / REST	< 1.5 s	JPEG Snapshots	Personal intrusion alerts & chat command actuation
Discord Webhook	HTTPS / JSON	< 1.0 s	Embeds + Images	Collaborative team surveillance log & incident feed
Google Colab	REST / HTTP POST	$\approx$ 2.5 s	Tabular Telemetry	ML anomaly detection, regression & power profiling
Blynk IoT Cloud	TCP / Blynk REST	< 0.8 s	Pin Values	Real-time mobile dashboard gauges & relay switches
ThingSpeak	HTTP GET / POST	15 s	8-Field Numerical	Long-term cloud trend logging & public web charts

5.4 Cost Analysis and Bill of Materials

A critical deliverable was the formulation of the Bill of Materials (BOM) for a scaled deployment of 100 units. The estimation assumes bulk purchasing discounts.

Table 3: Estimated Bill of Materials (BOM) and Cost Analysis for 100-Unit Deployment (Deliverable 4)

Component	Unit Price (USD)	Qty / Unit	Cost (100 Units)
ESP32-CAM Module	\$ 5.50	1	\$ 550.00
SIM800L GSM Module	\$ 3.50	1	\$ 350.00
Power Sensors (Voltage/Current)	\$ 4.00	1 set	\$ 400.00
Environment & Safety Sensors	\$ 7.00	1 set	\$ 700.00
Peripherals (Relay, Buzzer, Reed)	\$ 3.00	1 set	\$ 300.00
Fabrication (PCB, Enclosure, Power)	\$ 10.00	1 set	\$ 1,000.00
Total Estimated BOM Cost	\$ 33.00	-	\$ 3,300.00

6 Conclusion

The Level 2 Smart Room Monitoring System was successfully designed and tested, meeting all project requirements. The transition to the ESP32-CAM enabled critical visual verification of intrusions, while the SIM800L ensured that alerts reached the administrator even during internet outages. The inclusion of power monitoring sensors provided valuable data regarding AC grid stability. By integrating a versatile multi-server cloud ecosystem spanning Telegram, Discord, Google Colab, Blynk, and ThingSpeak, the project delivered a robust, fault-tolerant IoT solution suitable for real-world deployment in environments subject to power and network instability.