

ARG 26 Accumulator Design

Cornell FSAE, Battery Subteam Lead



Purpose: Lead team to design, build, and validate pouch cell battery pack for FSAE Electric race car competition in Michigan

Contributions: System design (pack sizing, cell selection, and integration), project management, process design (laser welding and spot welding), part integration

Technical details:

- ❖ 12S1P configuration, 543 V, 7.6kWh, 114 kW peak power, 21A regen
- ❖ Reduced mass by 11.5 lbs, volume by 15%, and internal resistance by 44%
- ❖ **Laser welded cell tabs** (Ni plated Cu) improve reliability and simplicity over bolts
 - Design compatible with **validated spot welding procedure** as well
 - Reduced part count by 200+ through removing bolts and cell spacers
- ❖ Integrated **custom BMS** system using **pogo pins** for voltage monitoring
 - High serviceability, validated vibration reliability with on car driving
- ❖ Lowered module count from 6 to 5, removing fixed weight and **improving system packaging**
 - Allowed inverters to be mounted in rear, lowering CG & improving weight distribution
- ❖ Initial aluminum enclosure replaced with **composite enclosure** saving 7 lbs
- ❖ Validated system decisions (pack voltage, energy and thermal performance) with **MATLAB lap simulations** for each event
- ❖ Preformed DCIR discharge testing to measure internal resistance of cells

Project I

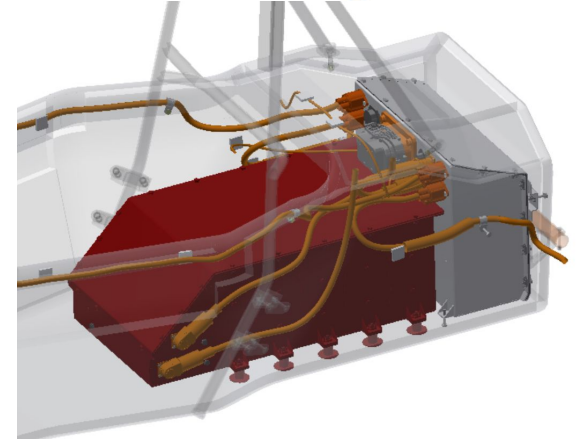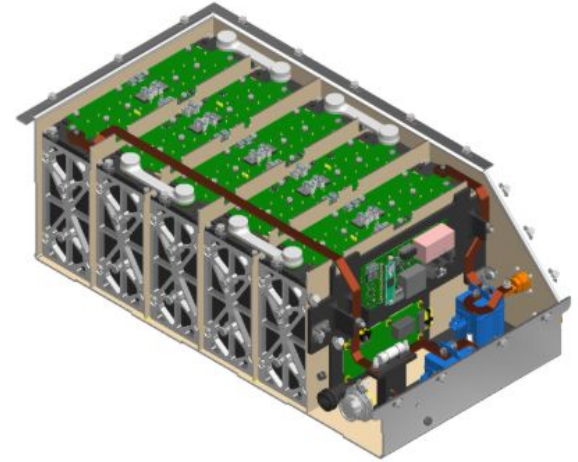


Accumulator (red) packaged in rear of car


ARG 26 Accumulator Design (Cont.)

Cornell FSAE, Battery Subteam Lead


AMK Motor Torque-Speed Relationship at Different Voltages

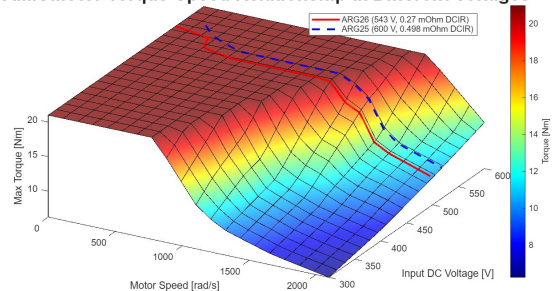

Motor curve analysis justified 543V pack

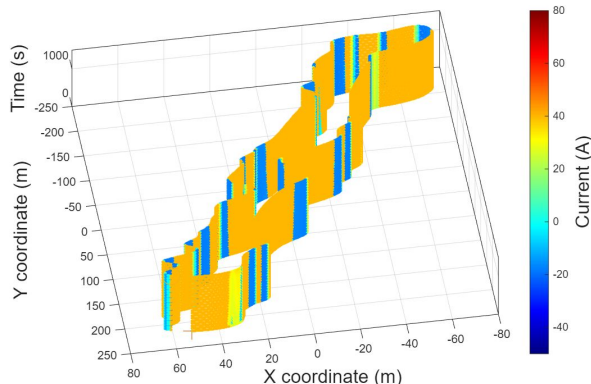


Current trace throughout lapsim used to validate pack thermal performance

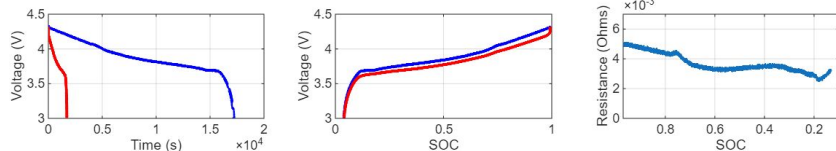

DCIR data from discharge test comparing 0.2C and 2C





Assembling battery modules

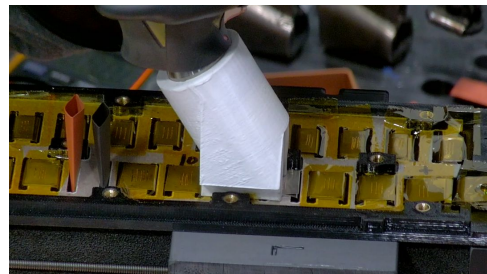

Laser welding battery modules



Spot welding setup and peel tested sample

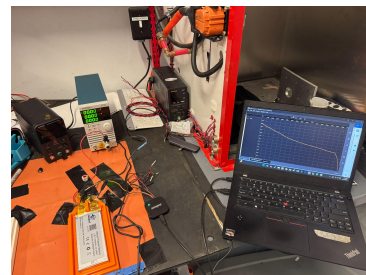

Discharge test setup



Laser welding training