SOT-23 Plastic-Encapsulate MOSFETS

Features

- V_{DS}=30V
- I_D=3.5A
- $R_{DS(on)}$@V_{GS}=10V ＜ 39mΩ
- $R_{DS(on)}$@V_{GS}=4.5V ＜ 59mΩ
- Advanced Trench Process Technology
- Low Threshold Voltage
- Fast Switching Speed

Drain-source Voltage
30 V
Drain Current
3.5 Ampere

Applications

- Load Switch for Portable Devices
- Voltage controlled small signal switch
- Direct logic-level interface：TTL/CMOS

Mechanical Data

- Case: SOT-23
  Molding compound meets UL 94V-0 flammability rating, RoHS-compliant,halogen-free
- Terminals: Solder plated, solderable per MIL-STD-750,Method 2026

SOT-23



Reference News





Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER		SYMBOL	UNIT	VALUE
Drain-source Voltage		V_{DS}	V	30
Gate-source Voltage		V_{GS}	V	±20
Drain Current	T_A=25°C @ Steady State	I_D	A	3.5
	T_A=70°C @ Steady State			2.8
Pulsed Drain Current		I_{DM}	A	20
Total Power Dissipation @ T_A=25°C		P_D	W	1.25
Thermal Resistance Junction-to-Ambient @ Steady State		$R_{\theta JA}$	°C / W	357
Junction and Storage Temperature Range		T_J,T_{STG}	°C	-55 ~+150

Ordering Information

PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SOT-23	R1	0.008	3000	45000	180000	7''

Static Parameter Characteristics (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	Condition	UNIT	Min	Typ	Max
Drain-Source Breakdown Voltage	BV_{DSS}	V_{GS}= 0V, I_D=250μA	V	30	—	—
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS}=30V,V_{GS}=0V	μA	—	—	1.0
Gate-Body Leakage Current	I_{GSS}	V_{GS}= ±20V, V_{DS}=0V	nA	—	—	±100
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS}= V_{GS}, I_D=250μA	V	1.0	—	2.2
Static Drain-Source On-Resistance	$R_{DS(ON)}$	V_{GS}= 10V, I_D=3.0A	mΩ	—	29.5	39
		V_{GS}= 4.5V, I_D=2.0A		—	44	59
Forward Transconductance	gfs	V_{DS}=5.0V, I_D=3.6A	S	—	5.0	—
Diode Forward Voltage	V_{SD}	I_S=3.0A,V_{GS}=0V	V	—	—	1.2

Dynamic Parameters (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	Condition	UNIT	Min	Typ	Max
Input Capacitance	C_{iss}	V_{DS}=15V V_{GS}=0V f=1MHZ	pF	—	363	—
Output Capacitance	C_{oss}			—	49	—
Reverse Transfer Capacitance	C_{rss}			—	39	—

Switching Parameters (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	Condition	UNIT	Min	Typ	Max
Total Gate Charge	Q_g	V_{GS}=10V V_{DS}=15V I_D=3.0A	nC	—	7.2	—
Gate-Source Charge	Q_{gs}			—	1.7	—
Gate-Drain Charge	Q_{gd}			—	1.0	—
Reverse Recovery Chrage	Q_{rr}	I_F=3.0A di/dt=100A/us		—	2.4	—
Reverse Recovery Time	t_{rr}		ns	—	5.9	—
Turn-on Delay Time	$t_{D(on)}$	V_{GS}=10V V_{DS}=15V R_L=5.0Ω R_G=3.9Ω I_D=3.0A		—	3.9	—
Turn-on Rise Time	t_r			—	8.8	—
Turn-off Delay Time	$t_{D(off)}$			—	10	—
Turn-off fall Time	t_f			—	3.7	—

Ratings And Characteristics Curves (Ta=25°C Unless otherwise specified)

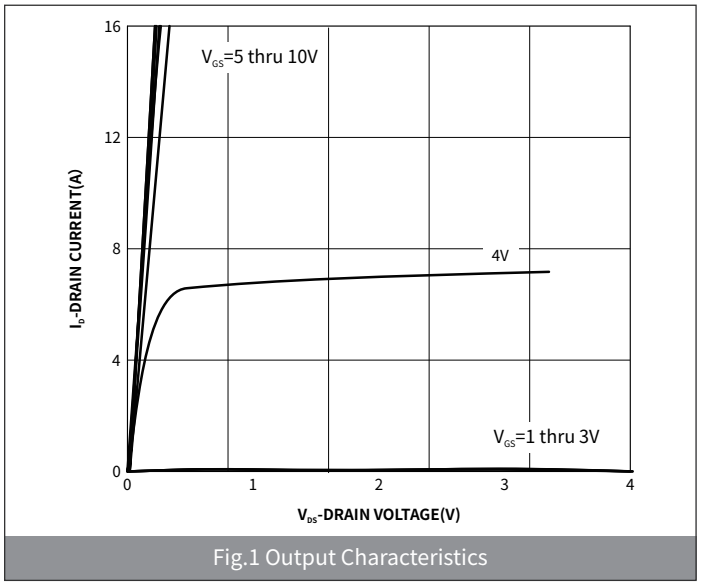

Fig.1 Output Characteristics

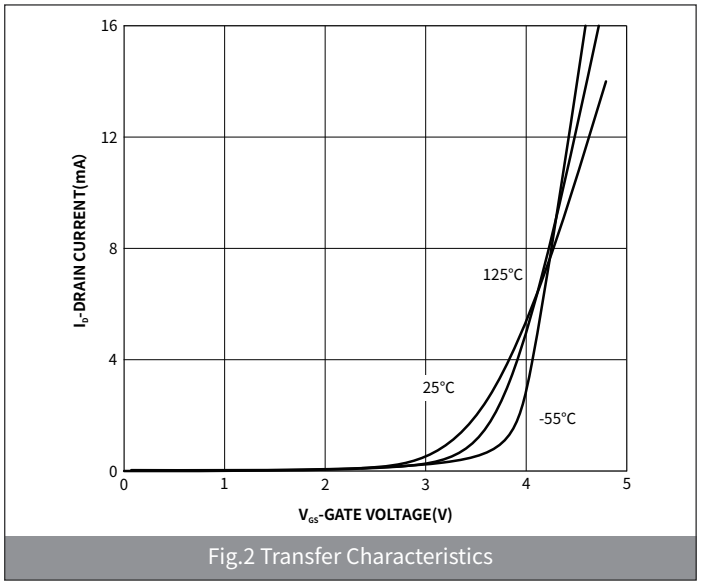

Fig.2 Transfer Characteristics

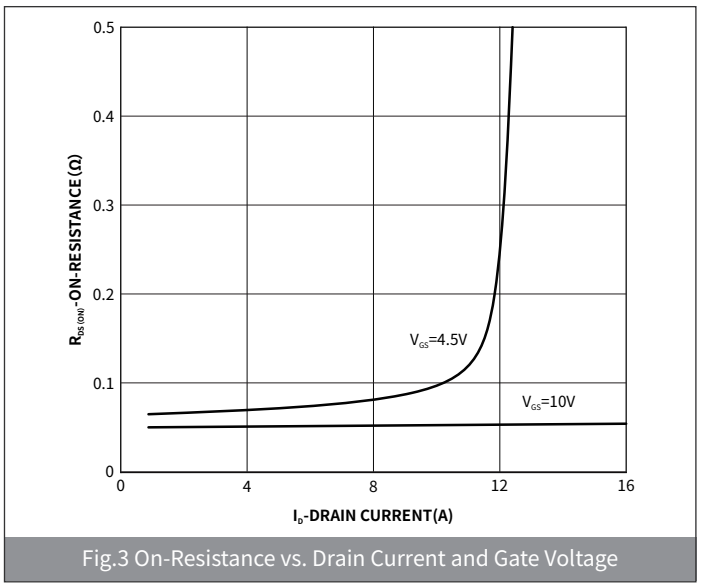

Fig.3 On-Resistance vs. Drain Current and Gate Voltage

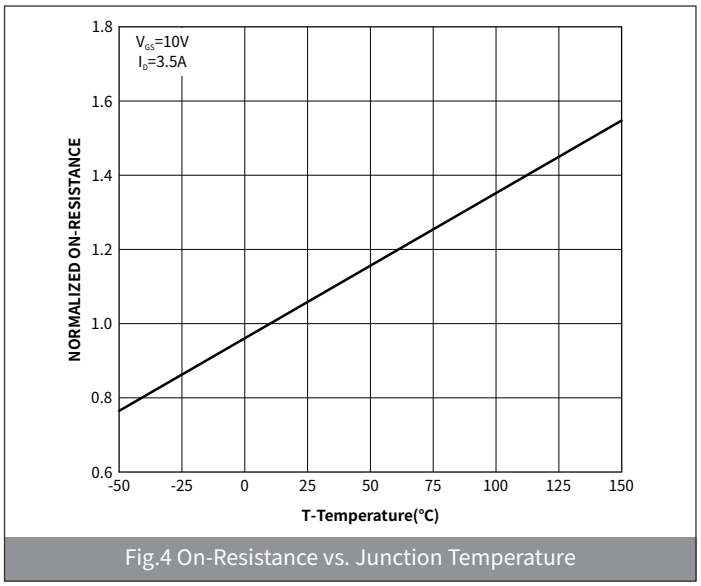

Fig.4 On-Resistance vs. Junction Temperature

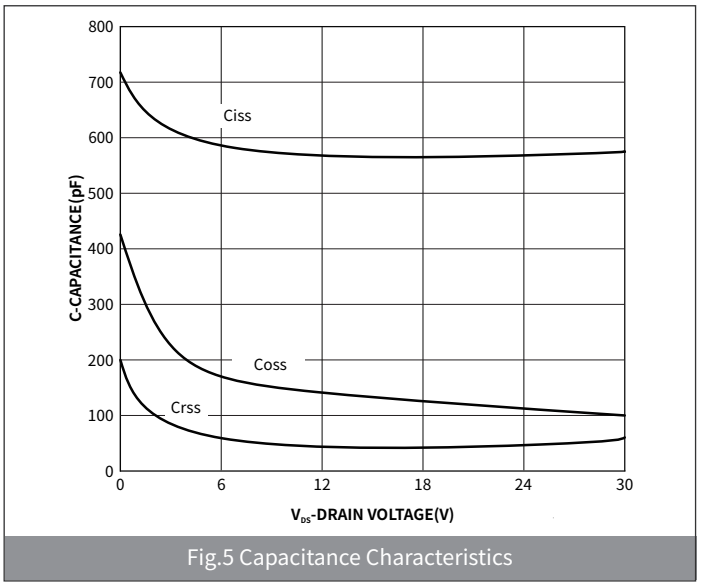

Fig.5 Capacitance Characteristics

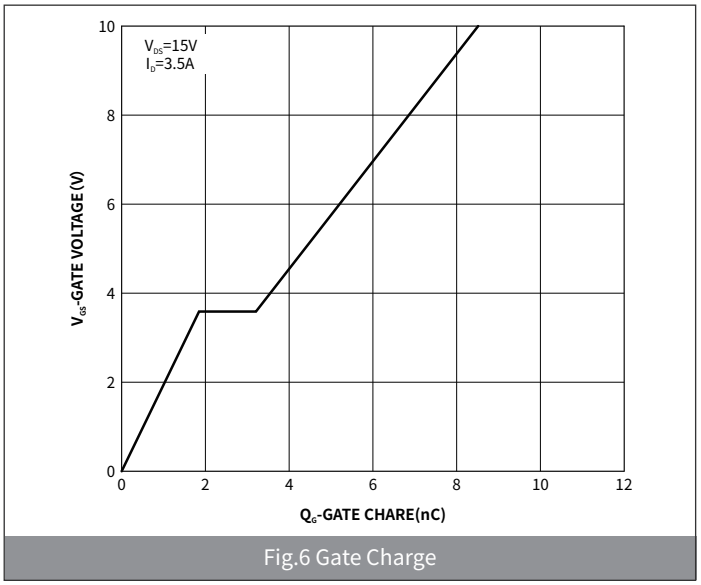

Fig.6 Gate Charge

Ratings And Characteristics Curves (Ta=25°C Unless otherwise specified)

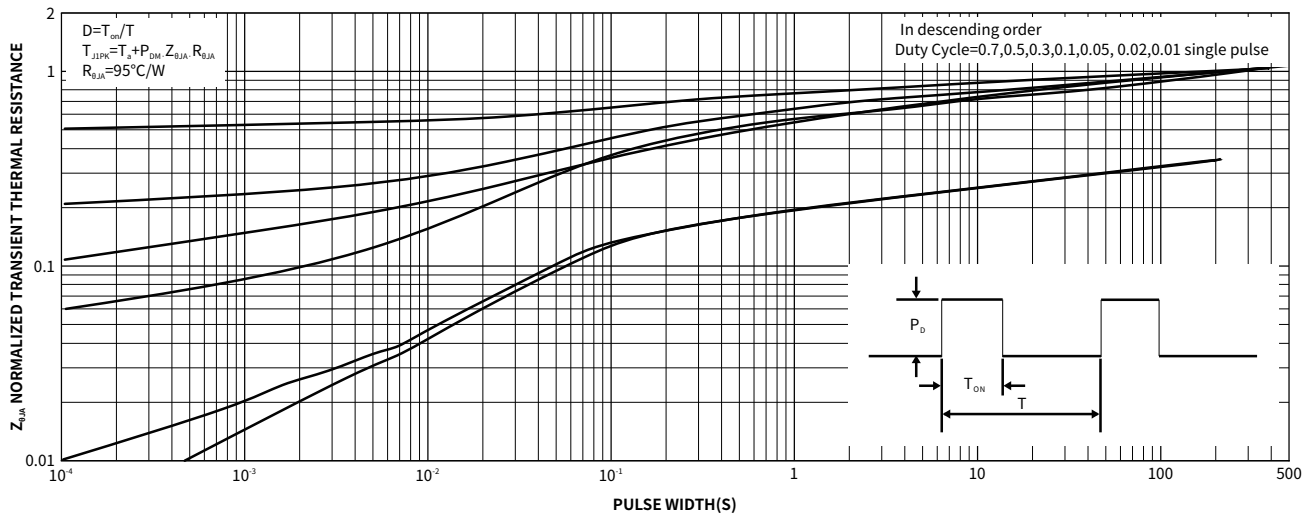

Fig.7 Normalized Maximum Transient Thermal Impedance

Package Outline Dimensions (SOT-23)

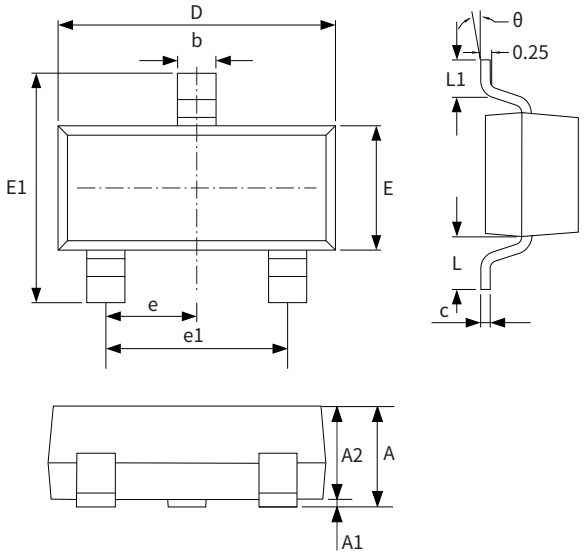

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.90	1.15	0.035	0.045
A1	-	0.10	-	0.004
A2	0.90	1.05	0.035	0.041
b	0.30	0.50	0.012	0.020
c	0.10	0.20	0.004	0.008
D	2.80	3.00	0.110	0.118
E	1.20	1.40	0.047	0.055
E1	2.25	2.55	0.089	0.100
e	0.950TYP		0.037TYP	
e1	1.80	2.00	0.071	0.079
L	0.550REF		0.022REF	
L1	0.30	0.50	0.012	0.020
θ	-	8°	-	8°

Suggested Pad Layout

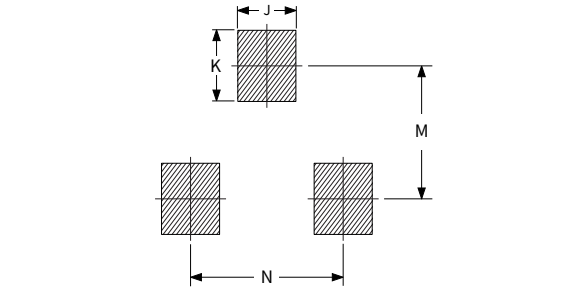

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
J	0.80	-	0.031	-
K	-	0.90	-	0.035
M	2.00	-	0.078	-
N	-	1.90	-	0.074