



Selector 6 test fixture.

Operator places the selector 6 box into the fixture shown below (the prototype fixture).

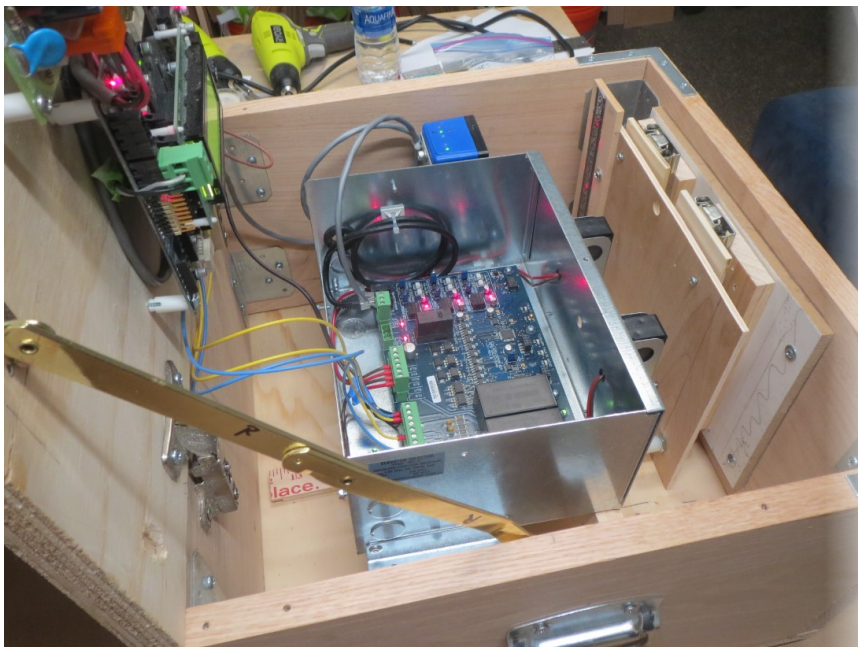

The camera faces the APS tape seen below on the left side of the photo.

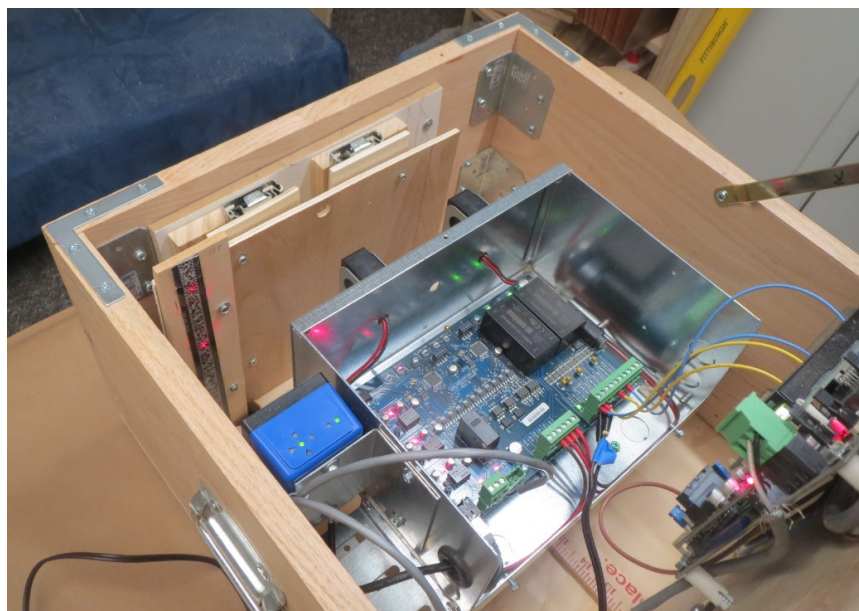

The operator raises and then lowers the slider panel. The panel moves two magnets and the APS encoder tape.

The system verifies the two magnetic switches, UTS, & DTS, and also verifies the APS camera, and the SPI CAN bus.

The entire test takes about 4 to 6 sec depending on how fast the operator raises and lowers the slider panel.

