
RLC-SQUID Parallel Config v2 Frequency Response vs Input Current

22.5

-20.0

-120

-160

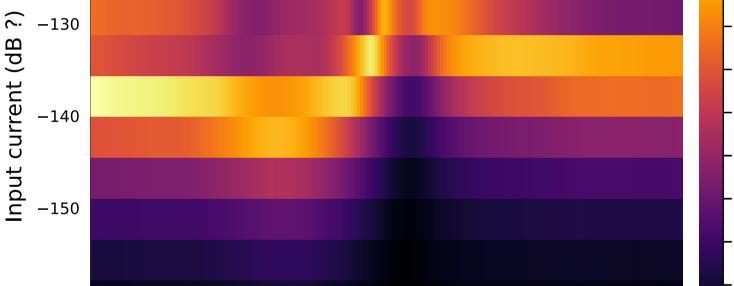

Detuning Frequency (Hz)

