

D-ATIS 131.45
 ATIS 127.45(departure) 126.85(arrival)
 Zhuhai APP(R) TM01 120.35(127.95)
 TM02 124.25(126.0)
 TM03 123.85(126.0)
 TM04 124.75(127.95)

TWR 130.35(118.05)(E)
 118.45(130.35)(W)

ZGSZ SHENZHEN/Baoan
 RNAV Rwy15


STANDARD ARRIVAL CHART-INSTRUMENT

VAR2°W

BEARINGS ARE MAGNETIC
 ALTITUDES, ELEVATIONS
 AND HEIGHTS IN METERS
 DME DISTANCES IN
 NAUTICAL MILES
 DISTANCES IN KM

1. RADAR REQUIRED
2. RNAV 1
3. Basic RNP1
4. GNSS or DME/DME/IRU REQUIRED

TL 3600(QNH<980HPA)
 3300(QNH≥980HPA)
 TA 2700

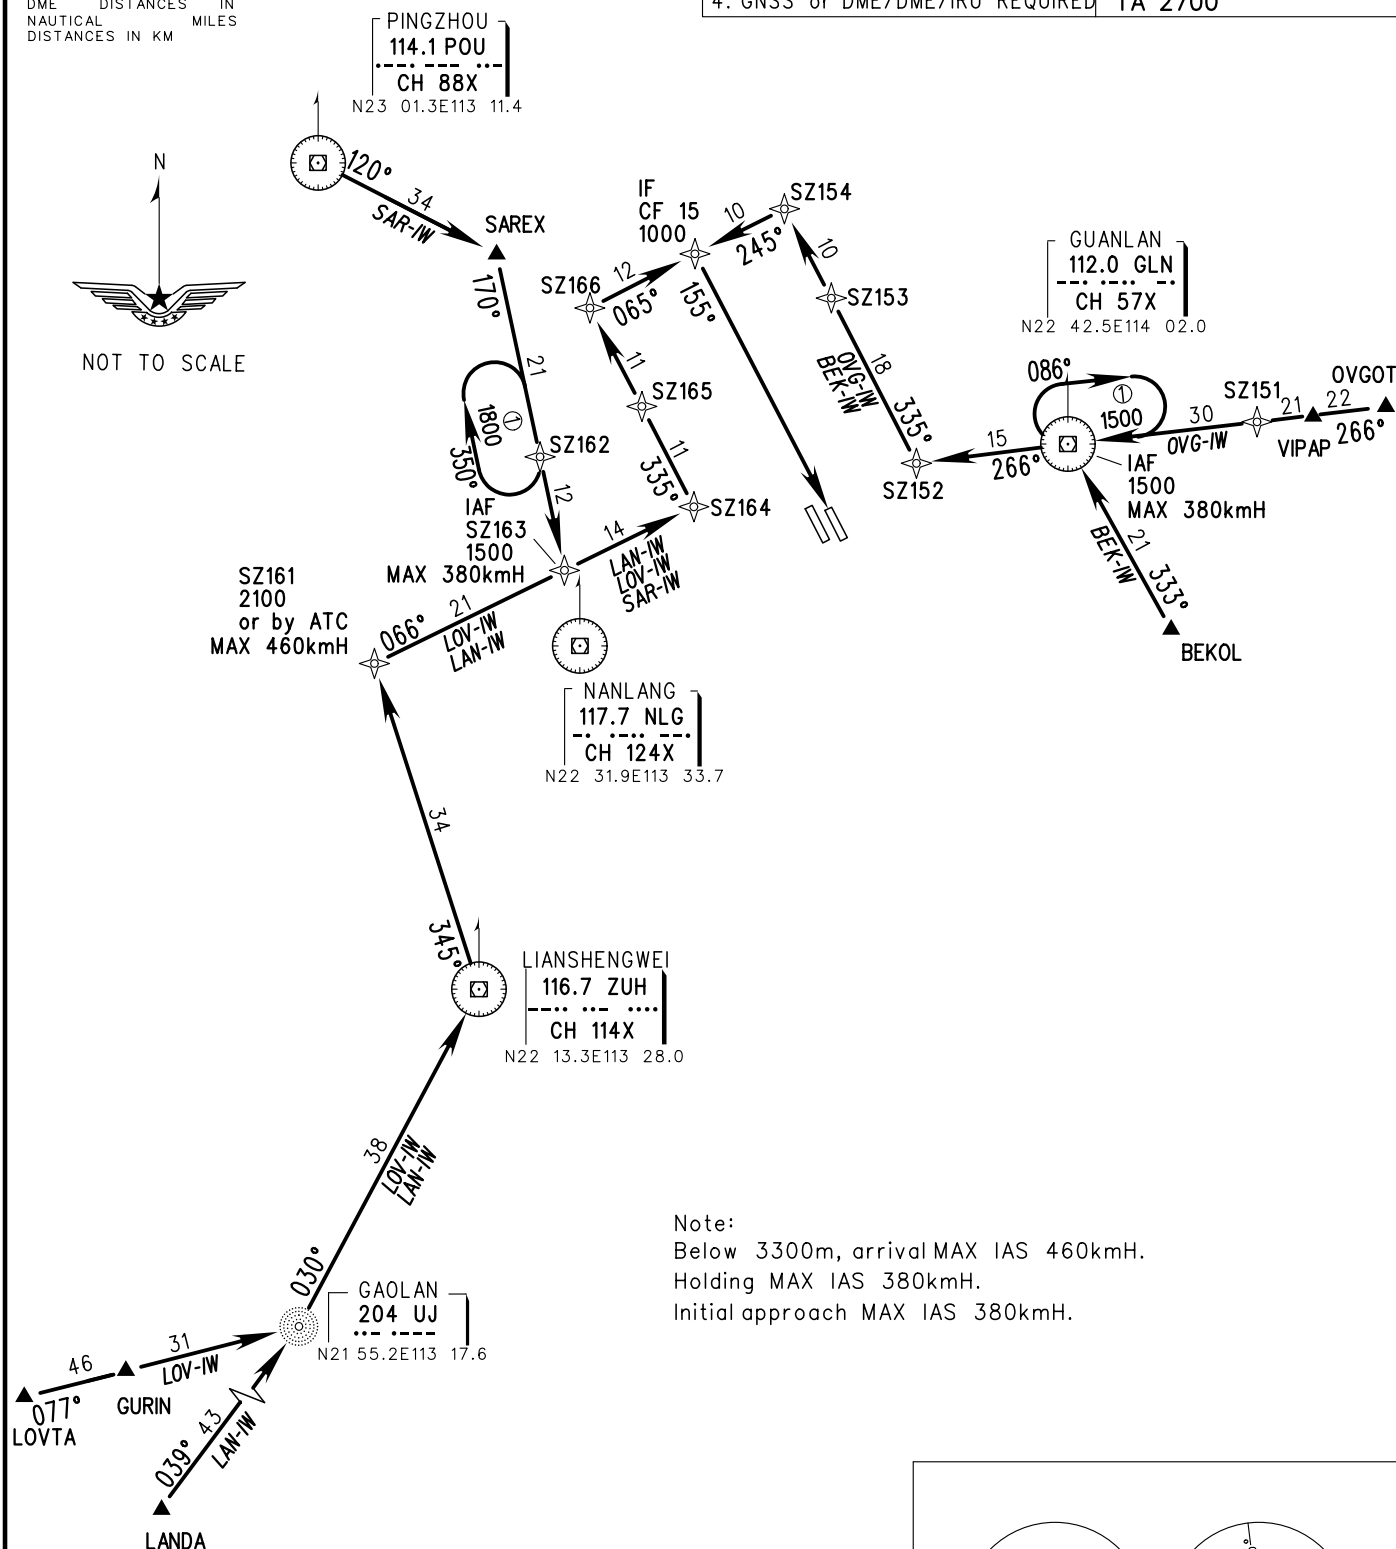

Note:
 Below 3300m, arrival MAX IAS 460kmH.
 Holding MAX IAS 380kmH.
 Initial approach MAX IAS 380kmH.

Changes: Procedure.

