


D-ATIS 131.45  
ATIS 128.6(DEP), 126.45(ARR)  
TWR 123.0(118.85) for RWY02L/20R  
130.35(118.85) for RWY02R/20L  
GND 121.85, 121.75(121.7)  
DCL 131.45  
Delivery 121.6(121.7)

ZUUU CHENGDU/Shuangliu  
N30° 34.8'E103° 56.9' ELEV 512m

AERODROME CHART

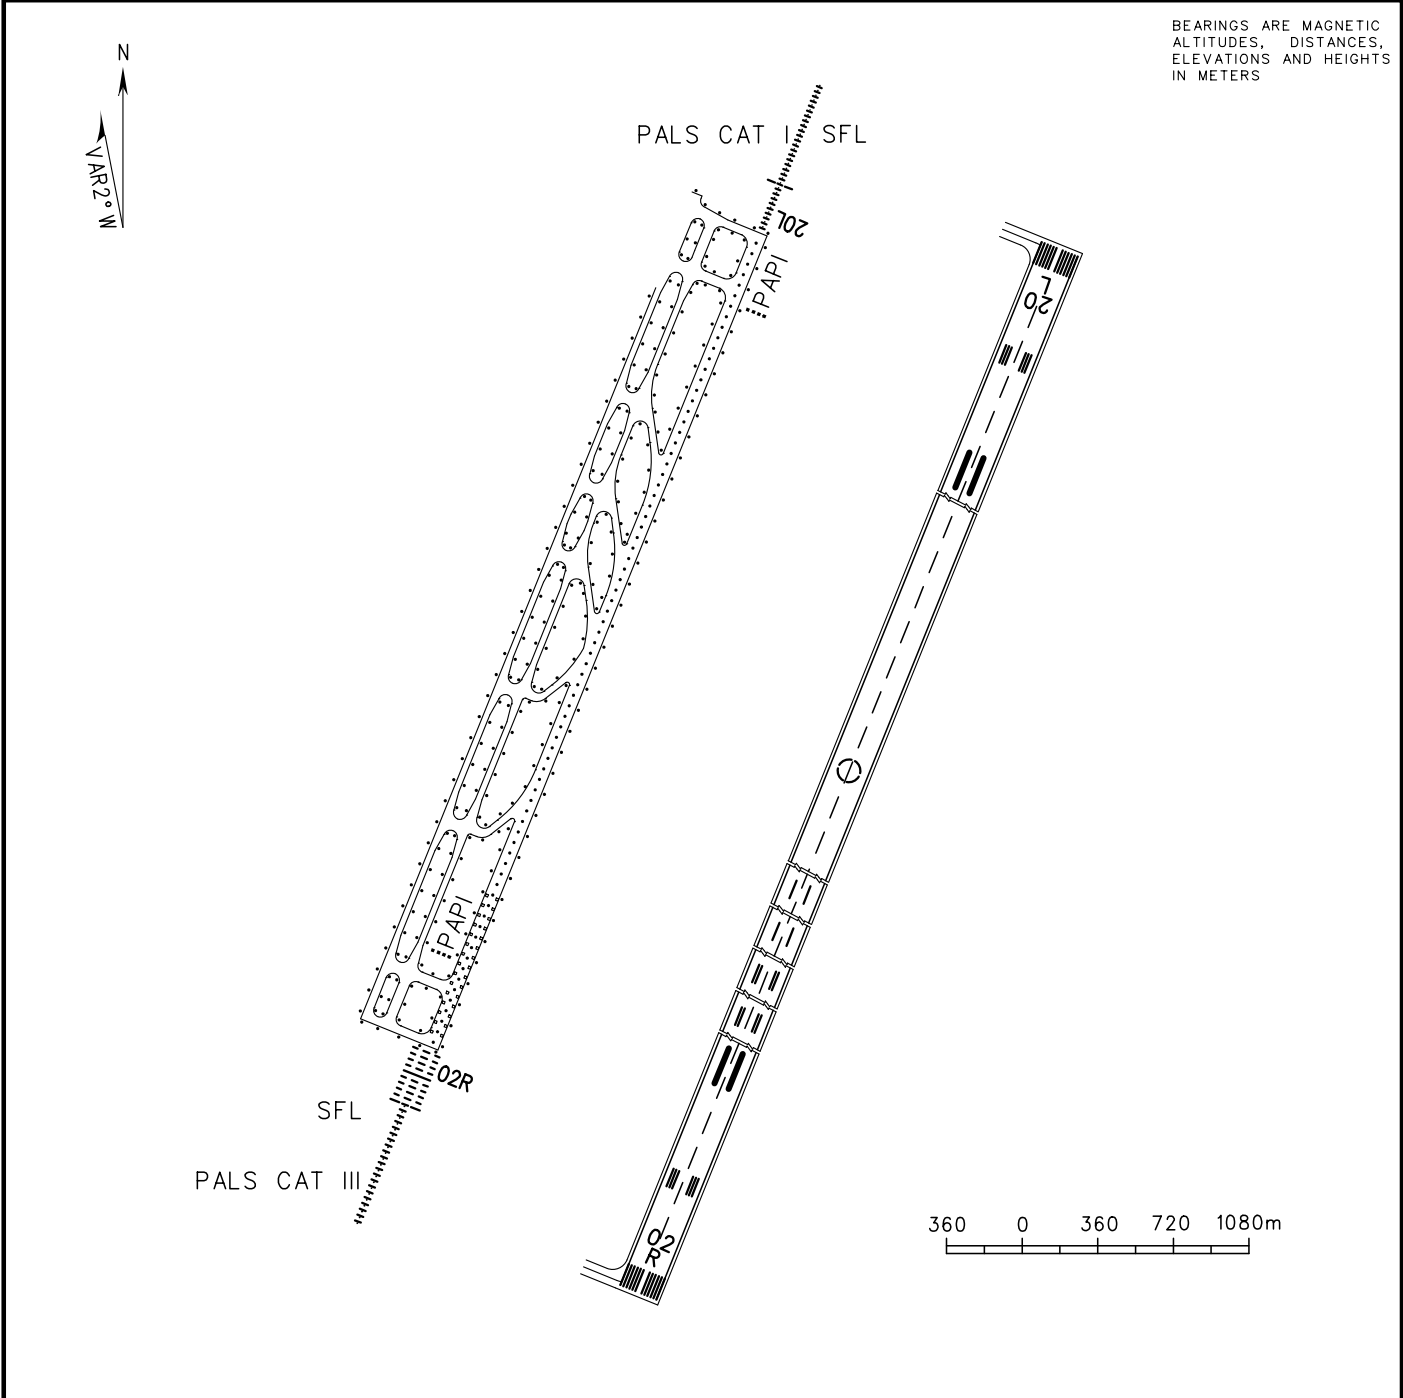

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)					LIGHTS	
ACFT Type		RWY02R/20L			RWY02R	RWY20L
		Low visibility procedure in force	REDL	NIL (Day only)	PALS CAT III PAPI RCLL REDL SFL TDZL	PALS CAT I PAPI RCLL REDL SFL
		REDL,RCLL				
2 TURB ENG	CAT A.B.C	RVR200	RVR400	RVR500		
or 3&4 ENG	CAT D	RVR250				
Other			VIS1600			
Changes: ATIS FREQ,Take-off minima.						