

AERODROME CHART



D-ATIS 126.65
TWR 118.25(118.85)
GND 121.65(DCL AVBL)

ZYTL DALIAN/Zhoushuizi

N38° 58.0'E121° 32.4' ELEV 33m

RWY	Direction	Bearing strength(PCN)	
10	103°	Stands Nr.27,28,38-40,42,43, 45-49,101-106	69/R/B/W/T
		RWY,TWY A1,A2, B, C, D, E, A(connect with THR RWY10) Stands Nr.1-2, 24-26	68/F/B/W/T
28	283°	main TWYA,stands Nr.19-23	61/R/B/W/T
		Stands Nr.3-8, 29-37	58/R/B/W/T
		Stands Nr.11-18, 50-52	49/R/B/W/T


BEARINGS ARE MAGNETIC
ALTITUDES, DISTANCES,
ELEVATIONS AND HEIGHTS
IN METERS

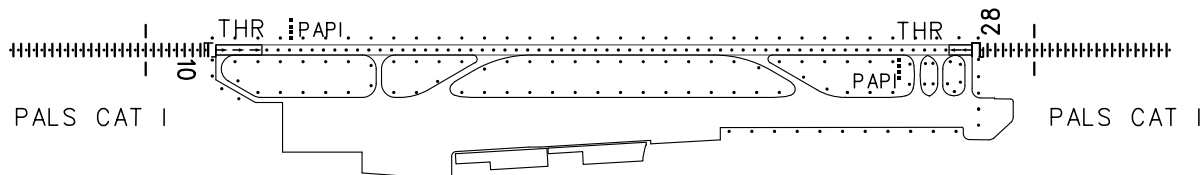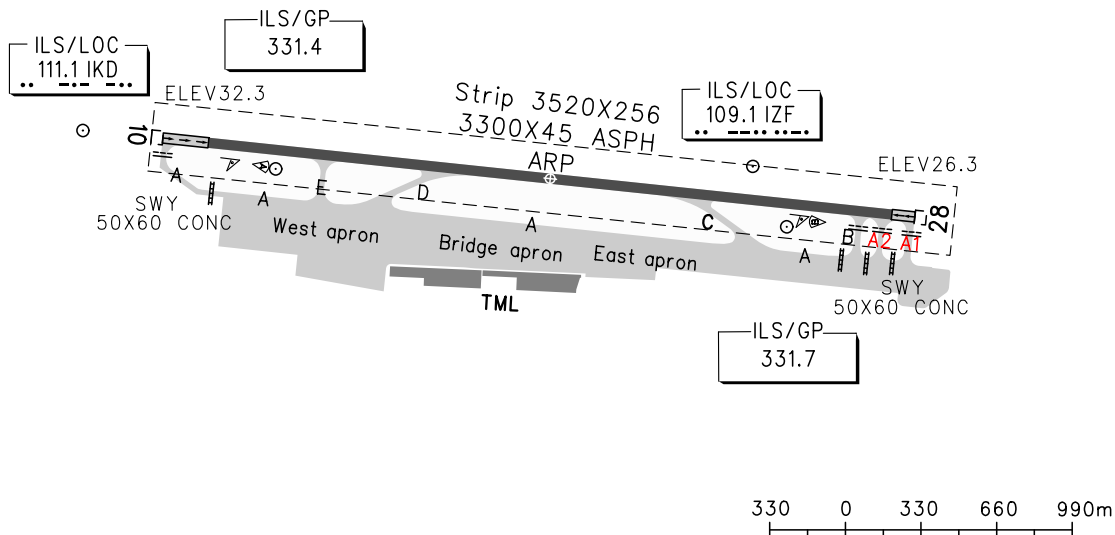

Remarks:

THR10 displaced 200m inwards
THR28 displaced 100m inwards

Displaced THR



TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)				LIGHTS	
RWY 10/28	With REDL & RCLL	With REDL or RCLL	Without REDL & RCLL	RWY10	RWY28
2 ENG	RVR500	RVR600	VIS1600	PALS CAT I SFL PAPI REDL RCLL	PALS CAT I SFL PAPI REDL RCLL
3&4 ENG	RVR500	RVR600	VIS800		

Changes: PCN, TWYs.