

STANDARD ARRIVAL CHART-INSTRUMENT

VAR4° W

ATIS 128.45
AP01 119.9(124.2)
AP02 126.35(124.2)
TWR 118.3(118.85)

ZHCC ZHENGZHOU/Xinzheng

RNAV RWY12L/12R

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM




NOT TO SCALE


Holding MAX IAS 380kmH

TL 3600
TA 3000
3300(QNH ≥ 1031hPa)
2700(QNH ≤ 979hPa)

1. RNAV 1
2. GNSS REQUIRED
3. RADAR REQUIRED

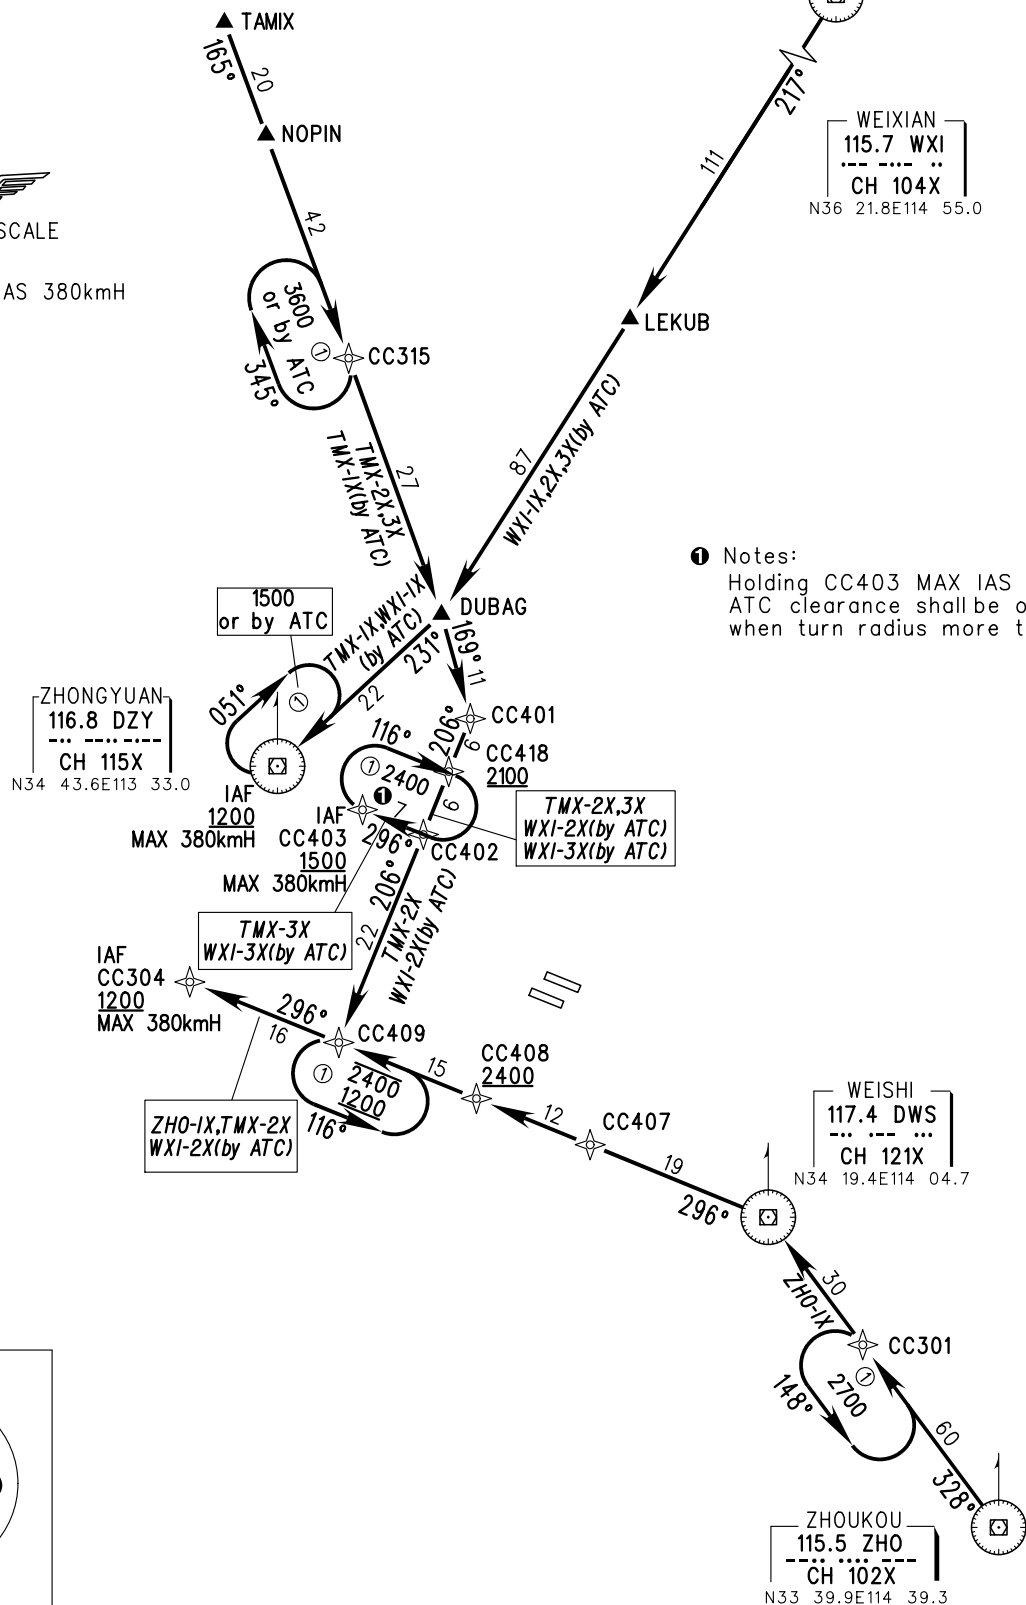

Notes:
Holding CC403 MAX IAS 350kmH,
ATC clearance shall be obtained
when turn radius more than 3km.



Changes: New chart.