


BEARINGS ARE MAGNETIC  
 ALTITUDES, DISTANCES,  
 ELEVATIONS AND HEIGHTS  
 IN METERS

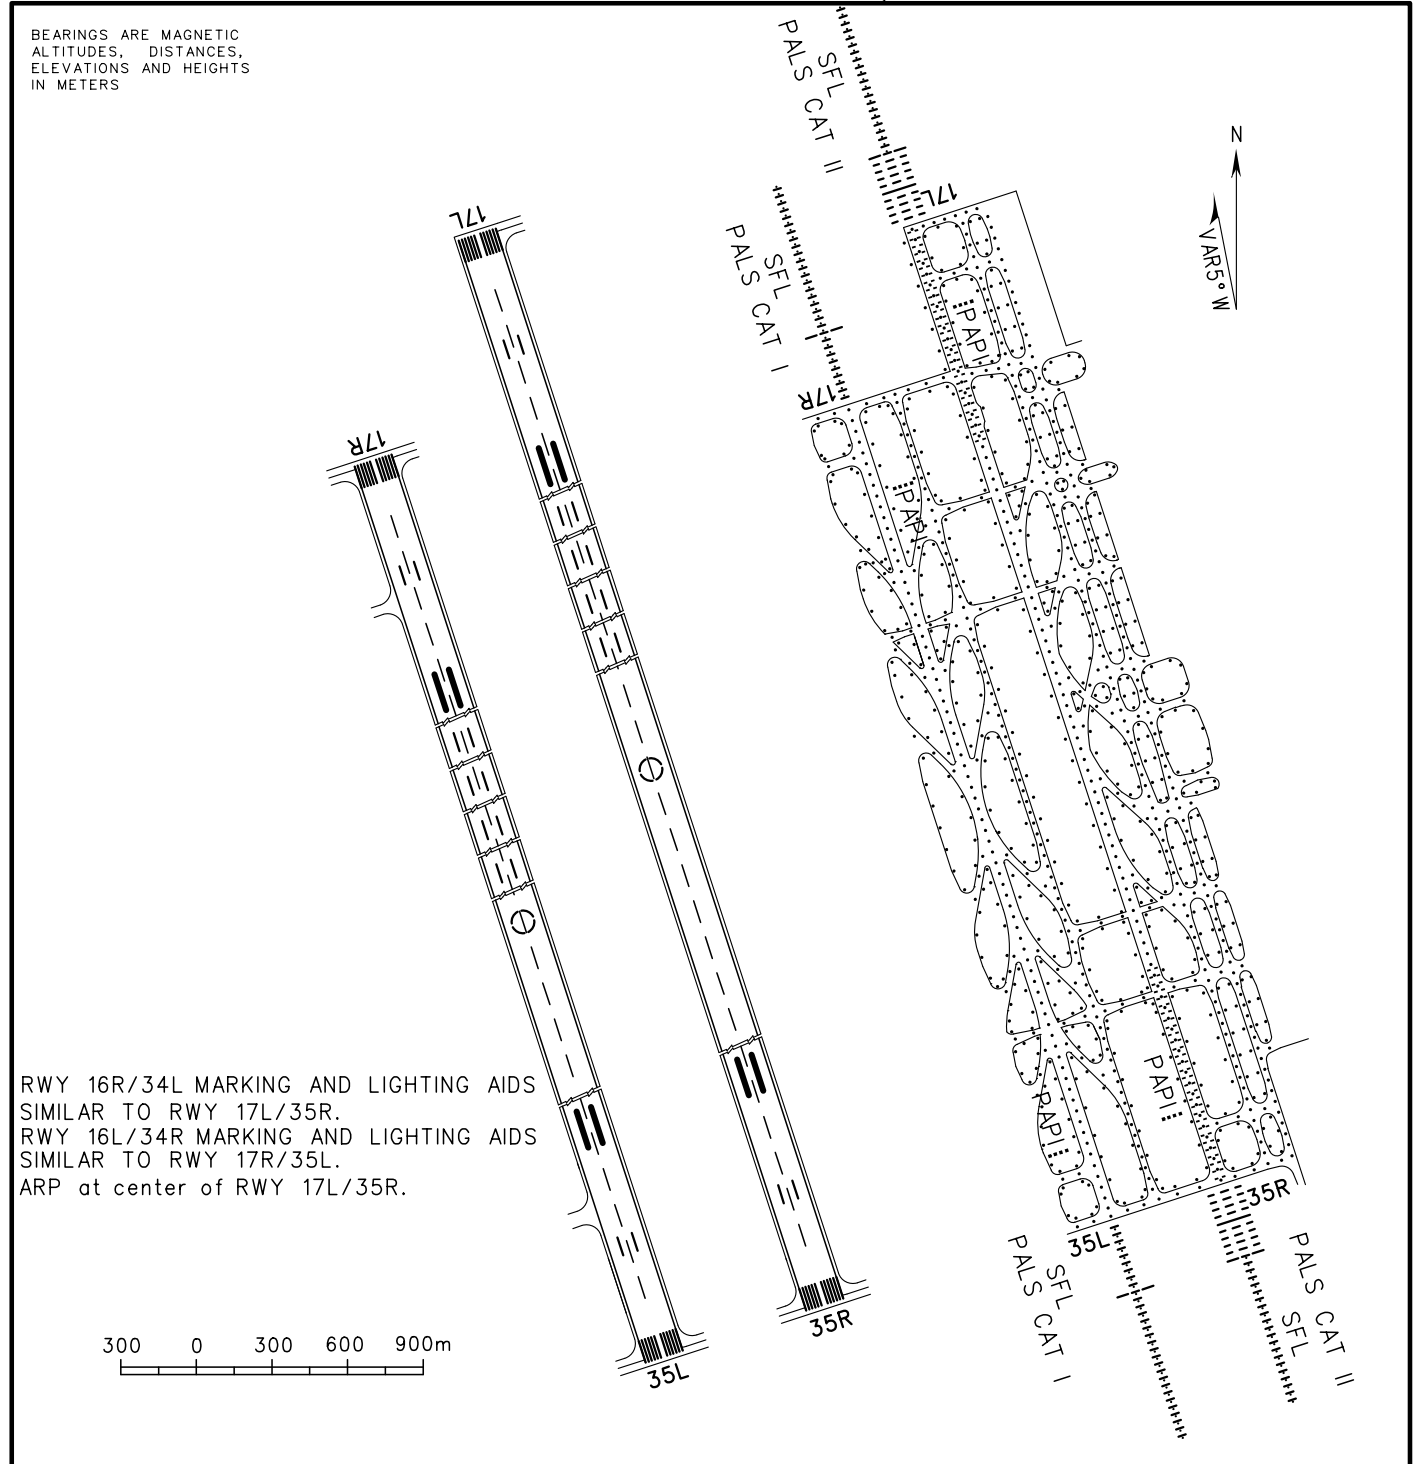

RWY 16R/34L MARKING AND LIGHTING AIDS  
 SIMILAR TO RWY 17L/35R.  
 RWY 16L/34R MARKING AND LIGHTING AIDS  
 SIMILAR TO RWY 17R/35L.  
 ARP at center of RWY 17L/35R.

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)					LIGHTS	
	Low visibility procedure in force17L/35R		16L/34R,16R/34L 17L/35R,17R/35L		16R/34L 17L/35R	16L/34R 17R/35L
	REDL RCLL	REDL RCLM	REDL	NIL(Day only)	PALS CAT II SFL PAPI REDL RCLL TDZL	PALS CAT I SFL PAPI REDL RCLL
A	RVR 200	RVR 250	RVR 400 VIS 800	RVR 500 VIS 800		
B						
C						
D	RVR 250	RVR 300				
Changes: Nil.						