

STANDARD DEPARTURE  
CHART-INSTRUMENT


VAR2° W

ZGGG  
GUANGZHOU/Baiyun  
RNAV RWY20L

BEARINGS ARE MAGNETIC ALTITUDES,ELEVATIONS AND HEIGHTS IN METERS DME DISTANCES IN NAUTICAL MILES DISTANCES IN KM		D-ATIS 127.0 APP 126.55(127.75)/AP01 119.70(127.75)/AP02 126.35(119.60)/AP03 121.05(124.20)/AP04 120.40(124.20)/AP05 TWR 118.25(124.3) for RWY02R/20L	TL 3600(QNH<980HPA) 3300(QNH>980HPA) TA 2700
1. RNAV 1 2. GNSS,DME/DME/IRU REQUIRED 3. RADAR REQUIRED	1. RNP1 or 2. GNSS REQUIRED		



- Notes:
- Departure turn MAX IAS 380kmH.
  - Under radar control service, actual flight ALT instructed by ATC.
  - Departure turn to RIGHT after take-off shall be permitted by ATC.
  - Turning is forbidden until DER.

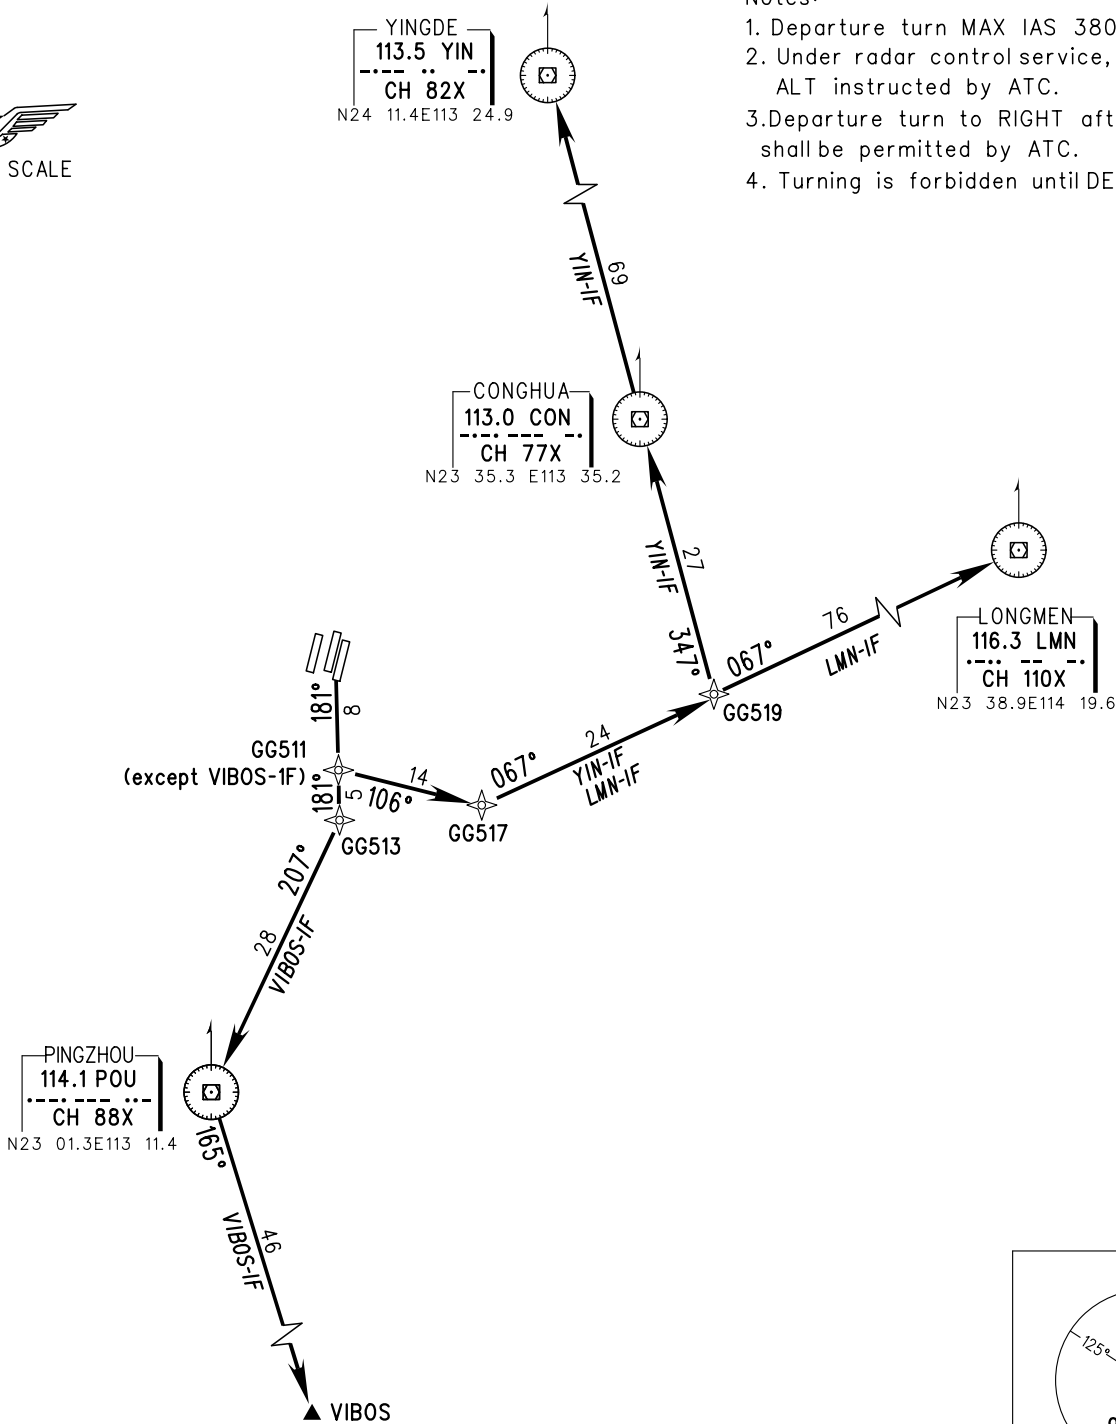

Changes: New RWY.

