Business apron

TWY B,E:

TWY C,D:

TWY F,F1:

TWY A:

RWY Direction

083°

263°


08


26

GND 121.7 Bearing strength(PCN) 91/R/B/W/T Apron(stands Nr.1-10): (stands Nr.301-309, 301L, 301R): 85/R/B/W/T Apron(stands Nr.12-46), RWY,TWY D1,D2,E1,E2,E3,F2,H,J: 80/R/B/W/T 79/R/B/W/T 78/R/B/W/T


77/R/B/W/T

75/R/B/W/T



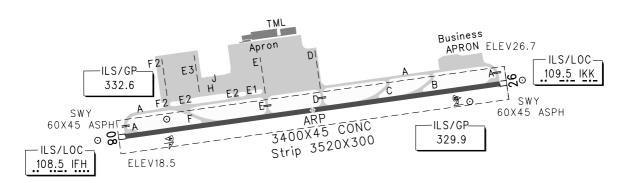

340 680 1020m 340 0

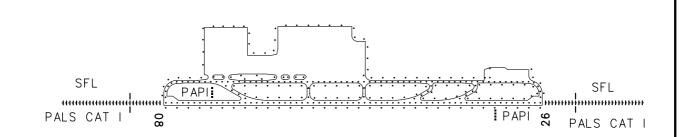



TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)				LIGHTS	
RWY	ACFT Type	REDL	NIL(Day only)	DWYOR	RWY26
08	2 TURB ENG or 3&4 ENG	RVR400	RVR500	RWY08 PALS CAT I	PALS CAT I
	Other	VIS1600		SFL PAPI	SFL PAPI
26	CEILING 300/VIS5000.			REDL RCLL	REDL RCLL
Changes: Holding position pattern B withdrawn.					