

D-ATIS 127.45(departure) 126.85(arrival)  
Zhuhai APP(R) TM01 120.35(127.95)  
TM02 124.25(126.0)  
TM03 123.85(126.0)  
TM04 124.75(127.95)

TWR 130.35(118.05)(E)  
118.45(130.35)(W)

ZGSZ SHENZHEN/Baoan

RNAV RWY34


# STANDARD DEPARTURE CHART-INSTRUMENT

VAR2°W

BEARINGS ARE MAGNETIC  
ALTITUDES, ELEVATIONS  
AND HEIGHTS IN METERS  
DME DISTANCES IN  
NAUTICAL MILES  
DISTANCES IN KM

1. RADAR REQUIRED
2. RNAV 1
3. Basic RNP1
4. GNSS or DME/DME/IRU REQUIRED

TL 3600(QNH<980HPA)  
3300(QNH>980HPA)  
TA 2700

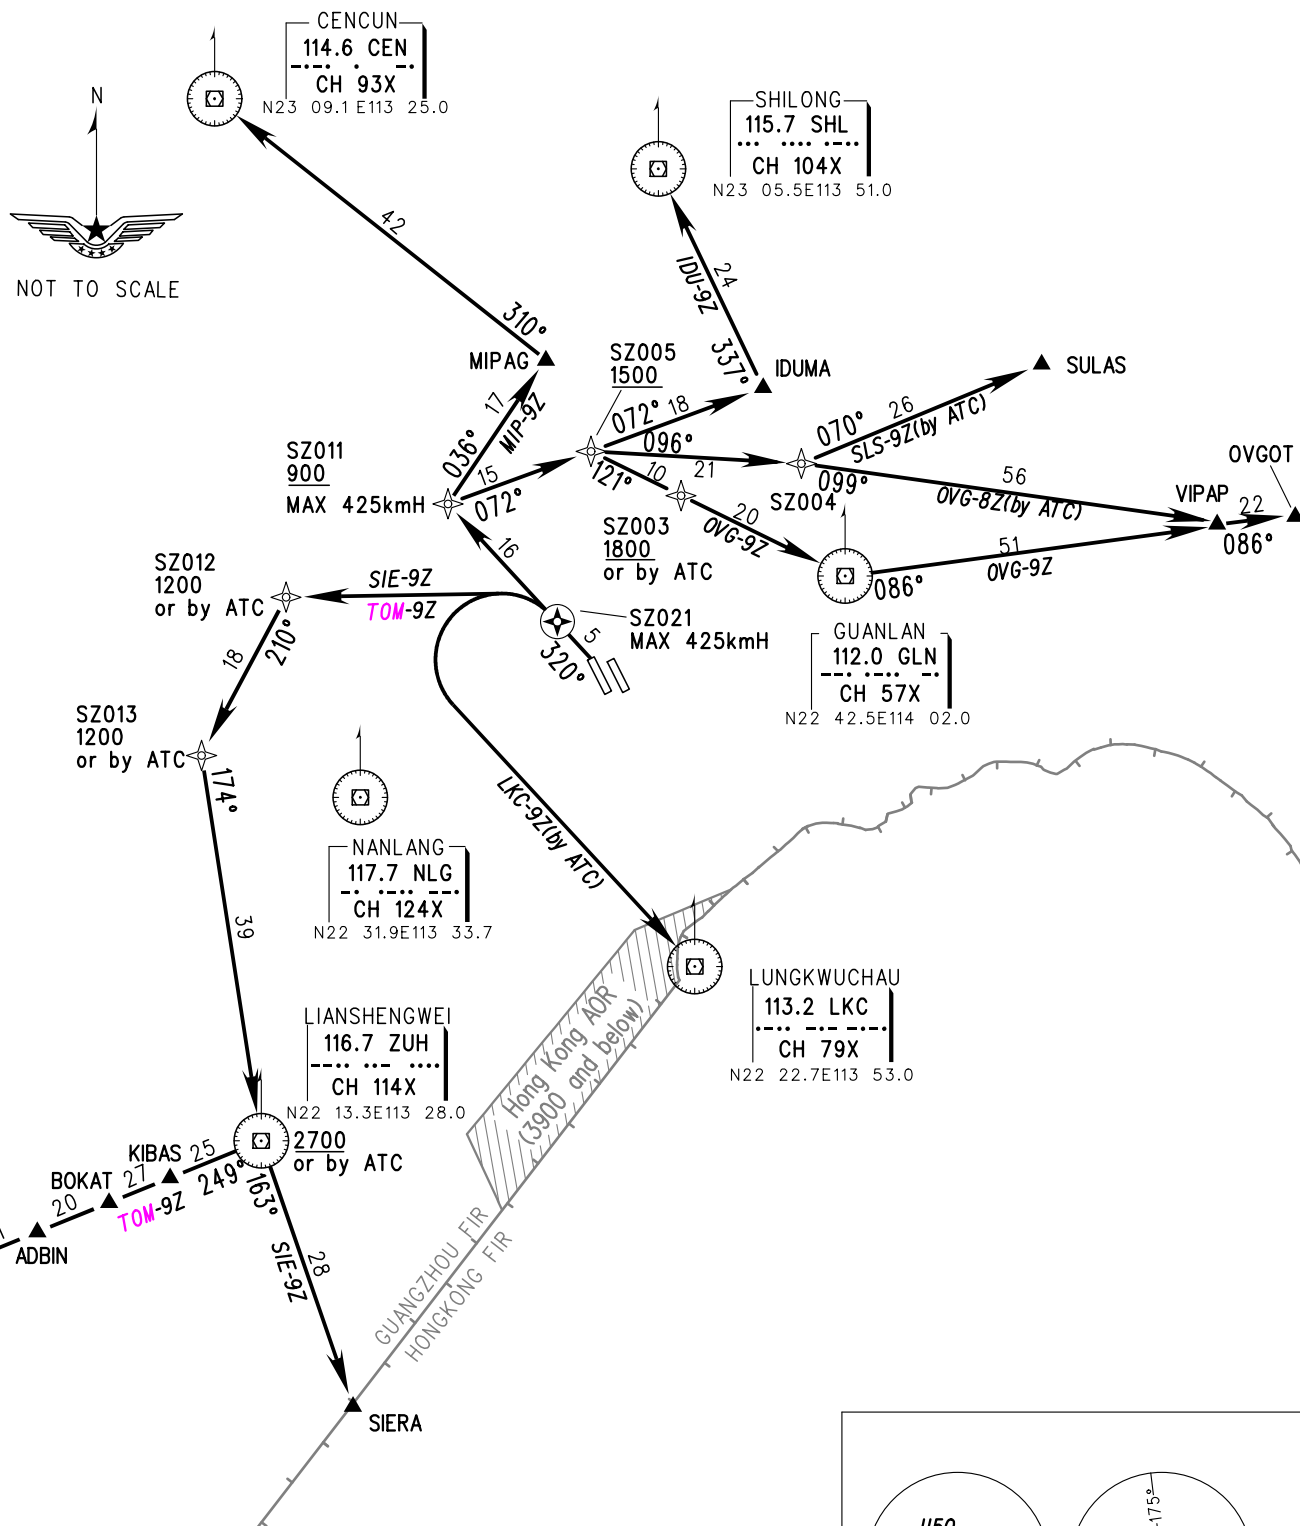

Note: ① Departure turn MAX IAS 425kmH.

② When two RWYs used for independent departure,  
IDU-9Z, OVG-8Z/9Z, SLS-9Z, MIP-9Z need ATC clearance.

Changes: TOMUD, TOM-9Z.

