

# STANDARD ARRIVAL CHART-INSTRUMENT

AP01 119.2(125.55)  
AP02 119.55(125.55)  
ATIS 126.45  
VAR4° W TWR 118.25(124.35)

ZBYN TAIYUAN/Wusu  
RNAV RWY13

BEARINGS ARE MAGNETIC  
ALTITUDES, ELEVATIONS  
AND HEIGHTS IN METERS  
DME DISTANCES IN  
NAUTICAL MILES  
DISTANCES IN KM




NOT TO SCALE

1. RADAR REQUIRED
2. RNAV 1
3. GNSS,DME/DME/IRU REQUIRED

TL 3600  
TA 3000  
3300(QNH ≥ 1031hPa)  
2700(QNH ≤ 979hPa)

- ① ANPIG-81A EXUMI-81A MAPMU-81A  
OKVUM-81A OMKAK-81A TODAM-81A
- ② ANPIG-82A EXUMI-82A MAPMU-82A  
OKVUM-82A OMKAK-82A TODAM-82A

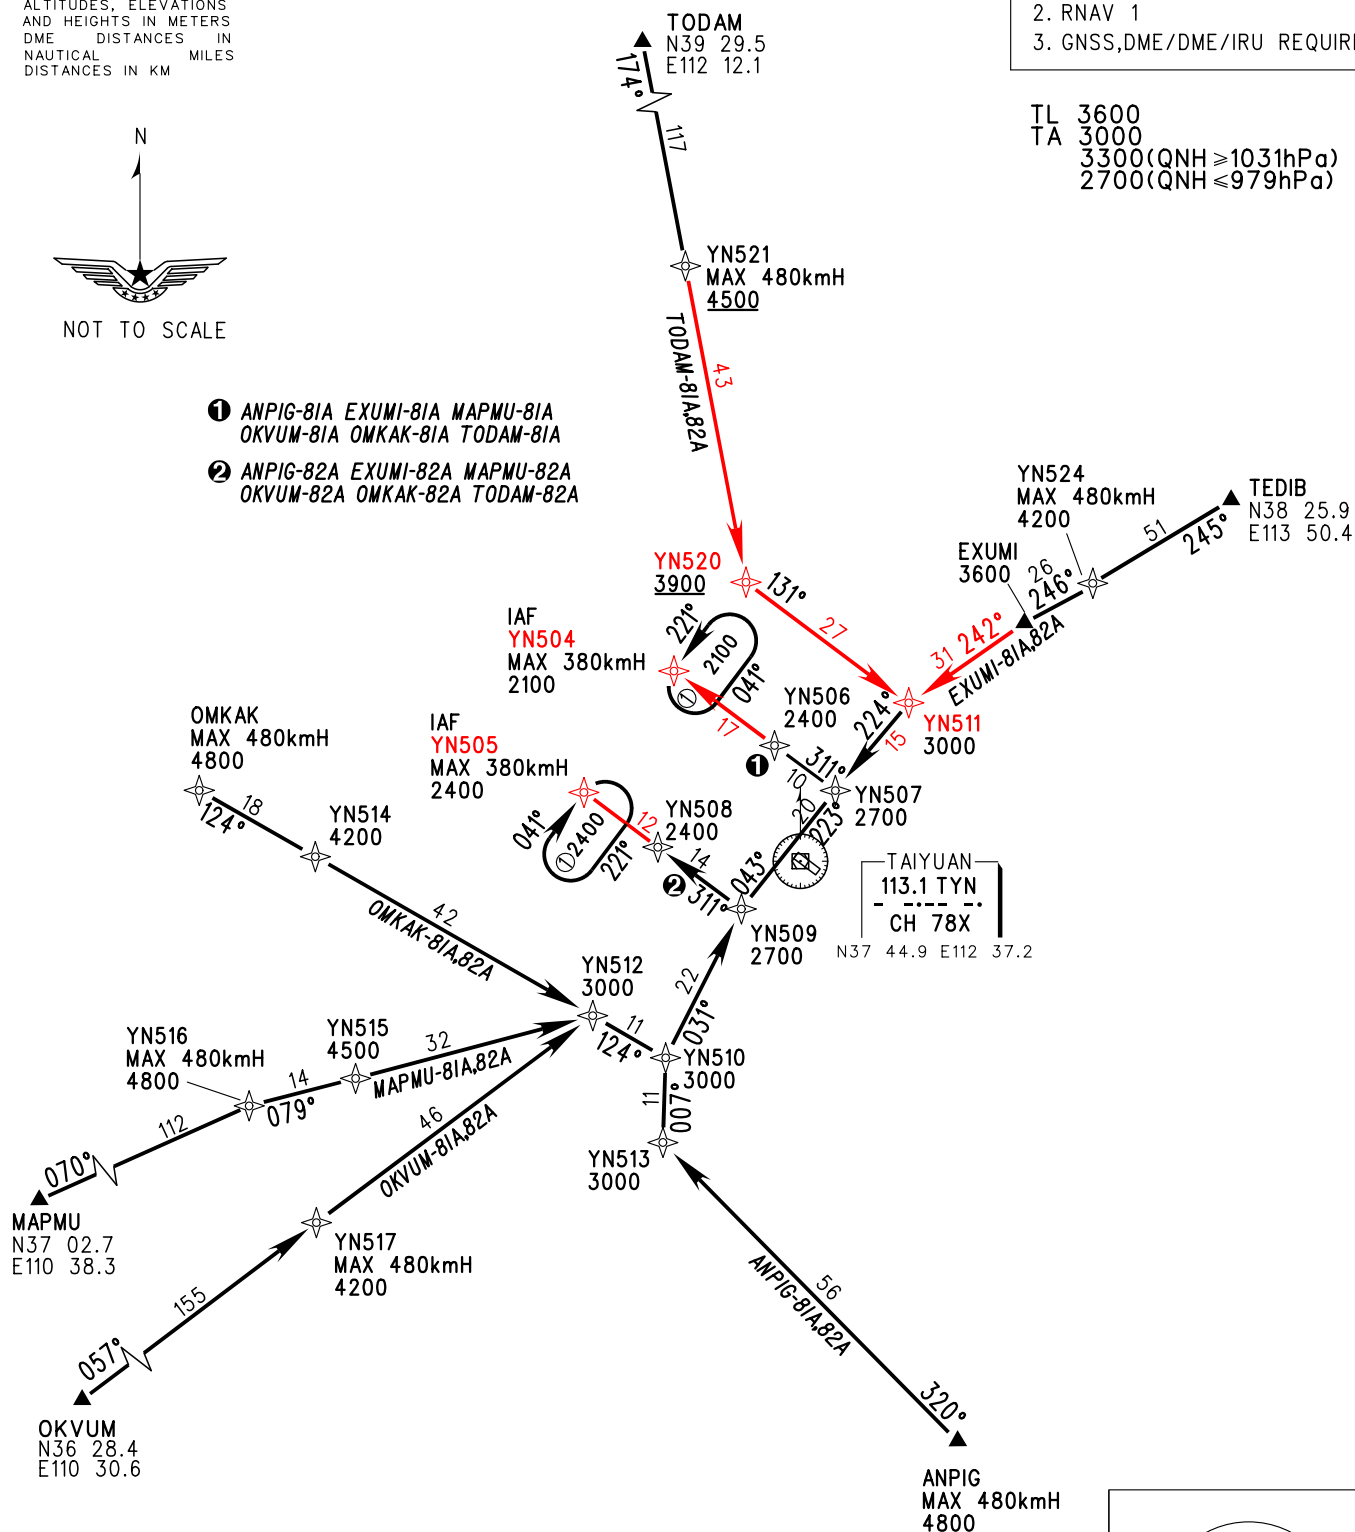

Changes: YN511, YN504, YN505, YN520, distance, flight course