

STANDARD ARRIVAL CHART-INSTRUMENT


VAR6° W

ATIS 127.2
D-ATIS 131.45
TWR 118.7(124.3)
APP 119.4(124.6)/AP01
121.15(124.6)/AP02


ZSQD QINGDAO/Liuting

RNAV RWY17

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM




NOT TO SCALE

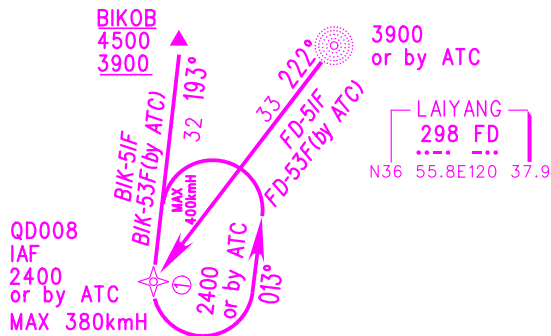


TL 3600
TA 3000
3300(QNH≥1031HPA)
2700(QNH≤979HPA)

1. RADAR REQUIRED
2. RNAV 1
3. GNSS REQUIRED

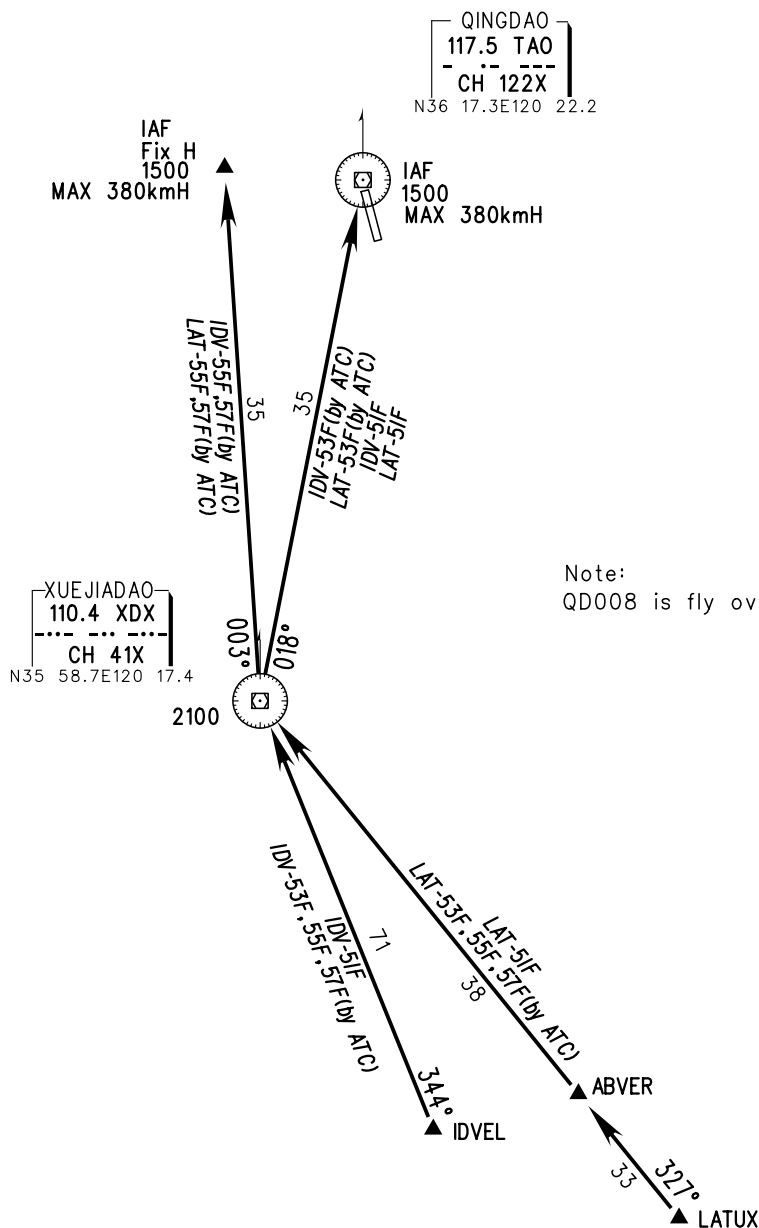

Note:
QD008 is fly over point for holding procedure.



Changes: Procedure, MSA.