

AERODROME CHART

TWR 130.0(118.2)

ZUXC XICHANG/Qingshan
N27° 59.4'E102° 11.0' ELEV 1559m


RWY	Direction	Bearing strength(PCN)
18	180°	RWY: 62/F/B/W/T
36	360°	TWY.Apron: 56/R/B/W/T

BEARINGS ARE MAGNETIC
ALTITUDES, DISTANCES,
ELEVATIONS AND HEIGHTS
IN METERS




ILS/LOC
109.3 IGO

ELEV 1559.2

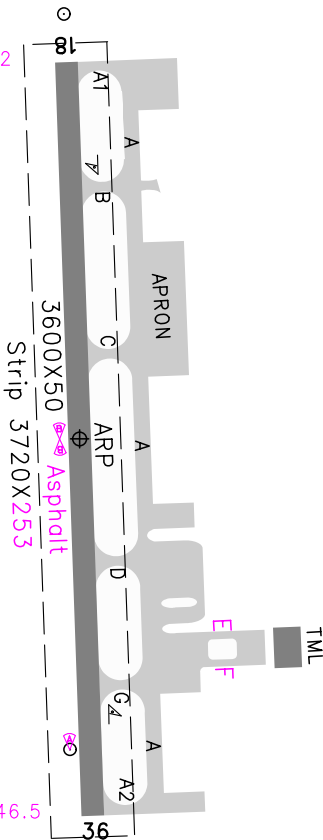

ILS/GP
332.0

ELEV 1546.5

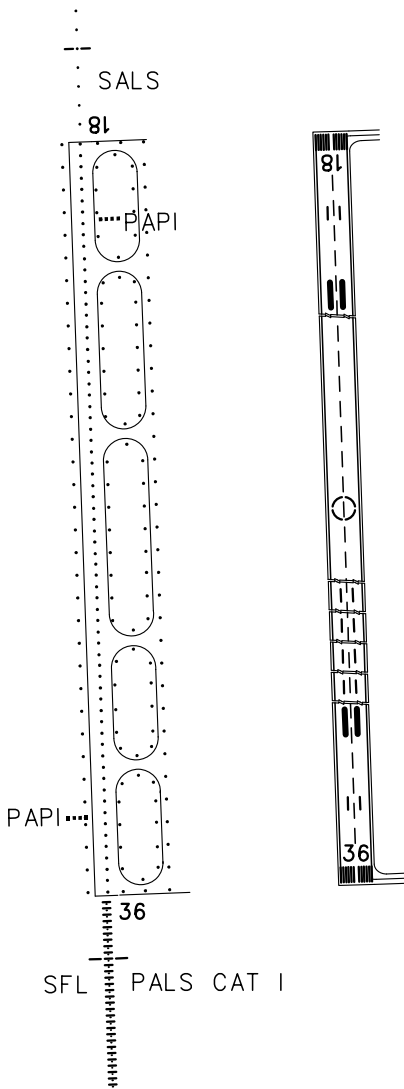

360 0 360 720 1080m

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)				LIGHTS	
RWY	ACFT Type	REDL	NIL(Day only)	RWY18	RWY36
18/ 36	2 TURB ENG or 3&4 ENG	VIS800	VIS1600	SALS PAPI REDL RCLL	PALS CAT I PAPI REDL RCLL SFL
	Other	VIS1600			
Note: TAKE-OFF MINMA of RWY36 is CLG 540m, VIS 5000m if climb gradient is less than 5.9%.					

Changes: PCN, ELEV, TWY, RVR.