

STANDARD DEPARTURE CHART-INSTRUMENT

VAR2° W


ZGGG
GUANGZHOU/Baiyun
RNAV RWY20R

BEARINGS ARE MAGNETIC ALTITUDES,ELEVATIONS
AND HEIGHTS IN METERS DME DISTANCES IN
NAUTICAL MILES DISTANCES IN KM

D-ATIS	127.0
APP	126.55(127.75)/AP01
	119.70(127.75)/AP02
	126.35(119.60)/AP03
	121.05(124.20)/AP04
	120.40(124.20)/AP05
TWR	118.1(130.0, 124.3) for RWY02L/20R


TL	3600(QNH<980HPA)
	3300(QNH>980HPA)
TA	2700

1. RNAV 1	or	1. RNP1
2. GNSS,DME/DME/IRU REQUIRED		2. GNSS REQUIRED
3. RADAR REQUIRED		



Notes:

1. Departure turn MAX IAS 380kmH.
2. Under radar control service, actual flight ALT instructed by ATC.
3. Departure turn to RIGHT after take-off shall be permitted by ATC.
4. Turning is forbidden until DER.

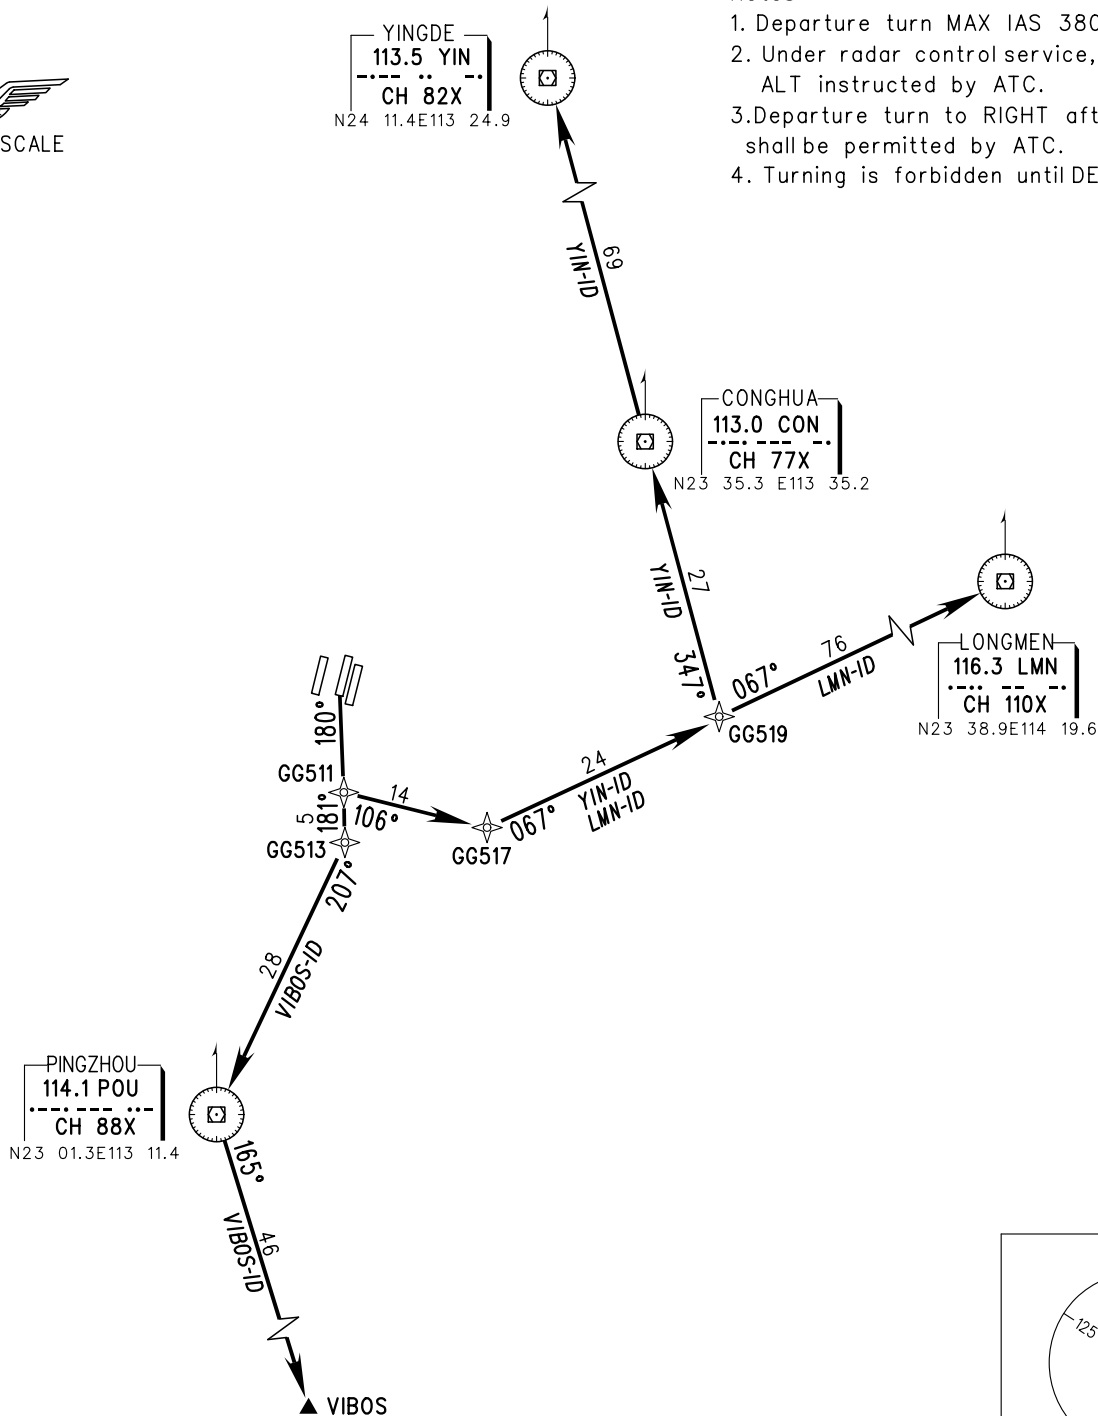

Changes: RWY number, procedures, FREQs.