

D-ATIS 127.45(departure) 126.85(arrival)
Zhuhai APP(R) TM01 120.35(127.95)
TM02 124.25(126.0)
TM03 123.85(126.0)
TM04 124.75(127.95)

TWR 130.35(118.05)(E)
118.45(130.35)(W)


ZGSZ SHENZHEN/Baoan

RWY16


STANDARD DEPARTURE CHART-INSTRUMENT

VAR2° W

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS
DME DISTANCES IN
NAUTICAL MILES
DISTANCES IN KM




NOT TO SCALE

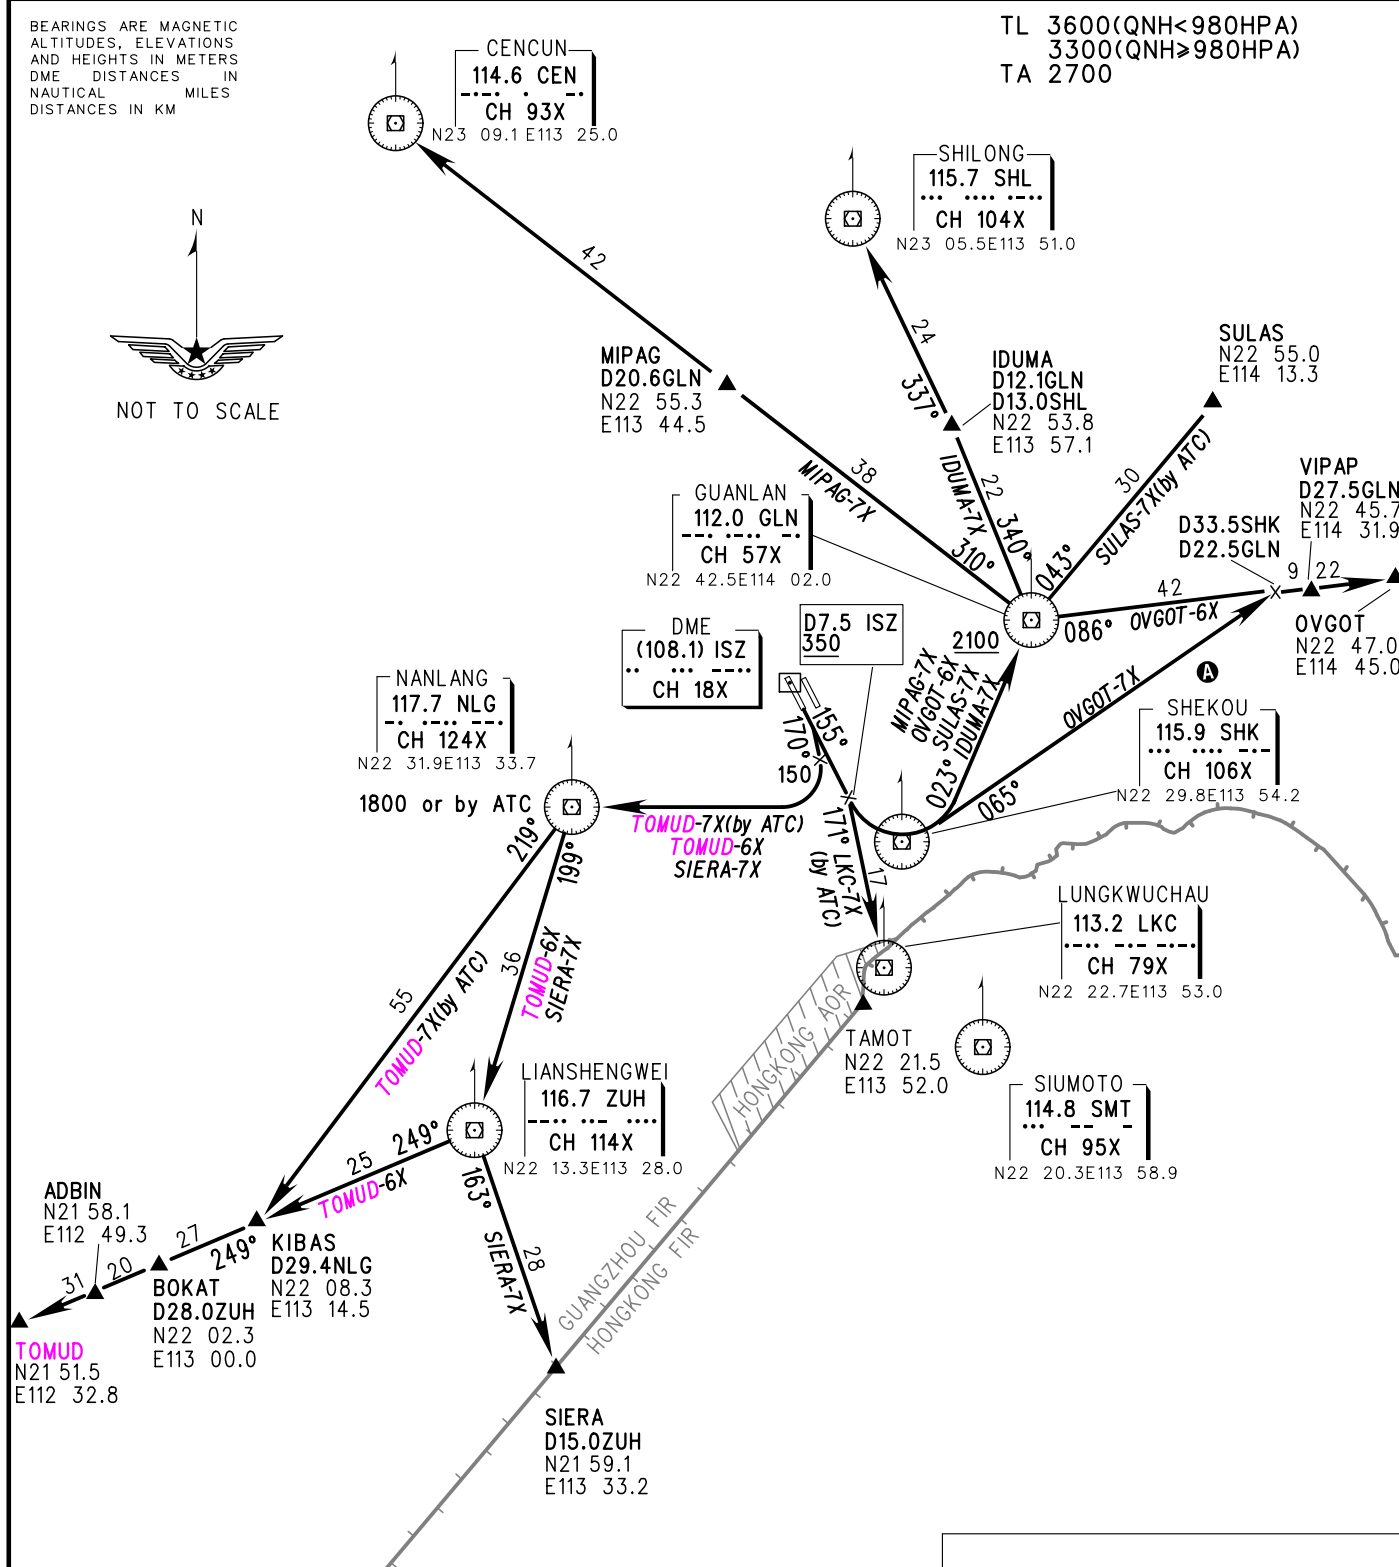

Note: ① Deviation to south of R065°SHK is forbidden for OVGOT-6X/7X, SULAS-7X, IDUMA-7X, MIPAG-7X.
② Departure turn MAX IAS 425km/h.
③ When two RWYs used for independent departure, SULAS-7X, IDUMA-7X, OVGOT-6X/7X, LKC-7X, MIPAG-7X need ATC clearance.
④ Deviation to south is forbidden.

Changes: TOMUD, TOMUD-6X/7X.

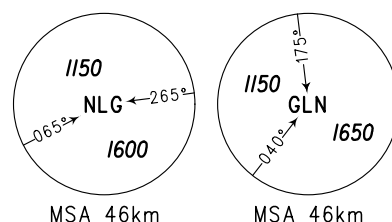

MSA 46km

MSA 46km