

# STANDARD DEPARTURE CHART-INSTRUMENT

VAR6°W

ZBAA BEIJING/Capital

RNAV

RWY36L/36R/01(REN0B)

BEARINGS ARE MAGNETIC ALTITUDES,ELEVATIONS  
AND HEIGHTS IN METERS DME DISTANCES IN  
NAUTICAL MILES DISTANCES IN KM


ATIS(DEP) 128.65

TWR01 124.3(118.3) 18R/36L  
TWR02 118.5(118.3) 18L/36R  
TWR03 118.05(118.6) 01/19

APP05 127.75(126.5) (H0)  
APP06 121.1(126.5) (H0)  
APP07 124.4(124.7) (2300-1400)

TL 3600  
TA 3000  
3300(QNH≥1031hPa)  
2700(QNH≤979hPa)

1. RADAR REQUIRED
2. RNAV 1
3. GNSS,DME/DME/IRU REQUIRED

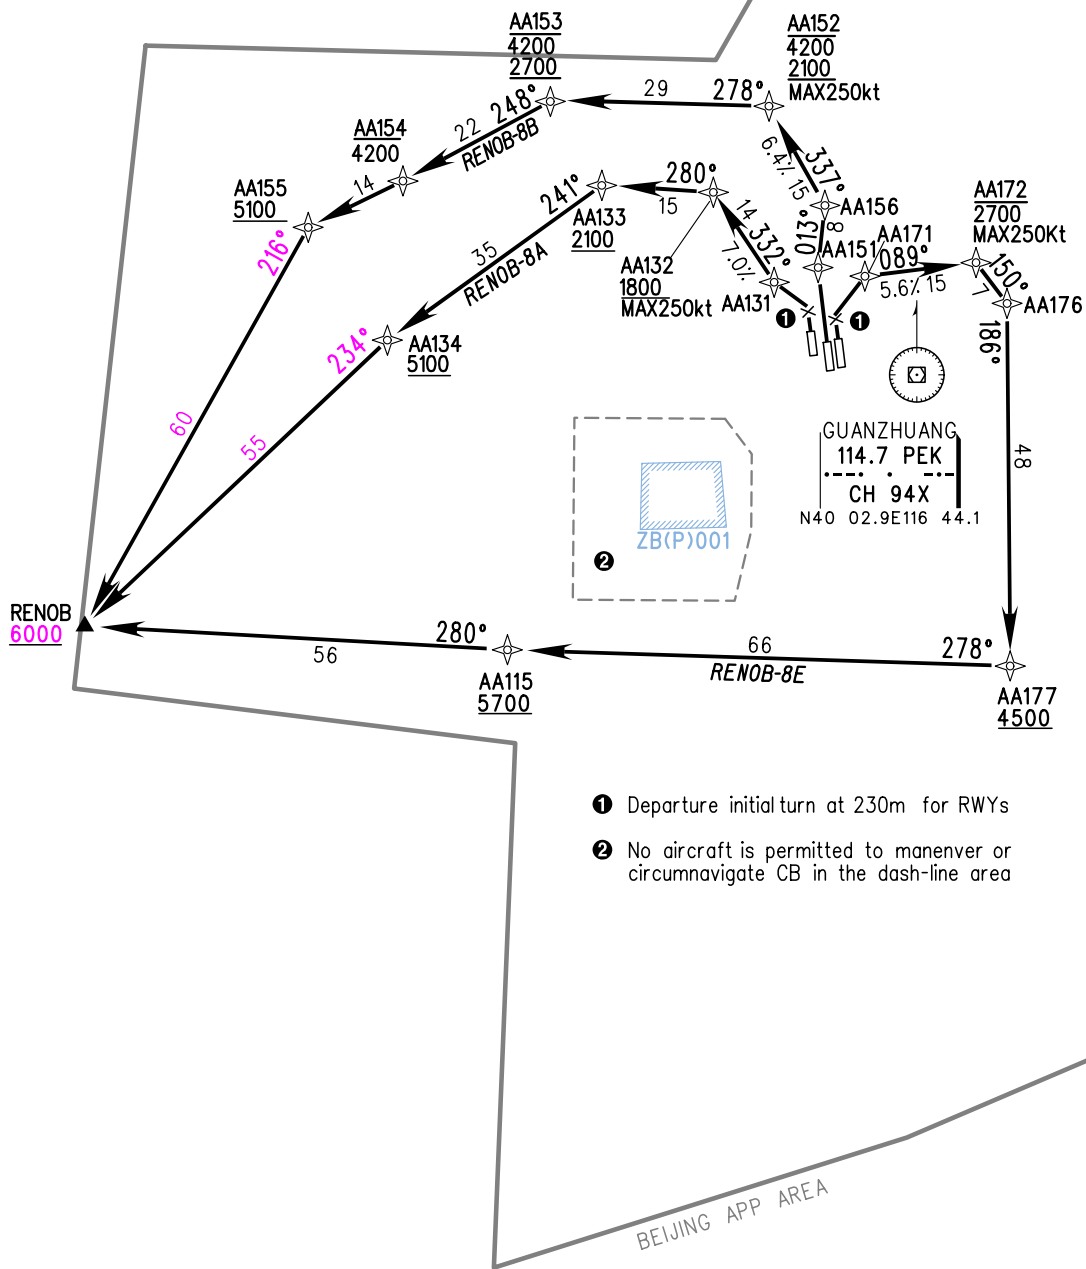

- ① Departure initial turn at 230m for RWYs
- ② No aircraft is permitted to maneuver or circumnavigate CB in the dash-line area

Changes: RENOB.

MSA 46km