


D-ATIS 131.45
ATIS 128.6(DEP), 126.45(ARR)
TWR 123.0(118.85) for RWY02L/20R
130.35(118.85) for RWY02R/20L
GND 121.85, 121.75(121.7)
DCL 131.45
Delivery 121.6(121.7)

ZUUU CHENGDU/Shuangliu

N30°34.8'E103°56.9' ELEV 512m

AERODROME CHART

BEARINGS ARE MAGNETIC
ALTITUDES, DISTANCES,
ELEVATIONS AND HEIGHTS
IN METERS

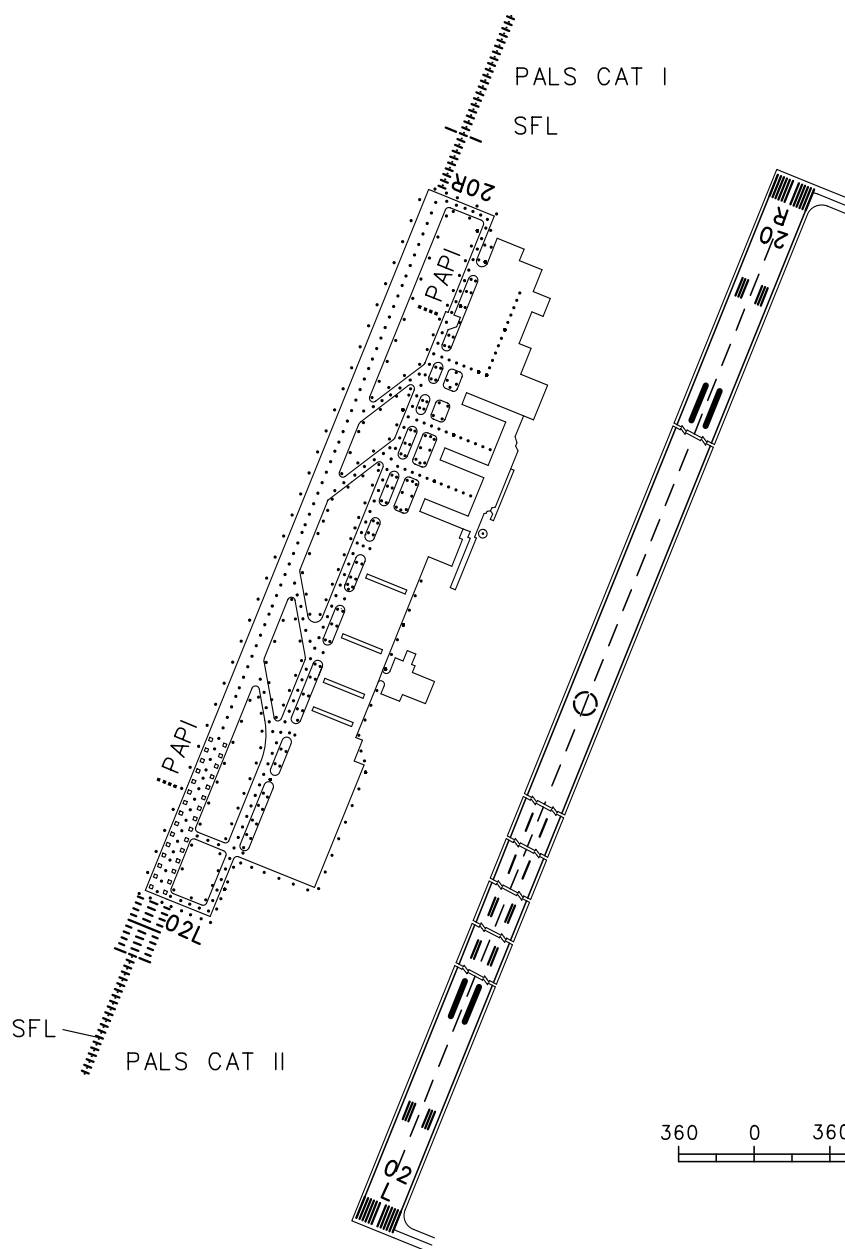

360 0 360 720 1080m

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)					LIGHTS	
ACFT Type		RWY02L/20R			RWY02L PALS CAT II PAPI RCLL REDL SFL TDZL	RWY20R PALS CAT I PAPI RCLL REDL SFL
		Low visibility procedure in force	REDL	NIL (Day only)		
		REDL,RCLL				
2 TURB ENG	CAT A.B.C	RVR200	RVR400	RVR500		
or 3&4 ENG	CAT D	RVR250				
Other			VIS1600			

Changes: ATIS FREQ, take-off minima.