




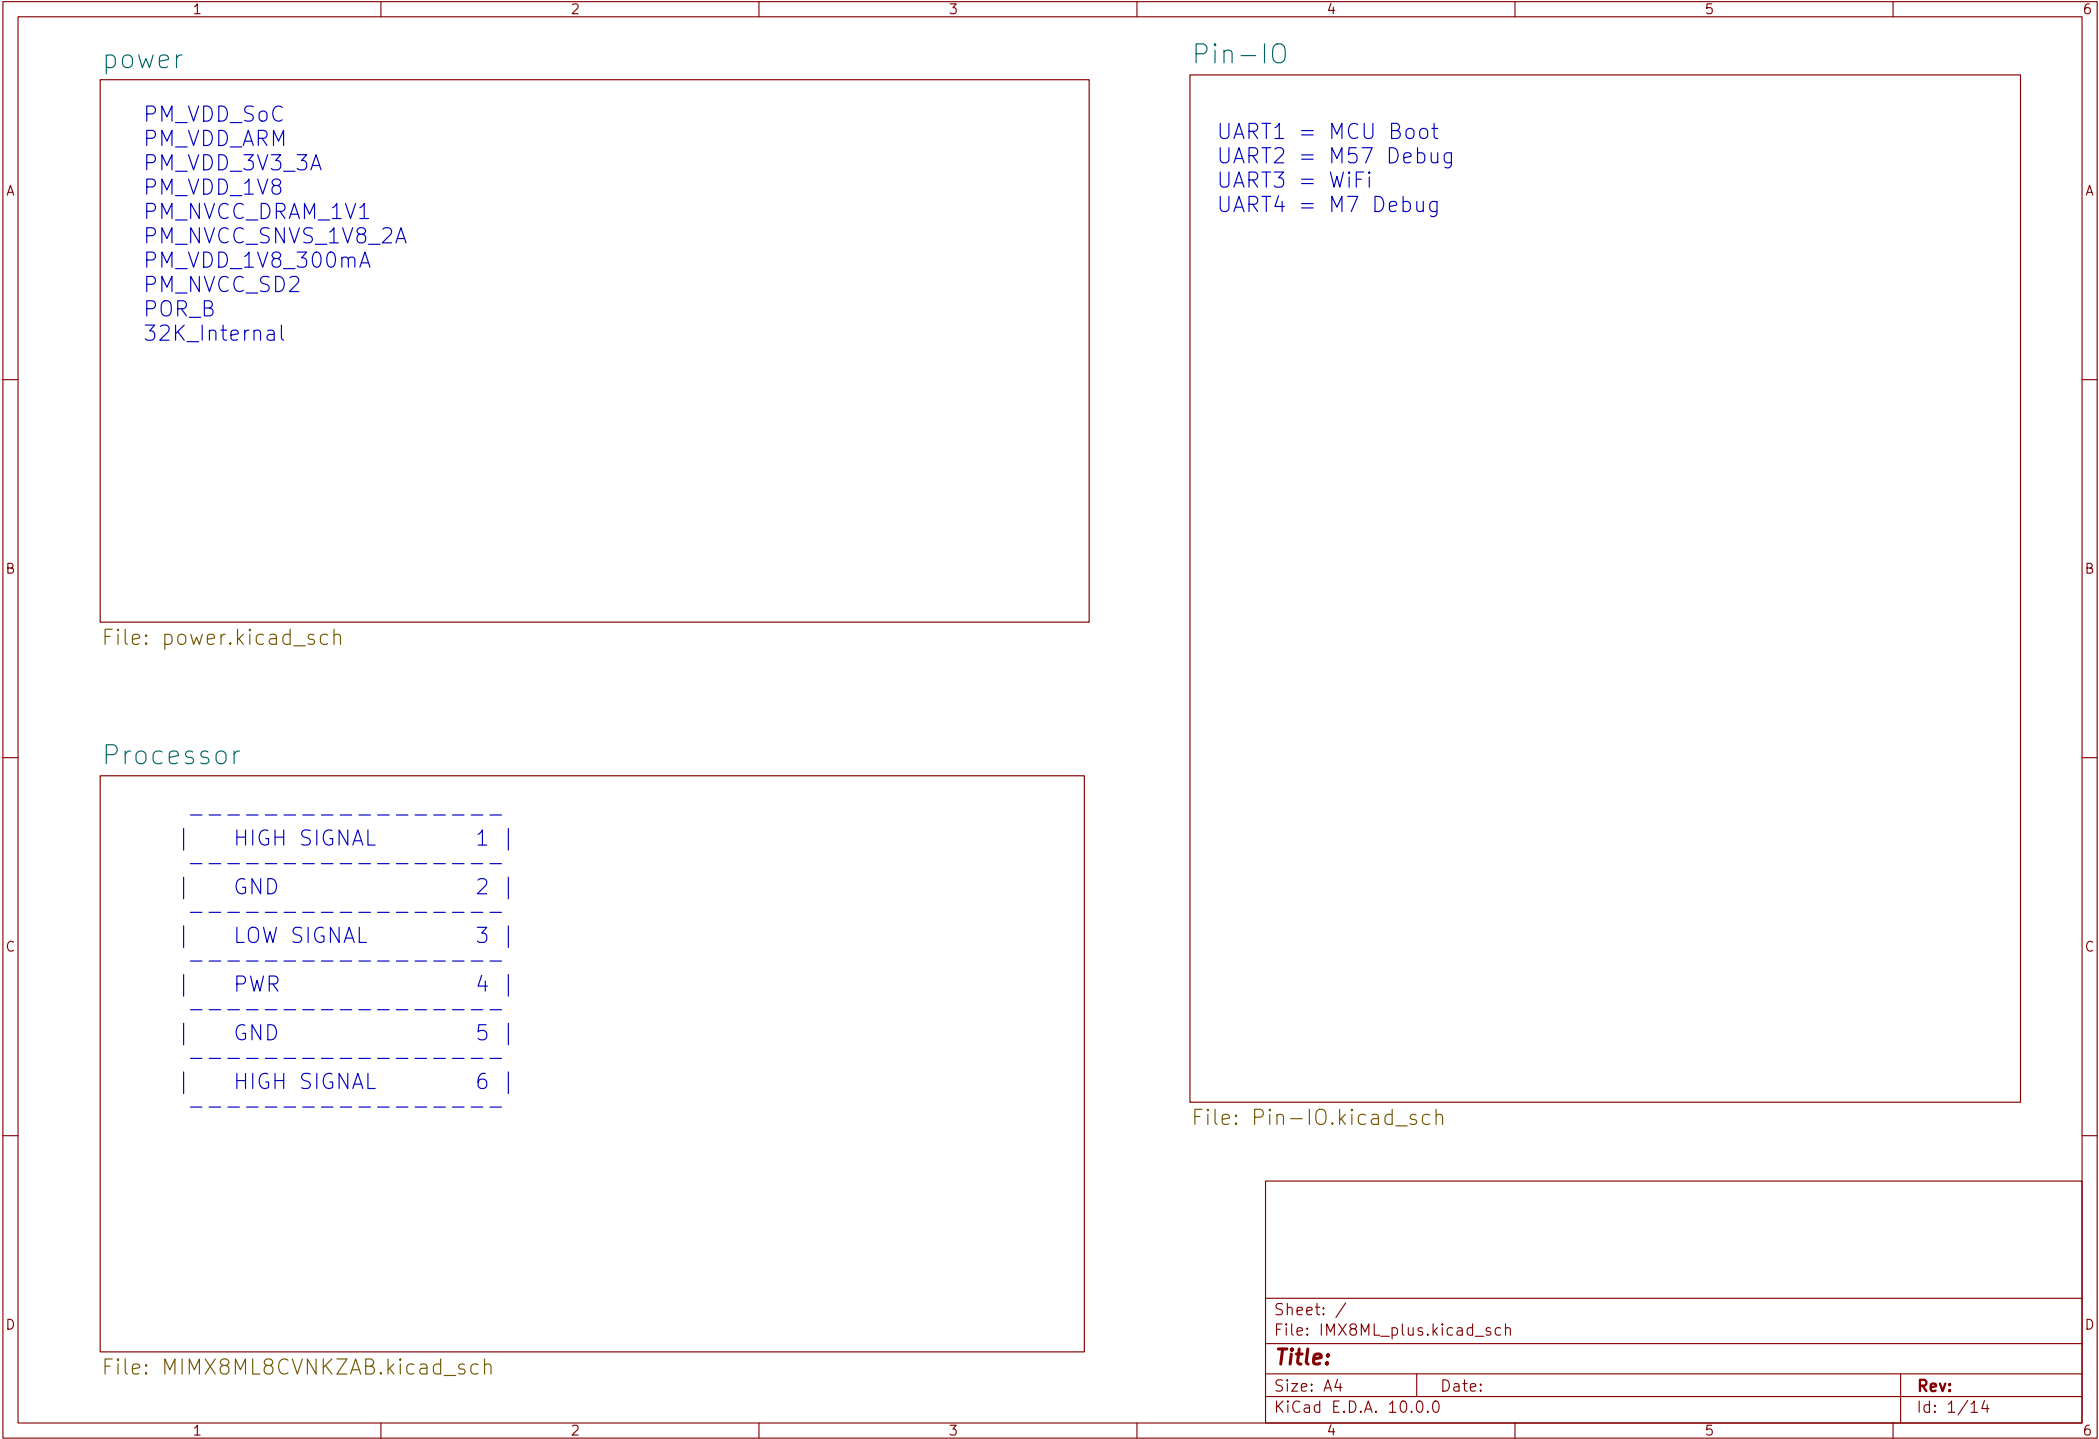



	1	2	3	4	5	6
A	up_power		Up_memorie_lpddr4		wireless	
B	File: up_power.kicad_sch		File: up_memorie_lpddr4.kicad_sch		File: wireless_module.kicad_sch	
C	storage		io-interface		up_config	
D	File: storage.kicad_sch		File: io-interface.kicad_sch		File: up_config.kicad_sch	
	1	2	3	4	5	6


Sheet: /Processor/		
File: MIMX8ML8CVNKZAB.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 10.0.0	Id: 2/14	

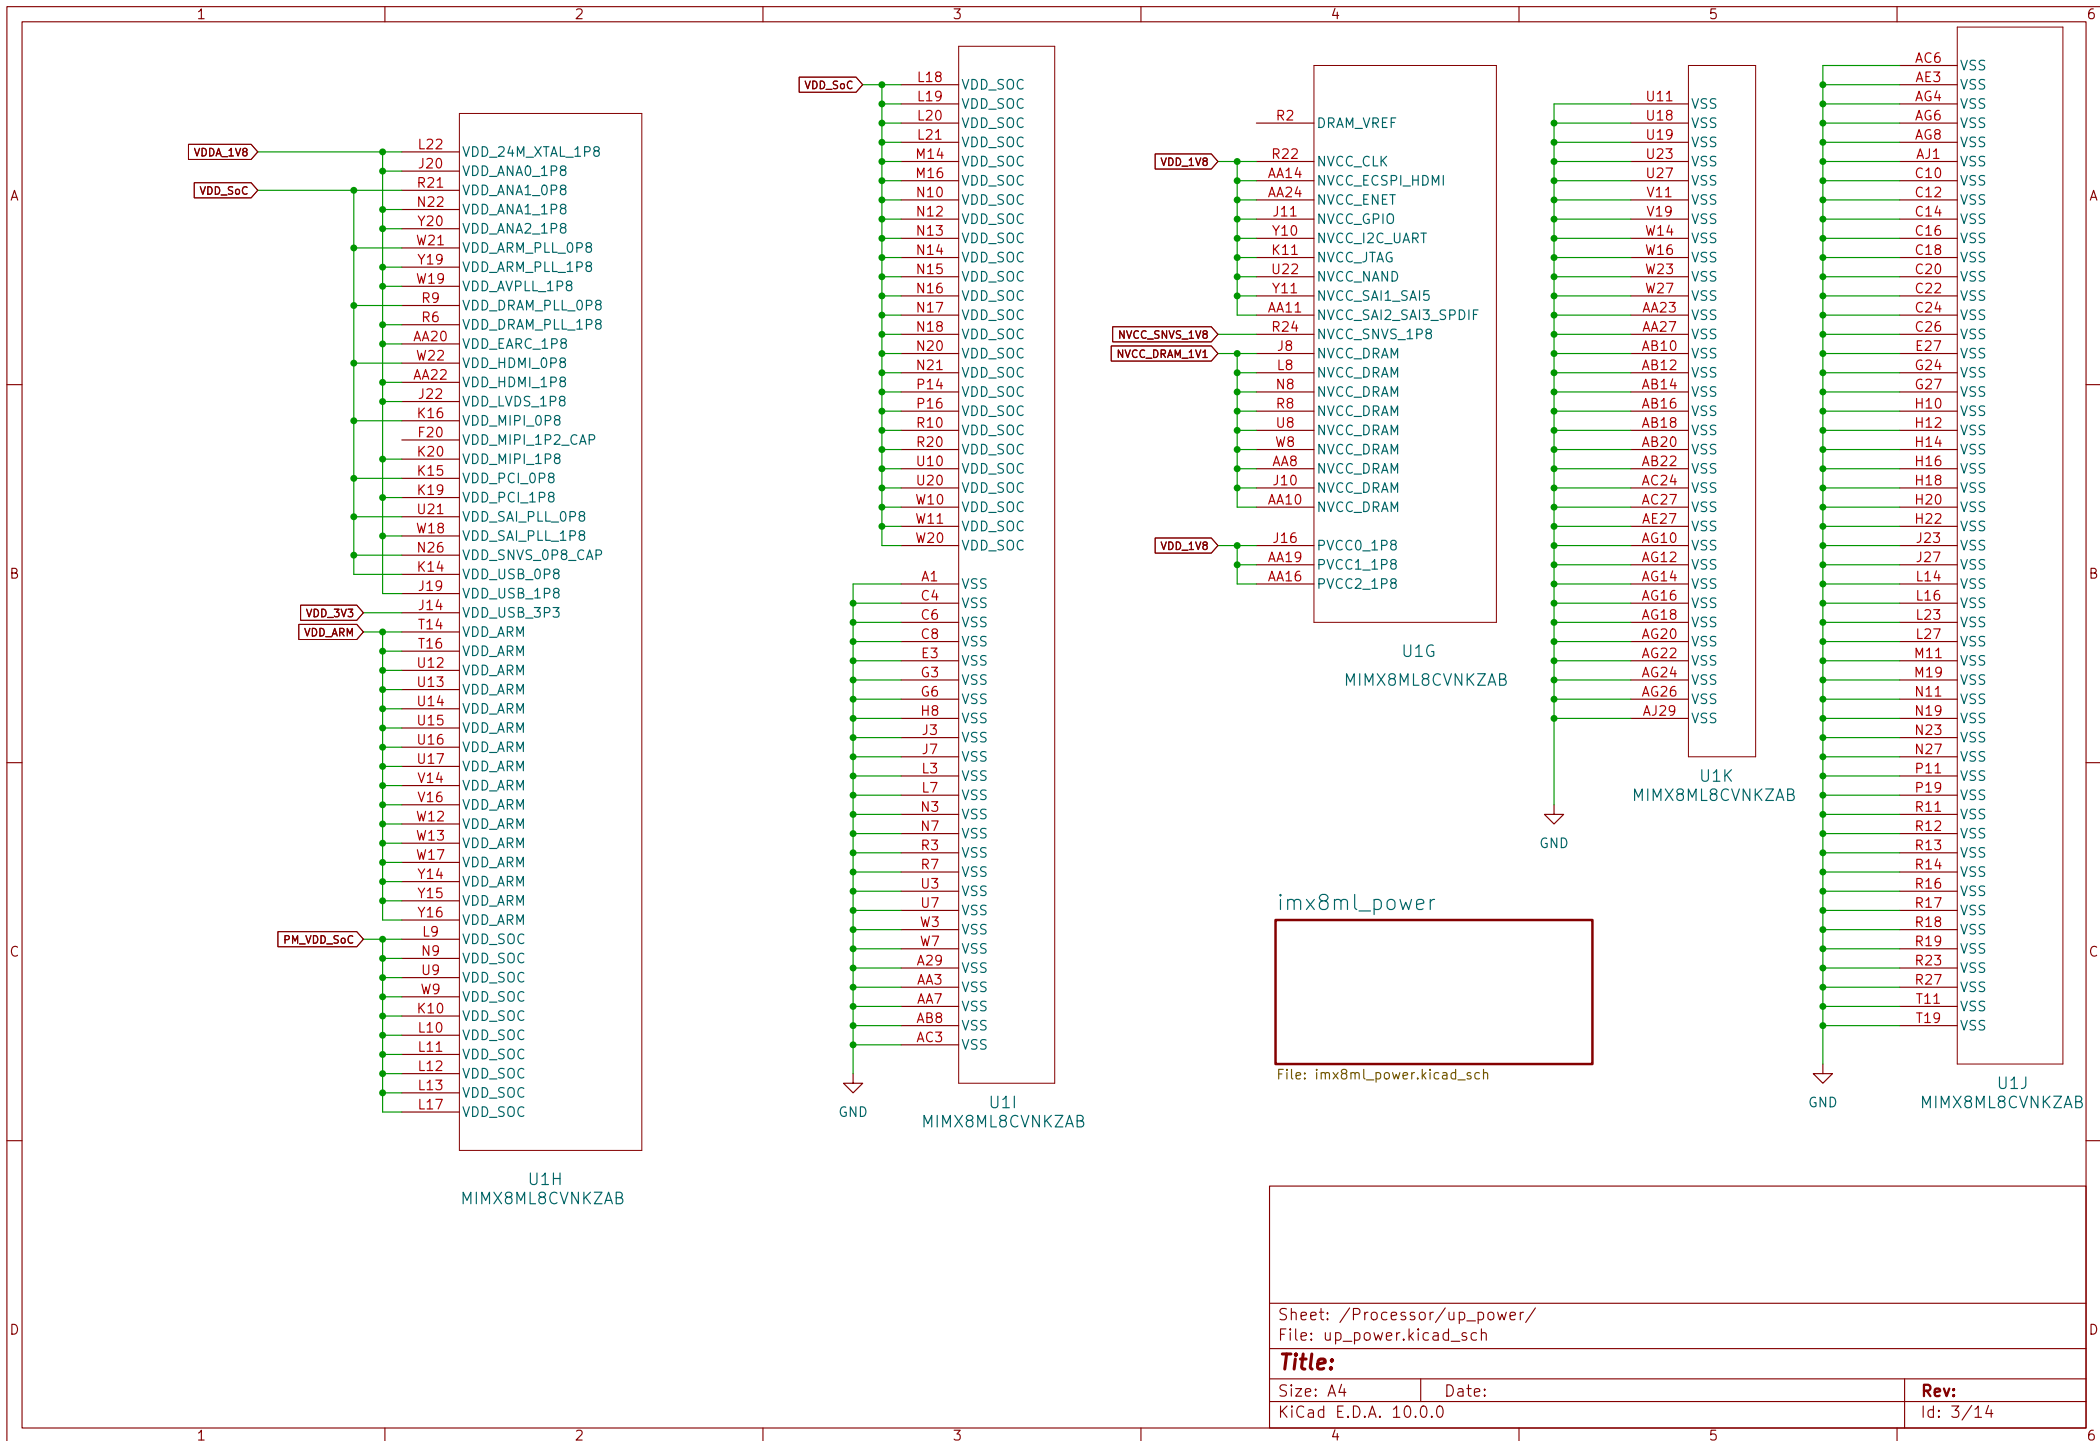


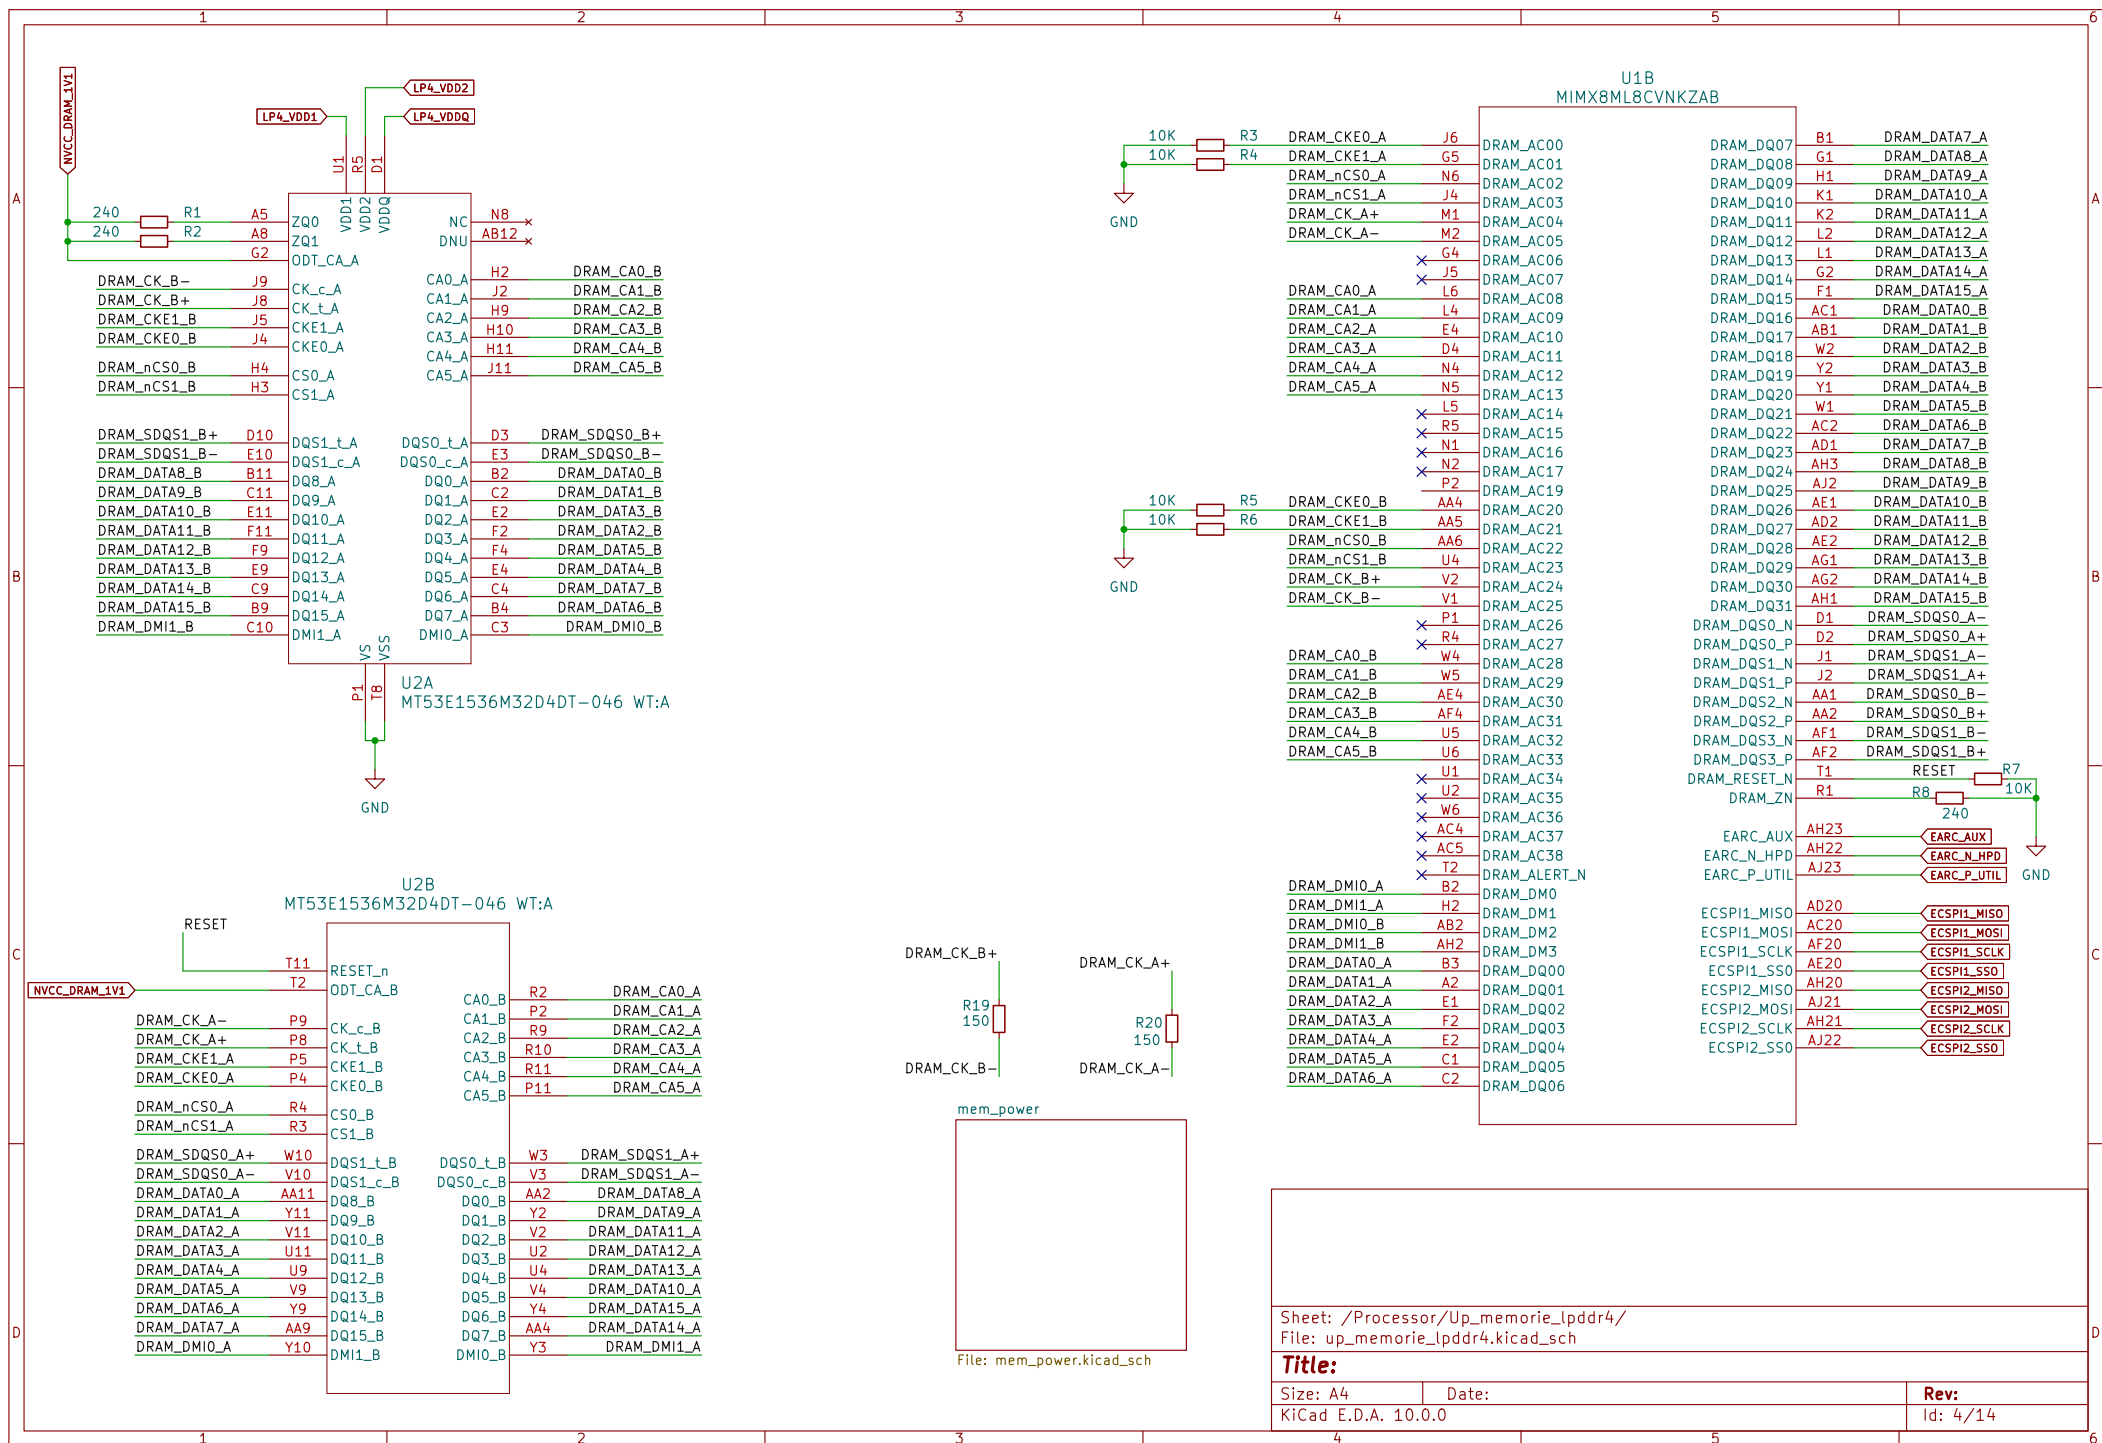


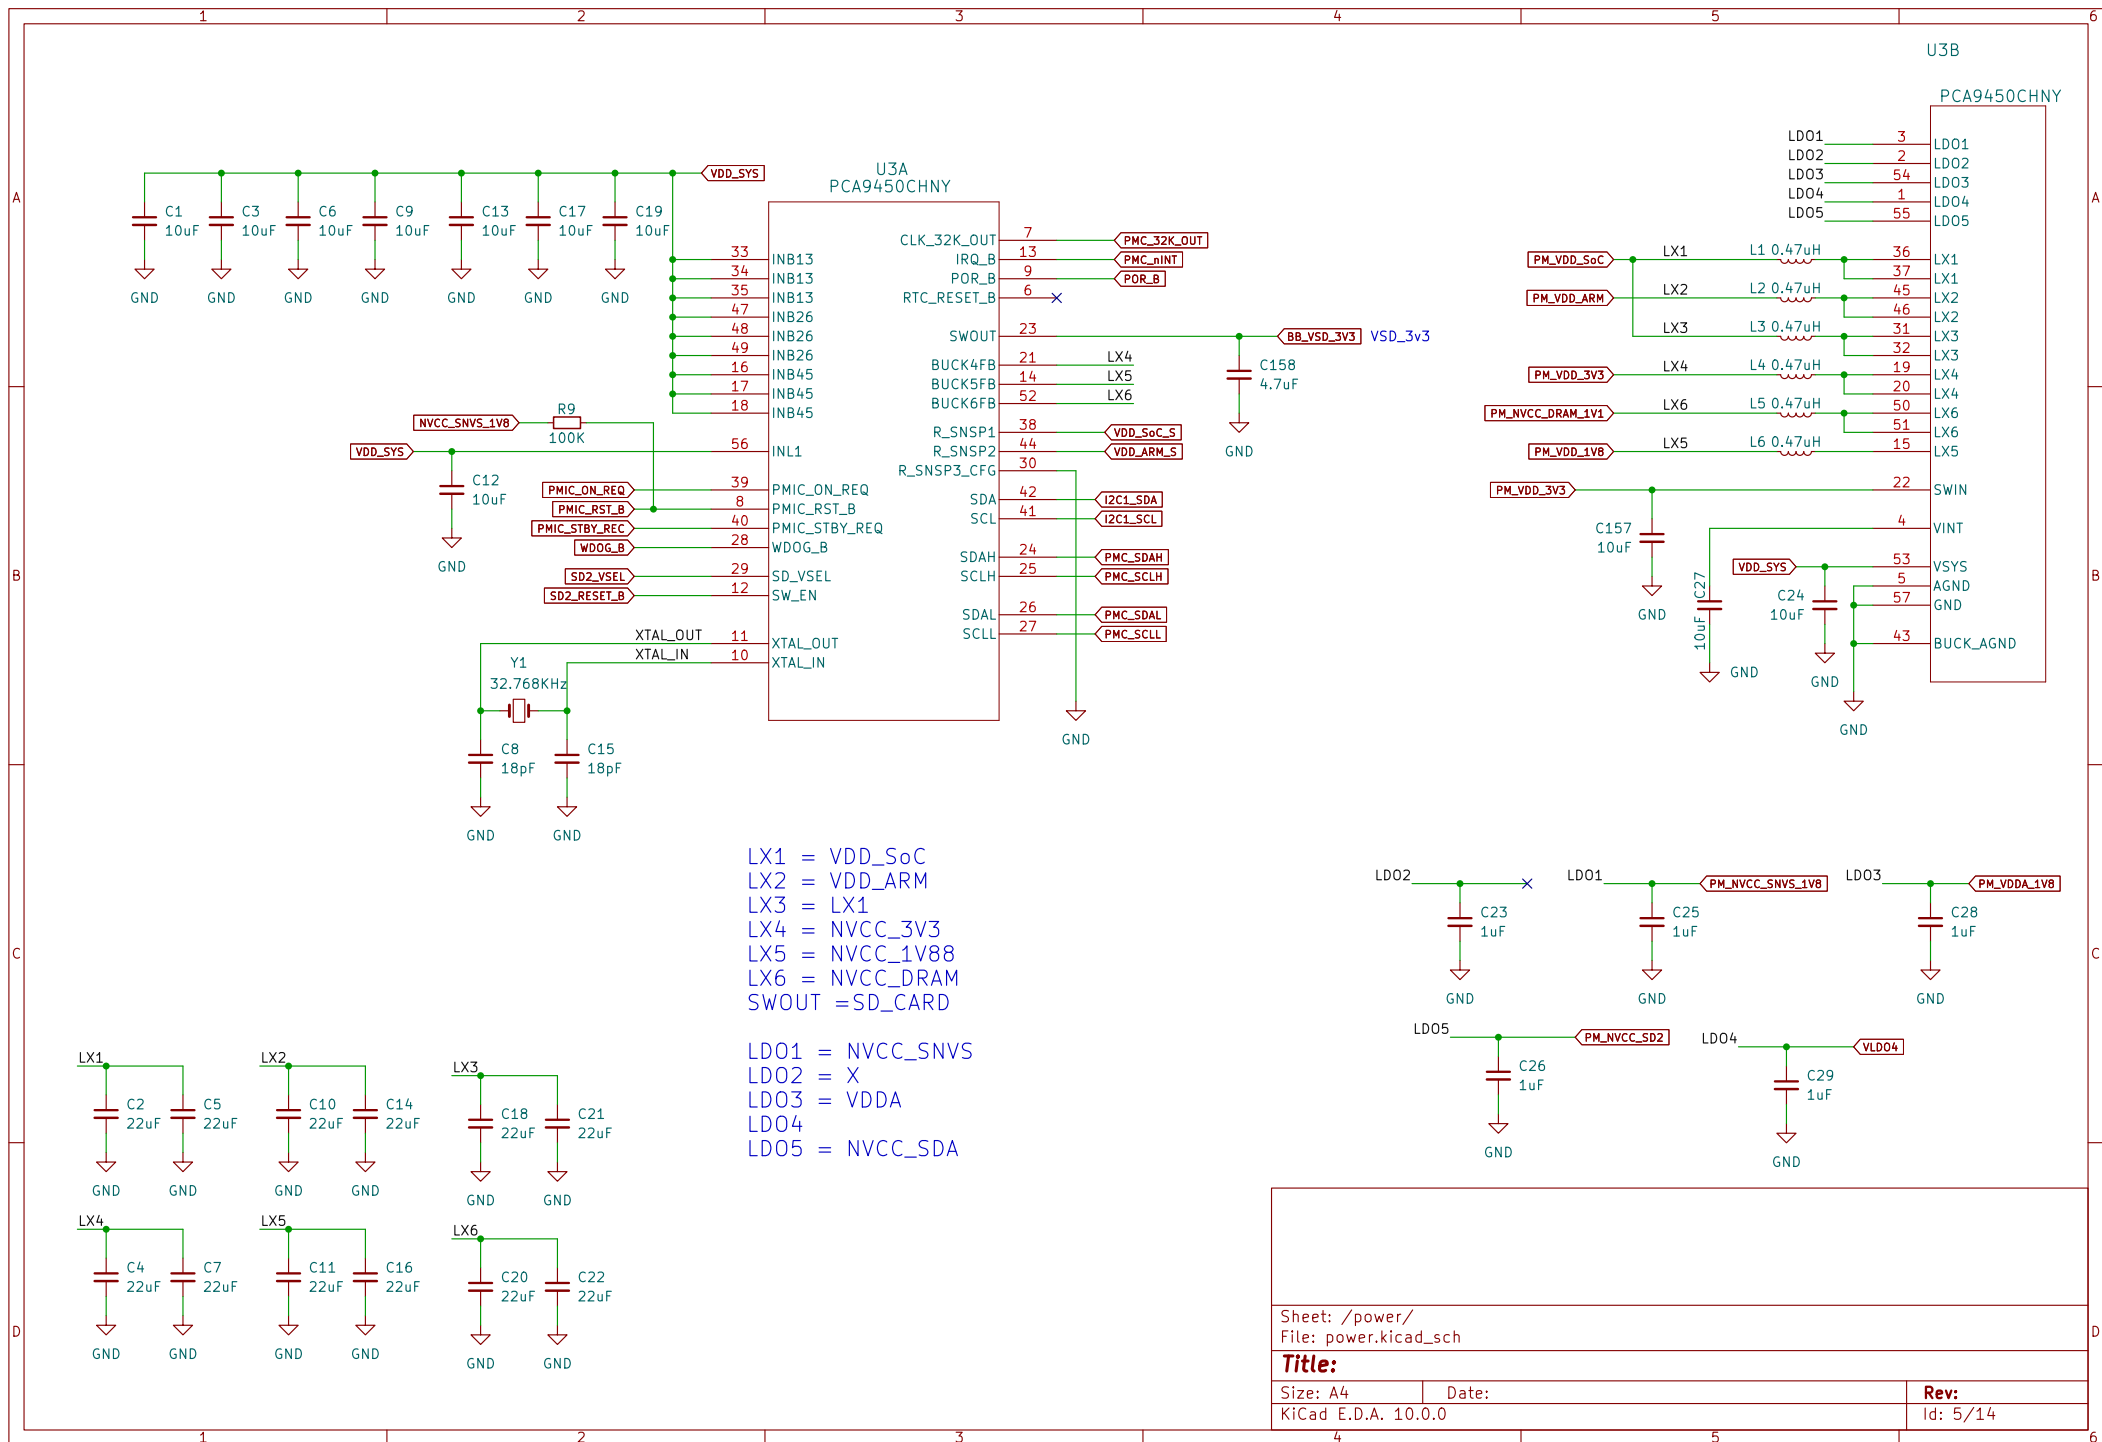

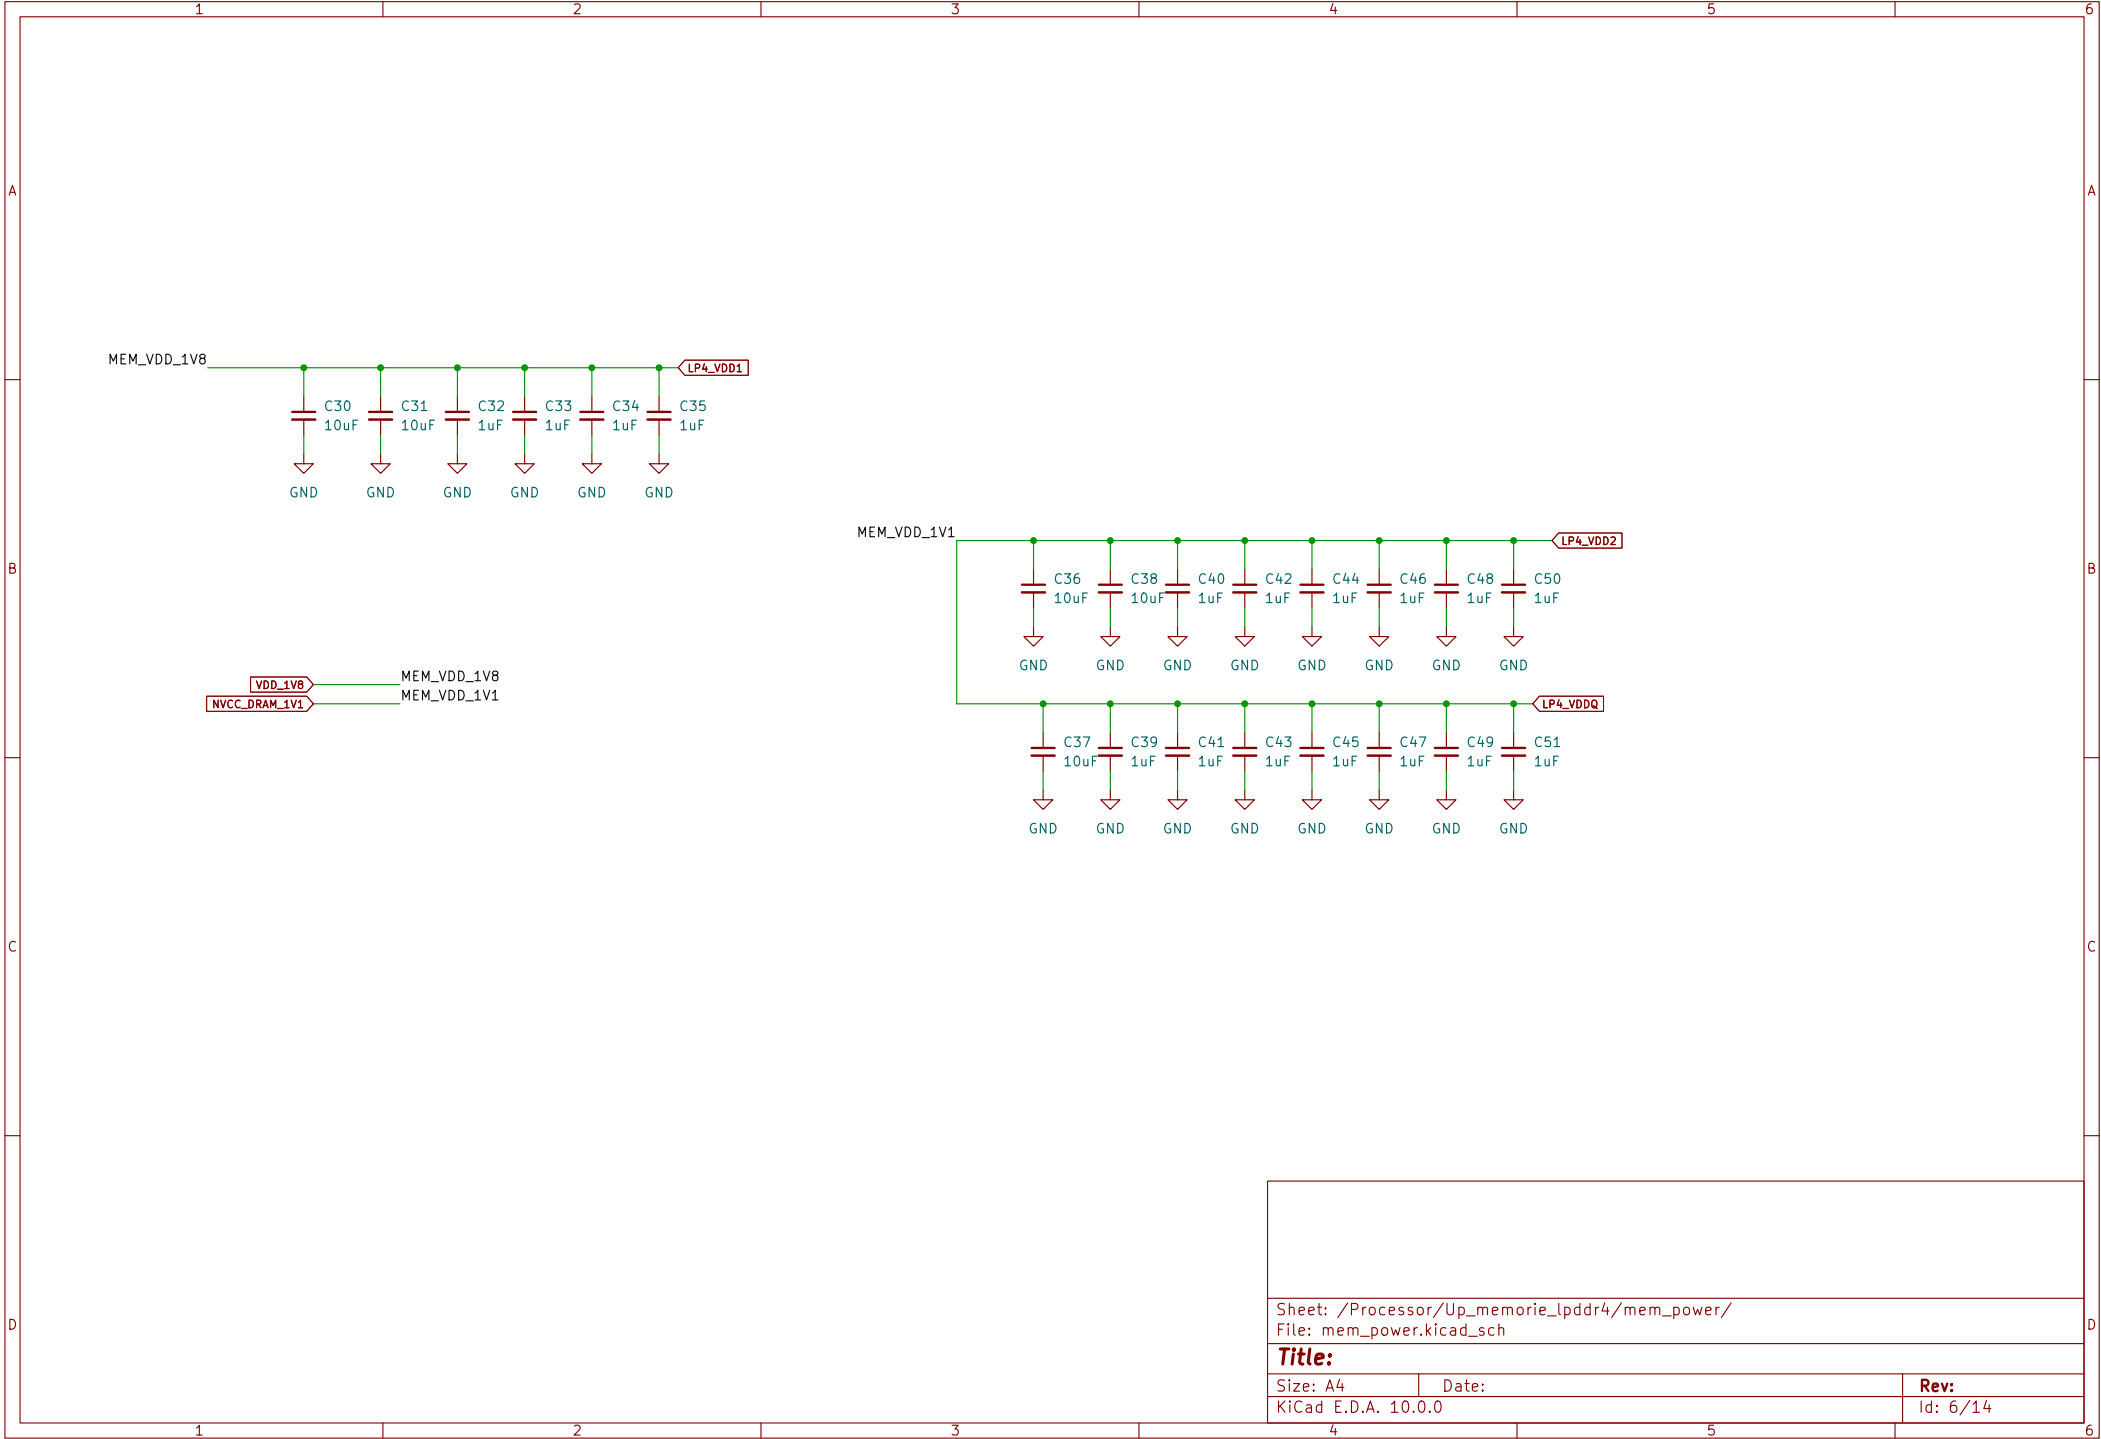

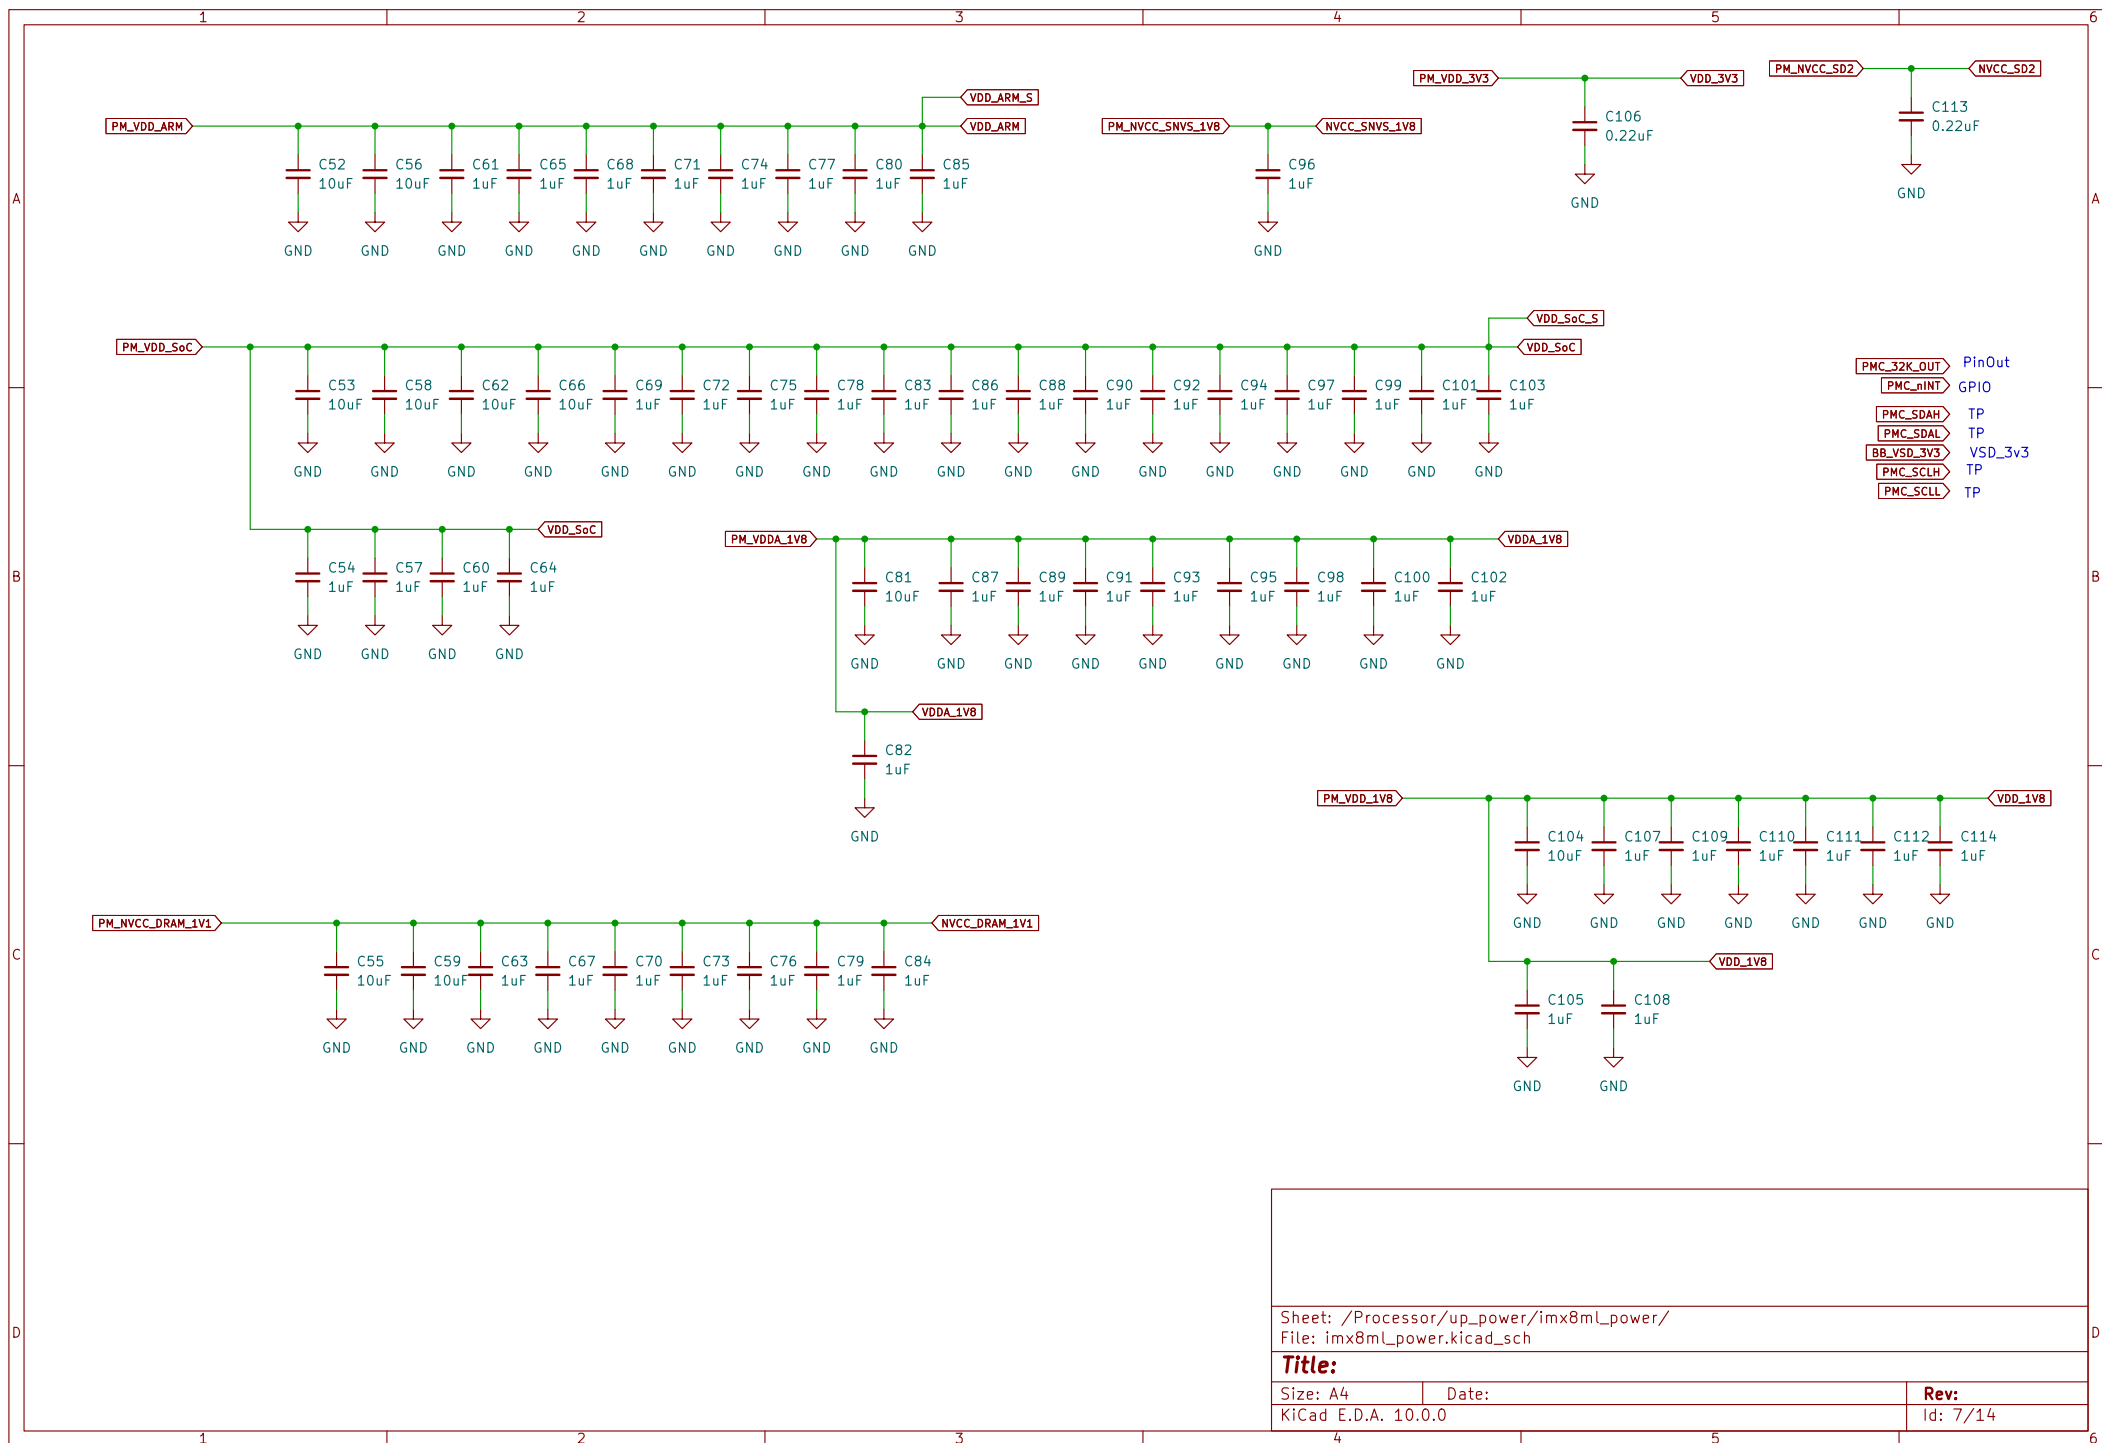

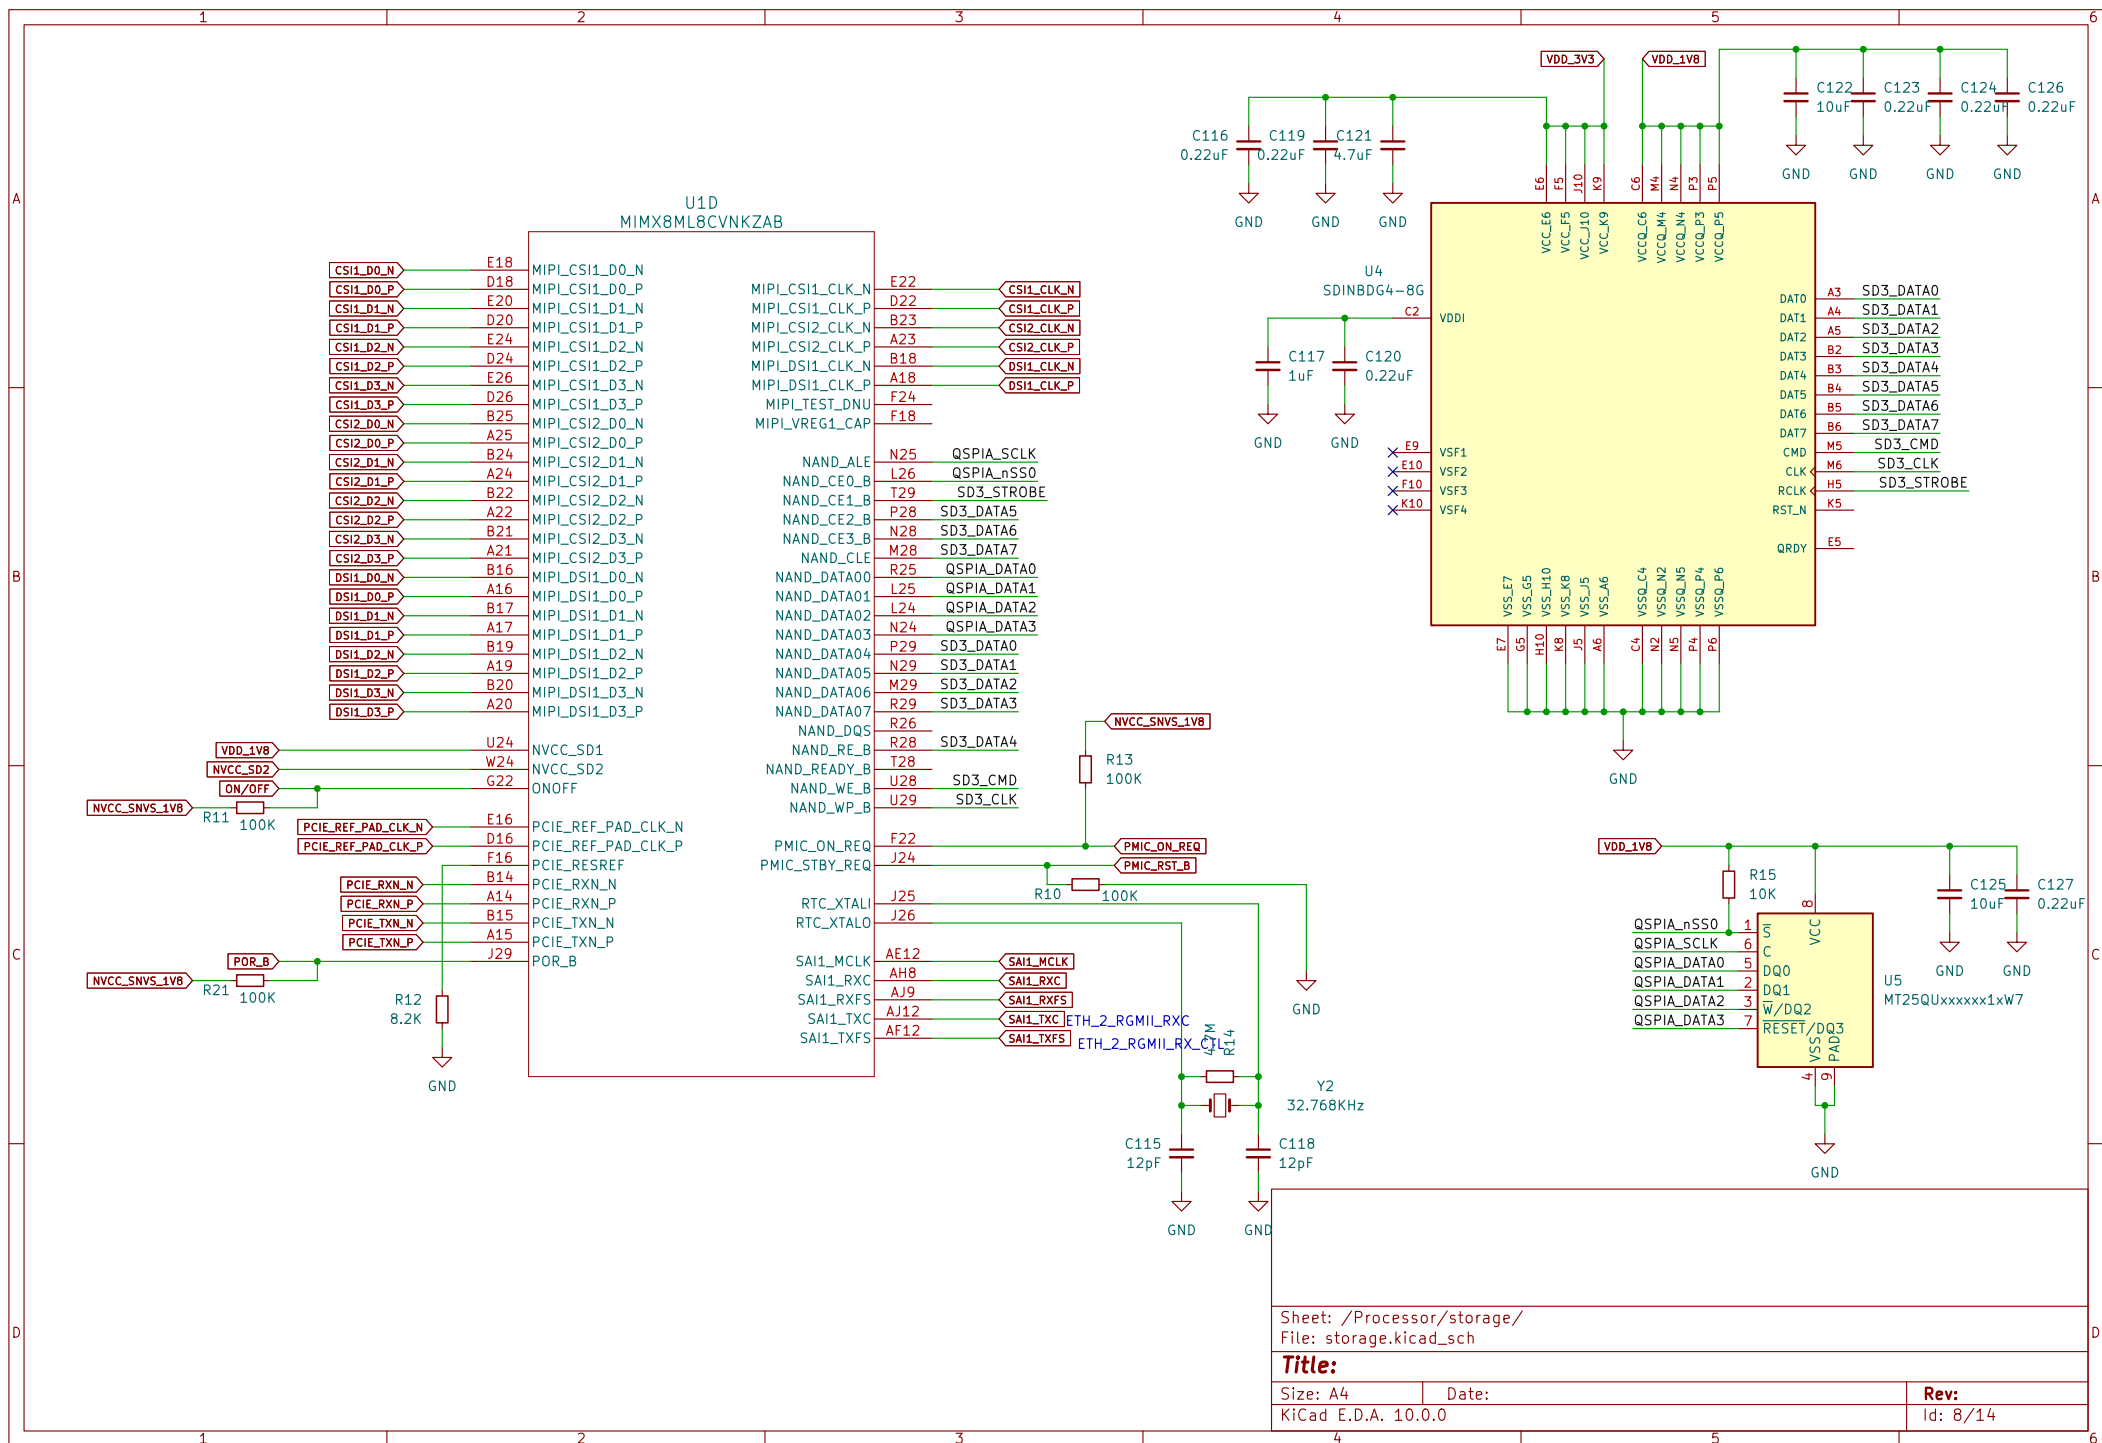

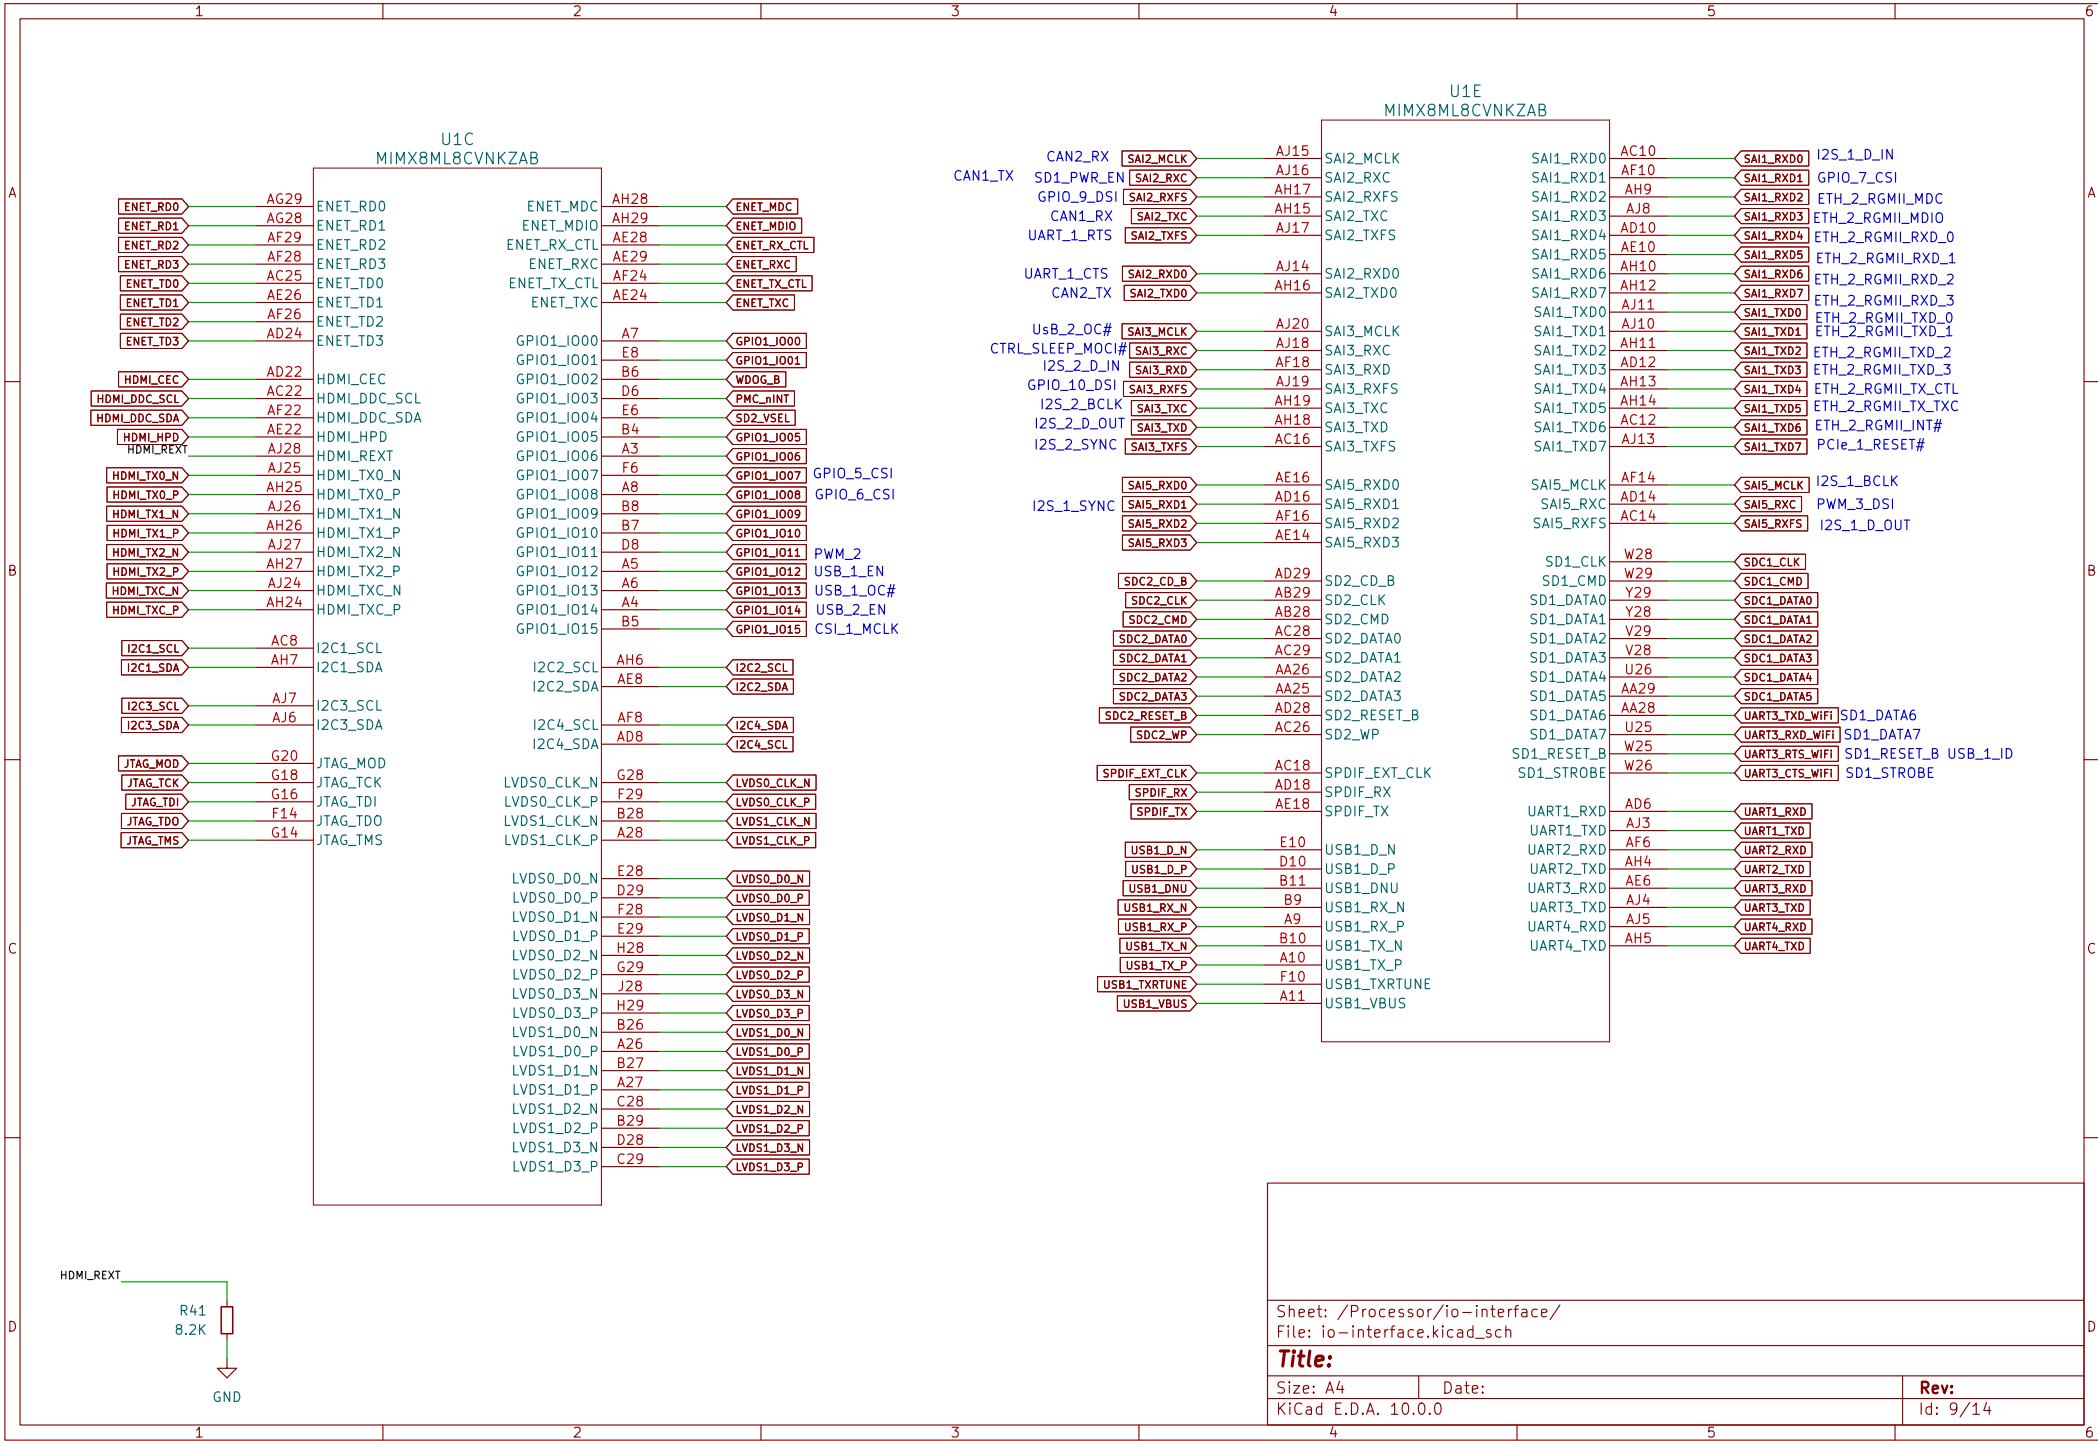

Sheet: /Processor/io-interface/
File: io-interface.kicad_sch

Title:


Size: A4

Date:


Rev:

KiCad E.D.A. 10.0.0

Id: 9/14

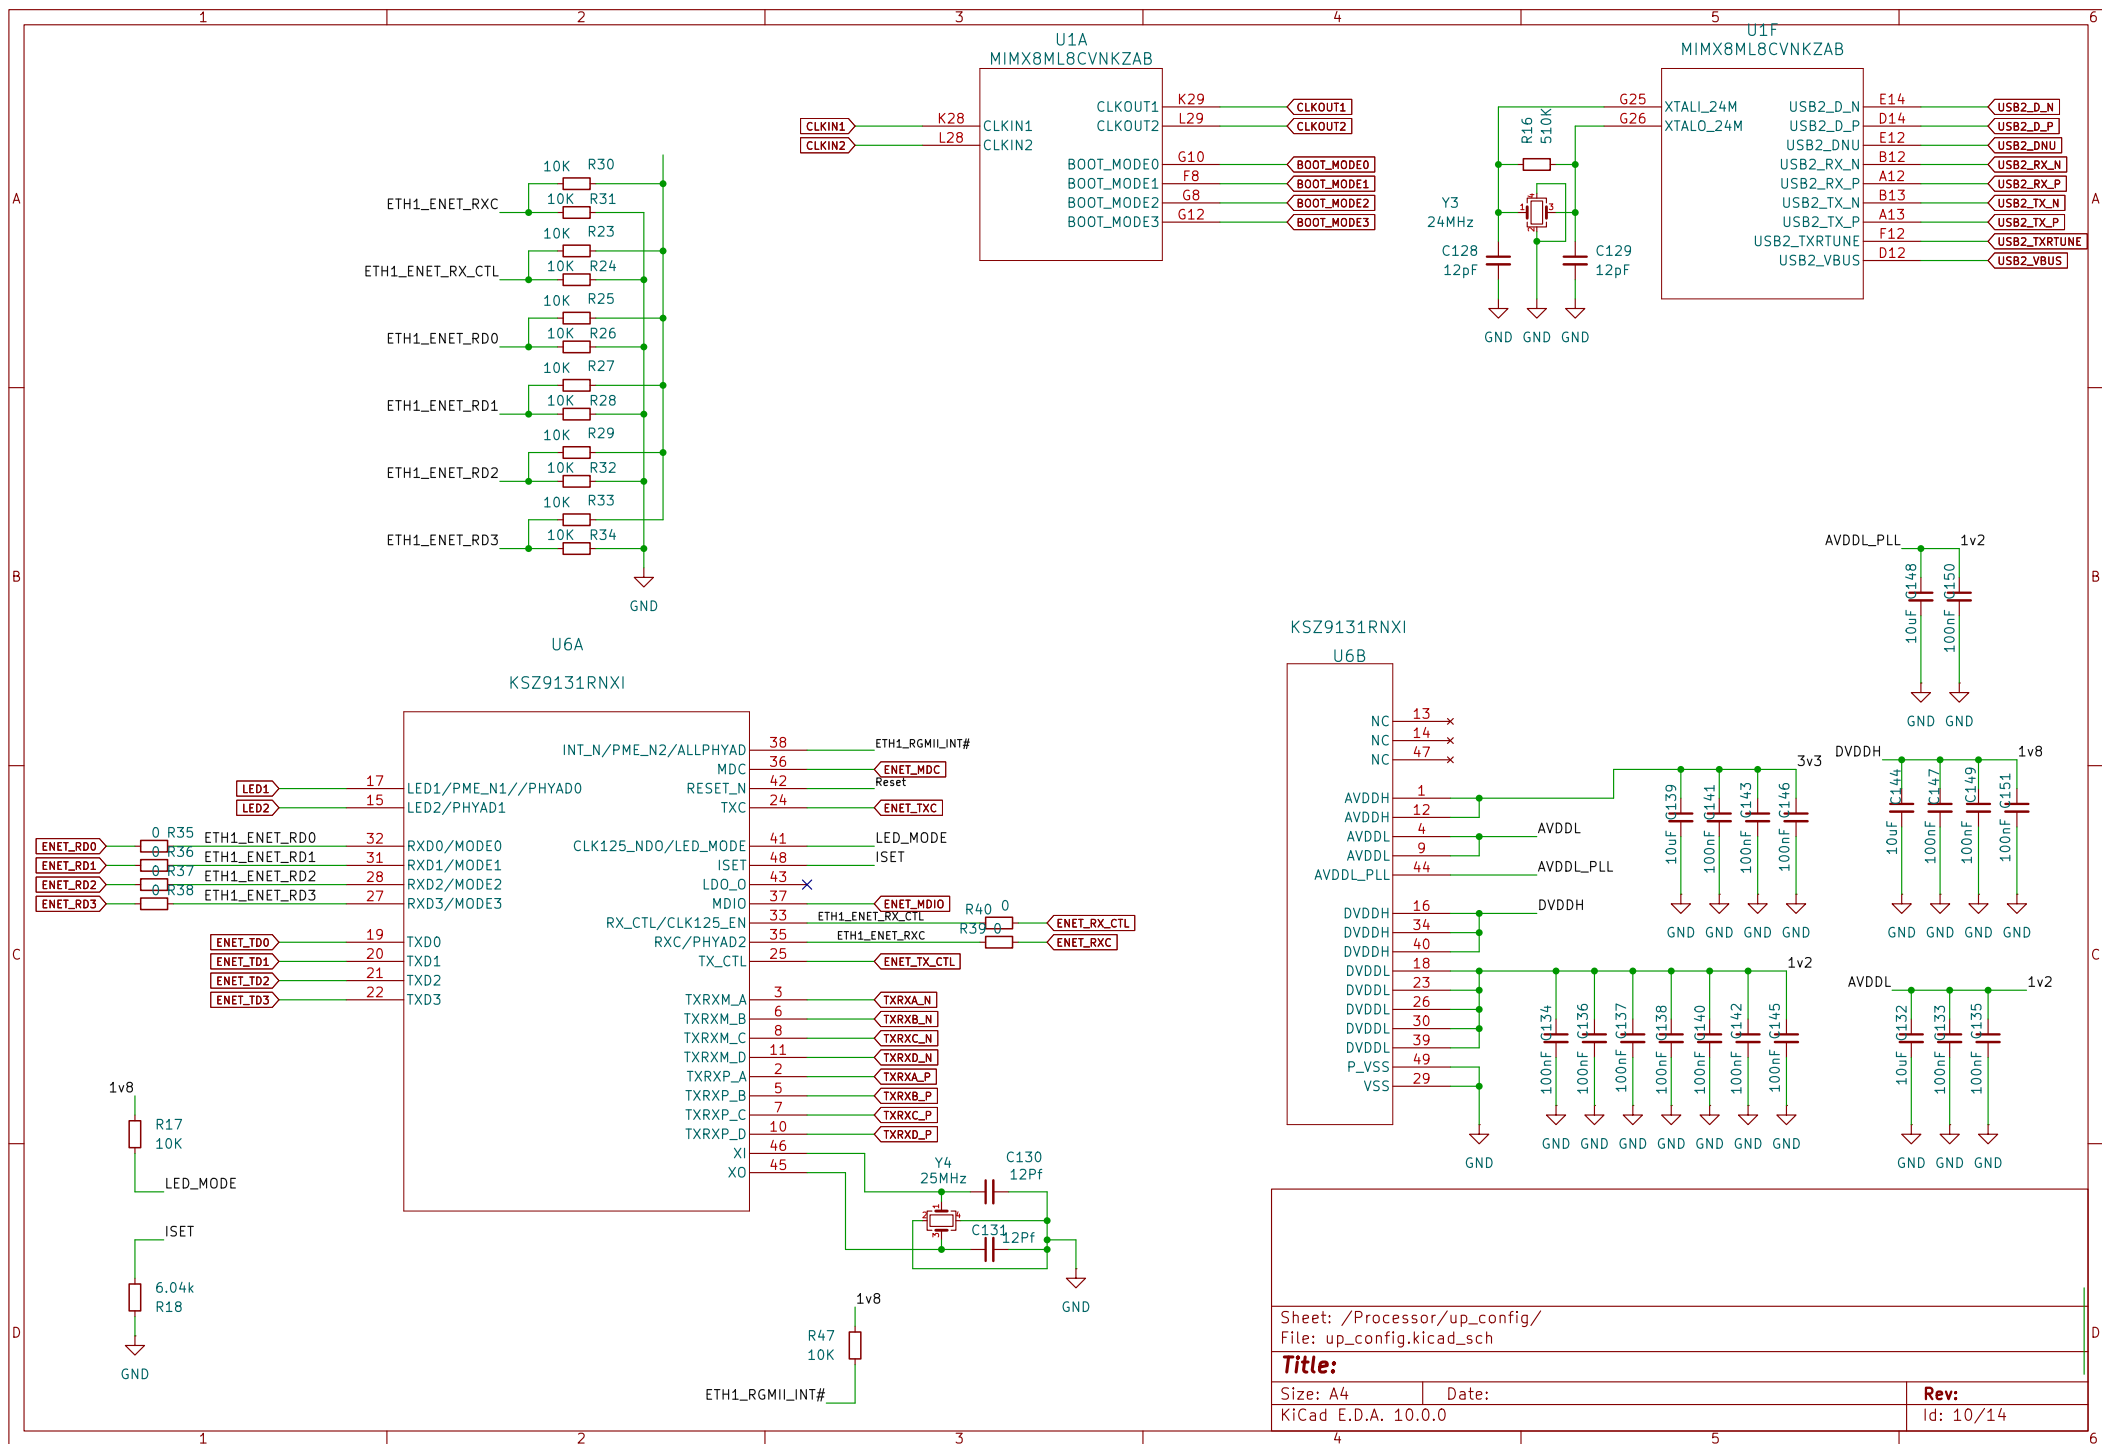

1	2	3	4	5	6
pin_io_left					
pin_io_rigth					
File: pin_io_left.kicad_sch					
File: pin_io_rigth.kicad_sch					
Sheet: /Pin-IO/ File: Pin-IO.kicad_sch					
Title:					
Size: A4			Date:		Rev:
KiCad E.D.A. 10.0.0					Id: 11/14

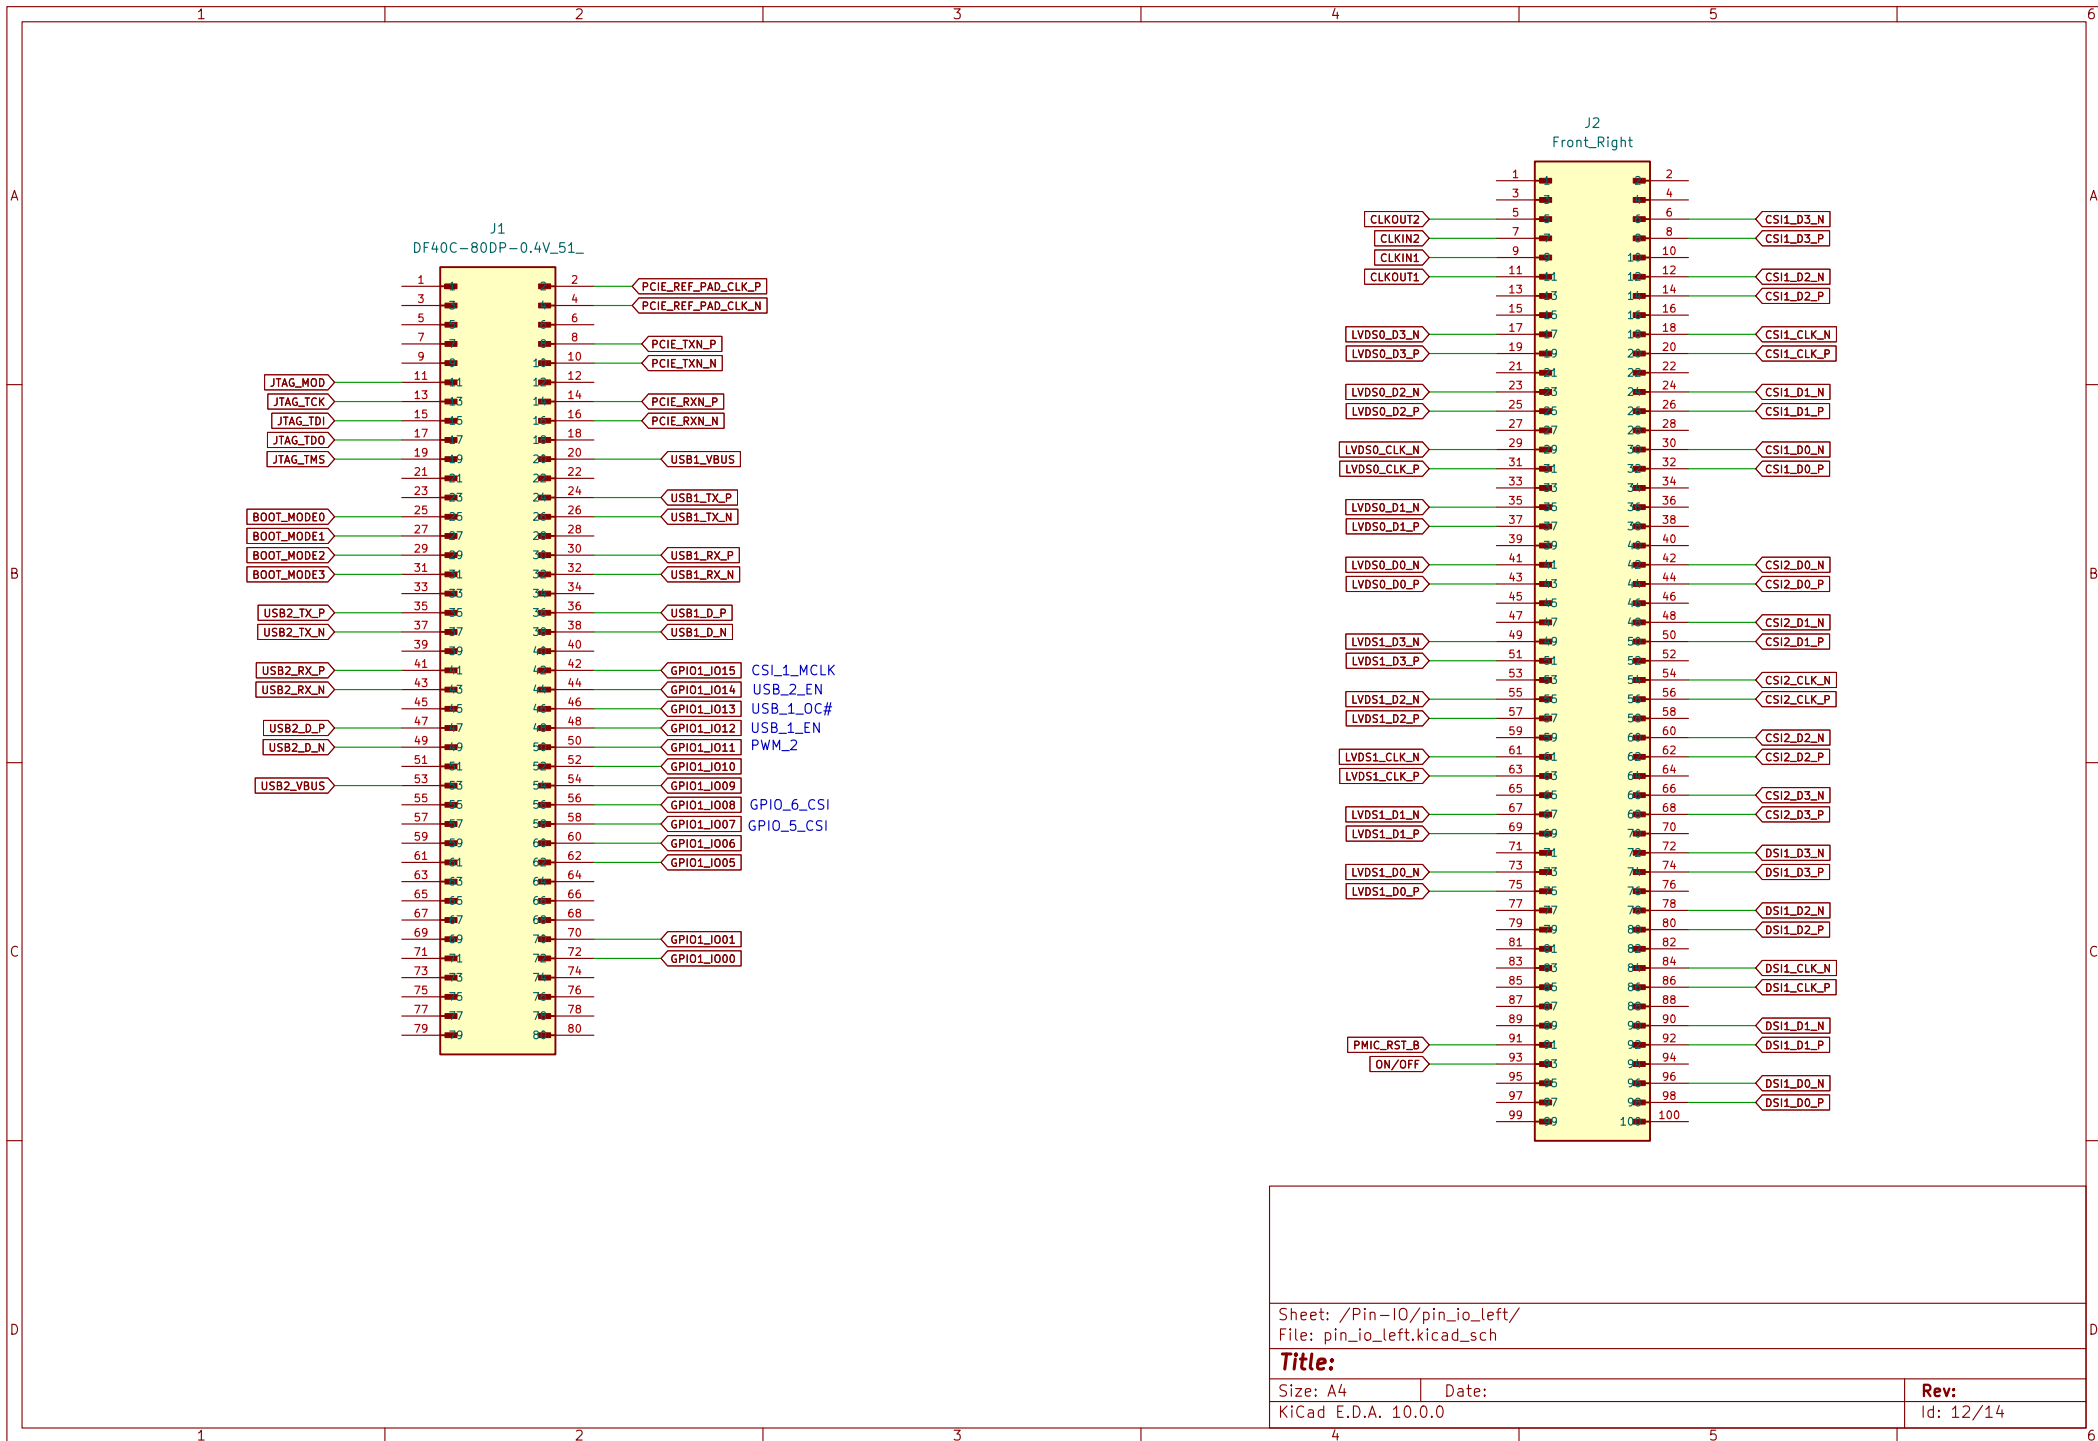

Sheet: /Pin-IO/pin_io_left/
File: pin_io_left.kicad_sch

Title:

Size: A4
KiCad E.D.A. 10.0.0

Date:


Rev:

Id: 12/14

CONFIG	WLAN	BLE
000	SDIO	UART
001	SDIO	SDIO
010	PCIe	USB2.0
011	PCIe	UART
100	USB3.0/2.0	UART
101	USB.0	USB2.0
110	USB3.0/2.0	USB3.0/2.0
111	USB3.0	USB3.0

CONFIGx Connect 100 kohm to GND to set the signal to "0"

PDn Power Down Input (active low). Pulling PDn pin low, sets SPB228 in Standby mode. This turns OFF most parts of the circuit and minimizes the current consumption. All I/O interface pins are set to predefined states (high, low or high-z) when in Standby mode.

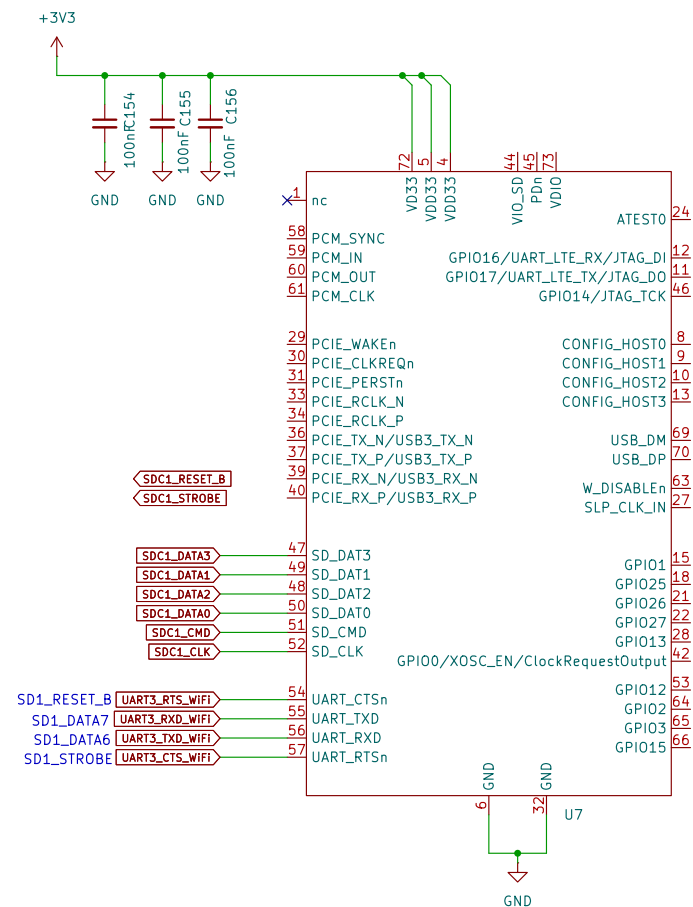

Sheet: /Processor/wireless/
File: wireless_module.kicad_sch

Title:

Size: A4

Date:

Rev:

KiCad E.D.A. 10.0.0

Id: 14/14