




# Supplementary Materials

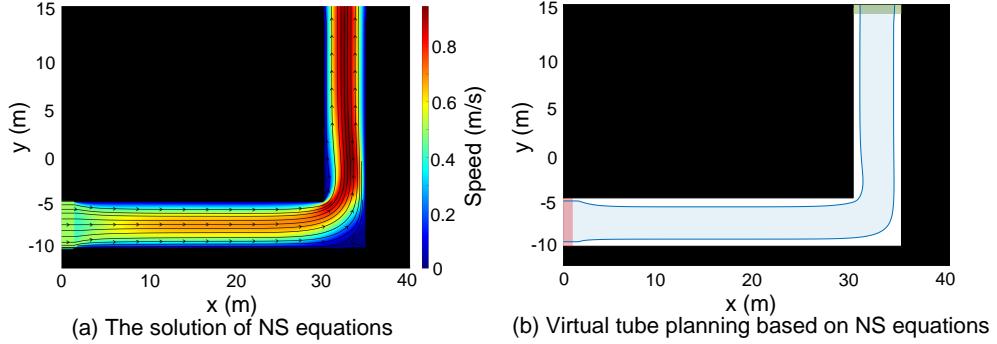


**Supplementary Fig.1. The solution to NS equations and the planned virtual tube based on Navier-Stokes (NS) equations of Scene 1.** Scene 1 is the first manually designed scene in the paper. The red rectangle represents the start area  $\mathcal{C}_s$ . The green rectangle represents the goal area  $\mathcal{C}_g$ . The black areas represent obstacles. The blue curves represent the boundaries of the virtual tube.

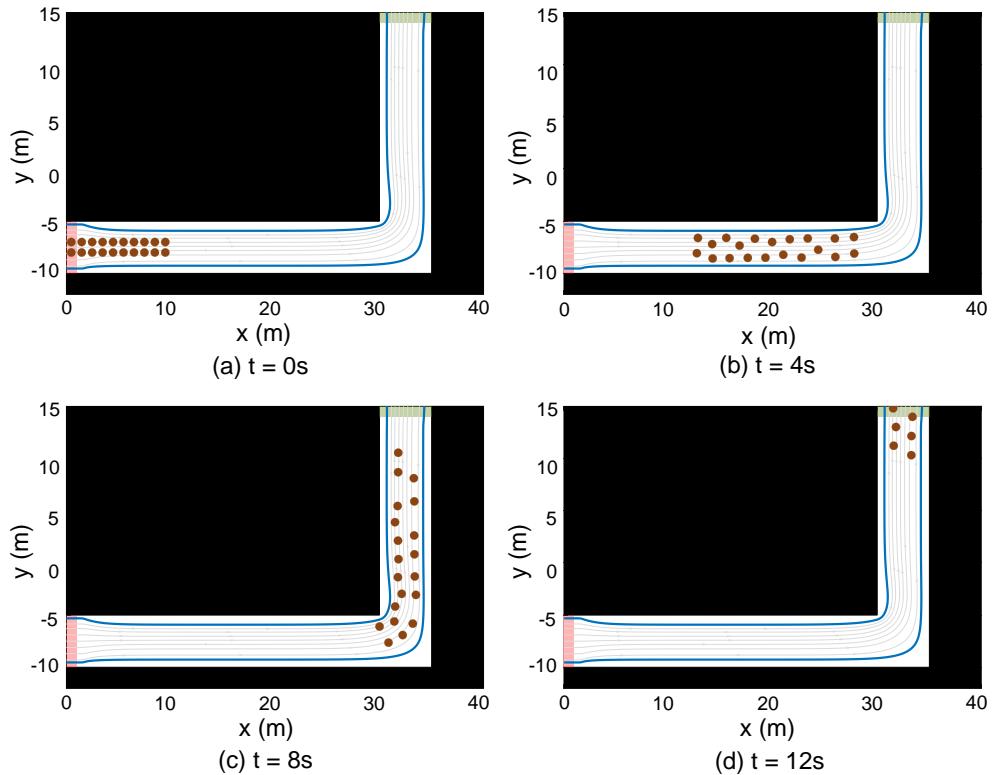


**Supplementary Fig.2. The passing-through process of 20 robots based on the method proposed under Scene 1.** The light grey curves represent the streamlines. The brown dots represent the robots.

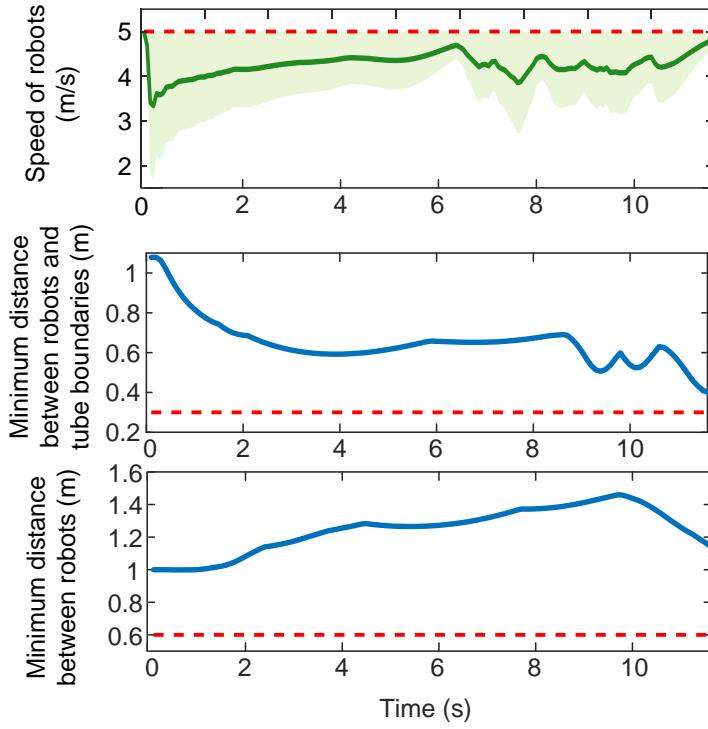


**Supplementary Fig.3. Metrics of the proposed method under Scene 1.** The light green area represents the maximum and minimum speeds. The dark green curve represents the average speed. The blue curve represents the minimum distance with respect to time. The red dotted line represents the maximum speed or the safety distance.

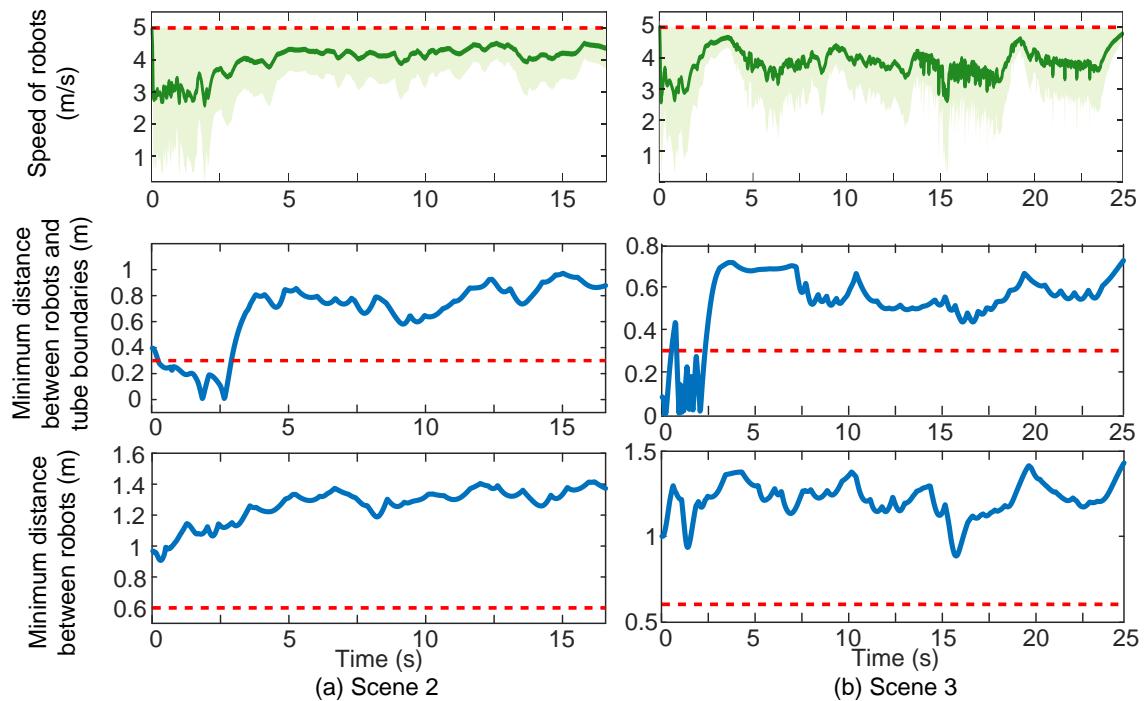

**Supplementary Fig.4. Metrics of the proposed method under Scene 2 and Scene 3.** The light green area identifies the maximum and minimum speeds. The dark green curve represents the average speed. The blue curve is the minimum distance with respect to time. The red dotted line represents the maximum speed or the safety distance.

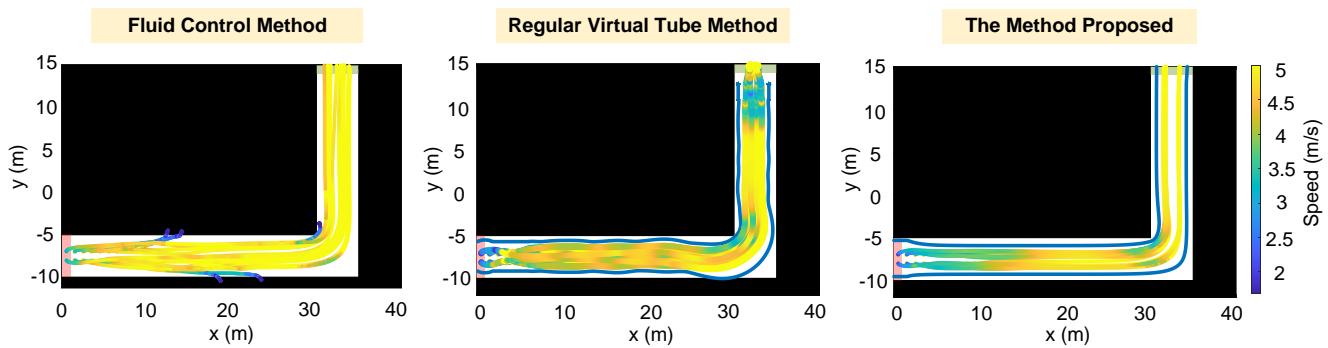


**Supplementary Fig.5. Comparison of passing-through processes based on three methods under Scene 1.** The colors of trajectories correspond to varied speeds, where the yellow represents the high speed and the blue represents the low speed.

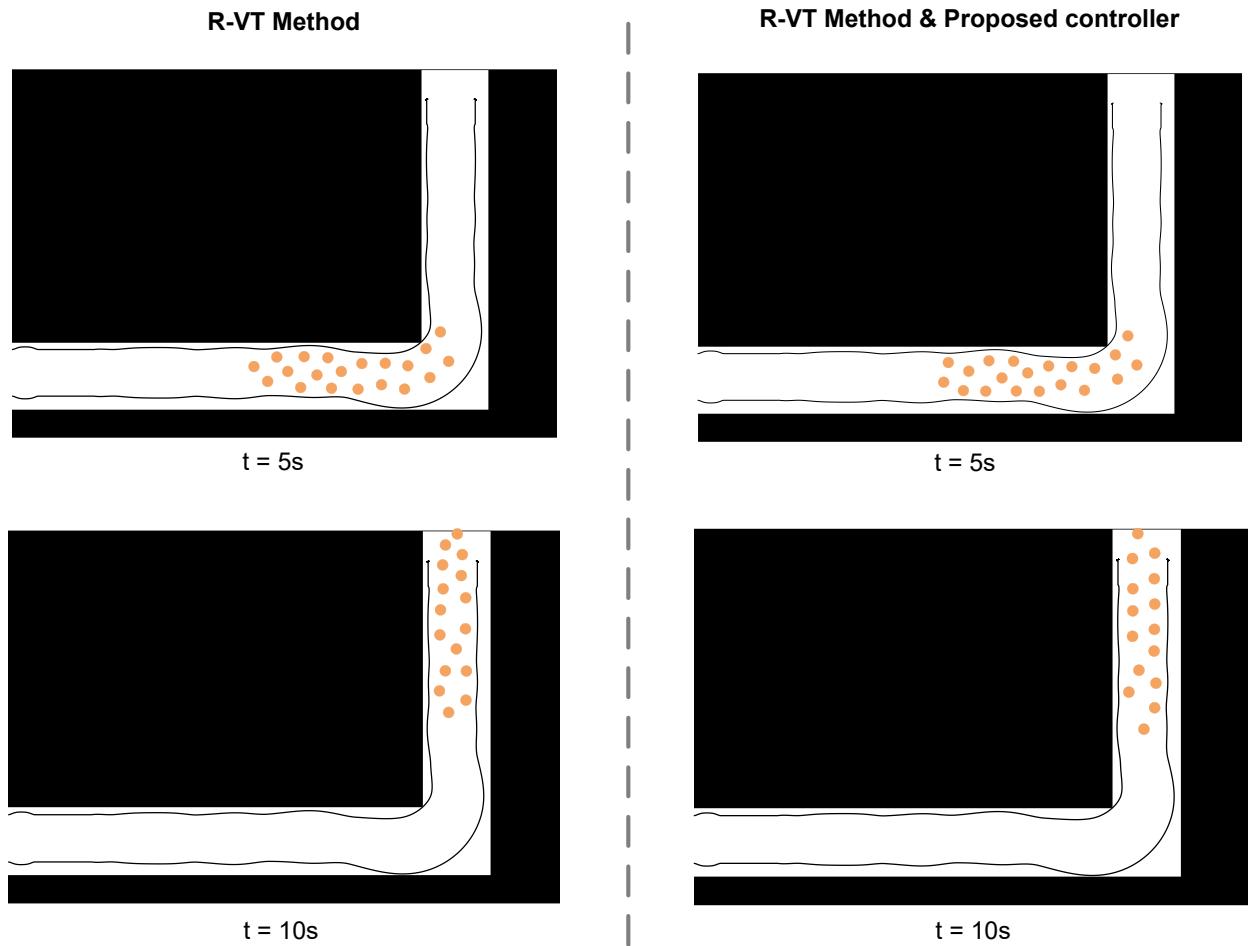


**Supplementary Fig.6. The passing-through process of 20 robots based on the R-VT method and the R-VT method with the proposed controller under Scene 1.**

R1.2

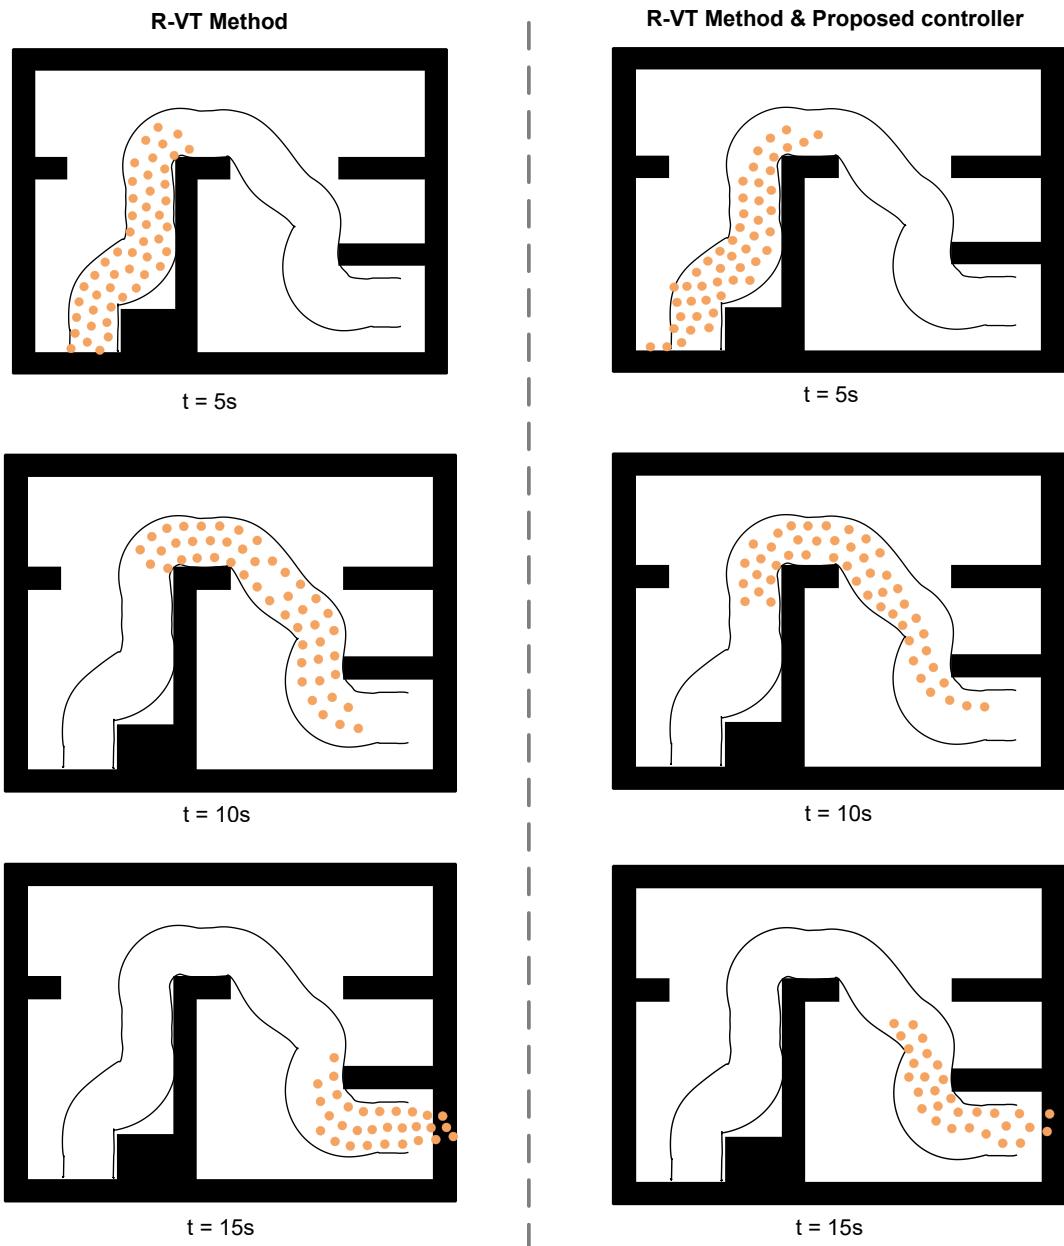

Supplementary Fig.7. The passing-through process of 49 robots based on the R-VT method and the R-VT method with the proposed controller under Scene 2.

R1.2

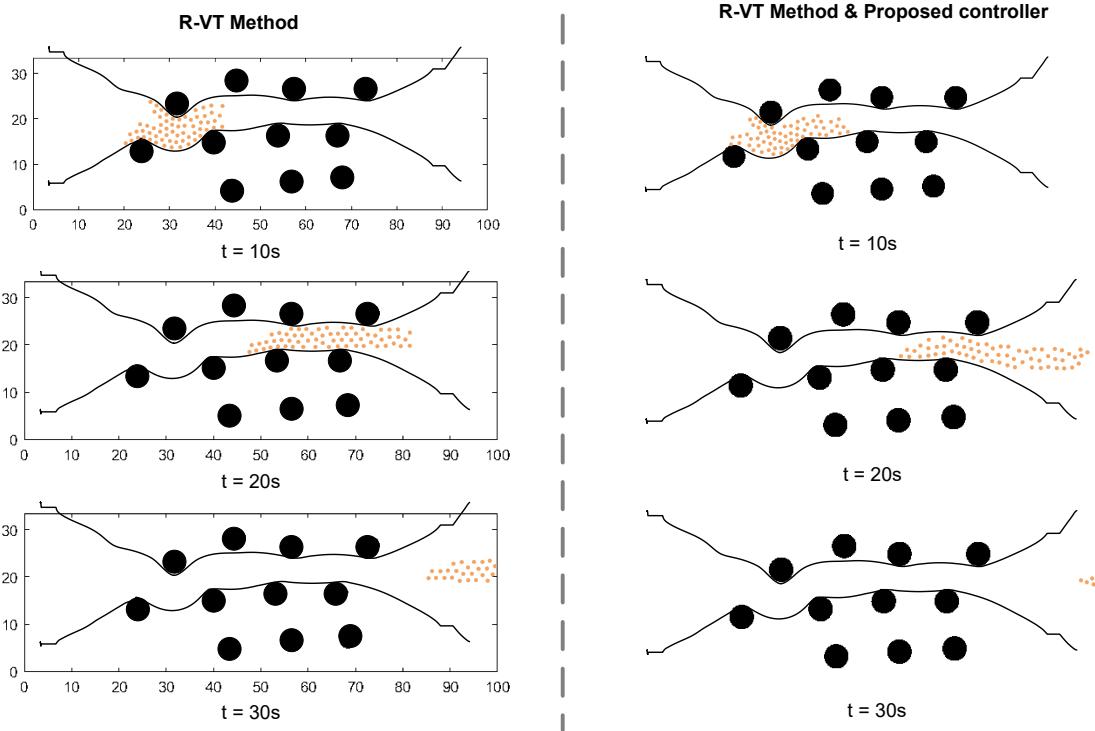

**Supplementary Fig.8.** The passing-through process of 63 robots based on the R-VT method and the R-VT method with the proposed controller under Scene 3.

R1.2

**Supplementary Table I: Performance metrics for different methods in three scenes.**

Scene	Metrics	Method			
		R-VT	FC	Proposed	R-VT-NS
Scene 1	AT(s)	13.35	$\infty$	<b>12.95</b>	13.00
	AR(%)	100	75	100	100
	AS(m/s)	<b>4.3179</b>	3.5142	4.2569	4.4044
	MD(m)	0.4605	0.9988	<b>0.9988</b>	0.9989
	TC	no	yes	no	no
	MC/AC( $m^{-1}$ )	136.09/0.11	/	<b>1.07/0.04</b>	136.09/0.11
	AW(m)	<b>3.6082</b>	/	3.4482	3.6082
Scene 2	AT(s)	21.44	$\infty$	<b>19.02</b>	19.68
	AR(%)	100	71.43	100	100
	AS(m/s)	3.8296	2.8243	<b>4.0249</b>	3.4402
	MD(m)	0.8634	0.8621	<b>0.9073</b>	0.9667
	TC	yes	yes	no	yes
	MC/AC( $m^{-1}$ )	669.37/0.39	/	<b>7.76/0.11</b>	669.37/0.39
	AW(m)	4.6368	/	<b>7.6807</b>	4.6368
Scene 3	AT(s)	33.6	$\infty$	<b>25.46</b>	32.10
	AR(%)	100	79.37	100	100
	AS(m/s)	3.2366	3.1611	<b>3.8583</b>	3.4672
	MD(m)	0.9930	<b>1</b>	0.8845	0.9999
	TC	yes	yes	no	yes
	MC/AC( $m^{-1}$ )	72.27/0.16	/	<b>2.78/0.05</b>	72.27/0.16
	AW(m)	<b>11.4083</b>	/	5.9786	11.4083

**Supplementary Appendix. Specific Steps of Virtual Tube Planning.** This appendix provides a detailed mathematical description of the virtual tube planning method based on the NS equations, with the key symbols defined in Section II-A and some other symbols defined in Section III-A of the paper.

Take the fluid flowing from left to right in a two-dimensional Cartesian coordinate system as an example, the specific steps for generating virtual tube boundaries are illustrated as follows, which correspond to the *Algorithm 1*, *Algorithm 2*, and *Algorithm 3* in the paper.

- **STEP 1:** The complete streamlines from  $\mathcal{C}_s$  to  $\mathcal{C}_g$  are screened out, that is, short streamlines caused by the map gridding and boundary conditions are removed. Define the set of selected streamlines as

$$\mathcal{HD}_c = \{C_{h,i} | \mathbf{p}_{c_0,i} \in \mathcal{C}_s, \mathbf{p}_{c_1,i} \in \mathcal{C}_g, i = 1, 2, \dots, M\}.$$

The streamlines in the set  $\mathcal{HD}_c$  are expressed as  $C_{hc,i}(t_k), i = 1, 2, \dots, M_{hd}$ .

- **STEP 2:** Arrange all streamlines in the spatial order, then obtain the set of candidate streamlines

$$\begin{aligned} \mathcal{HD}_s = \{C_{hc,i} | C_{hc,i} \in \mathcal{HD}_c, & y_{\mathbf{p}_{c_0,i}} \geq y_{\mathbf{p}_{c_0,i-1}}, \\ & i = 2, \dots, M_{hd}\}. \end{aligned}$$

The streamlines in the set  $\mathcal{HD}_s$  are expressed as  $C_{hs,i}(t_k), i = 1, 2, \dots, M_{hd}$ . Particularly, the sorting condition  $y_{\mathbf{p}_{c_0,i}} \geq y_{\mathbf{p}_{c_0,i-1}}$  can be replaced by  $x_{\mathbf{p}_{c_0,i}} \geq x_{\mathbf{p}_{c_0,i-1}}$ , which is determined by the position of  $\mathcal{C}_s$ . The reason for utilizing the coordinates of the starting points of streamlines to spatially order them is that there are no intersections between any pair of streamlines, which is illustrated in *Proposition 1* of the paper.

- **STEP 3:** This step is the key step. The average distance between every two adjacent streamlines is compared to distinguish the boundaries of virtual tubes. When the distance is relatively large, the two streamlines are considered to belong to the boundaries of two different virtual tubes. Assuming the minimum and maximum  $x$ -coordinate of  $C_{hs,i}$  in a two-dimensional coordinate system are  $x_{\min,i}$  and  $x_{\max,i}$ , respectively. Then randomly select  $m$  points  $\{\mathbf{q}_{i,j} | \mathbf{q}_{i,j} \in C_{hs,i}, x_{i,j} \in [x_{\min,i}, x_{\max,i}], i = 1, 2, \dots, M_{hd}, j = 1, 2, \dots, m\}$ , where  $x_{i,j}$  denotes the  $x$ -coordinate of  $\mathbf{q}_{i,j}$ . Correspondingly, the  $y$ -coordinate of  $\mathbf{q}_{i,j}$  is  $y_{i,j}$ . Let  $\mathcal{TB}_{cr}$  and  $\mathcal{TB}_{cl}$  represent the candidate sets of right and left boundaries of virtual tubes generated by this step, respectively. then

$$\begin{aligned} \mathcal{TB}_{cl} = \{C_{hs,i} | C_{hs,i} \in \mathcal{HD}_s, & \\ & \sum_{j=1}^m |y_{i,j} - y_{i-1,j}| / m > \Delta_{hd}, i = 2, 3, \dots, M_{hd}\}, \end{aligned}$$

$$\begin{aligned} \mathcal{TB}_{cr} = \{C_{hs,i-1} | C_{hs,i-1} \in \mathcal{HD}_s, & \\ & \sum_{j=1}^m |y_{i,j} - y_{i-1,j}| / m > \Delta_{hd}, i = 2, 3, \dots, M_{hd}\}, \end{aligned}$$

where  $\Delta_{hd} > 0$  is set based on experience. The boundaries are selected based on the principle of *fluid diversion*, which means that the fluid encountering an obstacle splits into two or more directions from an initially parallel or concentrated streamline. This phenomenon is depicted in Supplementary Fig.5.


- **STEP 4:** Filter out virtual tubes that are not excessively narrow to get the set of selected left boundaries

$$\begin{aligned} \mathcal{TB}_{sl} = \{C_{tcl,j} | \min \|\mathbf{b}_1 - \mathbf{b}_2\| & > r_s, \mathbf{b}_1 \in C_{tcl,j}, \\ & \mathbf{b}_2 \in C_{tcr,j}, j = 1, 2, \dots, n_{ct}\}. \end{aligned}$$

Similarly, the set of selected right boundaries  $\mathcal{TB}_{sr}$  can be obtained. Heretofore, multiple virtual tubes at the specific time step  $t_k, k \in \{1, 2, \dots, n\}$  can be obtained. Then, let  $C_{tsl,j} \in \mathcal{TB}_{sl}, C_{tsr,j} \in \mathcal{TB}_{sr}, j = 1, 2, \dots, n_{st}$  represent the selected left and right boundaries of virtual tubes picked by this step respectively, where  $n_{st}$  denotes the number of virtual tubes filtered out. Subsequently, the width of every virtual tube is defined. To begin with, select  $k_s$  points  $\{\mathbf{x}_{l,i}, i = 1, 2, \dots, k_s\}$  on  $C_{tsl,j}, j = 1, 2, \dots, n_{st}$ , which are evenly distributed along the curve. Correspondingly, find  $k_s$  points  $\{\mathbf{x}_{r,i}, i = 1, 2, \dots, k_s\}$  on  $C_{tsr,j}, j = 1, 2, \dots, n_{st}$ , which can be indicated by  $\{\mathbf{x}_{r,i} | \|\mathbf{x}_{r,i} - \mathbf{x}_{l,i}\| \leq \|\mathbf{x} - \mathbf{x}_{l,i}\|, \forall \mathbf{x} \in C_{tsr,j}, \mathbf{x}_{r,i} \in C_{tsr,j}, i = 1, 2, \dots, k_s, j = 1, 2, \dots, n_{st}\}$ . Then the width of the  $j$ th virtual tube at  $t_k$  is

$$w_{tb,j}(t_k) = \left( \sum_{i=1}^{k_s} \|\mathbf{x}_{r,i} - \mathbf{x}_{l,i}\| \right) / k_s, j = 1, 2, \dots, n_{st}.$$

- **STEP 5:** Select the virtual tubes with the widest average width from  $t \in \{t_1, t_2, \dots, t_n\}$ . The *average width* of virtual

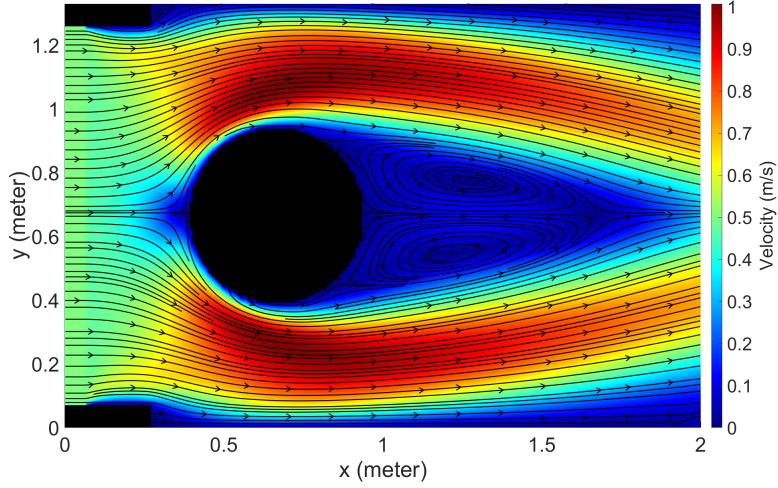

**Supplementary Fig.9. Streamlines obtained by solving the NS equations.** The black round is an obstacle. The left side is the source. The right side is sinking. The black arrow curves are streamlines. Various color indicates the speed.

tubes at  $t_k, k \in \{1, 2, \dots, n\}$  is

$$\bar{w}_{\text{tb}}(t_k) = \left( \sum_{j=1}^{n_{\text{st}}} w_{\text{tb},j}(t_k) \right) / n_{\text{st}}.$$

The sets of the final selected tube boundaries are denoted by  $\mathcal{T}\mathcal{B}_{\text{fl}}$  and  $\mathcal{T}\mathcal{B}_{\text{fr}}$ .