

1. The IP address of my computer is 172.24.3.70

[illegible]

2. Within the IP datagram header, the value in the upper layer protocol field is UDP(17).

The image shows a Wireshark packet capture analysis. The top pane displays a list of 26 packets. The bottom pane shows the detailed view of the selected packet (No. 25), which is an Internet Protocol Version 4 packet. The packet details are as follows:

- Frame 25: 70 bytes on wire (560 bits), 70 bytes captured (560 bits) on interface en0, id 0
- Ethernet II, Src: Apple_d5:84:fc (6c:7e:67:d5:84:fc), Dst: Fortinet_09:00:20 (00:09:0f:09:00:20)
- Internet Protocol Version 4, Src: 172.24.3.70, Dst: 128.119.245.12
 - 0100 = Version: 4
 - 0101 = Header Length: 20 bytes (5)
 - ✓ Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT)
 - 0000 00.. = Differentiated Services Codepoint: Default (0)
 -00 = Explicit Congestion Notification: Not ECN-Capable Transport (0)
 - Total Length: 56
 - Identification: 0xb9d6 (47574)
 - ✓ 000. = Flags: 0x0
 - 0... = Reserved bit: Not set
 - .0.. = Don't fragment: Not set
 - ..0. = More fragments: Not set
 - ...0 0000 0000 = Fragment Offset: 0
 - ✓ Time to Live: 1
 - ✓ [Expert Info (Note/Sequence): "Time To Live" only 1]
 - ["Time To Live" only 1]
 - [Severity level: Note]
 - [Group: Sequence]
 - Protocol: UDP (17)
 - Header Checksum: 0xdafc [validation disabled]
 - [Header checksum status: Unverified]
 - Source Address: 172.24.3.70
 - Destination Address: 128.119.245.12
 - ✓ User Datagram Protocol, Src Port: 47573, Dst Port: 33435
 - ✓ Data (28 bytes)

The status bar at the bottom indicates: Internet Protocol Version 4 (ip), 20 bytes. Packets: 4200 - Displayed: 4200 (100.0%) - Dropped: 0 (0.0%). Profile: Default.

- There are 20 bytes in the IP header as shown in the header length. As shown in the field "Total Length: 56", there are 56 bytes in the IP datagram which includes the payload and the header. Hence, there are $56 - 20 = 36$ bytes in the payload of the IP datagram.

Wireshark packet capture analysis showing an ICMP Echo (ping) request. The packet list shows a packet from 172.24.3.70 to 128.119.245.12. The packet details pane shows the IP header with a length of 20 bytes and a total length of 56 bytes. The packet bytes pane shows the raw data of the packet.

No.	Time	Source	Destination	Protocol	Length	Info
25	6.645834	172.24.3.70	128.119.245.12	UDP	70	47573 → 33435 Len=28
27	6.838408	172.24.0.1	172.24.3.70	ICMP	98	Time-to-live exceeded (Time to live exceeded in transit)
30	6.862558	172.24.3.70	128.119.245.12	UDP	70	47573 → 33436 Len=28
31	6.868863	172.24.0.1	172.24.3.70	ICMP	98	Time-to-live exceeded (Time to live exceeded in transit)
32	6.868234	172.24.3.70	128.119.245.12	UDP	70	47573 → 33437 Len=28
33	6.897784	172.24.0.1	172.24.3.70	ICMP	98	Time-to-live exceeded (Time to live exceeded in transit)
34	6.897992	172.24.3.70	128.119.245.12	UDP	70	47573 → 33438 Len=28
57	11.983282	172.24.3.70	128.119.245.12	UDP	70	47573 → 33439 Len=28
57	16.986144	172.24.3.70	128.119.245.12	UDP	70	47573 → 33440 Len=28
140	21.911256	172.24.3.70	128.119.245.12	UDP	70	47573 → 33441 Len=28
141	22.068157	10.30.55.169	172.24.3.70	ICMP	70	Time-to-live exceeded (Time to live exceeded in transit)
144	22.115363	172.24.3.70	128.119.245.12	UDP	70	47573 → 33442 Len=28
145	22.182842	10.30.55.169	172.24.3.70	ICMP	70	Time-to-live exceeded (Time to live exceeded in transit)
146	22.183219	172.24.3.70	128.119.245.12	UDP	70	47573 → 33443 Len=28
147	22.288537	10.30.55.169	172.24.3.70	ICMP	70	Time-to-live exceeded (Time to live exceeded in transit)
148	22.288745	172.24.3.70	128.119.245.12	UDP	70	47573 → 33444 Len=28

Frame 25: 70 bytes on wire (560 bits), 70 bytes captured (560 bits) on interface en0, id 0
 Ethernet II, Src: Apple d5:04:fc (6c:7e:67:d5:04:fc), Dst: Fortinet_09:00:20 (00:09:0f:09:00:20)
 Internet Protocol Version 4, Src: 172.24.3.70, Dst: 128.119.245.12

6100 ... = Version: 4
 0101 = Header Length: 20 bytes (5)
 Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT)
 0000 00.. = Differentiated Services Codepoint: Default (0)
00 = Explicit Congestion Notification: Not ECN-Capable Transport (0)
 Total Length: 56
 Identification: 0xb9d6 (47574)
 000. = Flags: 0x0
 0... = Reserved bit: Not set
 .0.. = Don't fragment: Not set
 ..0. = More fragments: Not set
 ...0 0000 0000 0000 = Fragment Offset: 0
 Time to Live: 1
 [Expert Info (Note/Sequence): "Time To Live" only 1]
 [Time To Live] only 1
 [Severity Level: Note]
 [Group: Sequence]
 Protocol: UDP (17)
 Header Checksum: 0xdafc [validation disabled]
 [Header checksum status: Unverified]
 Source Address: 172.24.3.70
 Destination Address: 128.119.245.12
 User Datagram Protocol, Src Port: 47573, Dst Port: 33435
 Data (28 bytes)

Destination Address: IPv4 address Packets: 4200 · Displayed: 1086 (25.9%) Profile: Default

4. The "More fragments" bit is set to 0 implies that it is the last fragment, but the "Fragment Offset" bit is also set to 0 implies that it is the first fragment. Hence, this IP datagram has not been fragmented


The image shows a Wireshark packet capture analysis. The top pane displays a list of network packets. Packet 25 is selected, showing a UDP packet from 172.24.3.70 to 128.119.245.12. The bottom pane shows the detailed view of this packet, highlighting the IP and UDP headers. In the IP header section, the 'Flags' field is expanded, showing three bits: 'Reserved bit: Not set', 'Don't fragment: Not set', and 'More fragments: Not set'. These bits are represented by '0' in the binary field and '000' in the hexadecimal field. The 'Time to Live' is 1, and the 'Protocol' is UDP (17). The 'User Datagram Protocol' section shows the source port as 47573 and the destination port as 33435. The data length is 28 bytes.

No.	Time	Source	Destination	Protocol	Length	Info
18	5.319218	172.24.3.70	172.24.3.70	ICMP	106	Destination unreachable (Network unreachable)
19	5.614224	172.24.3.70	10.68.26.34	TCP	78	[TCP Retransmission] 53828 → 7000 [SYN] Seq=0 Win=65535 Len=0 MSS=1460 WS=64 TSval=2289737222 TSecr=0 SACK_PERM
20	5.841486	172.24.3.70	172.24.3.70	ICMP	106	Destination unreachable (Network unreachable)
21	5.938442	172.24.3.70	10.68.191.211	TCP	78	[TCP Retransmission] 53829 → 7000 [SYN] Seq=0 Win=65535 Len=0 MSS=1460 WS=64 TSval=2883018280 TSecr=0 SACK_PERM
22	6.122570	172.24.3.70	10.68.28.173	TCP	78	[TCP Retransmission] 53827 → 7000 [SYN] Seq=0 Win=65535 Len=0 MSS=1460 WS=64 TSval=2550202955 TSecr=0 SACK_PERM
23	6.313149	172.24.3.70	172.24.3.70	ICMP	106	Destination unreachable (Network unreachable)
24	6.614262	172.24.3.70	10.68.26.34	TCP	78	[TCP Retransmission] 53828 → 7000 [SYN] Seq=0 Win=65535 Len=0 MSS=1460 WS=64 TSval=2289738222 TSecr=0 SACK_PERM
25	6.645834	172.24.3.70	128.119.245.12	UDP	70	47573 → 33435 Len=28
26	6.838487	172.24.3.70	172.24.3.70	ICMP	106	Destination unreachable (Network unreachable)
27	6.838488	172.24.3.70	172.24.3.70	ICMP	98	Time-to-live exceeded (Time to live exceeded in transit)
28	6.844268	172.24.3.70	8.8.8.8	DNS	83	Standard query 0x7d7a PTR 1.0.24.172.in-addr.arpa
29	6.844268	8.8.8.8	172.24.3.70	DNS	83	Standard query response 0x7d7a No such name PTR 1.0.24.172.in-addr.arpa
30	6.862550	172.24.3.70	128.119.245.12	UDP	70	47573 → 33436 Len=28
31	6.868063	172.24.3.70	172.24.3.70	ICMP	98	Time-to-live exceeded (Time to live exceeded in transit)
32	6.868234	172.24.3.70	128.119.245.12	UDP	70	47573 → 33437 Len=28
33	6.897784	172.24.3.70	172.24.3.70	ICMP	98	Time-to-live exceeded (Time to live exceeded in transit)

Frame 25: 70 bytes on wire (560 bits), 70 bytes captured (560 bits) on interface en0, id 0
 Ethernet II, Src: Apple 05:0d56fc:6c:72:67:d5:04:fc, Dst: Fortinet_09:00:20 (00:09:0f:00:00:20)
 Internet Protocol Version 4, Src: 172.24.3.70, Dst: 128.119.245.12
 0100 = Version: 4
 0101 = Header Length: 20 bytes (5)
 Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT)
 0000 00.. = Differentiated Services Codepoint: Default (0)
 00.. = Explicit Congestion Notification: Not ECN-Capable Transport (0)
 Total Length: 56
 Identification: 0xb9d6 (47574)
 0000 = Flags: 0x0
 0... = Reserved bit: Not set
 .0.. = Don't fragment: Not set
 ..0. = More fragments: Not set
 ..0 0000 0000 0000 = Fragment Offset: 0
 Time to Live: 1
 [Expert Info (Note/Sequence): "Time To Live" only 1]
 [Time To Live" only 1]
 [Severity level: Note]
 [Group: Sequence]
 Protocol: UDP (17)
 Header checksum: 0xdafc [validation disabled]
 [Header checksum status: Unverified]
 Source Address: 172.24.3.70
 Destination Address: 128.119.245.12
 User Datagram Protocol, Src Port: 47573, Dst Port: 33435
 Data (28 bytes)
 Data: 00
 [Length: 28]

Frame (frame), 70 bytes Packets: 4200 · Displayed: 4200 (100.0%) · Dropped: 0 (0.0%) Profile: Default

- As indicated in the screenshot (highlighted in red boxes), the Identification field in the IP datagram always change from one datagram to the next within this series of ICMP Echo Request messages sent by my computer.

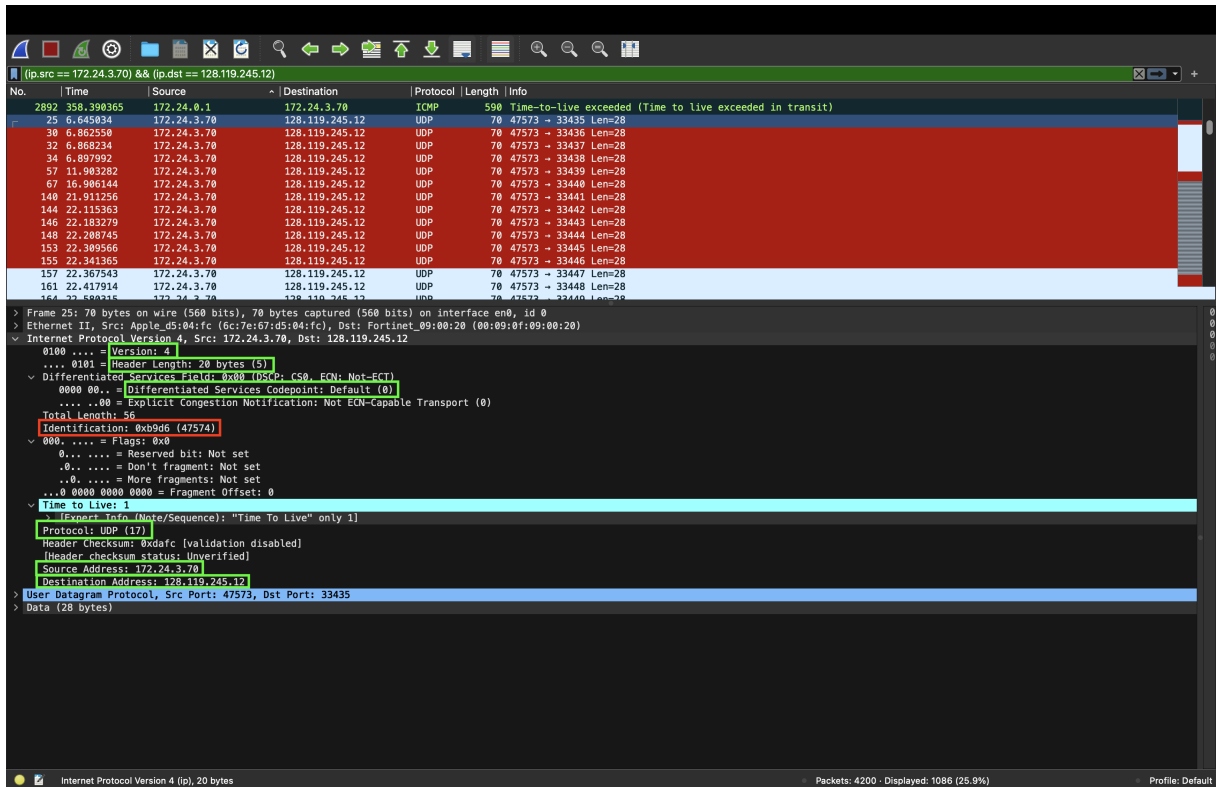

Wireshark packet capture analysis showing a list of packets and a detailed view of a selected packet.

Filter: (ip.src == 172.24.3.70) && (ip.dst == 128.119.245.12)

No.	Time	Source	Destination	Protocol	Length	Info
2892	358.398365	172.24.0.1	172.24.3.70	ICMP	590	Time-to-live exceeded (Time to live exceeded in transit)
25	6.645034	172.24.3.70	128.119.245.12	UDP	70	47573 → 33435 Len=28
30	6.862550	172.24.3.70	128.119.245.12	UDP	70	47573 → 33436 Len=28
32	6.868234	172.24.3.70	128.119.245.12	UDP	70	47573 → 33437 Len=28
34	6.897992	172.24.3.70	128.119.245.12	UDP	70	47573 → 33438 Len=28
57	11.903282	172.24.3.70	128.119.245.12	UDP	70	47573 → 33439 Len=28
67	16.906144	172.24.3.70	128.119.245.12	UDP	70	47573 → 33440 Len=28
140	21.911256	172.24.3.70	128.119.245.12	UDP	70	47573 → 33441 Len=28
144	22.115363	172.24.3.70	128.119.245.12	UDP	70	47573 → 33442 Len=28
146	22.183279	172.24.3.70	128.119.245.12	UDP	70	47573 → 33443 Len=28
148	22.208745	172.24.3.70	128.119.245.12	UDP	70	47573 → 33444 Len=28
153	22.309566	172.24.3.70	128.119.245.12	UDP	70	47573 → 33445 Len=28
155	22.341365	172.24.3.70	128.119.245.12	UDP	70	47573 → 33446 Len=28
157	22.367543	172.24.3.70	128.119.245.12	UDP	70	47573 → 33447 Len=28
161	22.417914	172.24.3.70	128.119.245.12	UDP	70	47573 → 33448 Len=28
164	22.508316	172.24.3.70	128.119.245.12	UDP	70	47573 → 33449 Len=28

Packet 32 Details:

- Frame 32: 70 bytes on wire (560 bits), 70 bytes captured (560 bits) on interface en0, id 0
- Ethernet II, Src: Apple d5:04:fc (6c:7e:67:d5:04:fc), Dst: Fortinet_09:00:20 (00:09:0f:00:00:20)
- Internet Protocol Version 4, Src: 172.24.3.70, Dst: 128.119.245.12
 - 0100 = Version: 4
 - 0101 = Header Length: 20 bytes (5)
 - 0000 00.. = Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT)
 - 00.. = Explicit Congestion Notification: Not ECN-capable Transport (0)
 - Total Length: 56
 - Identification: 0xb9d7 (47575)
 - 0000 = Flags: 0x0
 - 0... = Reserved bit: Not set
 - ..0. = Don't fragment: Not set
 - ..0. = More fragments: Not set
 - ...0 0000 0000 0000 = Fragment Offset: 0
 - Time to Live: 1
 - [Expert Info (Note/Sequence): "Time To Live" only 1]
 - Protocol: UDP (17)
 - Header checksum: 0xdafb (validation disabled)
 - [Header checksum status: Unverified]
 - Source Address: 172.24.3.70
 - Destination Address: 128.119.245.12
 - User Datagram Protocol, Src Port: 47573, Dst Port: 33436
 - Data (28 bytes)

Internet Protocol Version 4 (ip), 20 bytes

Packets: 4200 · Displayed: 1086 (25.9%)

Profile: Default

Wireshark packet capture analysis showing a list of packets and a detailed view of a selected packet.

Filter: (ip.src == 172.24.3.70) && (ip.dst == 128.119.245.12)

No.	Time	Source	Destination	Protocol	Length	Info
2892	358.398365	172.24.0.1	172.24.3.70	ICMP	590	Time-to-live exceeded (Time to live exceeded in transit)
25	6.645034	172.24.3.70	128.119.245.12	UDP	70	47573 → 33435 Len=28
30	6.862550	172.24.3.70	128.119.245.12	UDP	70	47573 → 33436 Len=28
32	6.868234	172.24.3.70	128.119.245.12	UDP	70	47573 → 33437 Len=28
34	6.897992	172.24.3.70	128.119.245.12	UDP	70	47573 → 33438 Len=28
57	11.903282	172.24.3.70	128.119.245.12	UDP	70	47573 → 33439 Len=28
67	16.906144	172.24.3.70	128.119.245.12	UDP	70	47573 → 33440 Len=28
140	21.911256	172.24.3.70	128.119.245.12	UDP	70	47573 → 33441 Len=28
144	22.115363	172.24.3.70	128.119.245.12	UDP	70	47573 → 33442 Len=28
146	22.183279	172.24.3.70	128.119.245.12	UDP	70	47573 → 33443 Len=28
148	22.208745	172.24.3.70	128.119.245.12	UDP	70	47573 → 33444 Len=28
153	22.309566	172.24.3.70	128.119.245.12	UDP	70	47573 → 33445 Len=28
155	22.341365	172.24.3.70	128.119.245.12	UDP	70	47573 → 33446 Len=28
157	22.367543	172.24.3.70	128.119.245.12	UDP	70	47573 → 33447 Len=28
161	22.417914	172.24.3.70	128.119.245.12	UDP	70	47573 → 33448 Len=28
164	22.508316	172.24.3.70	128.119.245.12	UDP	70	47573 → 33449 Len=28

Packet 32 Details:

- Frame 32: 70 bytes on wire (560 bits), 70 bytes captured (560 bits) on interface en0, id 0
- Ethernet II, Src: Apple d5:04:fc (6c:7e:67:d5:04:fc), Dst: Fortinet_09:00:20 (00:09:0f:00:00:20)
- Internet Protocol Version 4, Src: 172.24.3.70, Dst: 128.119.245.12
 - 0100 = Version: 4
 - 0101 = Header Length: 20 bytes (5)
 - 0000 00.. = Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT)
 - 00.. = Explicit Congestion Notification: Not ECN-capable Transport (0)
 - Total Length: 56
 - Identification: 0xb9d6 (47576)
 - 0000 = Flags: 0x0
 - 0... = Reserved bit: Not set
 - ..0. = Don't fragment: Not set
 - ..0. = More fragments: Not set
 - ...0 0000 0000 0000 = Fragment Offset: 0
 - Time to Live: 1
 - [Expert Info (Note/Sequence): "Time To Live" only 1]
 - Protocol: UDP (17)
 - Header checksum: 0xdafa (validation disabled)
 - [Header checksum status: Unverified]
 - Source Address: 172.24.3.70
 - Destination Address: 128.119.245.12
 - User Datagram Protocol, Src Port: 47573, Dst Port: 33437
 - Data (28 bytes)

Internet Protocol Version 4 (ip), 20 bytes

Packets: 4200 · Displayed: 1086 (25.9%)

Profile: Default

6. Referring to the screenshot in question 5, there are some fields (highlighted in green boxes) stay constant.

The field "Version: 4" stays constant since Ipv4 are used for all the datagrams.


The field "Header Length: 20 bytes (5)" stays constant since the datagrams are carrying the same specific ICMP message.

The field "Differentiated Services Field" stays constant since all datagrams carrying the same ICMP message have the same service class.


The field "Protocol: UDP(17)" stays constant since all datagrams carrying the same ICMP message have the same upper layer protocol.

The field "Source Address" and "Destination address" stay constant since the traceroute are executed from my computer targeted to the same address.


- I first apply filters to search for the frames using ICMP protocol sending to my ip address, and then click the frame with message "Time-to-live exceeded" in the Info part. Finally, I identify the ICMP TTL-exceeded messages sent to my computer by the first hop router by checking (1) the field "Type: 11 (Time-to-live exceeded)" in the "Internet Control Message Protocol"; and (2) the field "Time to Live: 1" in the "Internet Protocol Version 4" meaning that this is sent by the first router because no other router is passed during the process of the transmission of packets when send the TTL field of ICMP TTL-exceeded replies.

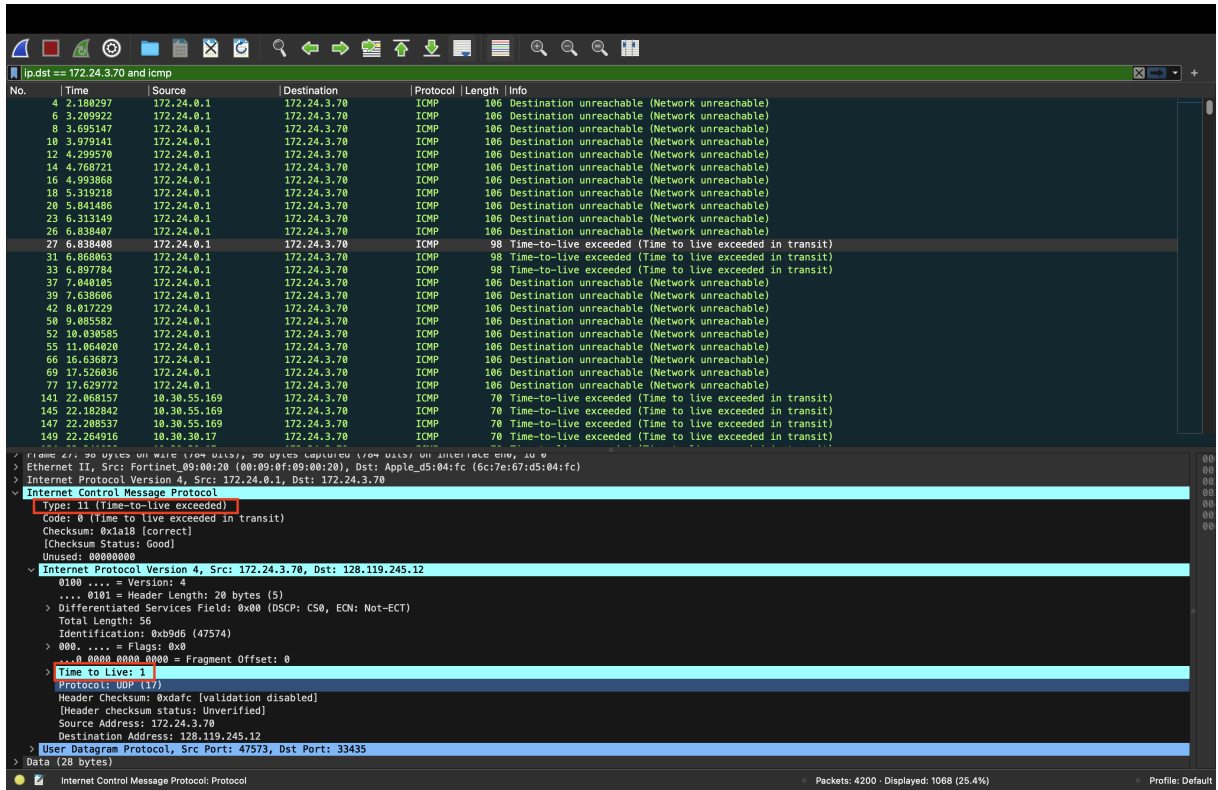

8. Yes, the message has been fragmented across more than one IP datagram. The screenshot below shows the first ICMP Echo Request message that was sent by my computer after the Packet Size was changed to be 2000.

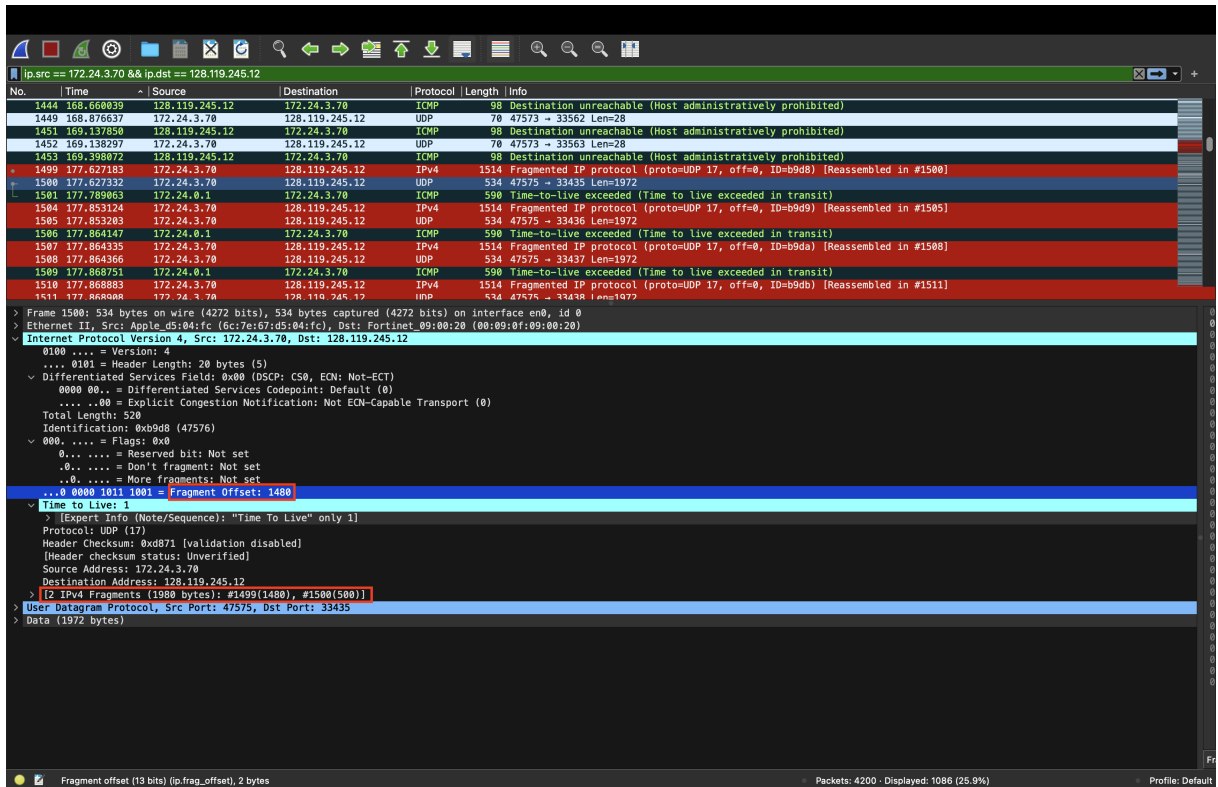


9. The screenshot of the first fragment of the fragmented IP datagram is

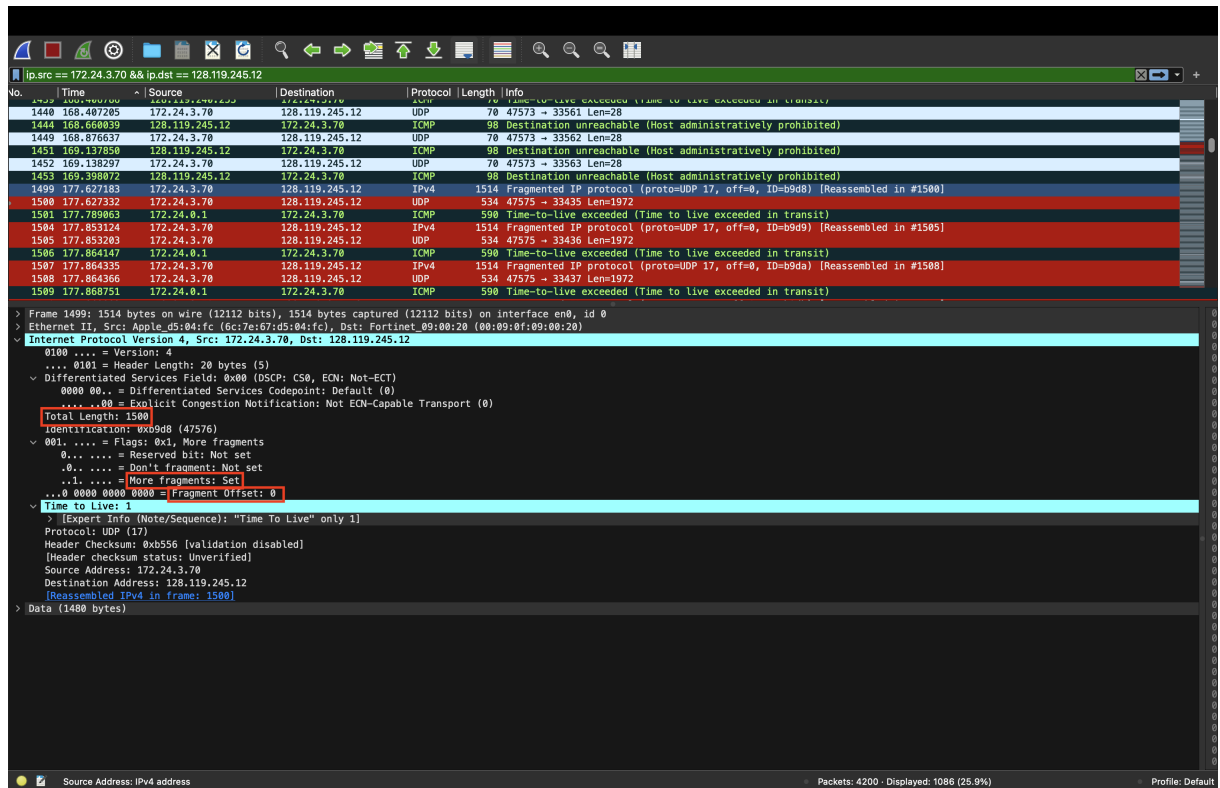



The field "More fragment: Set" in the IP header indicates that this datagram is a fragment. The field "Fragment Offset: 0" in the IP header indicates this is a first fragment. The total length of this IP datagram is 1500 bytes.

10. The screenshot of the second fragment of the fragmented IP datagram is

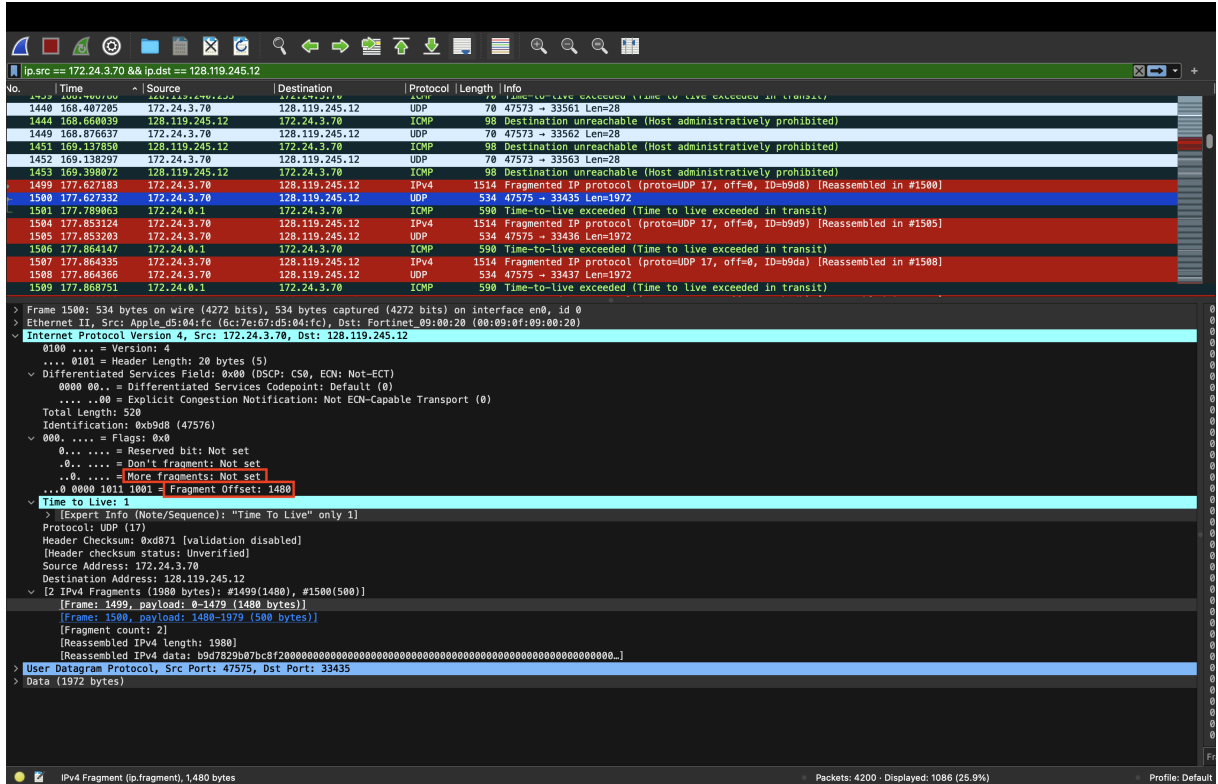

The field "Fragment Offset: 1480" in the IP header indicates this is a latter fragment. The field "More fragment: Not Set" in the IP header indicates that there is no more fragment.

11. The fields "Identification", "Total Length", "More fragments" and "Fragment Offset" change in the IP header between the first and second fragments.

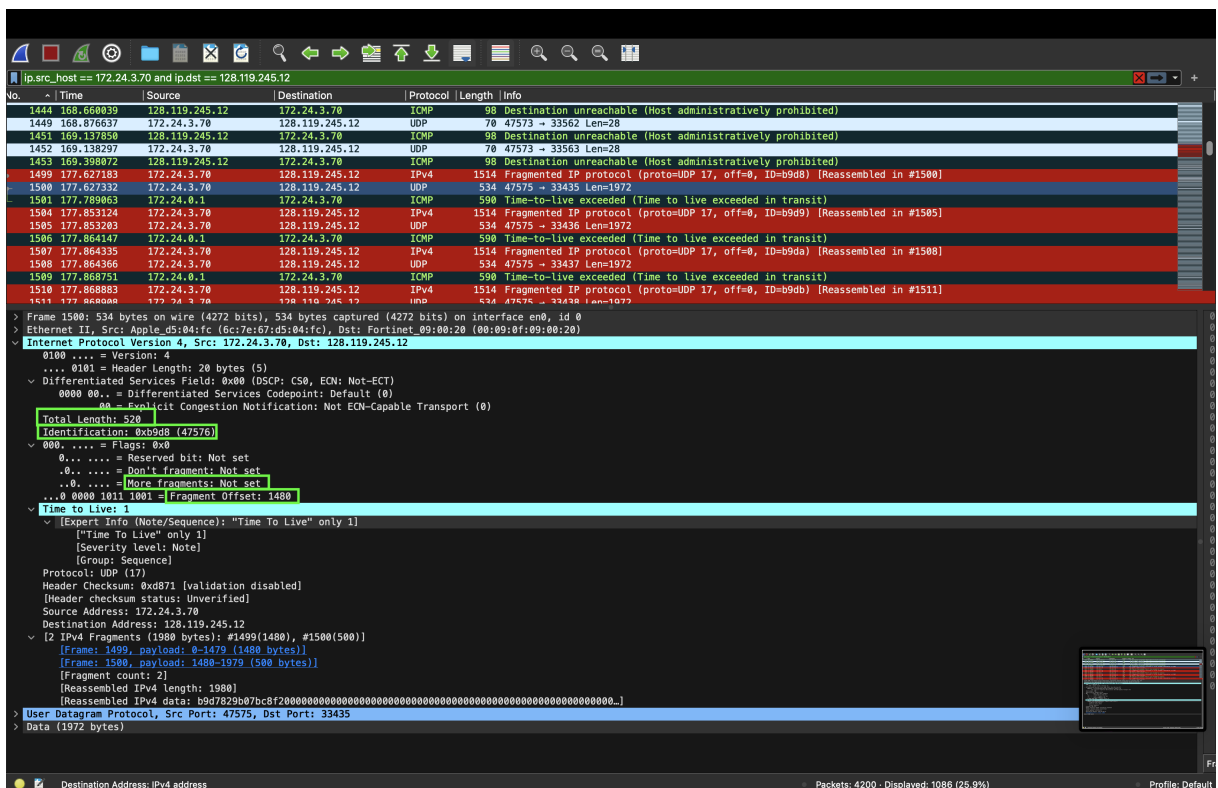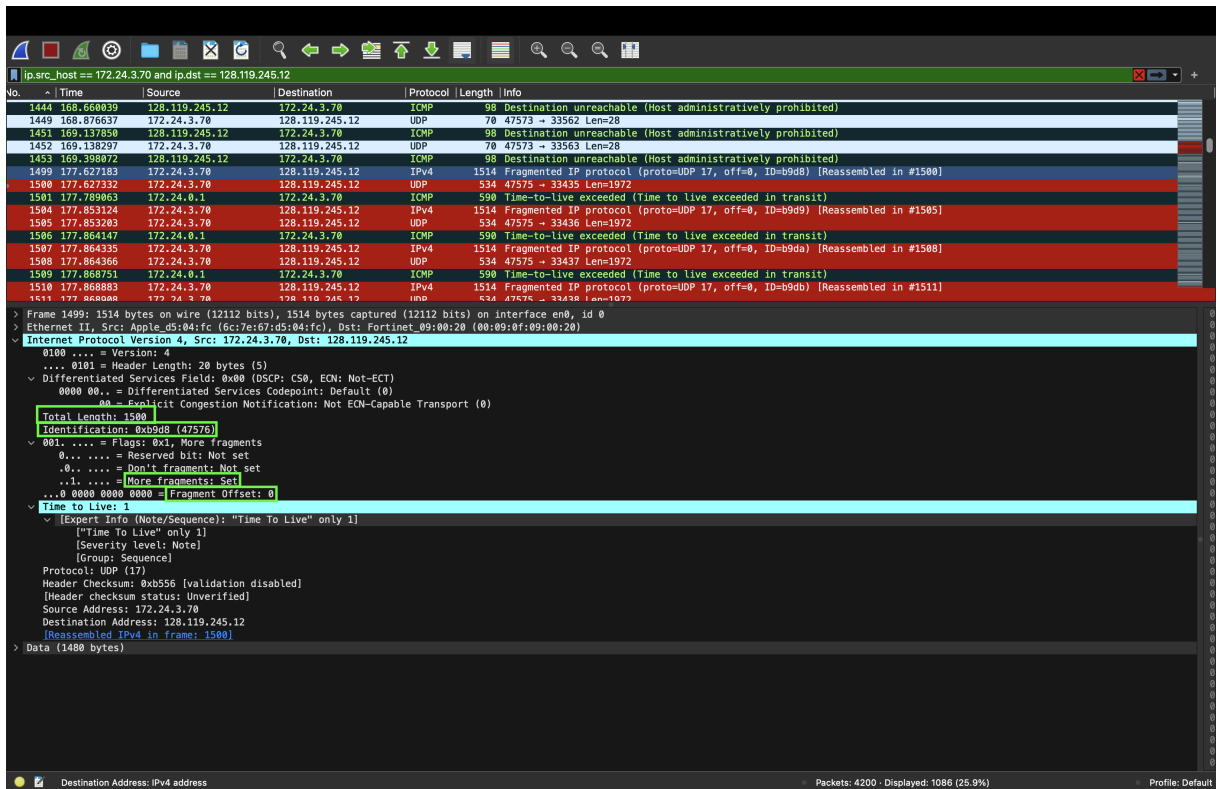

12. Three fragments were created from the original datagram.

[illegible]

13. The fields "Identification", "Total Length", "More fragments" and "Fragment Offset" change in the IP header among the fragments.

The screenshot shows a Wireshark packet capture of a fragmented IP packet. The packet list at the top shows several fragments of a 1500-byte packet. The packet details pane shows the IP header for one of the fragments with fields like Total Length, Identification, More fragments, and Fragment Offset.

No.	Time	Source	Destination	Protocol	Length	Info
2699	341.911347	172.24.3.70	128.119.245.12	UDP	534	47575 → 33562 Len=1972
2702	342.176389	128.119.245.12	172.24.3.70	ICMP	590	Destination unreachable (Host administratively prohibited)
2703	342.176699	172.24.3.70	128.119.245.12	IPv4	1514	Fragmented IP protocol (proto=UDP 17, off=0, ID=b9e0) [Reassembled in #2704]
2704	342.176736	172.24.3.70	128.119.245.12	UDP	534	47575 → 33563 Len=1972
2706	342.442032	128.119.245.12	172.24.3.70	ICMP	590	Destination unreachable (Host administratively prohibited)
2879	358.226092	172.24.3.70	128.119.245.12	IPv4	1514	Fragmented IP protocol (proto=UDP 17, off=0, ID=b9e0) [Reassembled in #2881]
2880	358.226141	172.24.3.70	128.119.245.12	IPv4	1514	Fragmented IP protocol (proto=UDP 17, off=1480, ID=b9e0) [Reassembled in #2881]
2881	358.226153	172.24.3.70	128.119.245.12	UDP	554	47583 → 33435 Len=3472
2882	358.350905	172.24.0.1	172.24.3.70	ICMP	590	Time-to-live exceeded (Time to live exceeded in transit)
2885	358.364405	172.24.3.70	128.119.245.12	IPv4	1514	Fragmented IP protocol (proto=UDP 17, off=0, ID=b9e1) [Reassembled in #2887]
2886	358.364448	172.24.3.70	128.119.245.12	IPv4	1514	Fragmented IP protocol (proto=UDP 17, off=1480, ID=b9e1) [Reassembled in #2887]
2887	358.364498	172.24.3.70	128.119.245.12	UDP	554	47583 → 33436 Len=3472
2888	358.379886	172.24.0.1	172.24.3.70	ICMP	590	Time-to-live exceeded (Time to live exceeded in transit)
2889	358.380228	172.24.3.70	128.119.245.12	IPv4	1514	Fragmented IP protocol (proto=UDP 17, off=0, ID=b9e2) [Reassembled in #2891]
2890	358.380277	172.24.3.70	128.119.245.12	IPv4	1514	Fragmented IP protocol (proto=UDP 17, off=1480, ID=b9e2) [Reassembled in #2891]

Frame 2879: 1514 bytes on wire (12112 bits), 1514 bytes captured (12112 bits) on interface en0, id 0
Ethernet II, Src: Apple d5:04:fc:6c:7e:67:d5:04:fc, Dst: Fortinet_09:00:20 (00:09:0f:00:00:20)
Internet Protocol Version 4, Src: 172.24.3.70, Dst: 128.119.245.12
0100 = Version: 4
.... 0101 = Header Length: 20 bytes (5)
Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT)
0000 00.. = Differentiated Services Codepoint: Default (0)
..00 = Explicit Congestion Notification: Not ECN-Capable Transport (0)
Total Length: 1500
Identification: 0xb9e0 (47584)
001. = Flags: 0x1, More fragments
0... = Reserved bit: Not set
0... = Don't fragment: Not set
..1. = More fragments: Set
...0 0000 0000 0000 = Fragment Offset: 0
Time to Live: 1
[Expert Info (Note/Sequence): "Time To Live" only 1]
["Time To Live" only 1]
[Severity Level: Note]
[Group: Sequence]
Protocol: UDP (17)
Header Checksum: 0xb54e [validation disabled]
[Header checksum status: Unverified]
Source Address: 172.24.3.70
Destination Address: 128.119.245.12
[Reassembled IPv4 in frame: 2881]
Data (1400 bytes)

The screenshot shows a Wireshark packet capture of a fragmented IP packet. The packet list at the top shows several fragments of a 1500-byte packet. The packet details pane shows the IP header for one of the fragments with fields like Total Length, Identification, More fragments, and Fragment Offset.

No.	Time	Source	Destination	Protocol	Length	Info
2699	341.911347	172.24.3.70	128.119.245.12	UDP	534	47575 → 33562 Len=1972
2702	342.176389	128.119.245.12	172.24.3.70	ICMP	590	Destination unreachable (Host administratively prohibited)
2703	342.176699	172.24.3.70	128.119.245.12	IPv4	1514	Fragmented IP protocol (proto=UDP 17, off=0, ID=b9e0) [Reassembled in #2704]
2704	342.176736	172.24.3.70	128.119.245.12	UDP	534	47575 → 33563 Len=1972
2706	342.442032	128.119.245.12	172.24.3.70	ICMP	590	Destination unreachable (Host administratively prohibited)
2879	358.226092	172.24.3.70	128.119.245.12	IPv4	1514	Fragmented IP protocol (proto=UDP 17, off=0, ID=b9e0) [Reassembled in #2881]
2880	358.226141	172.24.3.70	128.119.245.12	IPv4	1514	Fragmented IP protocol (proto=UDP 17, off=1480, ID=b9e0) [Reassembled in #2881]
2881	358.226153	172.24.3.70	128.119.245.12	UDP	554	47583 → 33435 Len=3472
2882	358.350905	172.24.0.1	172.24.3.70	ICMP	590	Time-to-live exceeded (Time to live exceeded in transit)
2885	358.364405	172.24.3.70	128.119.245.12	IPv4	1514	Fragmented IP protocol (proto=UDP 17, off=0, ID=b9e1) [Reassembled in #2887]
2886	358.364448	172.24.3.70	128.119.245.12	IPv4	1514	Fragmented IP protocol (proto=UDP 17, off=1480, ID=b9e1) [Reassembled in #2887]
2887	358.364498	172.24.3.70	128.119.245.12	UDP	554	47583 → 33436 Len=3472
2888	358.379886	172.24.0.1	172.24.3.70	ICMP	590	Time-to-live exceeded (Time to live exceeded in transit)
2889	358.380228	172.24.3.70	128.119.245.12	IPv4	1514	Fragmented IP protocol (proto=UDP 17, off=0, ID=b9e2) [Reassembled in #2891]
2890	358.380277	172.24.3.70	128.119.245.12	IPv4	1514	Fragmented IP protocol (proto=UDP 17, off=1480, ID=b9e2) [Reassembled in #2891]

Frame 2880: 1514 bytes on wire (12112 bits), 1514 bytes captured (12112 bits) on interface en0, id 0
Ethernet II, Src: Apple d5:04:fc:6c:7e:67:d5:04:fc, Dst: Fortinet_09:00:20 (00:09:0f:00:00:20)
Internet Protocol Version 4, Src: 172.24.3.70, Dst: 128.119.245.12
0100 = Version: 4
.... 0101 = Header Length: 20 bytes (5)
Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT)
0000 00.. = Differentiated Services Codepoint: Default (0)
..00 = Explicit Congestion Notification: Not ECN-Capable Transport (0)
Total Length: 1500
Identification: 0xb9e0 (47584)
001. = Flags: 0x1, More fragments
0... = Reserved bit: Not set
0... = Don't fragment: Not set
..1. = More fragments: Set
...0 0000 1011 1001 = Fragment Offset: 1480
Time to Live: 1
[Expert Info (Note/Sequence): "Time To Live" only 1]
["Time To Live" only 1]
[Severity Level: Note]
[Group: Sequence]
Protocol: UDP (17)
Header Checksum: 0xb495 [validation disabled]
[Header checksum status: Unverified]
Source Address: 172.24.3.70
Destination Address: 128.119.245.12
[Reassembled IPv4 in frame: 2881]
Data (1400 bytes)

