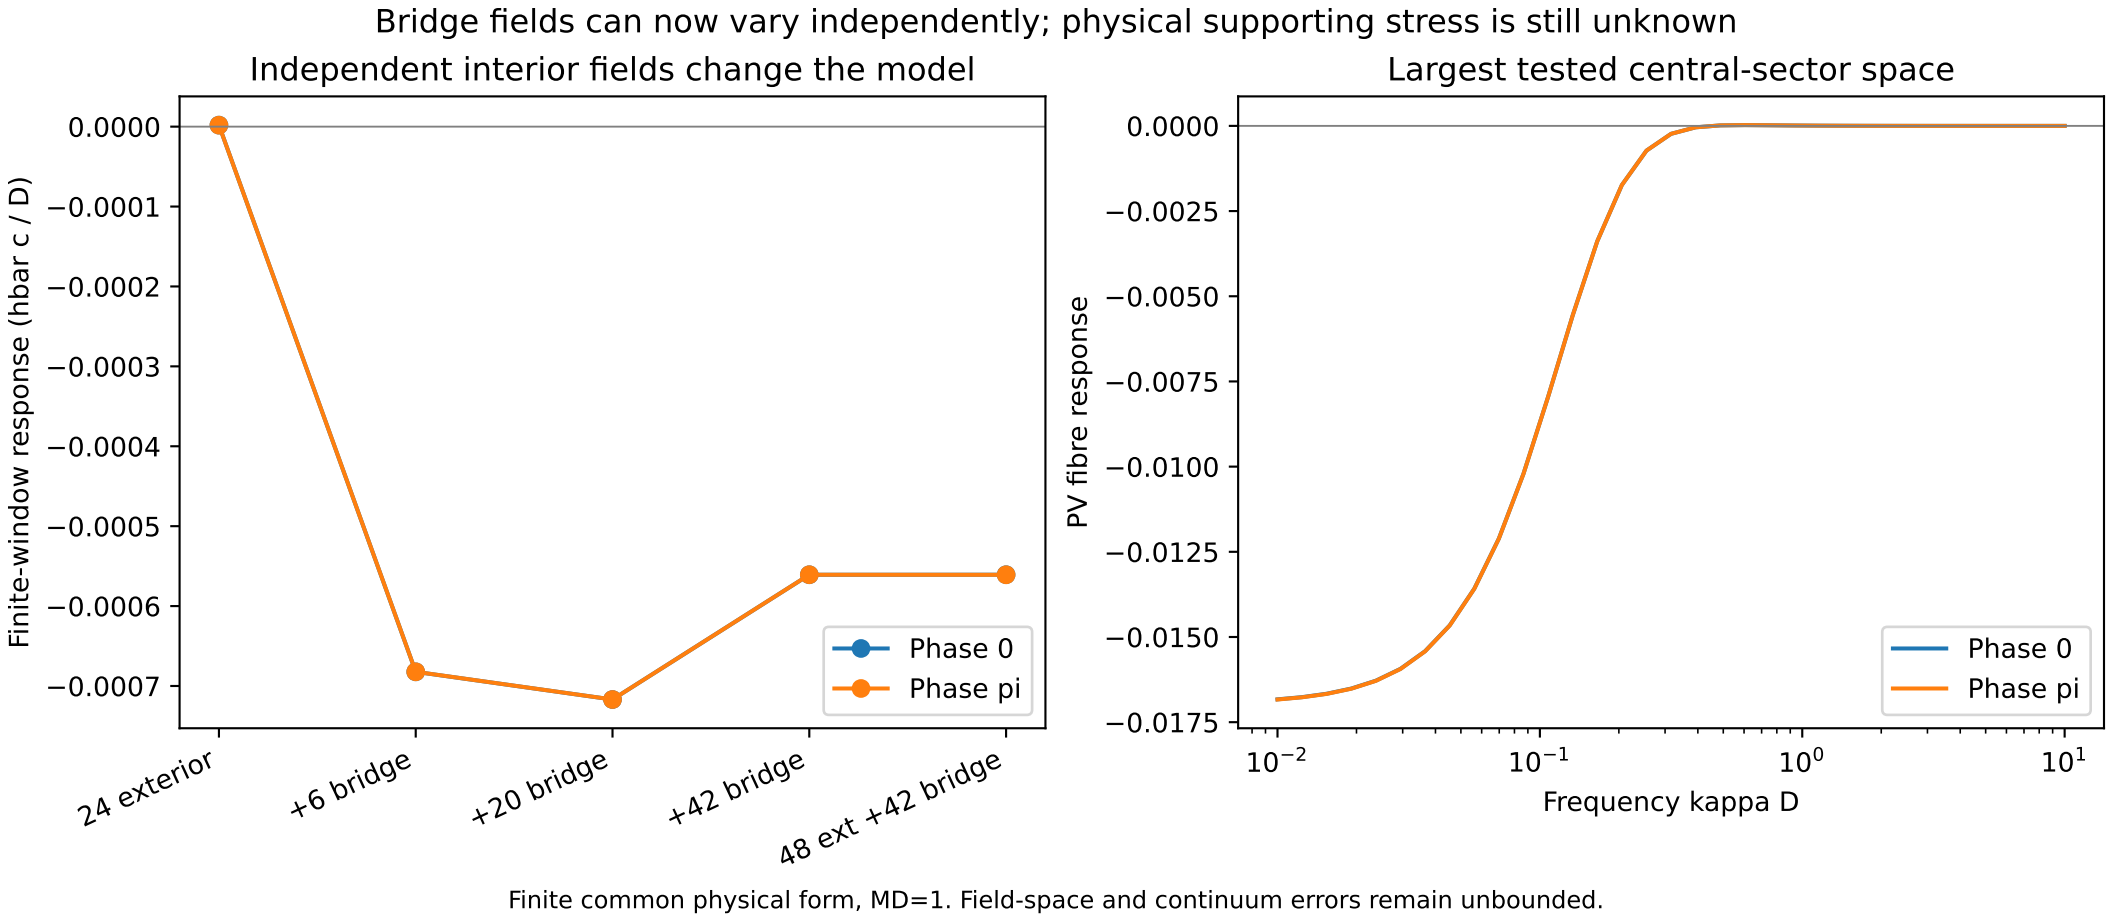
Bridge fields can now vary independently; physical supporting stress is still unknown
Independent interior fields change the model
Finite-window response (hbar c / D)
0.0000
−0.0001
−0.0002
−0.0003
−0.0004
−0.0005
−0.0006
−0.0007
24 exterior
+6 bridge
+20 bridge
+42 bridge
48 ext +42 bridge
Phase 0
Phase pi
Largest tested central-sector space
PV fibre response
0.0000
−0.0025
−0.0050
−0.0075
−0.0100
−0.0125
−0.0150
−0.0175
10^{-2}
10^{-1}
10^{0}
10^{1}
Frequency kappa D
Phase 0
Phase pi
Finite common physical form, MD=1. Field-space and continuum errors remain unbounded.