The same compact core, compared with an AdS reference

Connected minus invariant-reference environment · Both Weyl components · SINGLE retained μ = +½ sector

A. Two environments — prescribed geometry

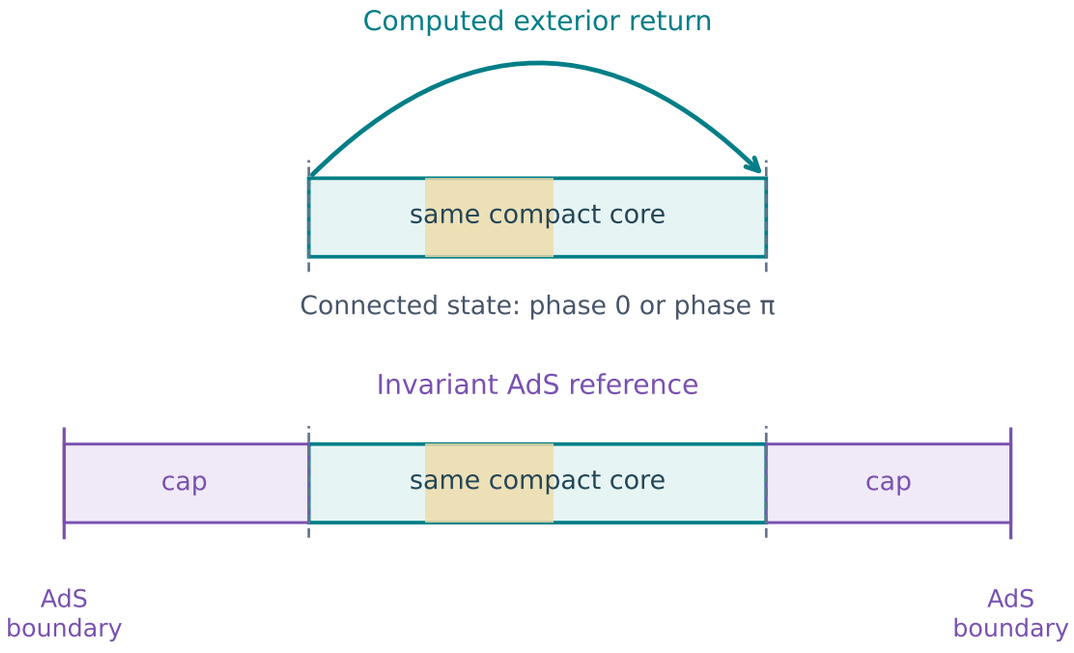

Caps continue beyond the dashed cuts; no wall is placed there.

B. Integrated source difference — separate scales

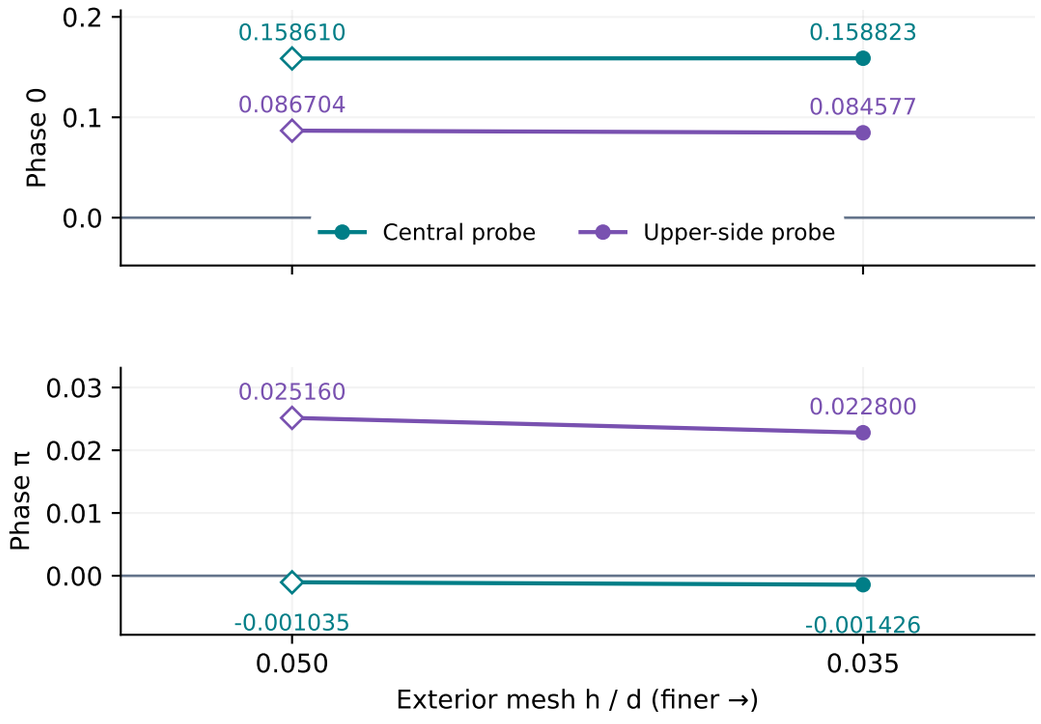

Weighted energy + radial pressure; connected minus reference.

Lines: matched order 8; open diamonds: primary order 12. $\hbar = c = d = 1$; finite window 1e-06 ≤ κd ≤ 96.

Phase π mesh changes: central 38%, upper 9%; frequency-panel change ≤ 1.5e-09. These are sensitivity tests, not error bounds.

The zero-null-stress reference requires the full invariant state. Angular completion, frequency tails and physical junction support remain unresolved.

A retained-sector reference difference does not establish absolute NEC violation or a stable supporting source.

No stable medium or 13 Sep 2027 → 12 Sep 2027 passage demonstrated.