

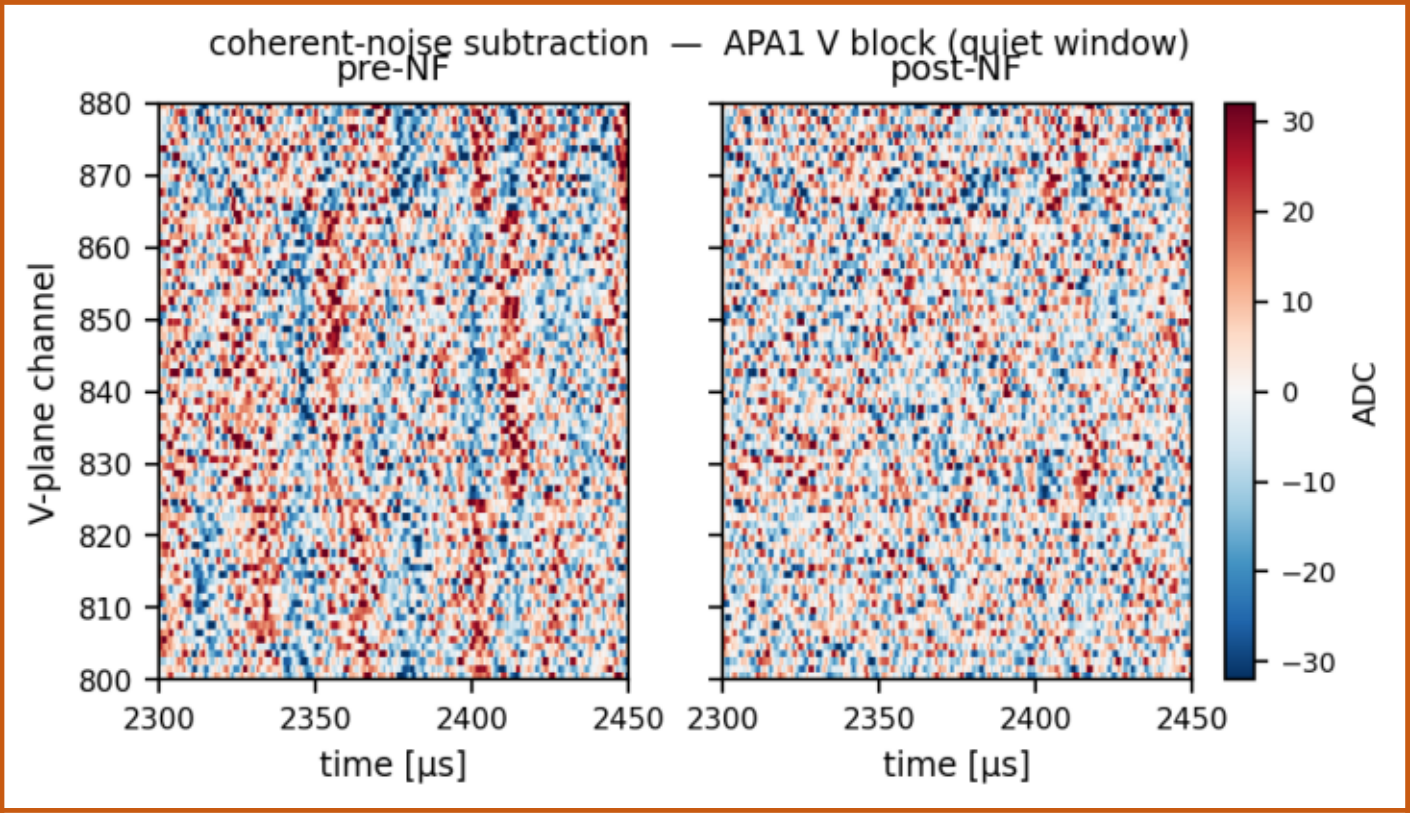


ProtoDUNE-HD Wire-Cell Noise Filtering · OmnibusNoiseFilter (per APA)

raw ADC → per-channel baseline → FEMB negative-pulse → coherent common-mode subtraction → cleaned ADC

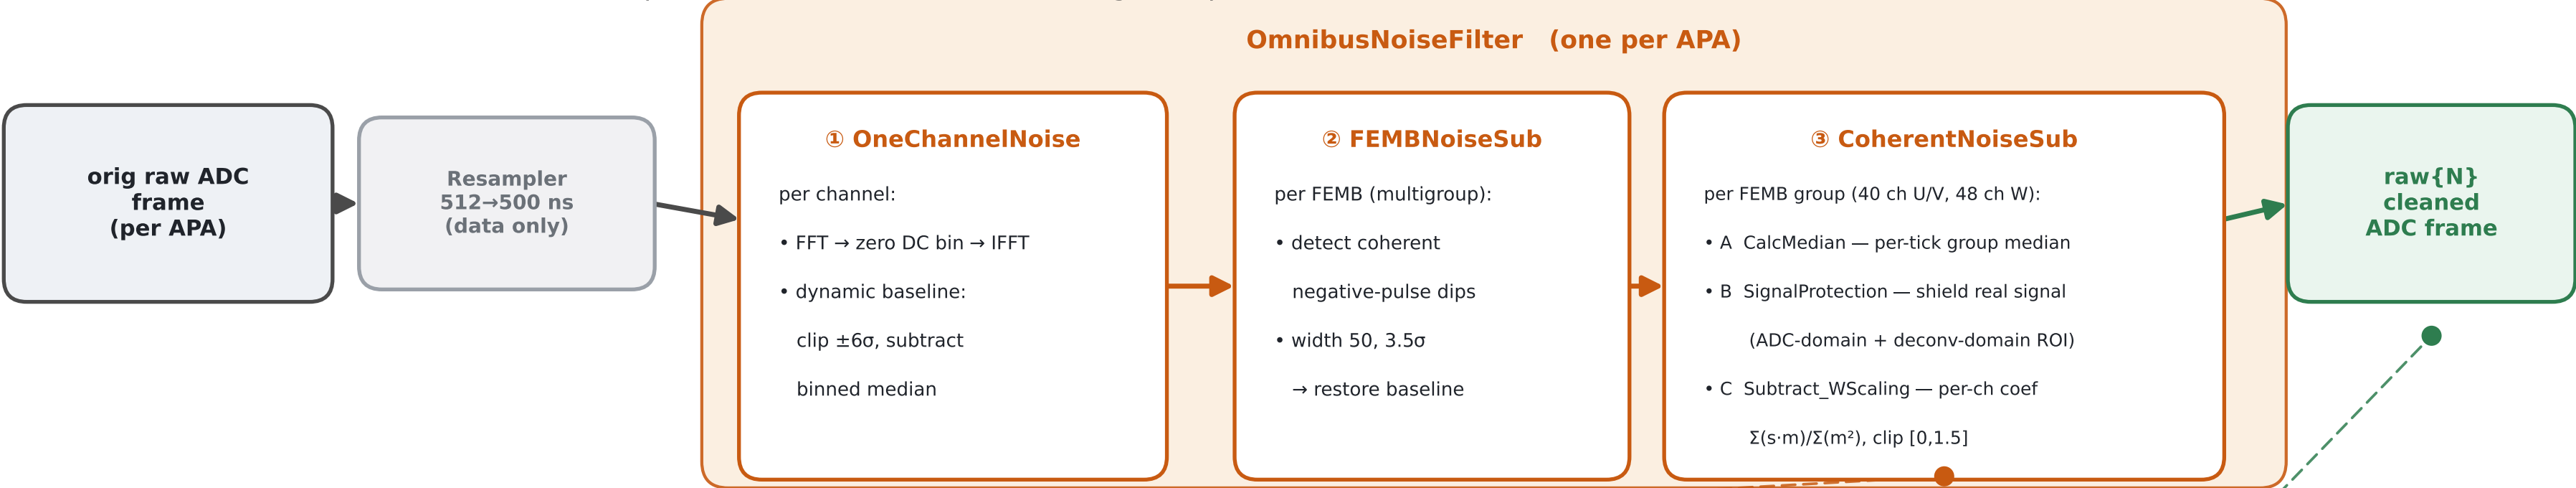

coherent-noise subtraction (data)

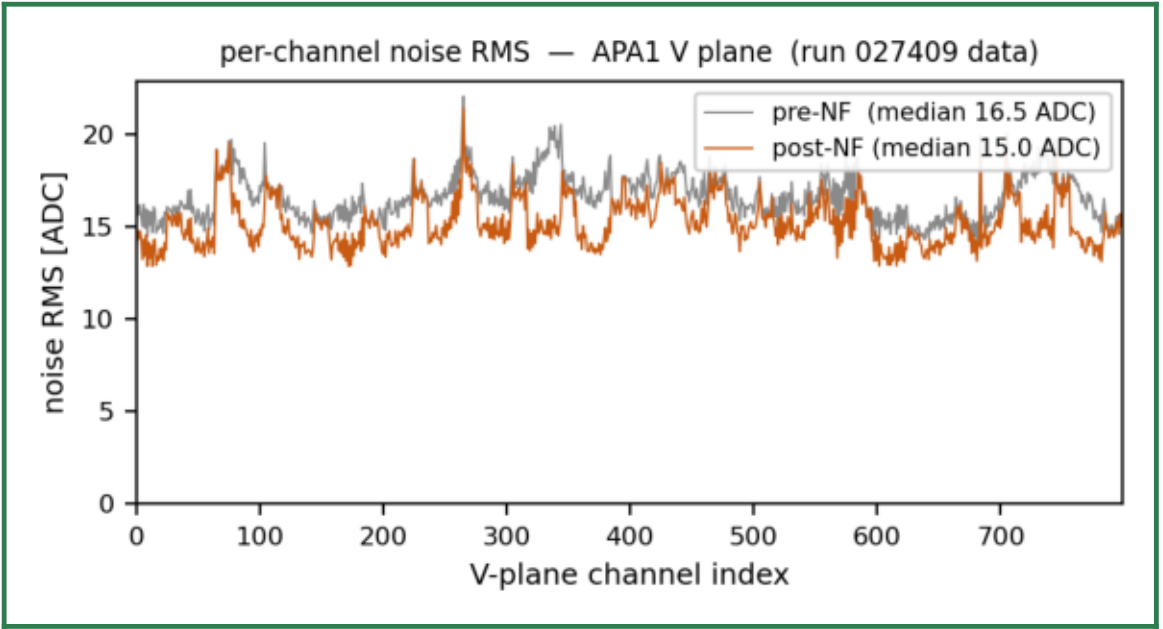

noise RMS: pre-NF → post-NF (data)

available in code — OFF here

PDHD cold electronics is DC-coupled,
so these MicroBooNE-era paths are
left at their C++ defaults:

- adaptive baseline / IS_RC partial
- RC+RC undershoot deconvolution
- per-channel freq-notch masks
- sticky-bit / ledge detection
- min/max-RMS noisy tagging