


All-Welded Plus Single Tier Locker 60" High

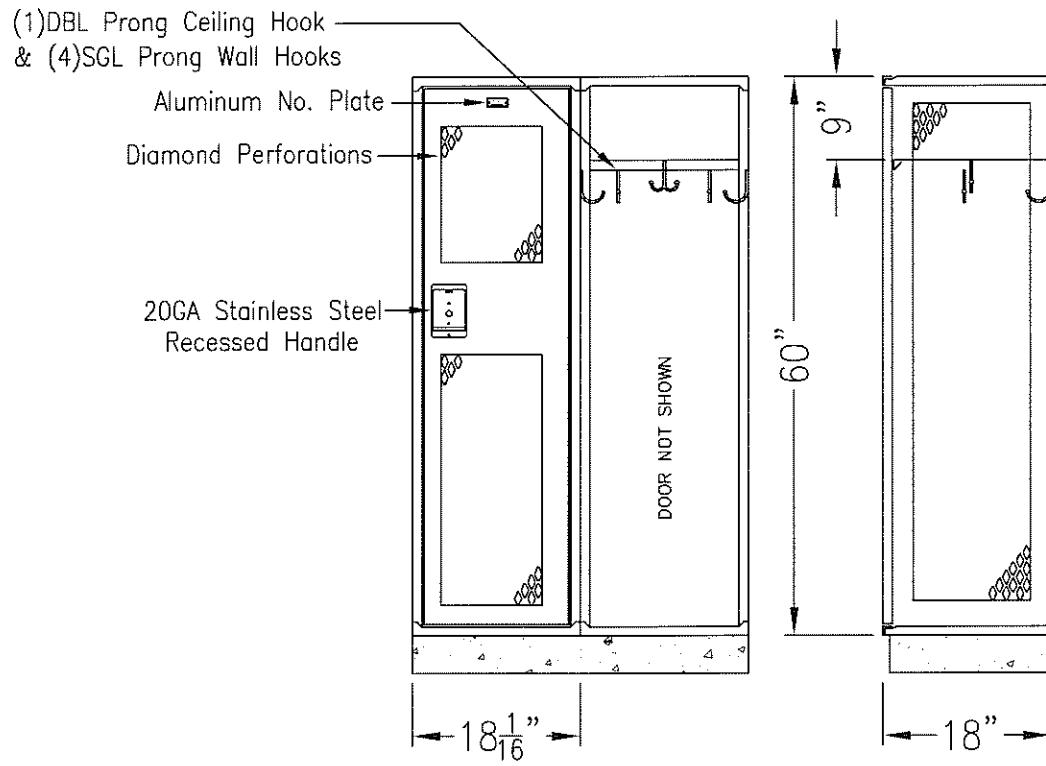

TYPICAL FOR 18" & 24" WIDE
TYPICAL FOR 18", 21" & 24" DEEP
PLEASE ALLOW $\frac{1}{16}$ " GROWTH PER FRAME

This Drawing Shows A Standard WEC Product. All Drawings
Are Copyright Protected By WEC Manufacturing. 07/13/11

Standard Construction-Basis Of Design:

(If A Change In Gauge Thickness Is Required Pricing Is Available Upon Request)

Top : 16 Gauge	Door : 14 Gauge
Back : 18 Gauge	Door Frame : 16 Gauge
Side : 16 Gauge	Shelf : 16 Gauge
Bottom : 16 Gauge	

Door Ventilation Options:

- 6" Louvers, (6) @ Top And (6) @ Bottom
- 3/4" x 1-1/2" Diamond Perforations
- 5/8" x 1/4" High Mini Louvers
- 5/8" x 1-1/8" High Rectangular Perforations
- Solid


Door Handle Options:

- 20 Gauge Recessed Handle (MPL)
- 20 Gauge Recessed Handle (SPL)

Locker Accessory Options:

- 18 Gauge Continuous Slope Hoods 4" Channel Base
- Base By Other

All-Welded Plus Single Tier Locker 72" High

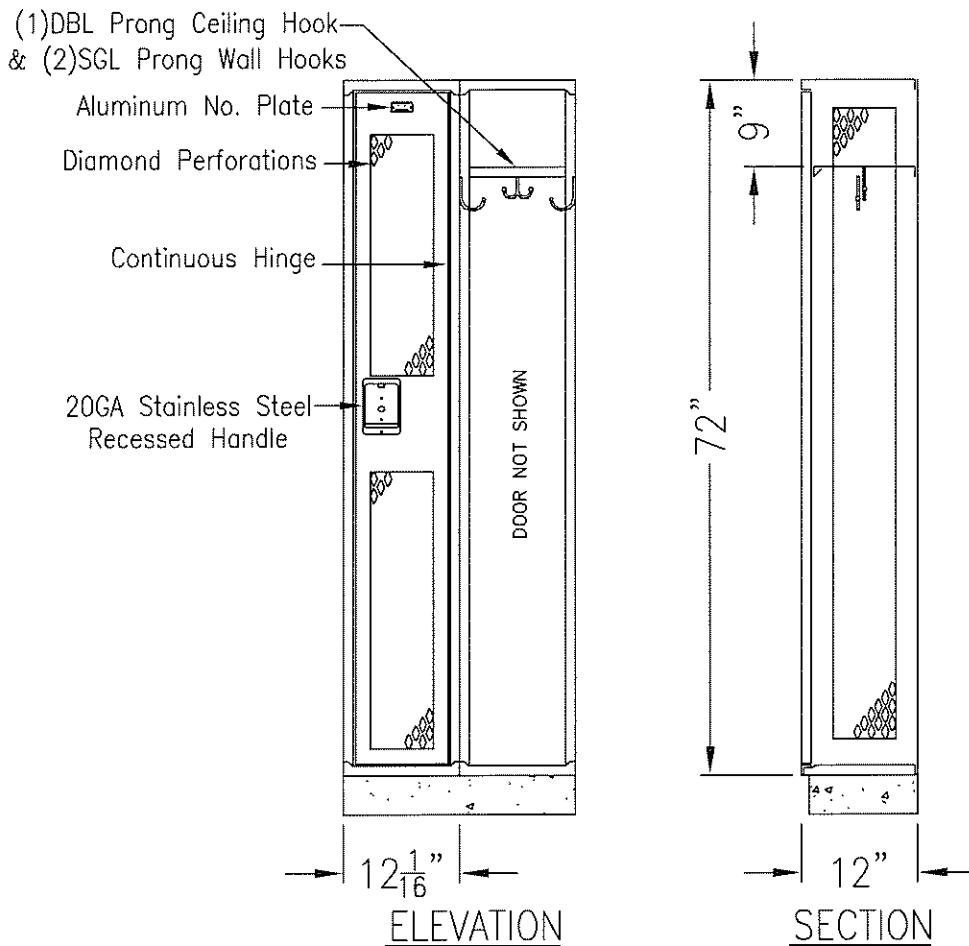

TYPICAL FOR 9", 12" & 15" WIDE
 TYPICAL FOR 12", 15", 18", 21" & 24" DEEP
 PLEASE ALLOW $\frac{1}{16}$ " GROWTH PER FRAME

This Drawing Shows A Standard WEC Product. All Drawings
 Are Copyright Protected By WEC Manufacturing. 07/13/11

Standard Construction-Basis Of Design:

(If A Change In Gauge Thickness Is Required Pricing Is Available Upon Request)

Top : 16 Gauge	Door : 14 Gauge
Back : 18 Gauge	Door Frame : 16 Gauge
Side : 16 Gauge	Shelf : 16 Gauge
Bottom : 16 Gauge	

Door Ventilation Options:

- 6" Louvers, (6) @ Top And (6) @ Bottom
- 3/4" x 1-1/2" Diamond Perforations
- 5/8" x 1-1/4" High Mini Louvers
- 5/8" x 1-1/8" High Rectangular Perforations
- Solid


Door Handle Options:

- 20 Gauge Recessed Handle (MPL)
- 20 Gauge Recessed Handle (SPL)

Locker Accessory Options:

- 18 Gauge Continuous Slope Hoods 4" Channel Base
- Base By Other

All-Welded Plus Double Tier Locker 60" High

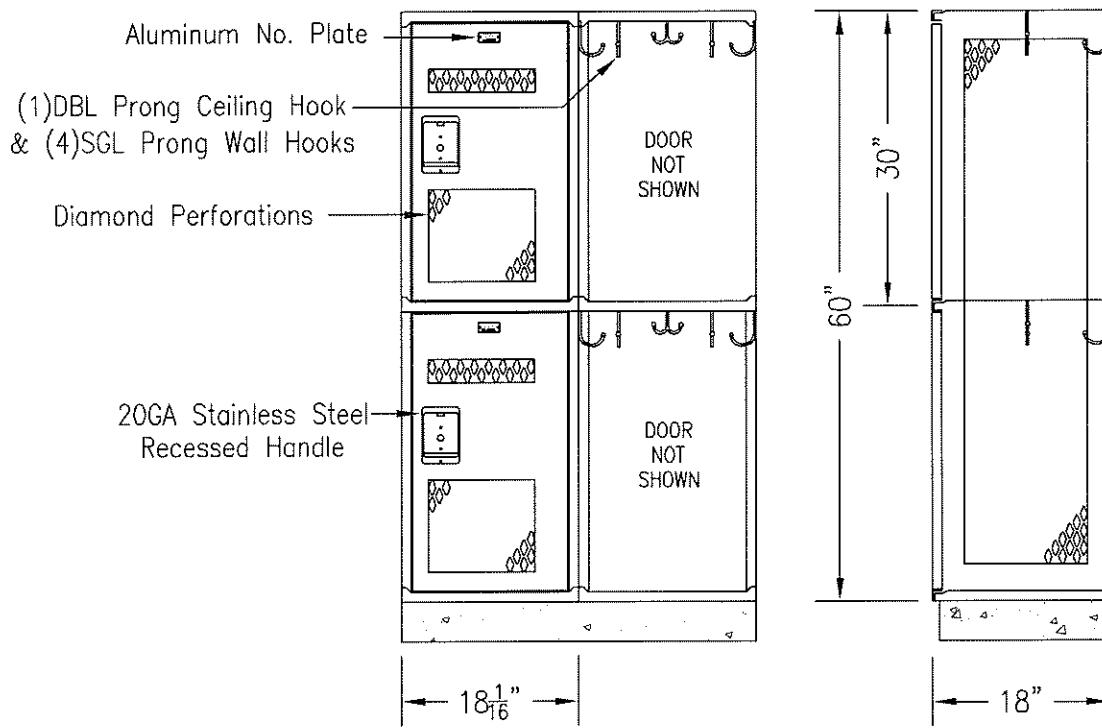

TYPICAL FOR 18" & 24" WIDE
TYPICAL FOR 18", 21" & 24" DEEP
PLEASE ALLOW $\frac{1}{16}$ " GROWTH PER FRAME

This Drawing Shows A Standard WEC Product. All Drawings
Are Copyright Protected By WEC Manufacturing. 07/13/11

Standard Construction—Basis Of Design:

(If A Change In Gauge Thickness Is Required Pricing Is Available Upon Request)

Top : 16 Gauge	Door : 14 Gauge
Back : 18 Gauge	Door Frame : 16 Gauge
Side : 16 Gauge	Shelf : 16 Gauge
Bottom : 16 Gauge	

Door Ventilation Options:

- 6" Louvers, (0) @ Top And (6) @ Bottom
- 3/4" x 1-1/2" Diamond Perforations
- 5/8" x 1/4" High Mini Louvers
- 5/8" x 1-1/8" High Rectangular Perforations
- Solid


Door Handle Options:

- 20 Gauge Recessed Handle (MPL)
- 20 Gauge Recessed Handle (SPL)

Locker Accessory Options:

- 18 Gauge Continuous Slope Hoods
- 4" Channel Base
- Base By Other

All-Welded Plus 9-Tier Locker 72" High

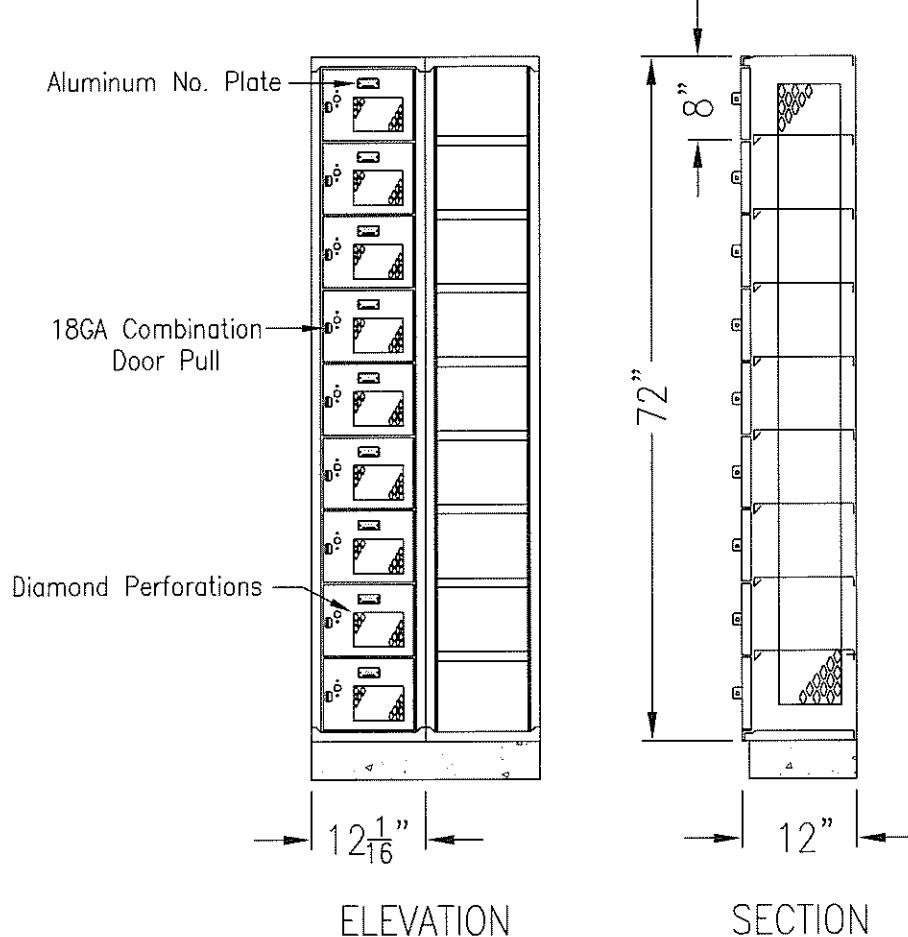

TYPICAL FOR 12" & 15" WIDE
TYPICAL FOR 12", 15" & 18" DEEP
PLEASE ALLOW $\frac{1}{16}$ " GROWTH PER FRAME

This Drawing Shows A Standard WEC Product. All Drawings
Are Copyright Protected By WEC Manufacturing. 07/13/11

Standard Construction-Basis Of Design:

(If A Change In Gauge Thickness Is Required Pricing Is Available Upon Request)

Top : 16 Gauge	Door : 14 Gauge
Back : 18 Gauge	Door Frame : 16 Gauge
Side : 16 Gauge	Shelf : 16 Gauge
Bottom : 16 Gauge	


Door Ventilation Options:

- 3" Louvers, (3) @ Center
- 3/4" x 1-1/2" Diamond Perforations
- 5/8" x 1/4" High Mini Louvers
- 5/8" x 1-1/8" High Rectangular Perforations
- Solid

Locker Accessory Options:

- 18 Gauge Continuous Slope Hoods 4" Channel Base
- Base By Other

All-Welded Plus 8-Tier Locker 72" High

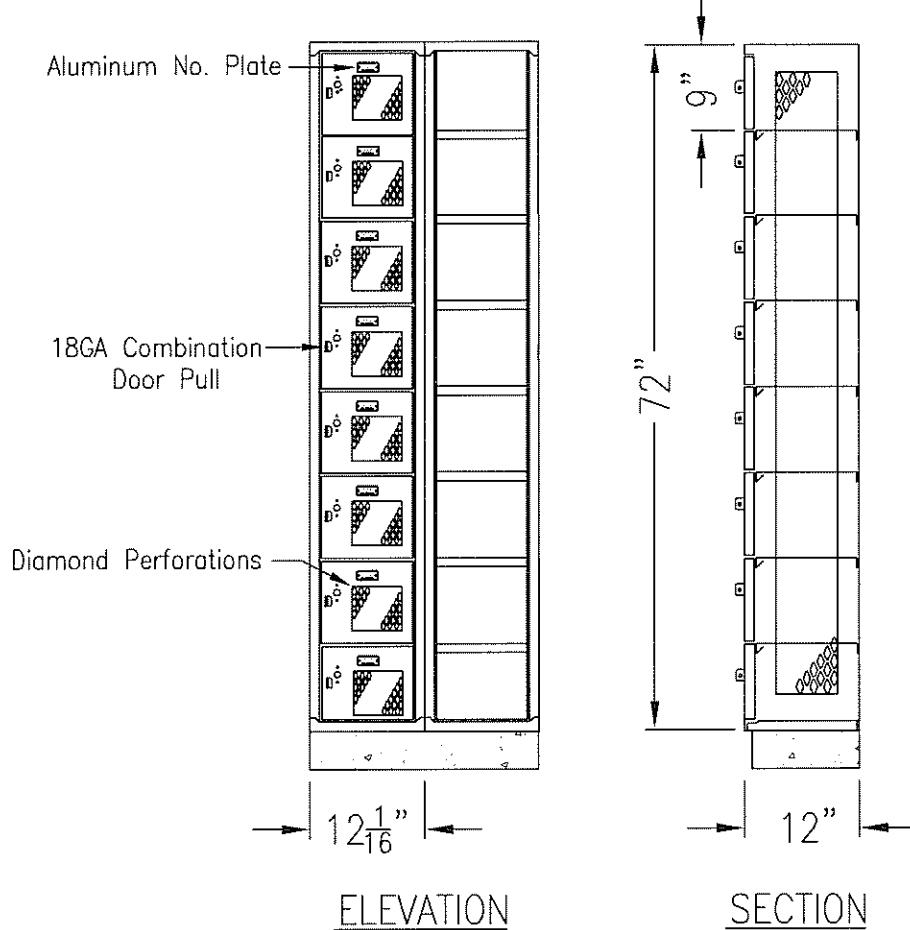

TYPICAL FOR 12" & 15" WIDE
TYPICAL FOR 12", 15" & 18" DEEP
PLEASE ALLOW $\frac{1}{16}$ " GROWTH PER FRAME

This Drawing Shows A Standard WEC Product. All Drawings
Are Copyright Protected By WEC Manufacturing. 07/13/11

Standard Construction-Basis Of Design:

(If A Change In Gauge Thickness Is Required Pricing Is Available Upon Request)

Top : 16 Gauge	Door : 14 Gauge
Back : 18 Gauge	Door Frame : 16 Gauge
Side : 16 Gauge	Shelf : 16 Gauge
Bottom : 16 Gauge	


Door Ventilation Options:

- 3" Louvers, (3) @ Center
- 3/4" x 1-1/2" Diamond Perforations
- 5/8" x 1/4" High Mini Louvers
- 5/8" x 1-1/8" High Rectangular Perforations
- Solid

Locker Accessory Options:

- 18 Gauge Continuous Slope Hoods 4" Channel Base
- Base By Other

All-Welded Plus 6-Tier Locker 72" High

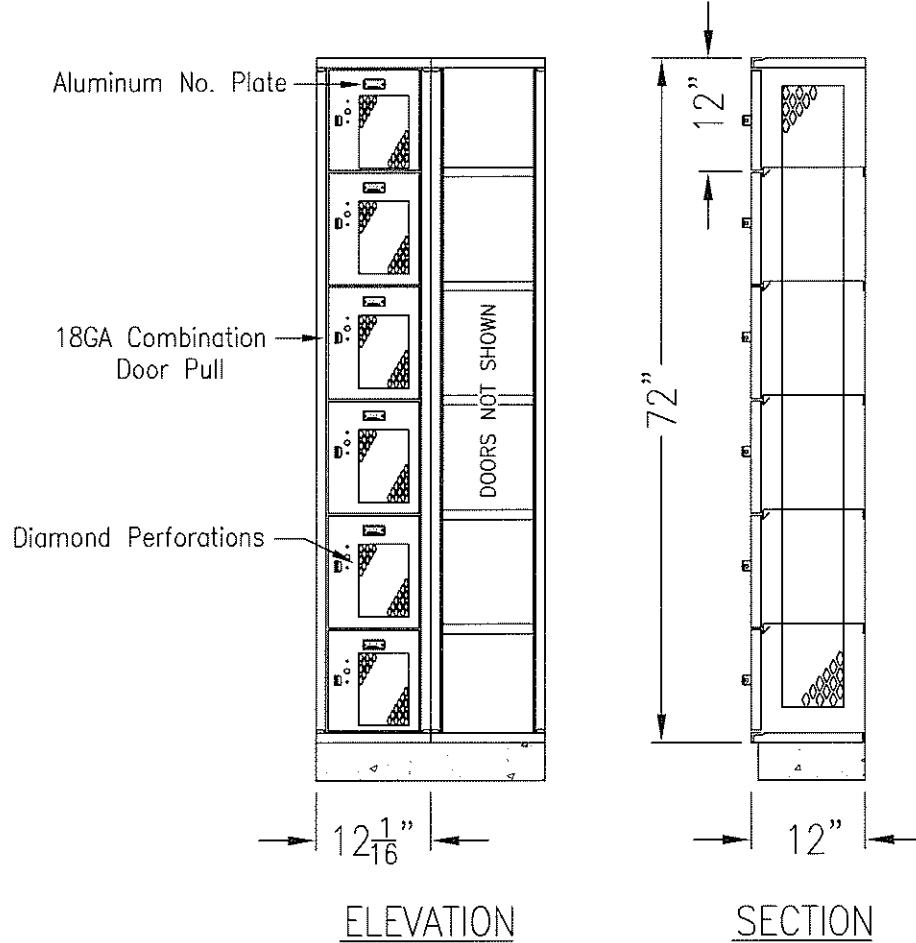

TYPICAL FOR 12" & 15" WIDE
 TYPICAL FOR 12", 15", 18", 21" & 24" DEEP
 PLEASE ALLOW $\frac{1}{16}$ " GROWTH PER FRAME

This Drawing Shows A Standard WEC Product. All Drawings
 Are Copyright Protected By WEC Manufacturing. 07/13/11

Standard Construction-Basis Of Design:

(If A Change In Gauge Thickness Is Required Pricing Is Available Upon Request)

Top : 16 Gauge	Door : 14 Gauge
Back : 18 Gauge	Door Frame : 16 Gauge
Side : 16 Gauge	Shelf : 16 Gauge
Bottom : 16 Gauge	


Door Ventilation Options:

- 3" Louvers, (3) @ Center
- 3/4" x 1-1/2" Diamond Perforations
- 5/8" x 1/4" High Mini Louvers
- 5/8" x 1-1/8" High Rectangular Perforations
- Solid

Locker Accessory Options:

- 18 Gauge Continuous Slope Hoods 4" Channel Base
- Base By Other

All-Welded Plus 4-Tier Locker 72" High

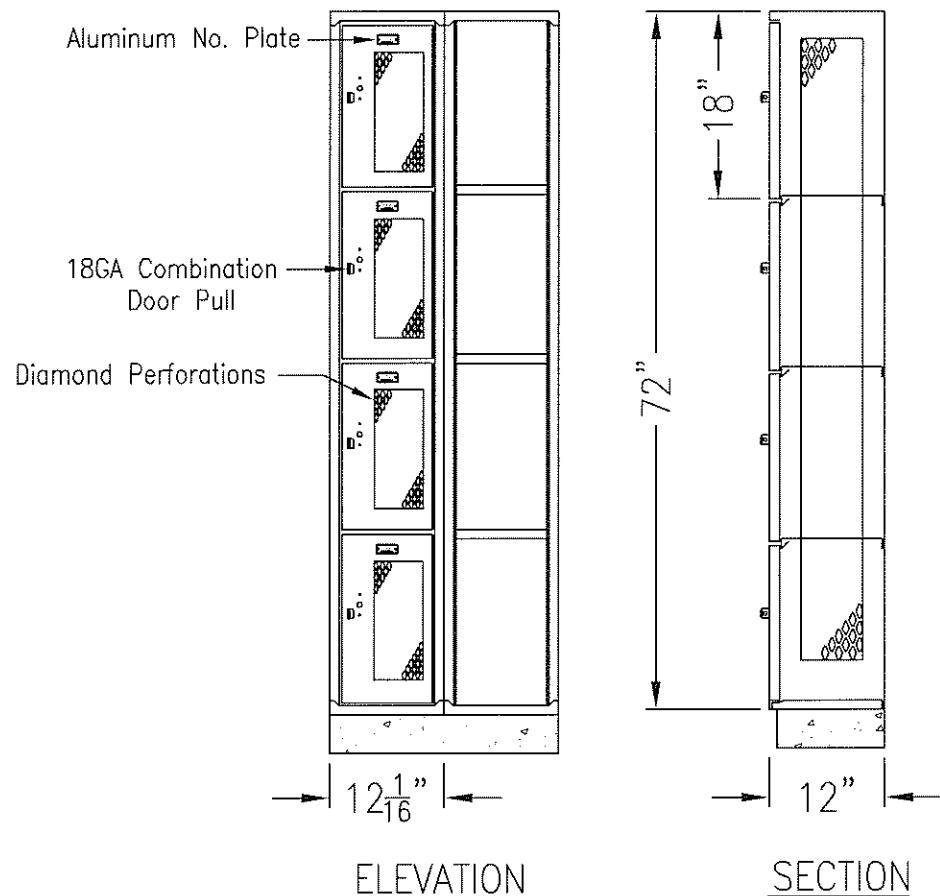

TYPICAL FOR 12" & 15" WIDE
TYPICAL FOR 12", 15", 18", 21" & 24" DEEP
PLEASE ALLOW $\frac{1}{16}$ " GROWTH PER FRAME

This Drawing Shows A Standard WEC Product. All Drawings
Are Copyright Protected By WEC Manufacturing. 07/13/11

Standard Construction-Basis Of Design:

(If A Change In Gauge Thickness Is Required Pricing Is Available Upon Request)

Top : 16 Gauge	Door : 14 Gauge
Back : 18 Gauge	Door Frame : 16 Gauge
Side : 16 Gauge	Shelf : 16 Gauge
Bottom : 16 Gauge	


Door Ventilation Options:

- 3" Louvers, (3) @ Center
- 3/4" x 1-1/2" Diamond Perforations
- 5/8" x 1/4" High Mini Louvers
- 5/8" x 1-1/8" High Rectangular Perforations
- Solid

Locker Accessory Options:

- 18 Gauge Continuous Slope Hoods 4" Channel Base
- Base By Other

All-Welded Plus
5-Tier Locker
72" High

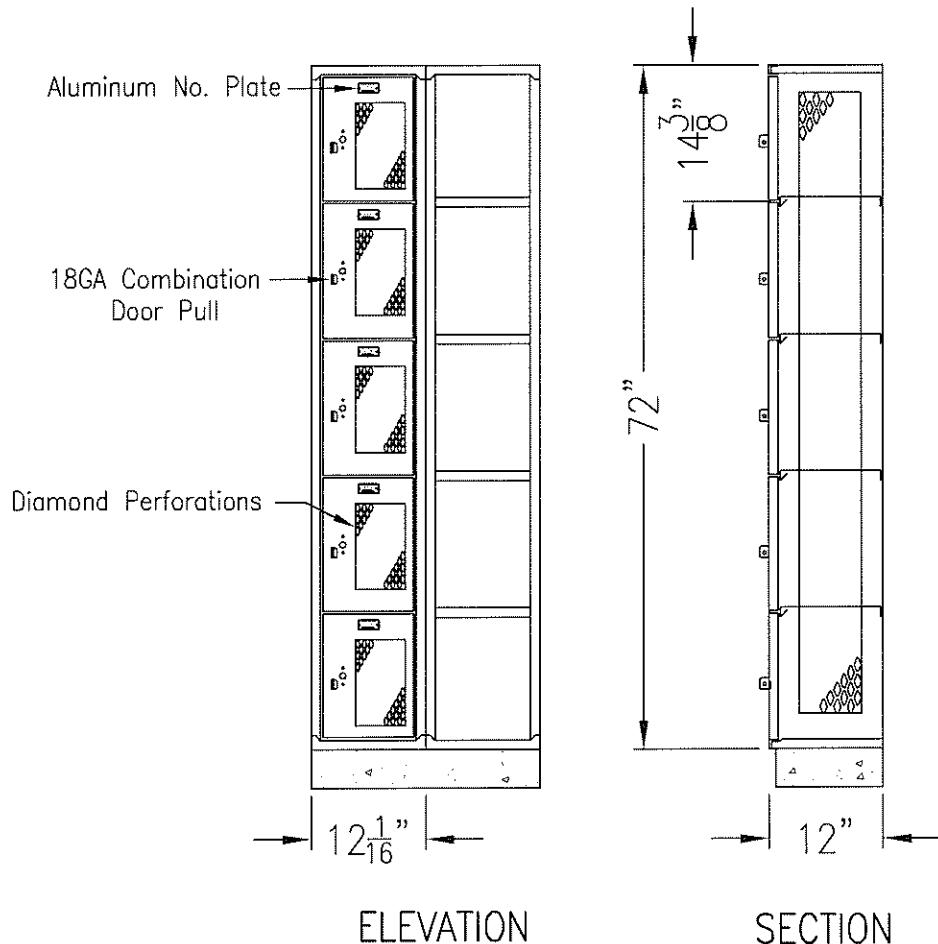

TYPICAL FOR 12" & 15" WIDE
TYPICAL FOR 12", 15", 18", 21" & 24" DEEP
PLEASE ALLOW $\frac{1}{16}$ " GROWTH PER FRAME

This Drawing Shows A Standard WEC Product. All Drawings
Are Copyright Protected By WEC Manufacturing. 07/13/11

Standard Construction—Basis Of Design:
(If A Change In Gauge Thickness Is Required Pricing Is Available Upon Request)

Top : 16 Gauge	Door : 14 Gauge
Back : 18 Gauge	Door Frame : 16 Gauge
Side : 16 Gauge	Shelf : 16 Gauge
Bottom : 16 Gauge	


Door Ventilation Options:

- 3" Louvers, (3) @ Center
- 3/4" x 1-1/2" Diamond Perforations
- 5/8" x 1/4" High Mini Louvers
- Solid

Locker Accessory Options:

- 18 Gauge Continuous Slope Hoods
- 4" Channel Base
- Base By Other

All-Welded Plus 5-Tier Locker 60" High

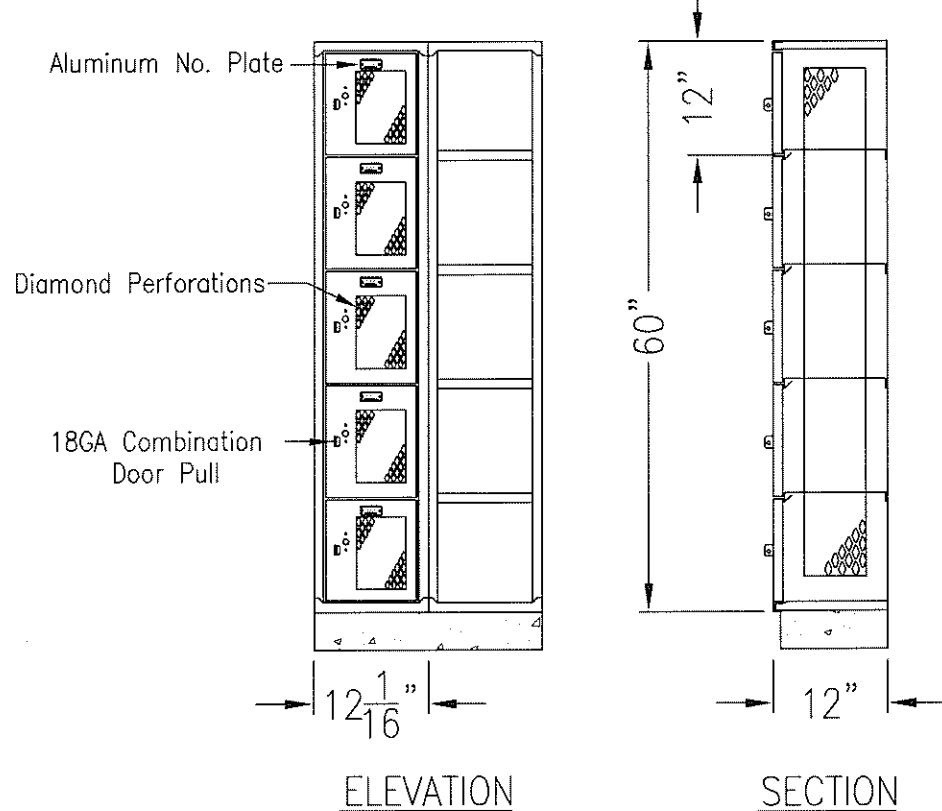

TYPICAL FOR 12" & 15" WIDE
 TYPICAL FOR 12", 15", 18", 21" & 24" DEEP
 PLEASE ALLOW $\frac{1}{16}$ " GROWTH PER FRAME

This Drawing Shows A Standard WEC Product. All Drawings
 Are Copyright Protected By WEC Manufacturing. 07/13/11

Standard Construction—Basis Of Design:

(If A Change In Gauge Thickness Is Required Pricing Is Available Upon Request)

Top : 16 Gauge	Door : 14 Gauge
Back : 18 Gauge	Door Frame : 16 Gauge
Side : 16 Gauge	Shelf : 16 Gauge
Bottom : 16 Gauge	


Door Ventilation Options:

- 3" Louvers, (3) @ Center
- 3/4" x 1-1/2" Diamond Perforations
- 5/8" x 1/4" High Mini Louvers
- 5/8" x 1-1/8" High Rectangular Perforations
- Solid

Locker Accessory Options:

- 18 Gauge Continuous Slope Hoods
- 4" Channel Base
- Base By Other

All-Welded Plus 4-Tier Locker 60" High

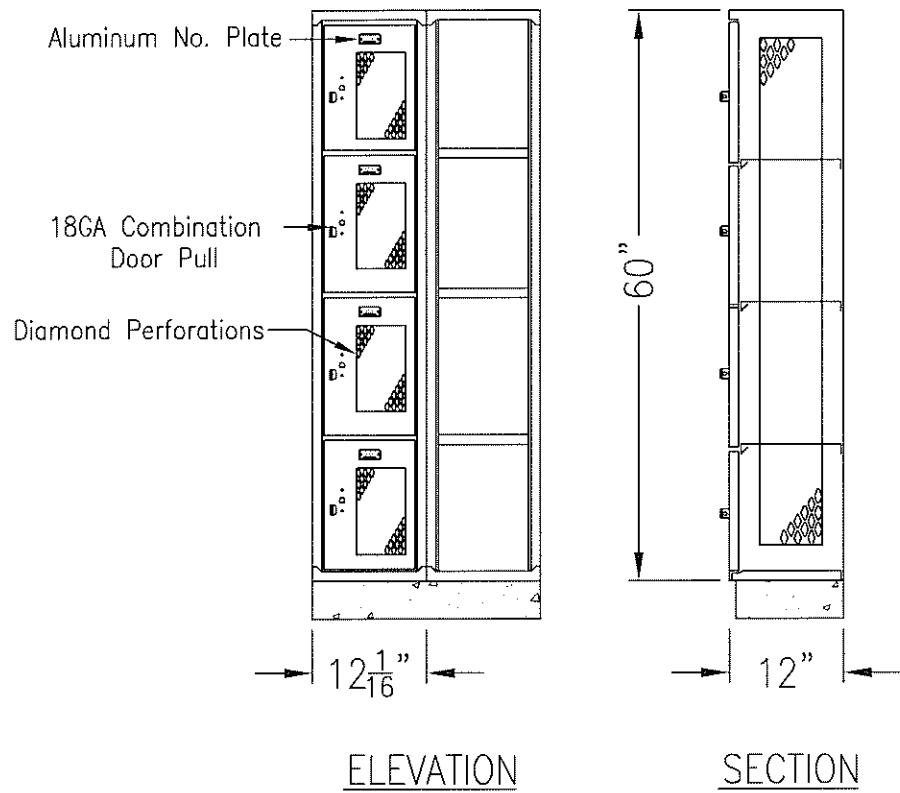

TYPICAL FOR 12" & 15" WIDE
TYPICAL FOR 12", 15", 18" & 21" DEEP
PLEASE ALLOW $\frac{1}{16}$ " GROWTH PER FRAME

This Drawing Shows A Standard WEC Product. All Drawings
Are Copyright Protected By WEC Manufacturing. 07/13/11

Standard Construction—Basis Of Design:

(If A Change In Gauge Thickness Is Required Pricing Is Available Upon Request)

Top : 16 Gauge	Door : 14 Gauge
Back : 18 Gauge	Door Frame : 16 Gauge
Side : 16 Gauge	Shelf : 16 Gauge
Bottom : 16 Gauge	


Door Ventilation Options:

- 6" Louvers, (3) @ Top And (3) @ Bottom
- 3/4" x 1-1/2" Diamond Perforations
- 5/8" x 1/4" High Mini Louvers
- 5/8" x 1-1/8" High Rectangular Perforations
- Solid

Locker Accessory Options:

- 18 Gauge Continuous Slope Hoods
- 4" Channel Base
- Base By Other

All-Welded Plus
3-Tier Locker
72" High

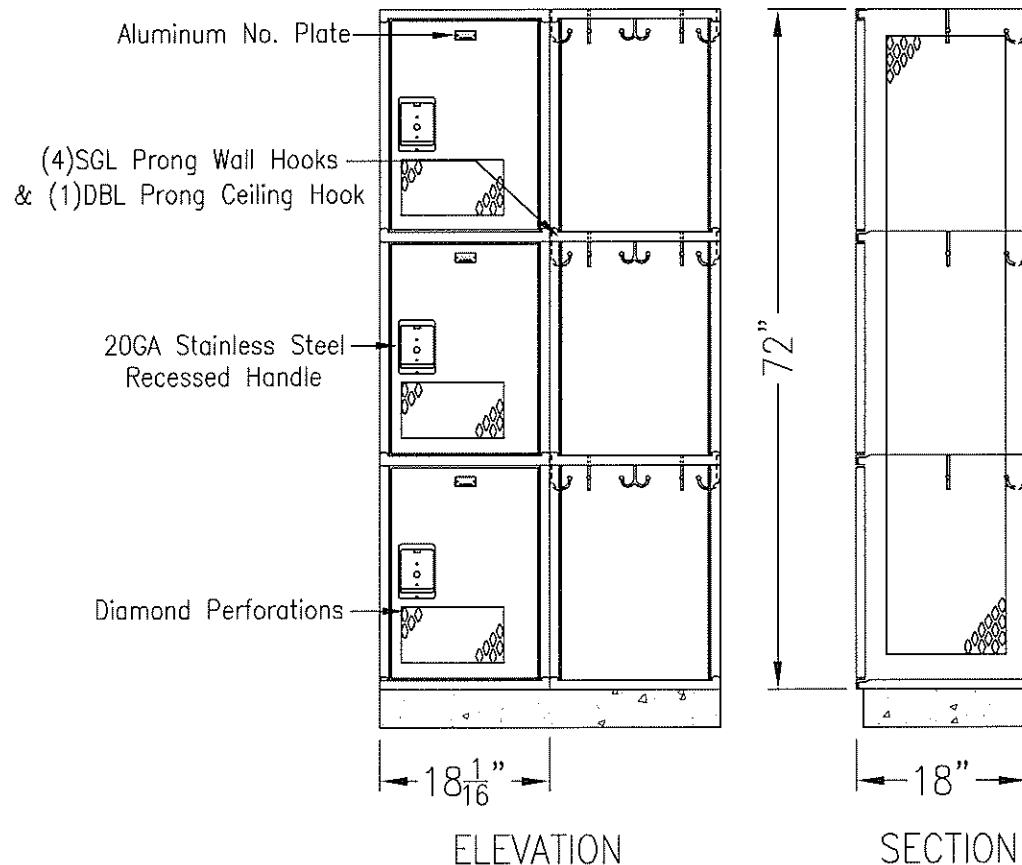

18" WIDE
TYPICAL FOR 18", 21" & 24" DEEP
PLEASE ALLOW $\frac{1}{16}$ " GROWTH PER FRAME

This Drawing Shows A Standard WEC Product. All Drawings
Are Copyright Protected By WEC Manufacturing. 07/13/11

Standard Construction-Basis Of Design:
(If A Change In Gauge Thickness Is Required Pricing Is Available Upon Request)

Top : 16 Gauge	Door : 14 Gauge
Back : 18 Gauge	Door Frame : 16 Gauge
Side : 16 Gauge	Shelf : 16 Gauge
Bottom : 16 Gauge	

Door Ventilation Options:

- 6" Louvers, (0) @ Top And (3) @ Bottom
- 3/4" x 1-1/2" Diamond Perforations
- 5/8" x 1/4" High Mini Louvers
- 5/8" x 1-1/8" High Rectangular Perforations
- Solid


Door Handle Options:

- 20 Gauge Recessed Handle (MPL)
- 20 Gauge Recessed Handle (SPL)

Locker Accessory Options:

- 18 Gauge Continuous Slope Hoods
- 4" Channel Base
- Base By Other

All-Welded Plus 3-Tier Locker 72" High

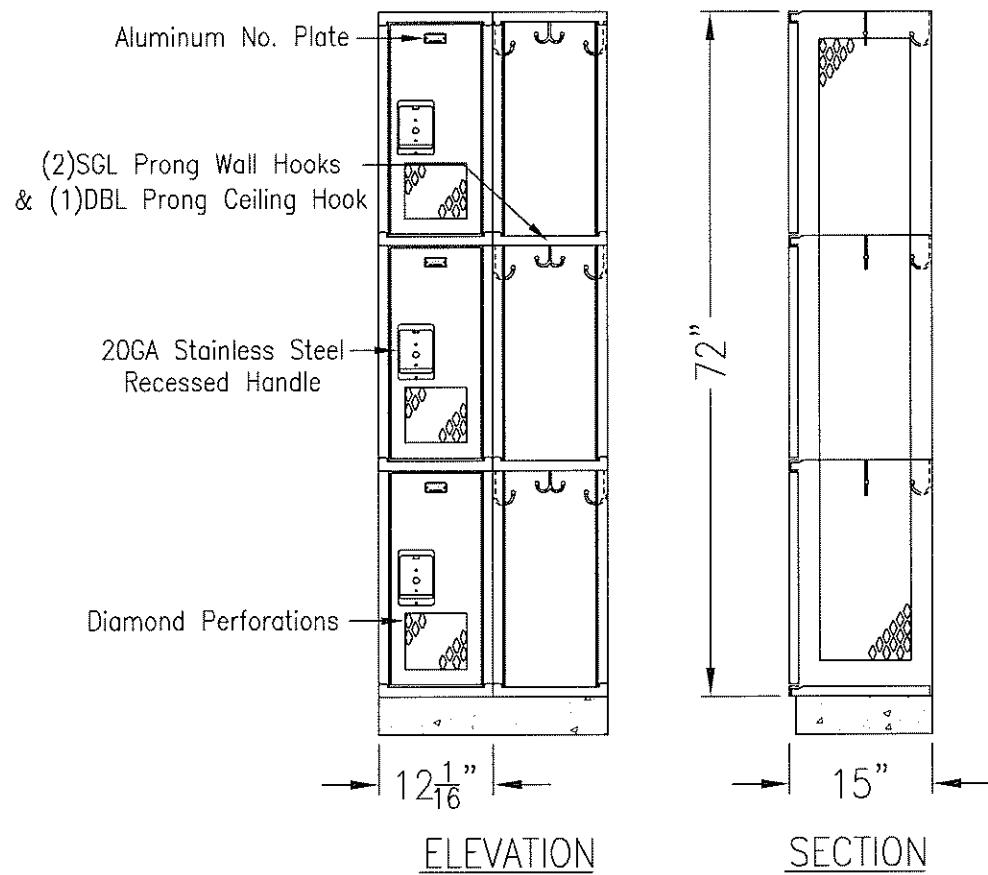

Standard Construction-Basis Of Design:

(If A Change In Gauge Thickness Is Required Pricing Is Available Upon Request)

Top : 16 Gauge	Door : 14 Gauge
Back : 18 Gauge	Door Frame : 16 Gauge
Side : 16 Gauge	Shelf : 16 Gauge
Bottom : 16 Gauge	

Door Ventilation Options:

- 6" Louvers, (0) @ Top And (3) @ Bottom
- 3/4" x 1-1/2" Diamond Perforations
- 5/8" x 1/4" High Mini Louvers
- 5/8" x 1-1/8" High Rectangular Perforations
- Solid


Door Handle Options:

- 20 Gauge Recessed Handle (MPL)
- 20 Gauge Recessed Handle (SPL)

Locker Accessory Options:

- 18 Gauge Continuous Slope Hoods
- 4" Channel Base
- Base By Other

All-Welded Plus 3-Tier Locker 60" High

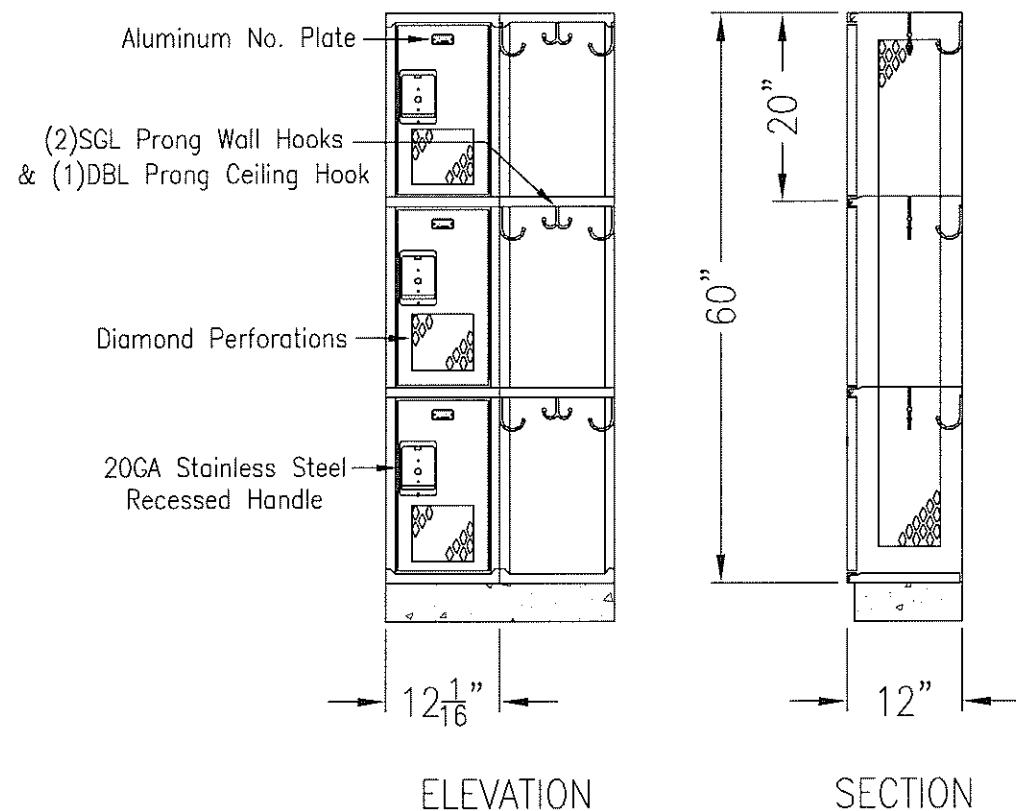

TYPICAL FOR 12" & 15" WIDE
TYPICAL FOR 12", 15", 18" & 21" DEEP
PLEASE ALLOW $\frac{1}{16}$ " GROWTH PER FRAME

This Drawing Shows A Standard WEC Product. All Drawings
Are Copyright Protected By WEC Manufacturing. 07/13/11

Standard Construction-Basis Of Design:

(If A Change In Gauge Thickness Is Required Pricing Is Available Upon Request)

Top : 16 Gauge	Door : 14 Gauge
Back : 18 Gauge	Door Frame : 16 Gauge
Side : 16 Gauge	Shelf : 16 Gauge
Bottom : 16 Gauge	

Door Ventilation Options:

- 6" Louvers, (0) @ Top And (3) @ Bottom
- 3/4" x 1-1/2" Diamond Perforations
- 5/8" x 1/4" High Mini Louvers
- 5/8" x 1-1/8" High Rectangular Perforations
- Solid


Door Handle Options:

- 20 Gauge Recessed Handle (MPL)
- 20 Gauge Recessed Handle (SPL)

Locker Accessory Options:

- 18 Gauge Continuous Slope Hoods 4" Channel Base
- Base By Other

All-Welded Plus 3-Tier Locker 60" High

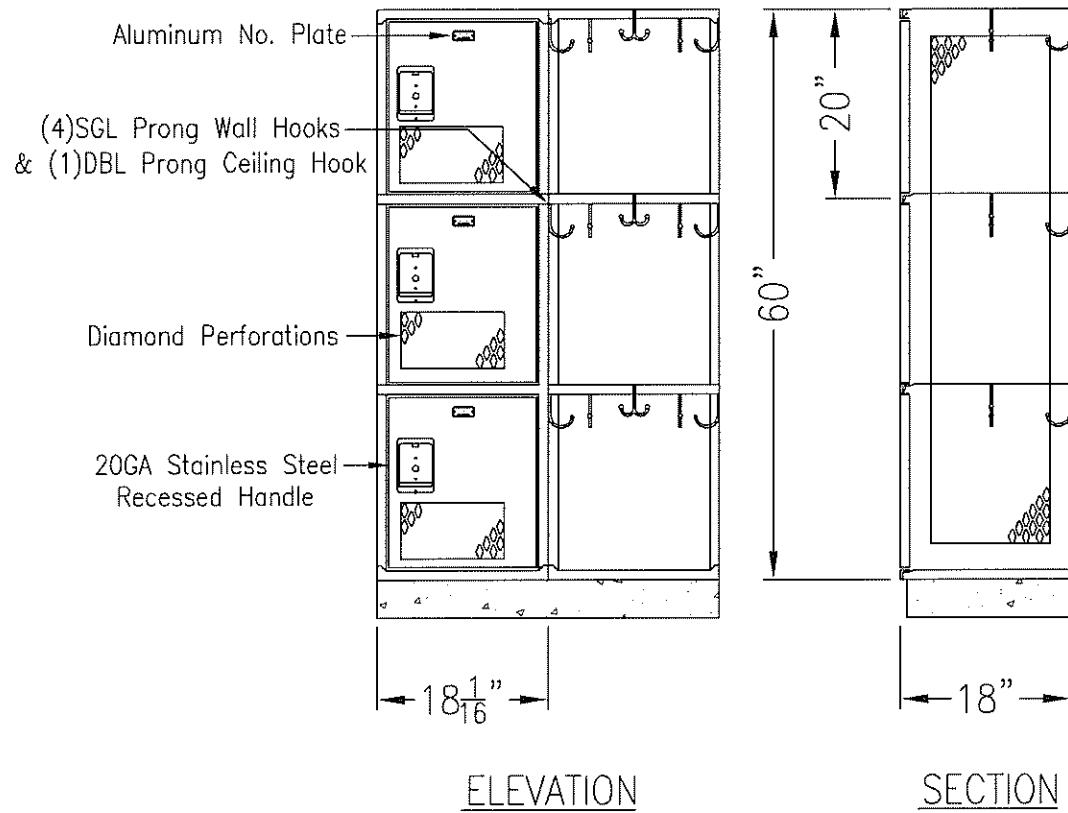

TYPICAL FOR 18" & 24" WIDE
TYPICAL FOR 18", 21" & 24" DEEP
PLEASE ALLOW $\frac{1}{16}$ " GROWTH PER FRAME

This Drawing Shows A Standard WEC Product. All Drawings
Are Copyright Protected By WEC Manufacturing. 07/13/11

Standard Construction-Basis Of Design:

(If A Change In Gauge Thickness Is Required Pricing Is Available Upon Request)

Top : 16 Gauge	Door : 14 Gauge
Back : 18 Gauge	Door Frame : 16 Gauge
Side : 16 Gauge	Shelf : 16 Gauge
Bottom : 16 Gauge	

Door Ventilation Options:

- 6" Louvers, (0) @ Top And (3) @ Bottom
- 3/4" x 1-1/2" Diamond Perforations
- 5/8" x 1/4" High Mini Louvers
- 5/8" x 1-1/8" High Rectangular Perforations
- Solid


Door Handle Options:

- 20 Gauge Recessed Handle (MPL)
- 20 Gauge Recessed Handle (SPL)

Locker Accessory Options:

- 18 Gauge Continuous Slope Hoods 4" Channel Base
- Base By Other

All-Welded Plus Double Tier Locker 72" High

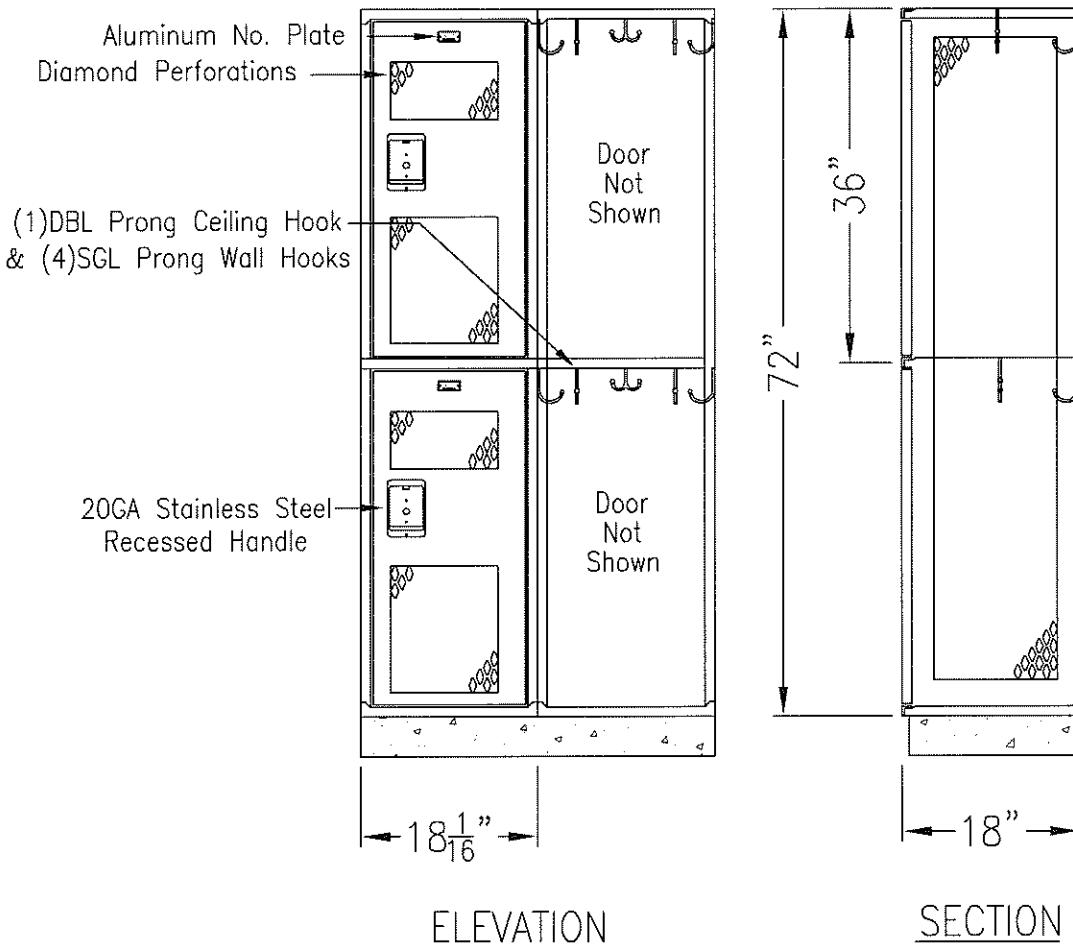

TYPICAL FOR 18" & 24" WIDE
TYPICAL FOR 18", 21" & 24" DEEP
PLEASE ALLOW $\frac{1}{16}$ " GROWTH PER FRAME

This Drawing Shows A Standard WEC Product. All Drawings
Are Copyright Protected By WEC Manufacturing. 07/13/11

Standard Construction-Basis Of Design:

(If A Change In Gauge Thickness Is Required Pricing Is Available Upon Request)

Top : 16 Gauge

Door : 14 Gauge

Back : 18 Gauge

Door Frame : 16 Gauge

Side : 16 Gauge

Shelf : 16 Gauge

Bottom : 16 Gauge

Door Ventilation Options:

- 6" Louvers, (3) @ Top And (6) @ Bottom
- 3/4" x 1-1/2" Diamond Perforations
- 5/8" x 1/4" High Mini Louvers
- 5/8" x 1-1/8" High Rectangular Perforations
- Solid


Door Handle Options:

- 20 Gauge Recessed Handle (MPL)
- 20 Gauge Recessed Handle (SPL)

Locker Accessory Options:

- 18 Gauge Continuous Slope Hoods
- 4" Channel Base
- Base By Other

All-Welded Plus Double Tier Locker 60" High

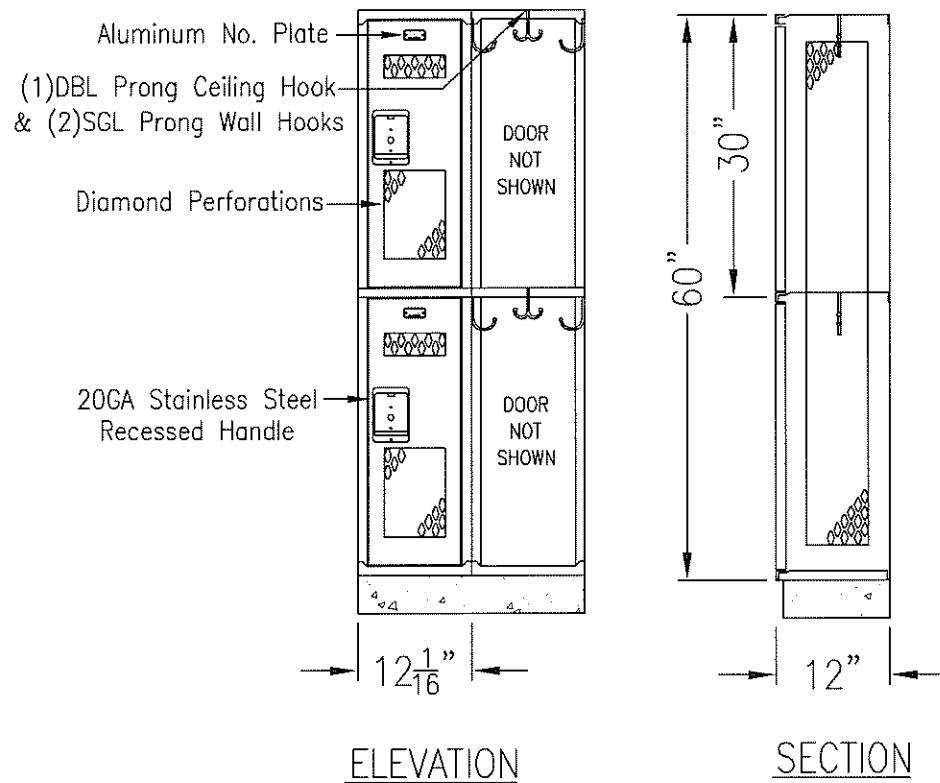

TYPICAL FOR 12" & 15" WIDE
TYPICAL FOR 12", 15", 18" & 21" DEEP
PLEASE ALLOW $\frac{1}{16}$ " GROWTH PER FRAME

This Drawing Shows A Standard WEC Product. All Drawings
Are Copyright Protected By WEC Manufacturing. 07/13/11

Standard Construction-Basis Of Design:

(If A Change In Gauge Thickness Is Required Pricing Is Available Upon Request)

Top : 16 Gauge	Door : 14 Gauge
Back : 18 Gauge	Door Frame : 16 Gauge
Side : 16 Gauge	Shelf : 16 Gauge
Bottom : 16 Gauge	

Door Ventilation Options:

- 6" Louvers, (0) @ Top And (6) @ Bottom
- 3/4" x 1-1/2" Diamond Perforations
- 5/8" x 1/4" High Mini Louvers
- 5/8" x 1-1/8" High Rectangular Perforations
- Solid


Door Handle Options:

- 20 Gauge Recessed Handle (MPL)
- 20 Gauge Recessed Handle (SPL)

Locker Accessory Options:

- 18 Gauge Continuous Slope Hoods
- 4" Channel Base
- Base By Other

All-Welded Plus Single Tier Locker 60" High

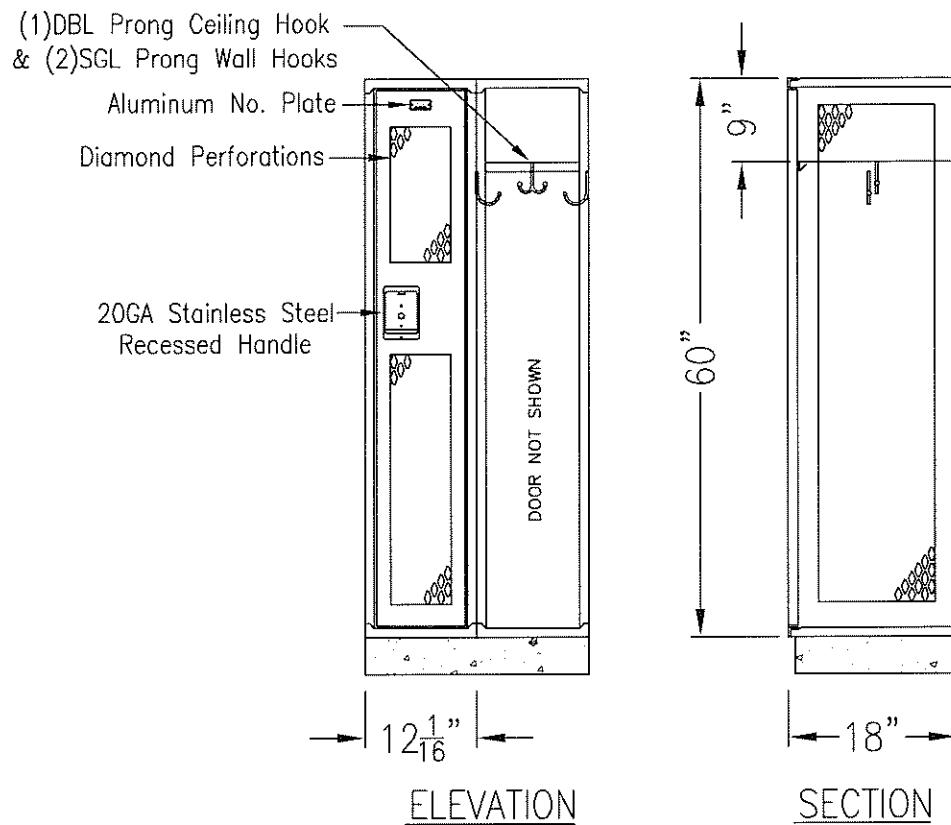

TYPICAL FOR 9", 12" & 15" WIDE
TYPICAL FOR 12", 15", 18", 21" & 24" DEEP
PLEASE ALLOW $\frac{1}{16}$ " GROWTH PER FRAME

This Drawing Shows A Standard WEC Product. All Drawings
Are Copyright Protected By WEC Manufacturing. 07/13/11

Standard Construction-Basis Of Design:

(If A Change In Gauge Thickness Is Required Pricing Is Available Upon Request)

Top : 16 Gauge	Door : 14 Gauge
Back : 18 Gauge	Door Frame : 16 Gauge
Side : 16 Gauge	Shelf : 16 Gauge
Bottom : 16 Gauge	

Door Ventilation Options:

- 6" Louvers, (6) @ Top And (6) @ Bottom
- 3/4" x 1-1/2" Diamond Perforations
- 5/8" x 1/4" High Mini Louvers
- 5/8" x 1-1/8" High Rectangular Perforations
- Solid

Door Handle Options:

- 20 Gauge Recessed Handle (MPL)
- 20 Gauge Recessed Handle (SPL)

Locker Accessory Options:

- 18 Gauge Continuous Slope Hoods 4" Channel Base
- Base By Other

**All-Welded Plus
Single Tier Locker
72" High**


(1)DBL Prong Ceiling Hook
& (4)SGL Prong Wall Hooks

Aluminum No. Plate


Diamond Perforations

Continuous Hinge

20GA Stainless Steel
Recessed Handle

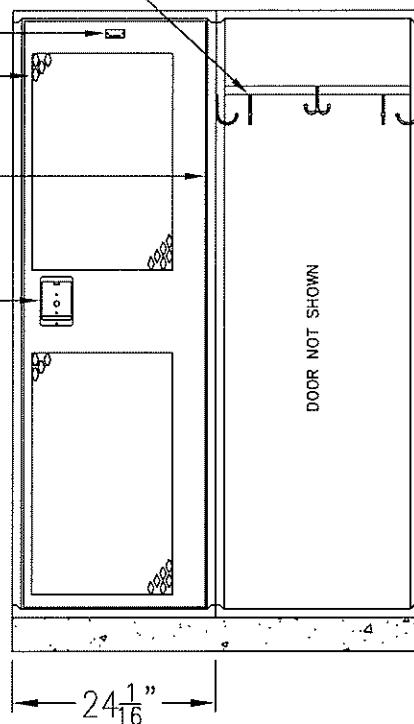

ELEVATION

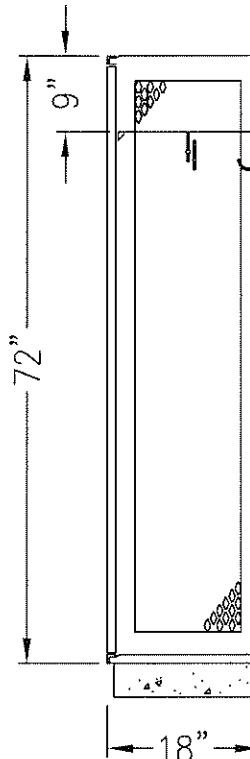

SECTION

TYPICAL FOR 18" & 24" WIDE
TYPICAL FOR 18", 21" & 24" DEEP
PLEASE ALLOW $\frac{1}{16}$ " GROWTH PER FRAME

Standard Construction-Basis Of Design:

(If A Change In Gauge Thickness Is Required Pricing Is Available Upon Request)

Top : 16 Gauge

Door : 14 Gauge

Back : 18 Gauge

Door Frame : 16 Gauge

Side : 16 Gauge

Shelf : 16 Gauge

Bottom : 16 Gauge

Door Ventilation Options:

- 6" Louvers, (6) @ Top And (6) @ Bottom
- 3/4" x 1-1/2" Diamond Perforations
- 5/8" x 1/4" High Mini Louvers
- 5/8" x 1-1/8" High Rectangular Perforations
- Solid

Door Handle Options:

- 20 Gauge Recessed Handle (MPL)
- 20 Gauge Recessed Handle (SPL)

Locker Accessory Options:

- 18 Gauge Continuous Slope Hoods
- 4" Channel Base
- Base By Other