


# PT EBARA INDONESIA

## HEAD OFFICE & FACTORY

Jl. Raya Jakarta-Bogor Km.32 Curug, Cimanggis.  
Kota Depok, Jawa Barat 16453.  
Phone : (+6221) 8740 852-53 (Hunting) Fax: (+6221) 8740 033

## SURABAYA OFFICE

3rd Fl., Wisma SIER Building  
Jl. Rungkut Industri Raya No. 10, Rungkut Tengah,  
Kec. Gn. Anyar.  
Surabaya, Jawa Timur 60293.  
Phone : (+6231) 9985 3535

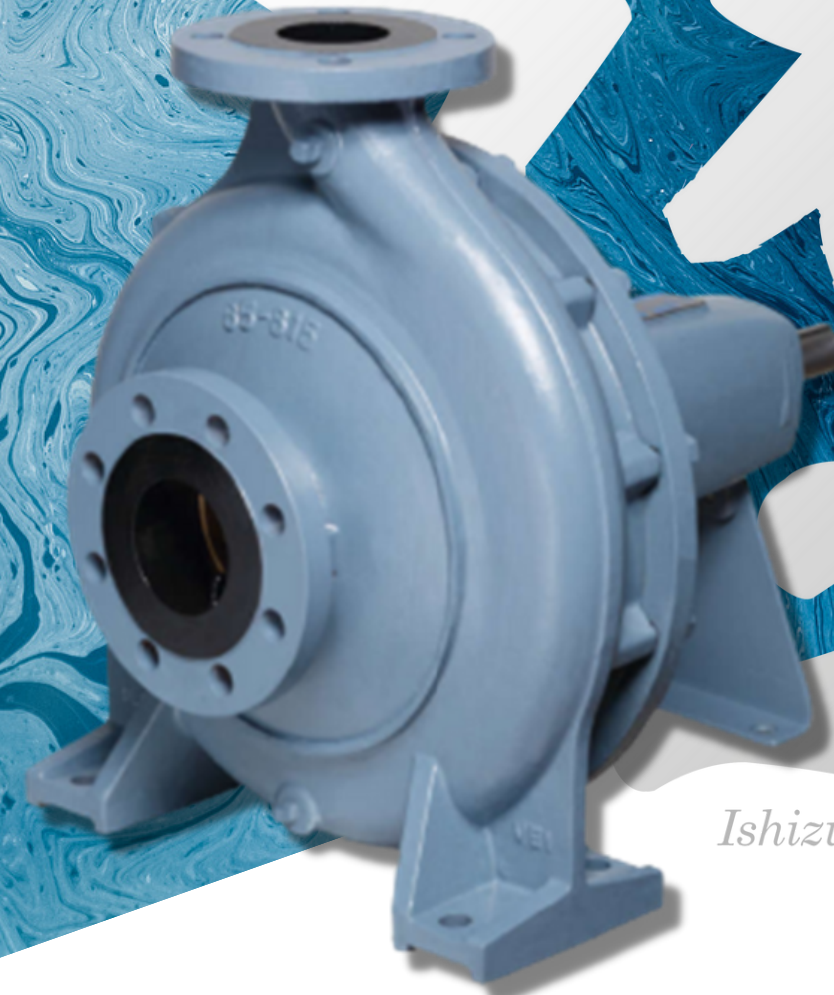

*Ishizue*

# GS

EBARA End Suction Volute Pump

50 Hz



# Features



**Energy-Saving Design**  
World top class pump efficiency achieved. Impeller designed using our proprietary 3D inverse design technology. Higher efficiency means lower energy consumption



**High Working Pressure and Range of Temperature**  
Maximum working pressure up to 25 Bar.  
Liquid Temperature: 10 C Degree ~ 140 C Degree.



**International Standards**  
Pump dimensions adopt EN733. Mechanical seal adopts EN12756. Protector fitted in accordance with EN294.



**Easy Removal and Maintenance**  
BPO (Back Pull Out) system allows all rotating elements can be removed without disconnecting suction and discharge pipe work.

# Application Fields



Water Supply



Building



General Industry

# Specification

**Liquid Handling**  
Clean Water, -10 ~ 140 C\*

**Max. Working Pressure**  
Up to 25 Bar\*

**Design Standard**  
EN 733

**Casing**  
Cast Iron  
Ductile Cast Iron\*

**Impeller**  
Bronze  
Cast Iron  
Ductile Cast Iron

**Shaft**  
Stainless Steel

**Flange**  
DIN PN16.  
DIN PN25\*

**Bearing**  
Sealed Ball Bearing

**Shaft Seal**  
Mechanical Seal  
Gland Packing

\*Optional & Contact Us for more detail.

# Selection Chart

2 Pole || 50 hz

