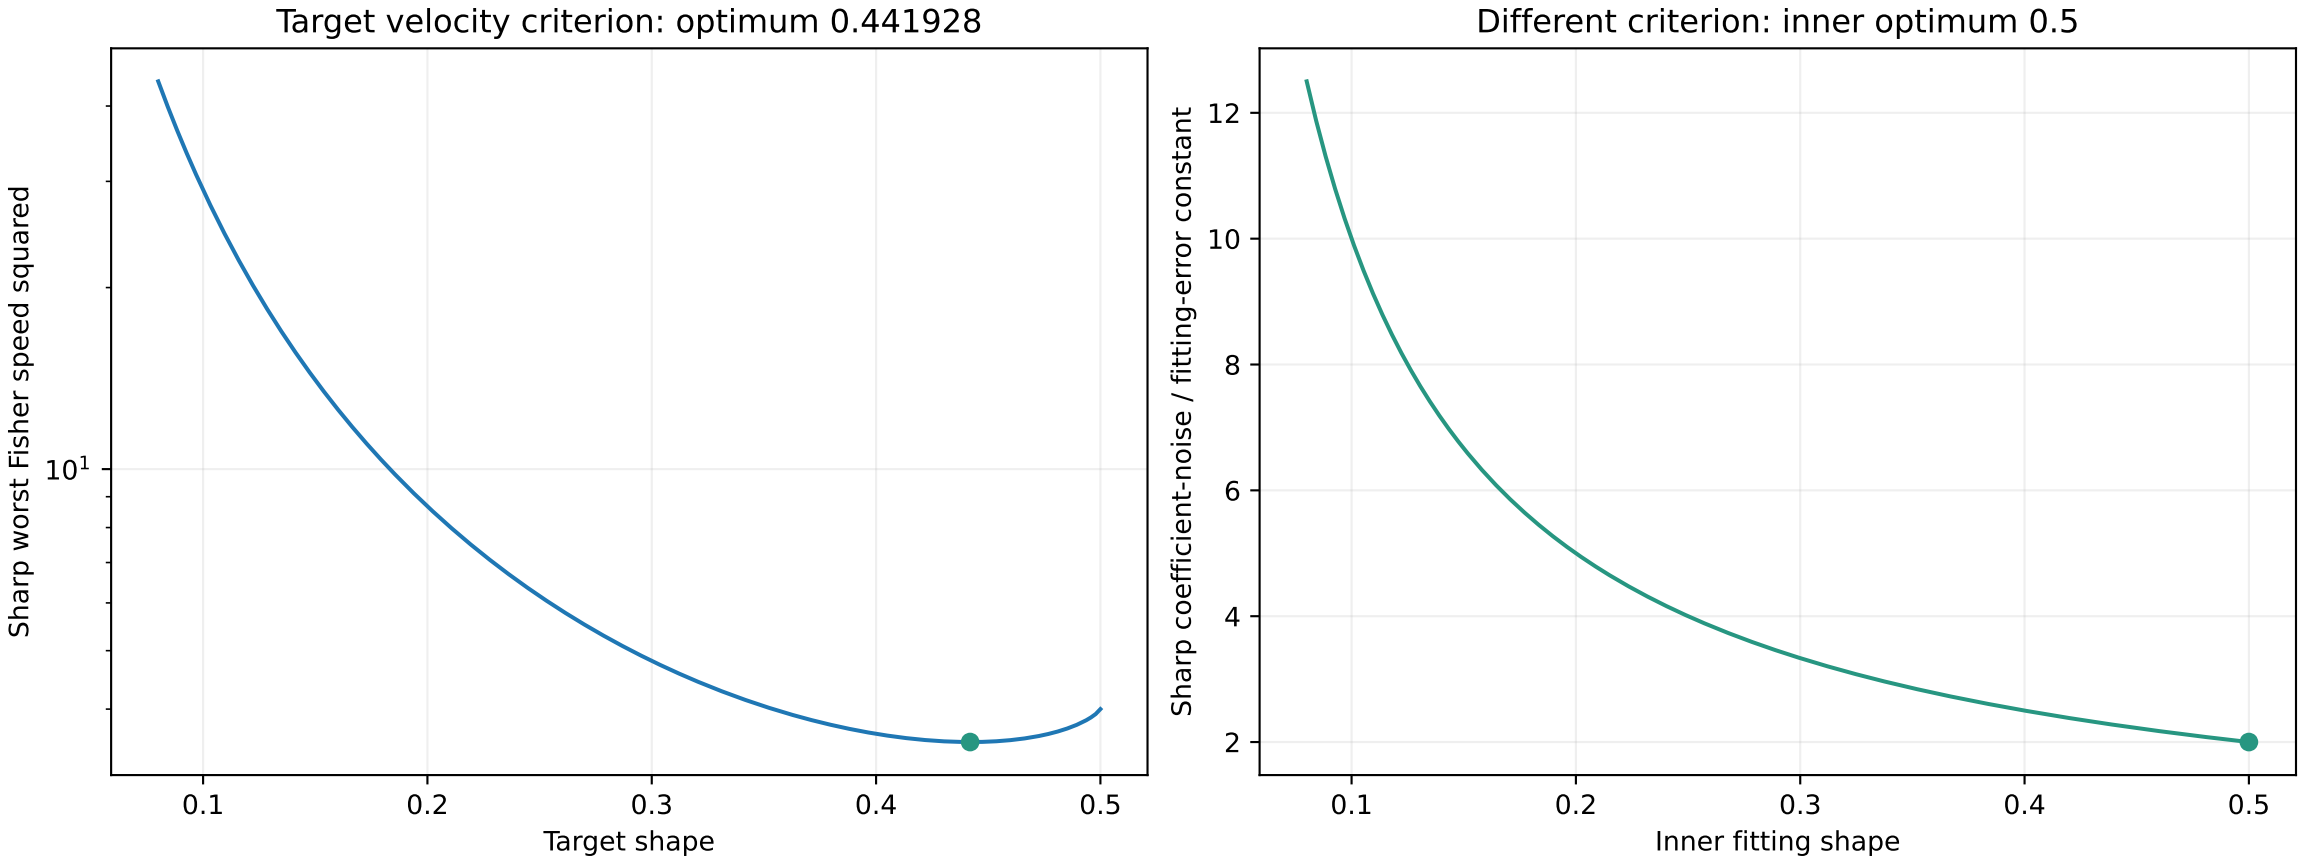
Target velocity criterion: optimum 0.441928
Sharp worst Fisher speed squared
10^1
0.1
0.2
0.3
0.4
0.5
Target shape
Different criterion: inner optimum 0.5
Sharp coefficient-noise / fitting-error constant
12
10
8
6
4
2
0.1
0.2
0.3
0.4
0.5
Inner fitting shape