

# vcdMaker

A User's Guide to vcdMaker  
Edition 2  
August, 2017

Copyright (c) 2017 vcdMaker team

# Table of Contents

1	Licensing.....	<a href="#">1</a>
2	Introduction.....	<a href="#">2</a>
3	Installation.....	<a href="#">3</a>
3.1	Windows.....	<a href="#">3</a>
3.1.1	Installing.....	<a href="#">3</a>
3.1.2	Uninstalling.....	<a href="#">3</a>
3.2	Linux.....	<a href="#">4</a>
3.2.1	Installing.....	<a href="#">4</a>
	RPM.....	<a href="#">4</a>
	DPKG.....	<a href="#">4</a>
3.2.2	Uninstalling.....	<a href="#">4</a>
	RPM.....	<a href="#">4</a>
	DPKG.....	<a href="#">4</a>
4	Getting Started with vcdMaker.....	<a href="#">5</a>
5	Input log files.....	<a href="#">6</a>
5.1	Specifying the user log format.....	<a href="#">6</a>
5.2	The inherent vcdMaker log format.....	<a href="#">7</a>
6	Creating VCD files.....	<a href="#">10</a>
7	Merging log files.....	<a href="#">11</a>
8	Viewing VCD files.....	<a href="#">13</a>
8.1	GtkWave.....	<a href="#">13</a>
8.1.1	Downloading.....	<a href="#">13</a>
8.1.2	First steps.....	<a href="#">13</a>
9	Warnings and errors.....	<a href="#">22</a>
10	Reference projects.....	<a href="#">24</a>
11	Release notes.....	<a href="#">25</a>
11.1	Version 1.0.1.....	<a href="#">25</a>
11.2	Version 2.0.1.....	<a href="#">25</a>
11.3	Version 3.0.1.....	<a href="#">25</a>

# 1 Licensing

The MIT License (MIT)

Copyright (c) 2017 vcdMaker team

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

## 2 Introduction

Quite often while debugging a computer system huge log files are created and they need to be analyzed afterwards. That could be achieved by parsing the trace and extracting the relevant information but initially one needs to know what the information is. The *vcdMaker* tool set has been created to serve this purpose and help software and firmware engineers to analyze their applications and systems. It translates a human readable log files into the Variable Change Dump format files allowing for their further visualization which can be done using any of the VCD viewers. As a single picture is said to be worth thousand words the approach makes the debugging process easier and more efficient.

The tool set is provided as a freeware. There are no charges for using it but the development team would appreciate your feedback. All of the comments, requests or screen captures presenting the way you benefited from using it are appreciated. Contact us via *vcdmaker@mail.com*.

## 3 Installation

### 3.1 Windows

#### 3.1.1 Installing

Start the installation by executing the *vcdMakerSetup.exe*. Then just follow the installer. During the process you will be able to adjust the installation path. The installer will copy all the necessary files, create the shortcut to the *vcdMaker* manual in your Programs Menu and update the user's environmental variable PATH. Therefore once installed a user will be able to invoke the application from any location.

The setup log could be created by invoking the installer in the following way:

```
vcdMakerSetup.exe /install /log vcdMakerInstallation.log
```

#### 3.1.2 Uninstalling

The *vcdMaker* package can be easily and entirely removed by the Programs and Features Control Panel tool. Alternatively one could use the following command:

```
vcdMakerSetup.exe /uninstall
```

## 3.2 *Linux*

There are binary packages available for the Linux distributions using the RPM and the DPKG package managers. The packages contain the applications themselves, the manual pages, the user documentation as well as sample files. By default, they will be installed in the '/usr/share/doc/vcdMaker' folder.

### 3.2.1 Installing

#### RPM

```
rpm -i package_name.rpm
```

#### DPKG

```
dpkg -i package_name.deb
```

### 3.2.2 Uninstalling

#### RPM

```
rpm -e vcdmaker
```

#### DPKG

```
dpkg -r vcdmaker
```

## 4 Getting Started with vcdMaker

Running *vcdMaker* is easy but to make the learning curve really steep there have been provided sample files one could use to get the knack of the tool.

In the target installation folder there is a *sample* sub-folder containing the *example.txt* file (for Windows, for Linux see 3.2). It composes of an arbitrary set of signals and their values changing over time. The format of the input file has been described in 5. Copy the file to any folder you wish to experiment in.

Then, use the following command to create the output VCD file:

```
vcdMaker -o output.vcd -t us example.txt
```

The *vcdMaker* will parse the *example.txt* file and create the *output.vcd* file. That's it!

So as to get the feeling of how you could use the VCD file it is recommended to read the Chapter 8 first.

Using *vcdMerge* is equally easy! There are sample files provided as well. Let's merge *system1\_time1.txt* and *system2\_time2.txt*. The logs represent systems working in different time domains (they are not synchronized).

The synchronization points in both logs have been marked with the 'Sync' events. Browse the logs and search for them. Their time stamps are the parameters of the signals sources.

The syntax is:

```
vcdMerge.exe -o merge_t1_t2.vcd  
T,71050601,us,System1,Counter,system1_time1.txt  
T,234256037,us,System2,Counter,system2_time2.txt
```

For the synchronized sources (*system1\_time1.txt* and *system2\_time1.txt*) the time stamps shall be set to 0:

```
vcdMerge.exe -o merge_t1_t1.vcd  
T,0,us,System1,Counter,system1_time1.txt  
T,0,us,System2,Counter,system2_time1.txt
```

## 5 Input log files

*vcdMaker* tools can parse any user provided log. The syntax of the log can be specified by the XML file which has been described in 5.1. Alternatively the logs to be processed might be created in the inherent *vcdMaker* format presented in 5.2.

### 5.1 Specifying the user log format

The user log format can be specified by the XML file with the following structure:

```
<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
<!DOCTYPE signals SYSTEM "vcdMaker.dtd">
<signals>

<vector>
  <line> Regular expression describing the line including group matching </line>
  <timestamp> E.g. '\1' or ' 60*\1 + \2' (for min:sec format) or 'hex2dec(\1)' </timestamp>
  <name> Fixed full name or group matching name, e.g. '\3.Value' </name>
  <value>The value of the signal. The regex group.</value>
  <size>The size of the vector.</size>
</vector>

<real>
  <line> Regular expression describing the line including group matching </line>
  <timestamp> E.g. '\1' or ' 60*\1 + \2' (for min:sec format) or 'hex2dec(\1)' </timestamp>
  <name> Fixed full name or group matching name, e.g. '\3.Value' </name>
  <value>The value of the signal. The regex group.</value>
</real>

<event>
  <line> Regular expression describing the line including group matching </line>
  <timestamp> E.g. '\1' or ' 60*\1 + \2' (for min:sec format) or 'hex2dec(\1)' </timestamp>
  <name> Fixed full name or group matching name, e.g. '\3.Value' </name>
</event>

...
</signals>

</log_configuration >
```

There might exist several vector, real or event nodes. According to the user needs. The syntax of the XML file can be verified with the provided DTD file (samples/vcdMaker.dtd in the target installation directory):

```
<?xml version="1.0" encoding="UTF-8"?>
<!ELEMENT signals (vector | real | event)*>

<!ELEMENT vector ( line,
                    timestamp,
                    name,
                    value,
                    size)
>
<!ELEMENT real ( line,
                  timestamp,
                  name,
                  value)
>
<!ELEMENT event ( line,
                   timestamp,
                   name)
>
<!ELEMENT line (#PCDATA)>
<!ELEMENT timestamp (#PCDATA)>
<!ELEMENT name (#PCDATA)>
<!ELEMENT value (#PCDATA)>
<!ELEMENT size (#PCDATA)>
```



For example, to parse the inherent *vcdMaker* format one could use the configuration file below:

```
<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
<!DOCTYPE signals SYSTEM "vcdMaker.dtd">
<signals>

<vector>
  <line>^#([[:d:]]+) ([[:graph:]]+) ([[:d:]]+) ([[:d:]]+) ( +.*)?</line>
  <timestamp>1</timestamp>
  <name>2</name>
  <value>3</value>
  <size>4</size>
</vector>

<real>
  <line>^#([[:d:]]+) ([[:graph:]]+) ([[:d:]]+[:punct:]]+) f( +.*)?</line>
  <timestamp>1</timestamp>
  <name>2</name>
  <value>3</value>
</real>

<event>
  <line>^#([[:d:]]+) ([[:graph:]]+) e( +.*)?</line>
  <timestamp>1</timestamp>
  <name>2</name>
</event>

</signals>
```

## 5.2 The inherent *vcdMaker* log format

Let's present the inherent format of the input log file by an example below.

```
...
#77655698 FRDM.Sensors.Magnetometer.MagY 873 32
#77655817 FRDM.Sensors.Magnetometer.MagZ 3126 32
#77756251 FRDM.Buttons.SW1 1 1 Key pressed
#77805674 FRDM.Sensors.Magnetometer.MagX 64955 32
#77805797 FRDM.Sensors.Magnetometer.MagY 853 32
#77805916 FRDM.Sensors.Magnetometer.MagZ 3191 32
#77806061 FRDM.Sensors.Slider 99 7
#77806070 FRDM.Sync e
#77808473 FRDM.Sensors.Accelerometer.AccX 0.538574 f
#77808473 FRDM.Sensors.Accelerometer.AccY 0.172852 f
#77808473 FRDM.Sensors.Accelerometer.AccZ 0.706543 f
...
```

In general a log signal syntax is defined as follows:

```
#Timestamp Signal_name Value <Size | f | e> Optional_comment
```


There are common properties of the log signals:

- **Timestamp** – The system time stamp. The time unit is provided later during the creation of the VCD file. **The entries in the log file do not have to be ordered. In other words, the entries with lower time stamp values might follow the entries with higher time stamp values.** The events will be reordered properly during the VCD file creation. This might be

useful when there are a few loggers in your system accessing the same logging device (e.g. UART). They all might log at their own pace and flush their buffers randomly.

- **Signal name**

The structure describing the hierarchy for accessing the signal or the variable. The hierarchy can be illustrated by the tree. For instance:

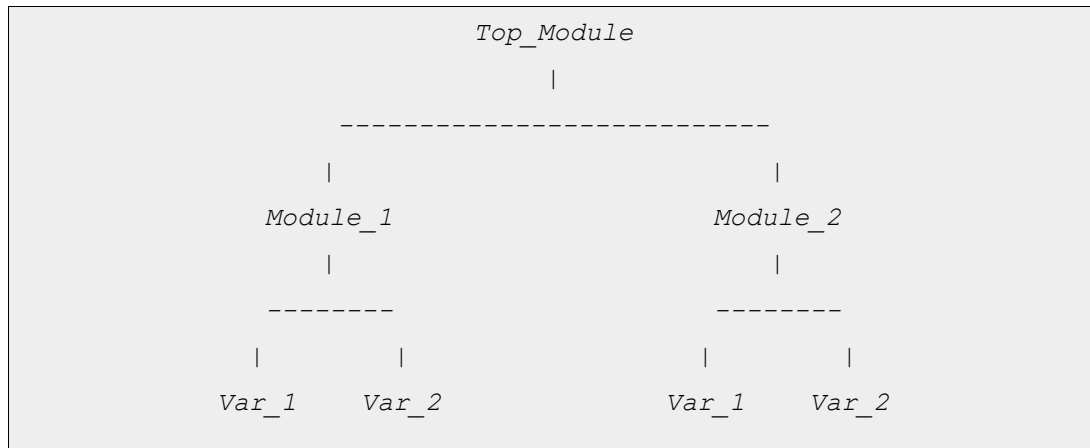

In total there are four variables in the system above and they could be described as follows:

```

Top_Module.Module_1.Var_1
Top_Module.Module_1.Var_2
Top_Module.Module_2.Var_1
Top_Module.Module_2.Var_2
  
```

**The nesting of the signal name is not limited to 3 levels. A user can use whatever nesting level is needed.**

There are also properties specific to different signal types:

- integer values

```

#Timestamp TopModule...SubModule.VarName Value Size Comment
E.g.
#77655698 FRDM.Sensors.Magnetometer.MagY 873 32
  
```

**Value** – The value of the variable.

**Size** - The *size* parameter represents the number of bits needed to represent the value. Currently the maximum size shall not exceed 64 (any integer between larger than 0 and lesser than 65).

- real values

```
#Timestamp TopModule...SubModule.VarName Value f Comment  
E.g.  
#77808473 FRDM.Sensors.Accelerometer.AccZ 0.706543 f
```

**Value** - Real values shall be expressed in the '%f printf()' format.

- events

```
#Timestamp TopModule...SubModule.EventName e Comment  
E.g.  
#77806070 FRDM.Sync e
```

## 6 Creating VCD files

To produce the VCD file from a log file use the following command:

```
vcdMaker -t timeUnit [-c LineCounterName] [-u UserLogFormat] [-v] -o filename.vcd logFilename
```

**filename** – The target VCD file name.

**timeUnit** – The time unit in which the samples have been recorded. Available time units are: *s*, *ms*, *us*, *ns*, *ps*, *fs*.

**-c LineCounterName** – the switch is optional and it allows for adding a signal containing the log line number referencing to any signal change occurring at a given time. By following the line number one can easily identify the interesting place in the log. The LineCounterName name shall follow the standard signal format. If no top module name is provided *Top* will be assumed. For example, if you name it just 'Counter' it will appear in the output VCD file as 'Top.Counter' as every variable needs its rooting.

**-u UserLogFormat** – the switch is optional and it allows for providing the XML file describing the format of the log provided. See details in 5.1. If not provided, the syntax presented in 5.2 is expected.

**v** – the switch is optional while it enables the verbose mode in which the application will print out all of the log lines not matching the expected format. It is recommended to use this mode after the initial *vcdMaker* execution returns a positive number of invalid lines.

**logFilename** – The name of the log file to be processed.

Examples:

Basic syntax:

```
vcdMaker -o out.vcd -t us example.txt
```

User defined log format:

```
vcdMaker -o out.vcd -u vcdMaker.xml -t us example.txt
```

Adding the line counter:

```
vcdMaker -o out.vcd -t us -c Counter example.txt
```

## 7 Merging log files

There is also a possibility to create a single output VCD file out of several input log files. The feature might be useful while analyzing behaviors within distributed systems. The syntax of the *vcdMerge* command is as follows:

```
vcdMerge [-t timeUnit] [-v] -o filename sources
```

**filename** – The target VCD file name.

**timeUnit** – The time unit in which the output VCD file will be produced. Available time units are: *s, ms, us, ns, ps, fs*. If the parameter is not provided then the finest time base among the sources is selected. E.g. if one of the sources provides a log in 'ms' while another one provides a log in 'us' the output file will be in 'us'.

**Warning!** When the time unit is forced and it is less accurate than the finest unit within the provided sources the time stamps of some signals in the output VCD file might contain a rounding error ( $\pm 1$  [time unit]). Usually, it is better to use the automatically chosen time unit.

**-v** – the switch is optional. It enables the verbose mode in which the application will print out all of the log lines not matching the expected format.

**sources** – The descriptions of the signals sources.

A user might merge as many sources as needed.

Each source is characterized by a set of parameters separated with ',':

*format,timestamp,unit,prefix,counter,filename*

format	The format of the input file. Use 'T' for the inherent <i>vcdMaker</i> log format described in 5.2. Use 'U{log_format.xml}' to specify the user log format. See details in 5.1.
timestamp	The synchronization time for the input log. Set to 0 for synchronized logs.
unit	The unit of the time stamp.
prefix	The prefix to be added to all the signals within the unit. It can be left empty. Then, no prefix is added.
counter	The line counter signal name to be added to the output file. It can be left empty. Then, no line counter signal is added.
filename	The name of the file to be merged.

Examples:

All source options used:

```
vcdMerge -o out.vcd -v T,71050601,us,Prefix1,Counter1,log1.txt  
          U{vcdMaker.xml},234256037,us,Prefix2,Counter2,log2.txt
```

No signal counters:

```
vcdMerge -o out.vcd -v T,71050601,us,Prefix1,,log1.txt T,234256037,us,Prefix2,,log2.txt
```

No prefixes nor signal counters:

```
vcdMerge -o out.vcd -v T,71050601,us,,,log1.txt T,234256037,us,,,log2.txt
```

## 8 Viewing VCD files

There are many applications on the market allowing for viewing Variable Change Dumb format files and they are especially popular among RTL designers. Although very often such tools are quite expensive there exist a few free alternatives and one of them has been presented later in this manual.

### 8.1 *GtkWave*

GtkWave has been chosen for various reasons. It's free, light, easy to use and it has got rich features.

#### 8.1.1 Downloading

The tool can be downloaded from:

<http://gtkwave.sourceforge.net/>


#### 8.1.2 First steps

For the users convenience there has been provided the introduction to the GtkWave on the following pages. The further details related to the tool can be found in the GtkWave documentation itself.

## Step 1

Run the tool. Drag and drop the *examples.vcd* file to the GtkWave.


In the top SST pane expand the FRDM and select Buttons. Keep 'Ctrl' pressed and in the bottom SST pane select SW1 and SW3. Click the *Append* button.

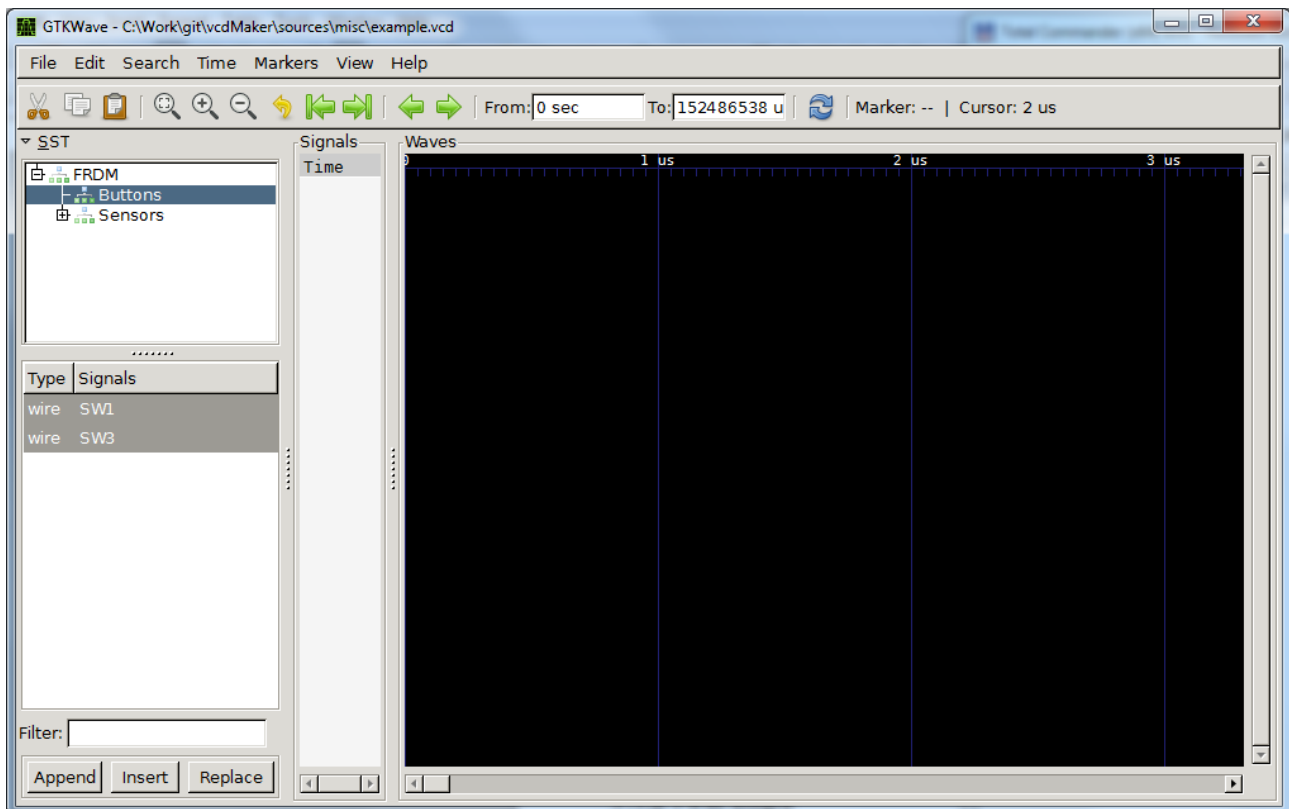




## Step 2

In the top SST pane set the focus on Sensors. Keeping 'Ctrl' pressed select Light and Slider from the bottom SST pane. Click the *Append* button.

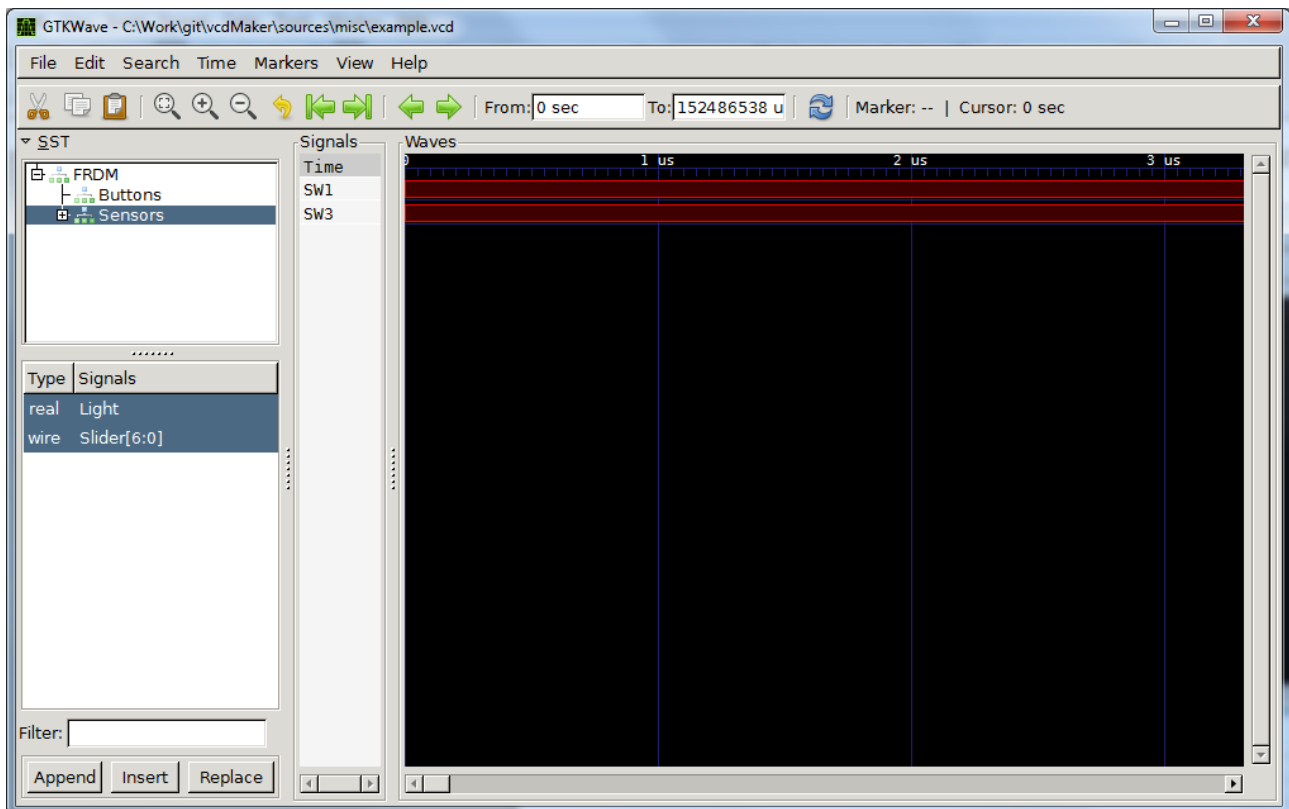


### Step 3

In the top SST pane expand Sensors and select Accelerometer. In the bottom SST pane select AccX. Click *Append* again.

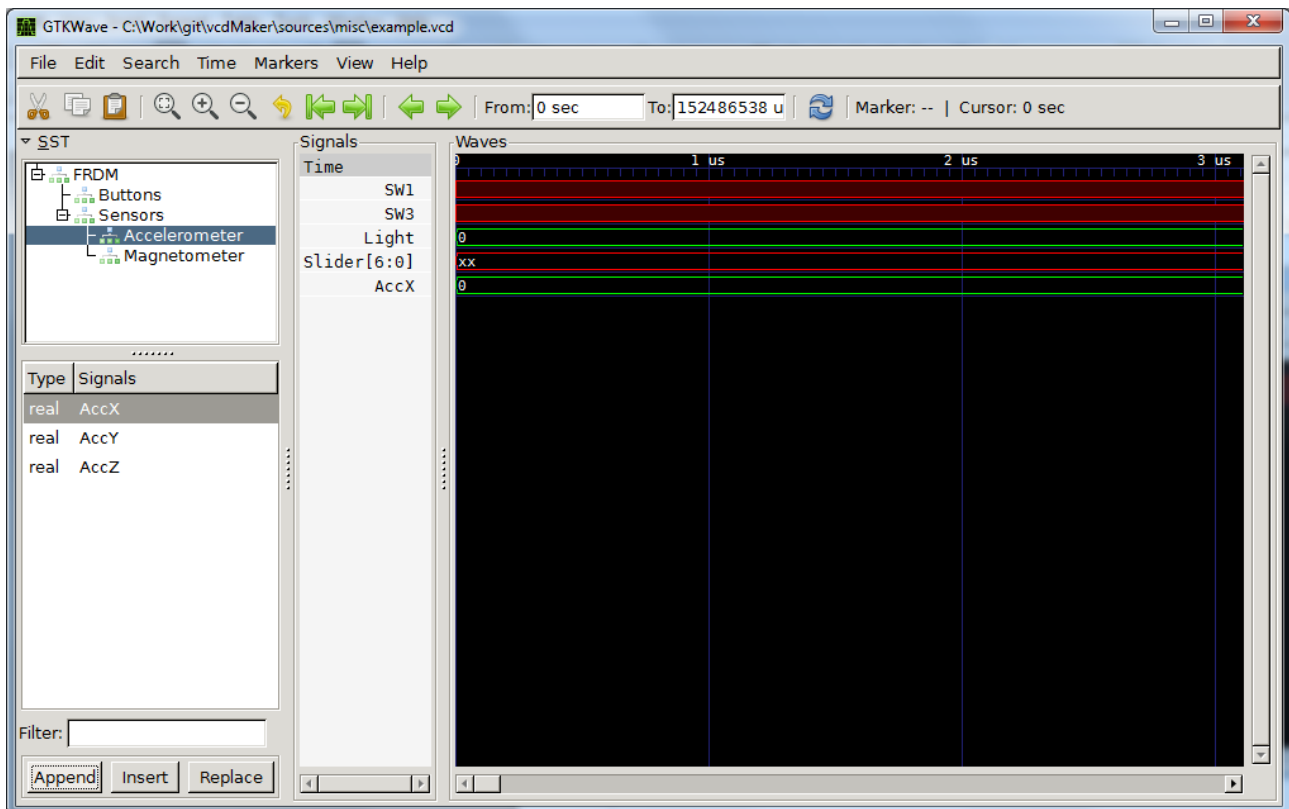


## Step 4

In the Signals pane select SW3. Press *Find Next Edge* button (green right arrow) three times. Then, press *Zoom Out* button (zoom minus) several times so as you get a similar view scale as below.

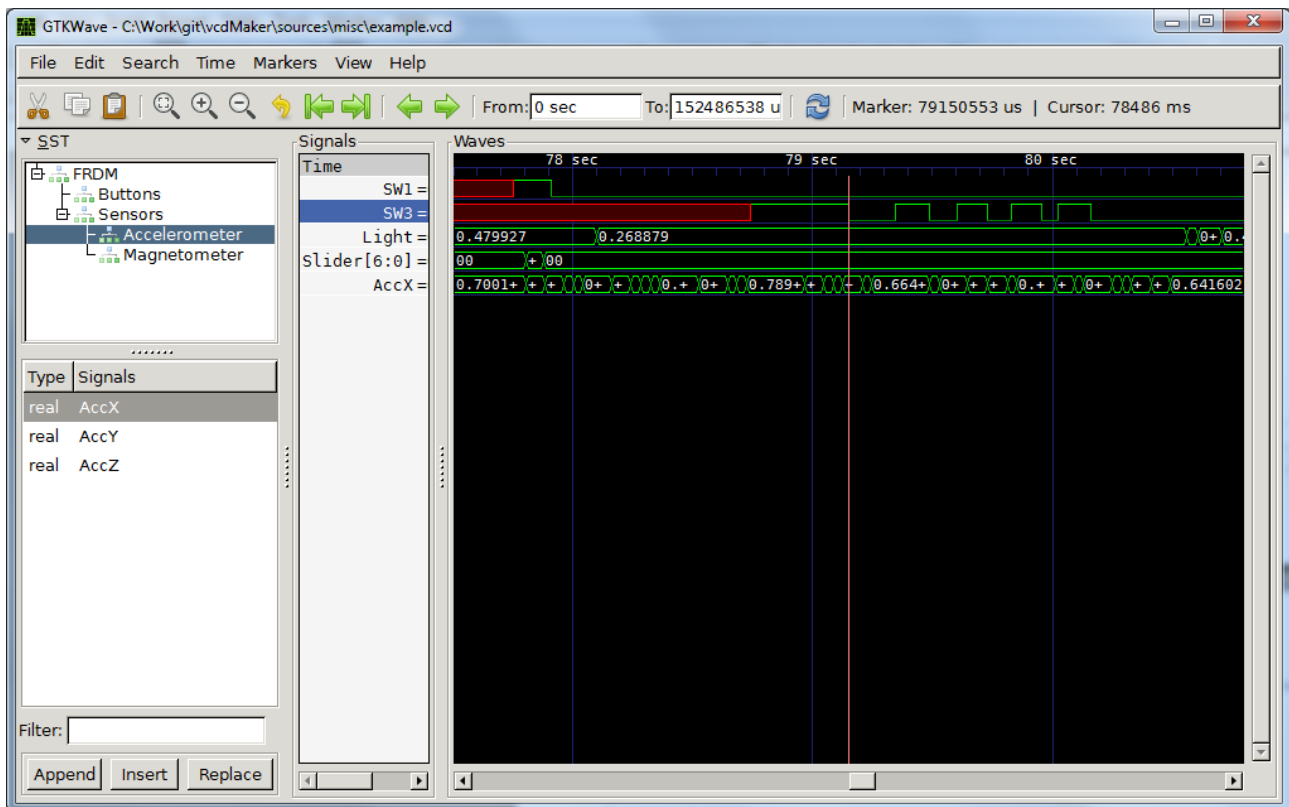


## Step 5

Now, click close to the next rising edge of the SW3. Press 'b' key. Then click on the nearest falling SW3 edge. As measured by GtkWave the pulse is 142.712 [ms] width. Congratulations! You just learned how to measure time between two registered events.

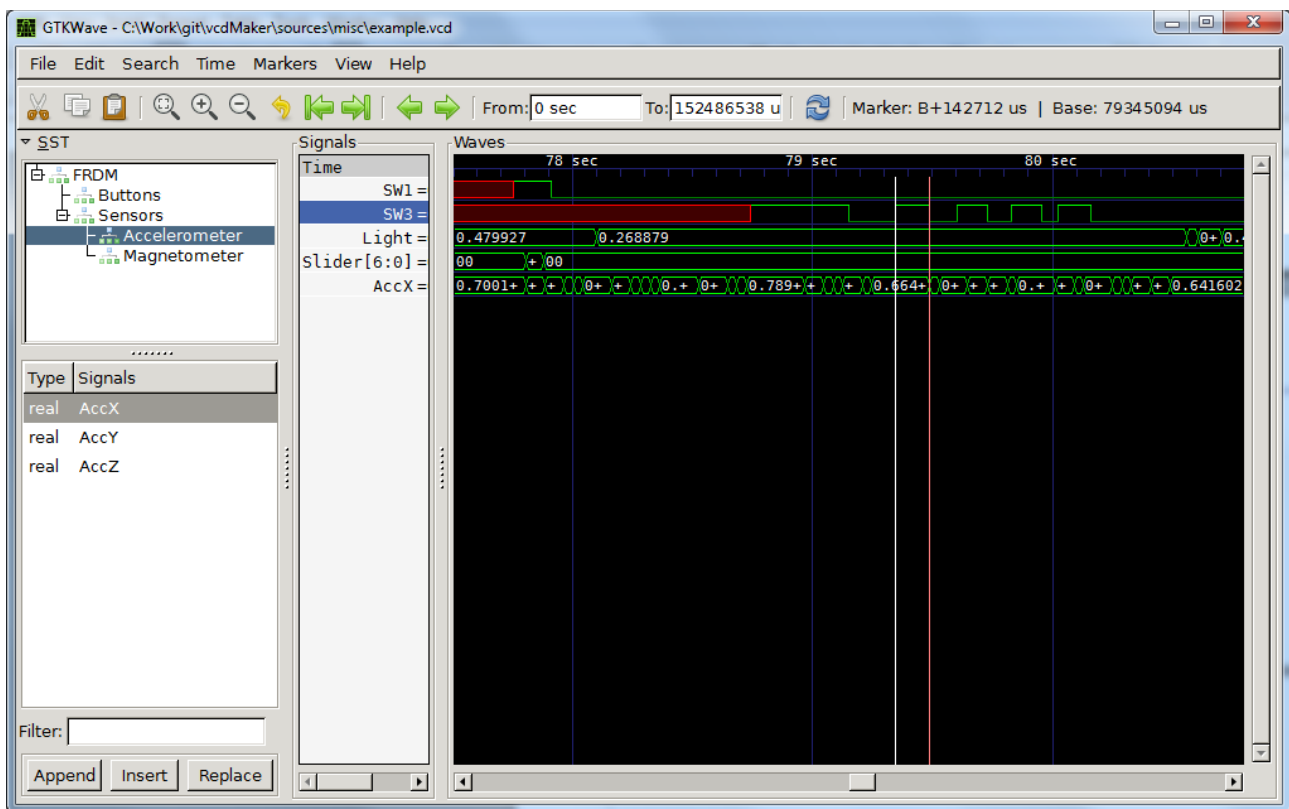


## Step 6

In the Signals pane select Slider. Right click on Slider. Select *Data Format -> Analog -> Interpolated*. Now, you can scroll left and right the Waves window to see the changes of the signal over time. Of course, you can zoom it in or out to get the better results.

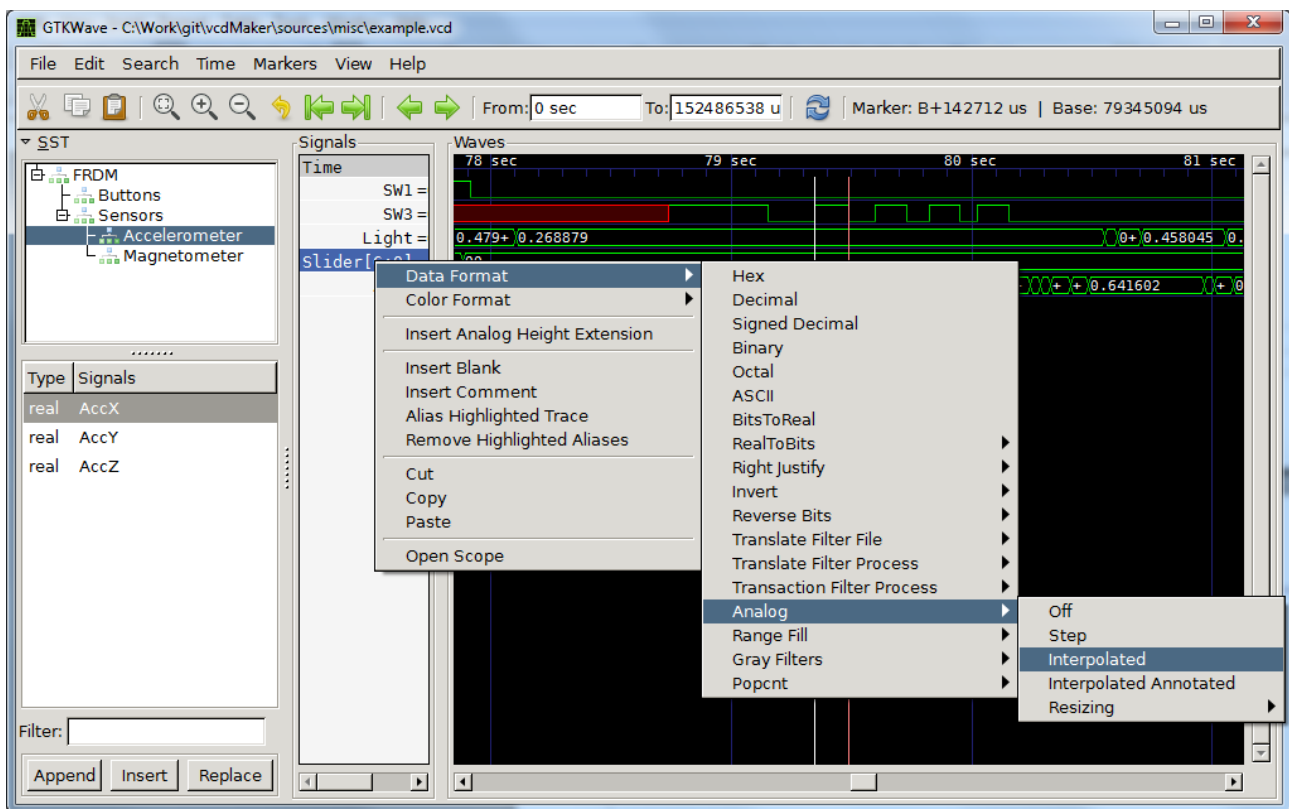


## Step 7

In the Signals pane select Slider and right click on it. Select *Insert Analog Height Extension*. It will make the row higher and scaled better for the analog view. You can repeat steps 6 and 7 for AccX as well.

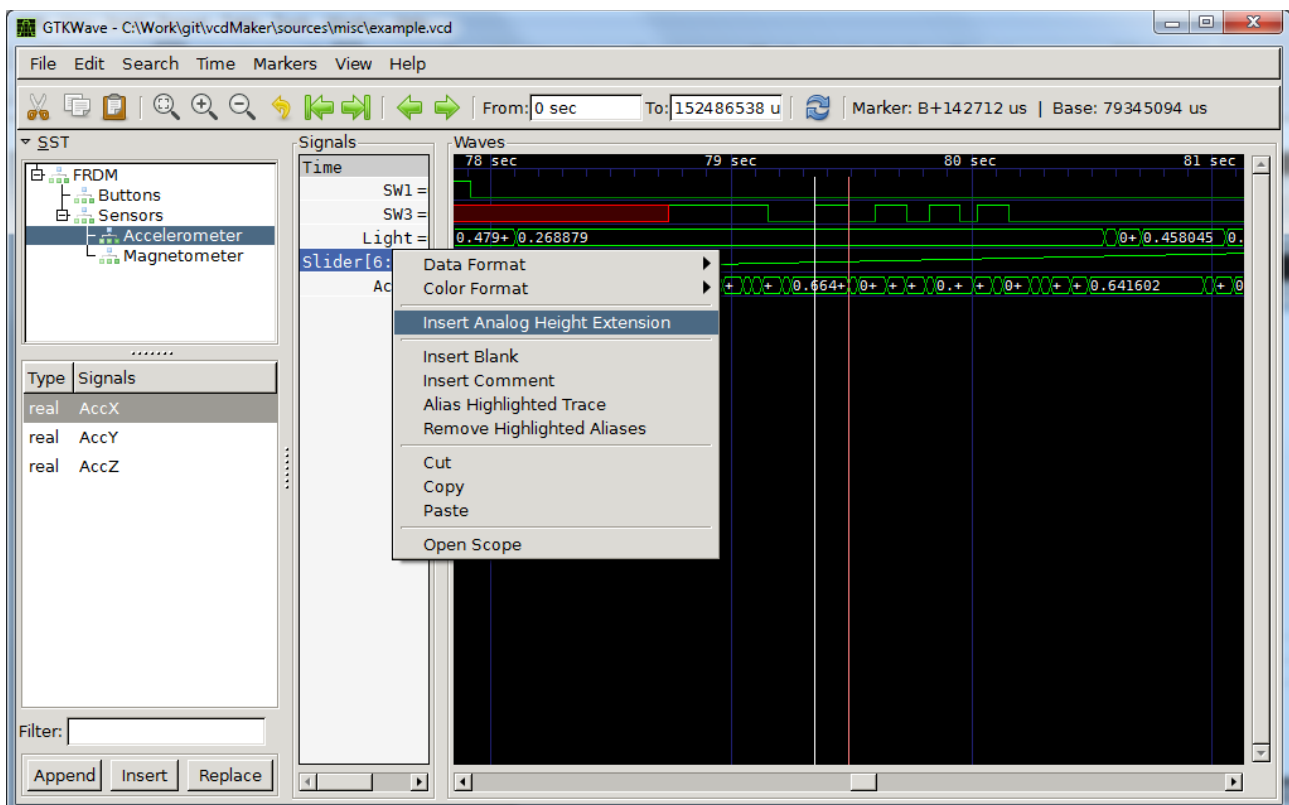

## Step 8

Well done! Hopefully, these simple steps let you know the most basic operations of the GtkWave. There are also the most commonly used ones as well. For further information about the tool please refer to its documentation.

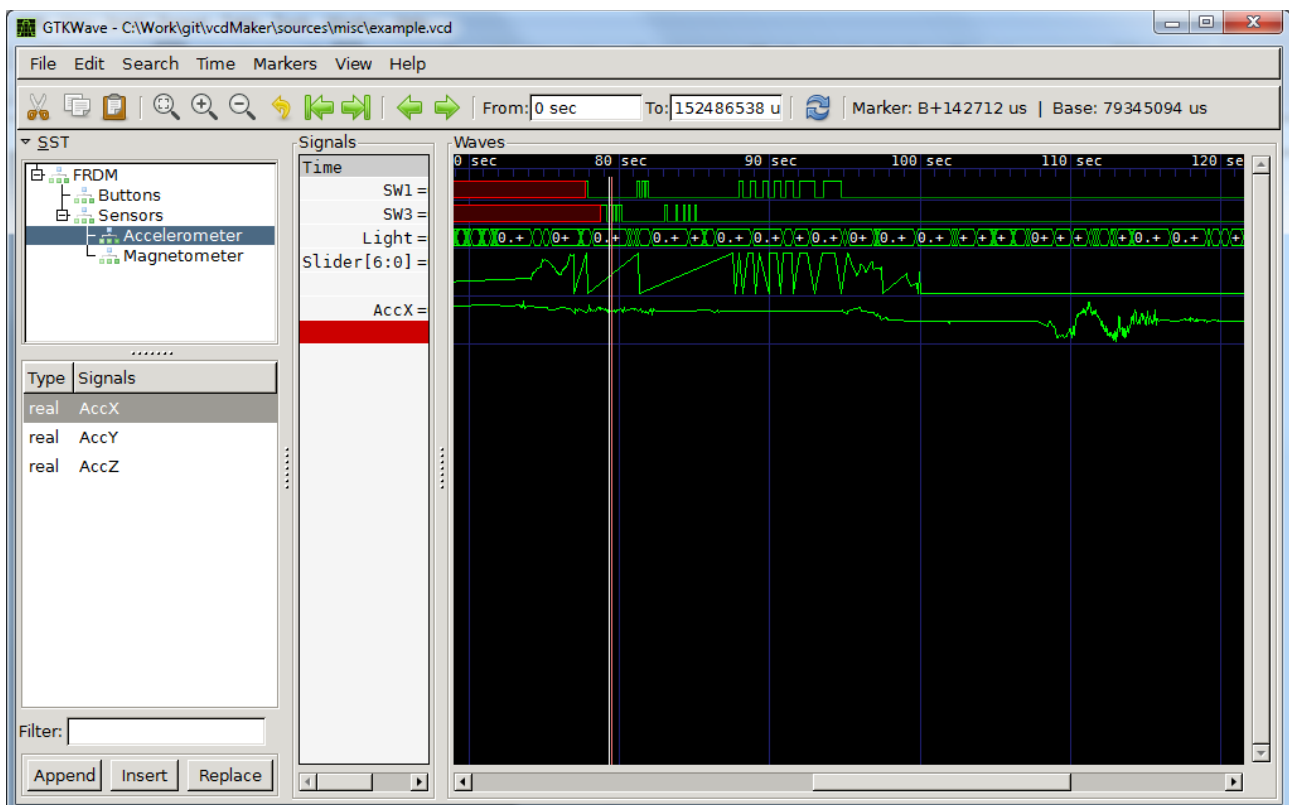

## 9 Warnings and errors

Legend:

Common
vcdMaker
vcdMerge

The following table presents a list of possible warnings.

Warning	String	Description
0001	Synchronization time out of bounds. Cannot merge {source}.	The entire signal source cannot be merged as its new synchronization point timestamp falls out of 64-bit value. Consider changing the output time unit.
0002	Timestamp out of bounds. Cannot merge {signalName} at {timestamp} {timeUnit}.	The signal cannot be merged as its new timestamp falls out of 64-bit value. Consider shortening the log or changing the output time unit.

The errors likely to occur has been listed below.

Error	String	Description
0001	Opening file {fileName} failed, it either doesn't exist or is inaccessible.	Missing file. Check if the path and the file name are correct.
0002	Conflicting signal names! {signalName} in the sources: {sourceA} and {sourceB}.	There are signals from different sources having the same name. Consider adding or changing the source specific prefix. In the case of vcdMaker change the name of the line counter.
0003	Invalid time unit: {timeUnit}.	The time unit out of spec. Make sure the provided time unit is valid: [s, ms, us, ns, ps, fs].
0004	Synchronization point value out of bounds: {timeStamp}.	The synchronization point falls out of the 64-bit value. Consider changing the output time unit.
0005	Invalid log file format: {format}.	The file format out of spec. Currently only 'T' format is supported.
0006	Invalid synchronization point value: {synchronizationPoint}.	The synchronization point value wasn't provided in the valid decimal format. Correct the value of the synchronization point.



0007	Invalid number of source parameters: {sourceDescription}.	Wrong number of source parameters, separated by ','. Correct the source description.
0008	Leading time out of bounds.	Leading source time out of bounds. Consider changing the output time unit.
0009	There are at least two signal sources required.	Too few signal sources. At least two signal sources are required.
0010	XML - No parsing regular expression.	The regular expression describing the user log syntax is missing.
0011	XML - No timestamp expression.	The expression used to create the signal timestamp is missing.
0012	XML - No name expression.	The expression used to create the signal name is missing.
0013	XML - No value expression.	The expression used to create the signal value is missing.
0014	XML - No size expression.	The expression used to create the signal size is missing.
0015	XML - Unexpected tag: {tag_name}	Unexpected tag in the user provided XML file.

## 10 Reference projects

There are a few projects which have been created using popular development platforms and which demonstrate the way *vcdMaker* tools could be used.

The demo for the Freescale FRDM-KL46Z kit:

[https://developer.mbed.org/users/ketjow/code/vcdMaker\\_Demo/](https://developer.mbed.org/users/ketjow/code/vcdMaker_Demo/)

The demo for the STM Discovery L476 kit:

[https://developer.mbed.org/users/ketjow/code/vcdMaker\\_Demo\\_DISCO\\_L476/](https://developer.mbed.org/users/ketjow/code/vcdMaker_Demo_DISCO_L476/)

The demo for the Microchip Xpress kit:

<https://mplabxpress.microchip.com/mplabcloud/example/details/261>

## 11 Release notes

### 11.1 Version 1.0.1

- **vcdMaker**
  - The initial version of the application
  - Supported platforms:
    - *Win32*

### 11.2 Version 2.0.1

- **vcdMaker**
  - New features:
    - *Updated command line interface – removed '-f' option*
    - *Line counter*
    - *Events logging*
  - Supported platforms:
    - *Win32*
    - *Linux*
  - Resolved issues:
    - *#1 - Floats in vcd not rounded.*
- **vcdMerge**
  - The initial version of the application
  - Supported platforms:
    - *Win32*
    - *Linux*

### 11.3 Version 3.0.1

- **vcdMaker/ vcdMerge**
  - New features:
    - *Parsing user logs*
    - *Error/Warning reporting*
  - Resolved issues:
    - *#22 – Linux target shall be able to cope with logs containing Windows EOLs*
  - Supported platforms:

- *Win32*
- *Linux*