D-ATIS	Apt Elev	Alt Set: hPa Trans level: By ATC
113.750 117.0 128.080	83	RNAV 5 1. Standard routes may be varied by ATC. 2. ACFT may be instructed 'direct to' (wpt) following RADAR vectoring.

ALESO 1H [ALES1H]
RNAV (DME/DME or GNSS) ARRIVAL

ROUTING

ALESO - ROTNO - ETVAX (FL180) - TIGER - LLEØ1 (K250-) - BIG VOR (K220-; FL070).

DESCENT PLANNING

Pilots should plan for possible descent clearance as follows:
FL180 by ETVAX,
FL070 by BIG VOR.
ACTUAL DESCENT CLEARANCE WILL BE AS DIRECTED BY ATC.

WARNING
Do not proceed beyond BIG VOR without ATC clearance.

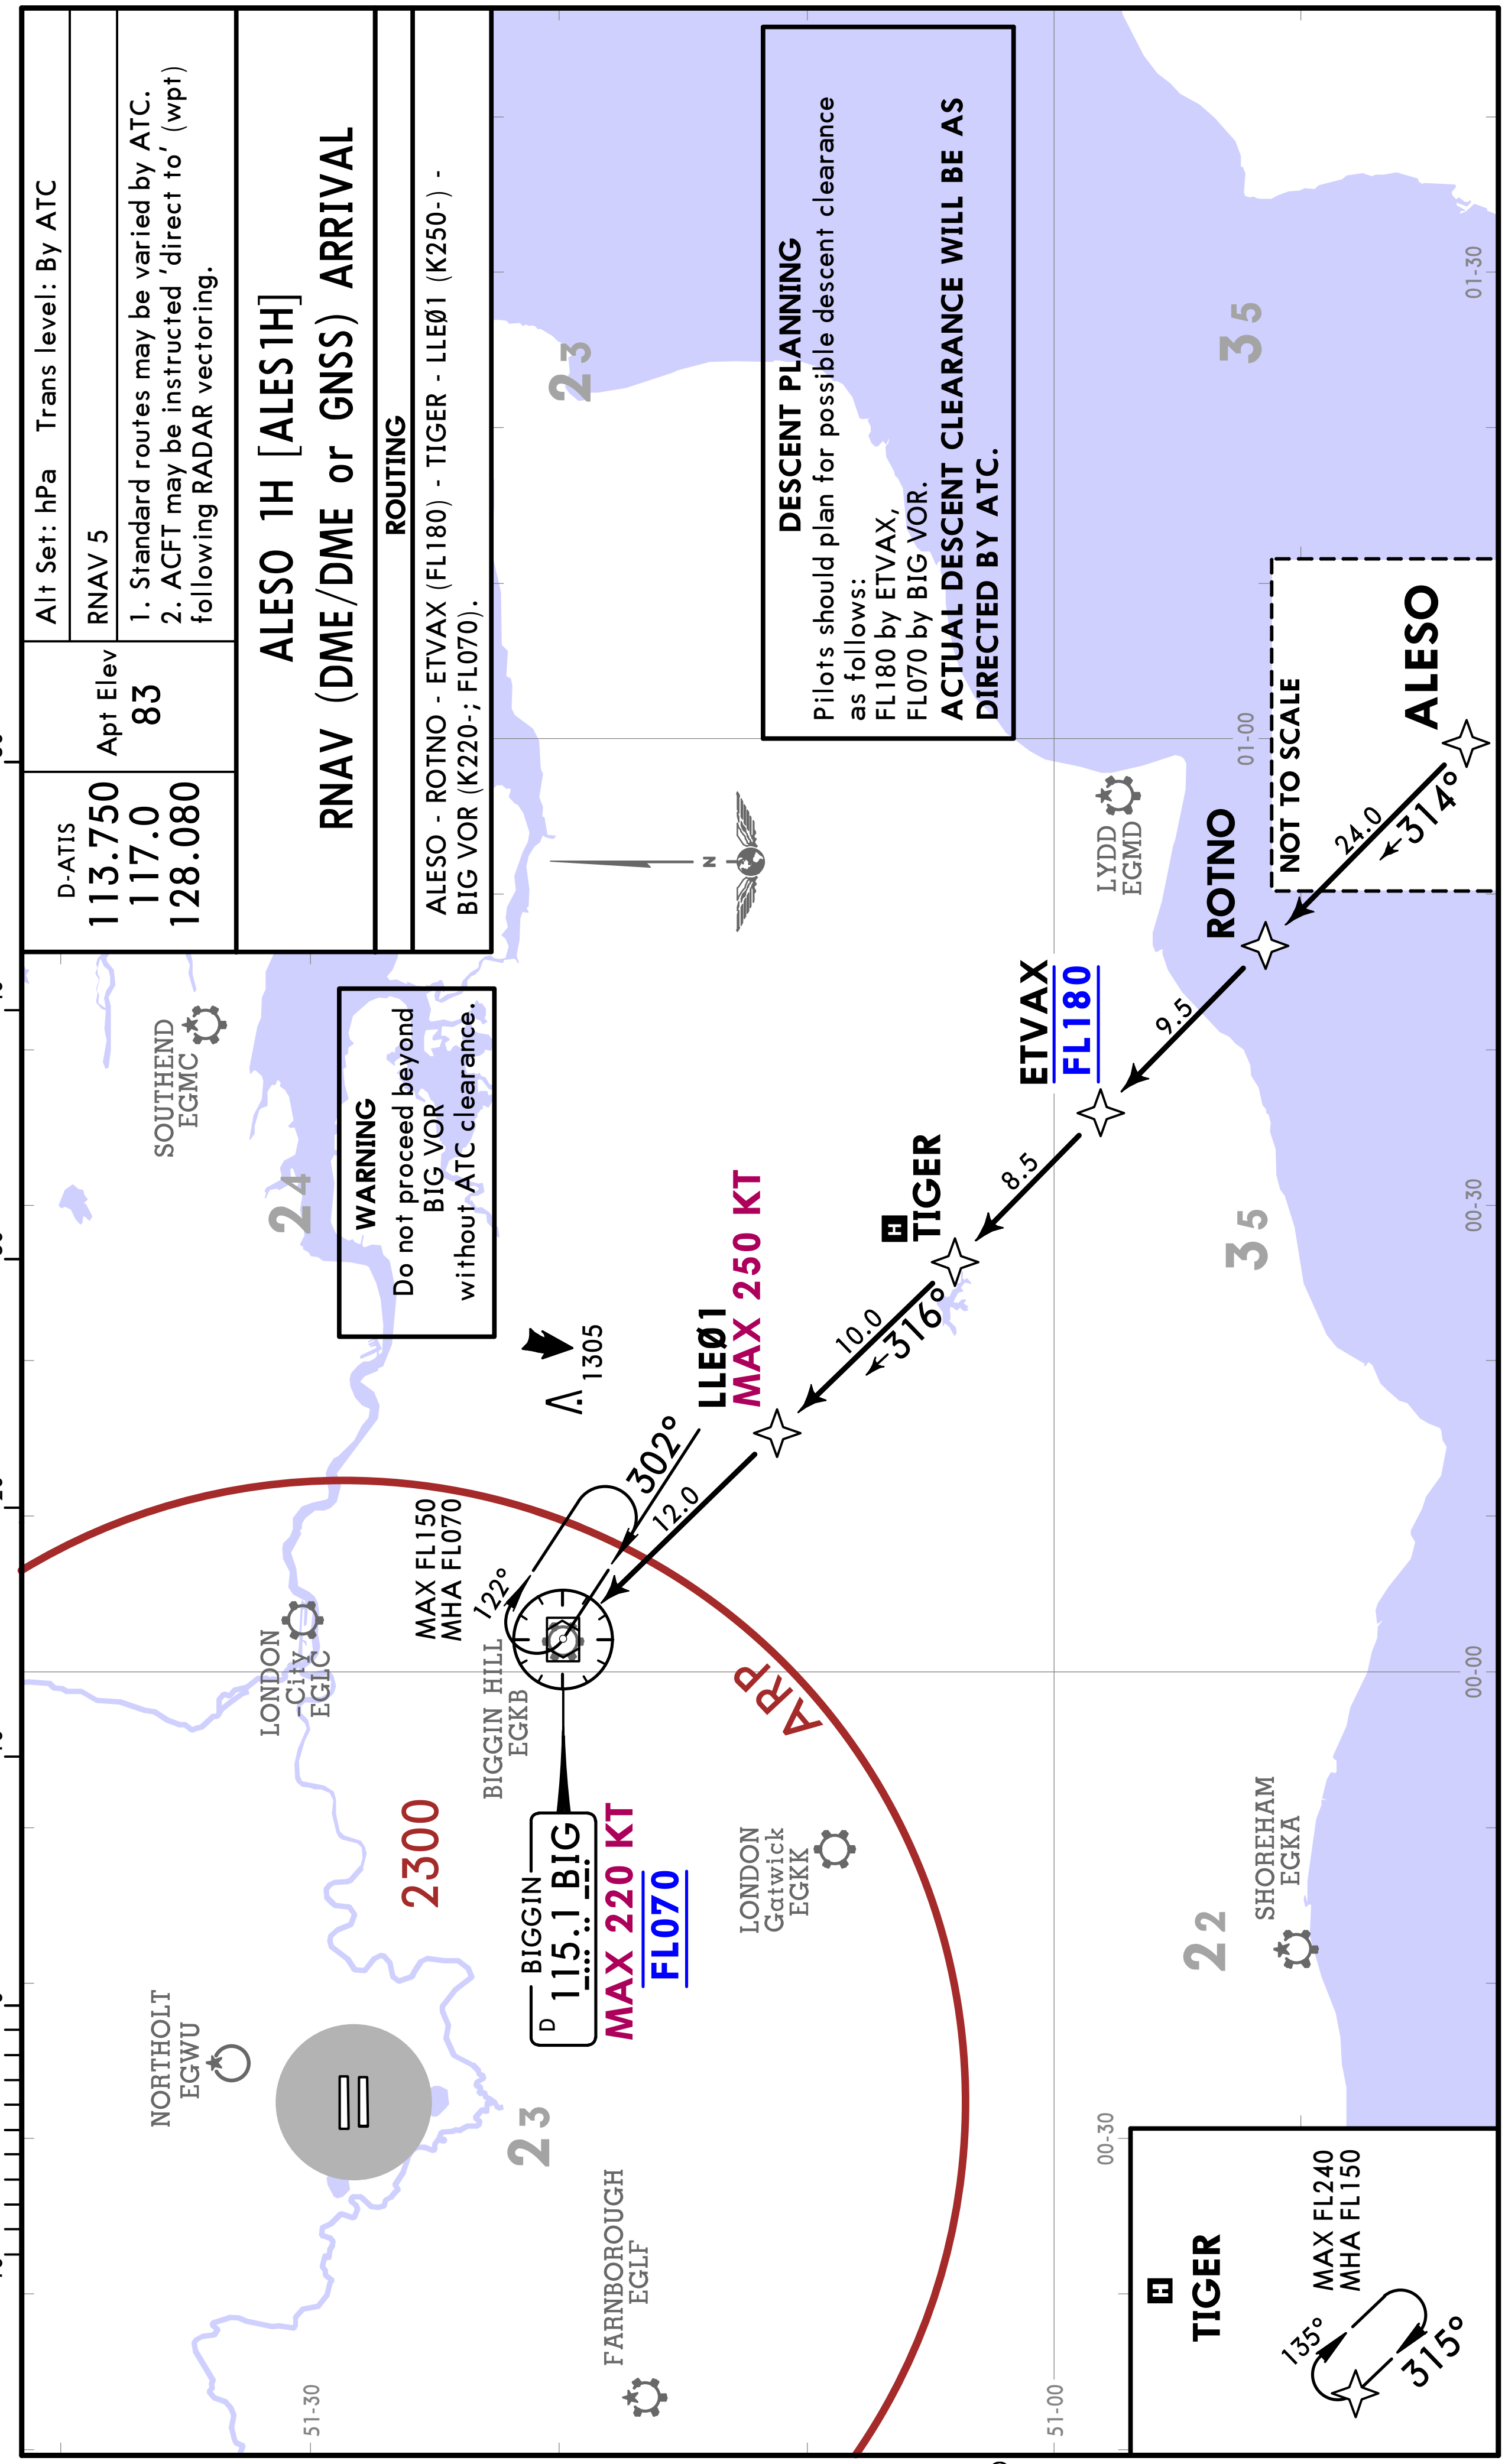

D-ATIS	Apt Elev	RNAV 5	Alt Set: hPa Trans level: By ATC
113.750 117.0 128.080	83	1. Standard routes may be varied by ATC. 2. ACFT may be instructed 'direct to' (wpt) following RADAR vectoring.	

BARMI 1H [BARM1H], LOGAN 2H [LOGA2H] RNAV (DME/DME or GNSS) ARRIVALS

SPEED: MAX 250 KT BELOW FL100 UNLESS OTHERWISE AUTHORIZED

STAR	ROUTING
BARMI 1H	BARMI (FL300) - SONOG - LOGAN (FL250) - SABER (FL160) - BRASO - WESUL (K250-) - LAM VOR (K220-; FL070).
LOGAN 2H	LOGAN (FL250) - SABER (FL160) - BRASO - WESUL (K250-) - LAM VOR (K220-; FL070).

DESCENT PLANNING

Pilots should plan for possible descent clearance as follows:

BARMI 1H: FL300 by BARMI,
FL250 by LOGAN,
FL160 by SABER,
FL070 by LAM VOR.

LOGAN 2H: FL250 by LOGAN,
FL160 by SABER,
FL070 by LAM VOR.

ACTUAL DESCENT CLEARANCE WILL BE AS DIRECTED BY ATC.

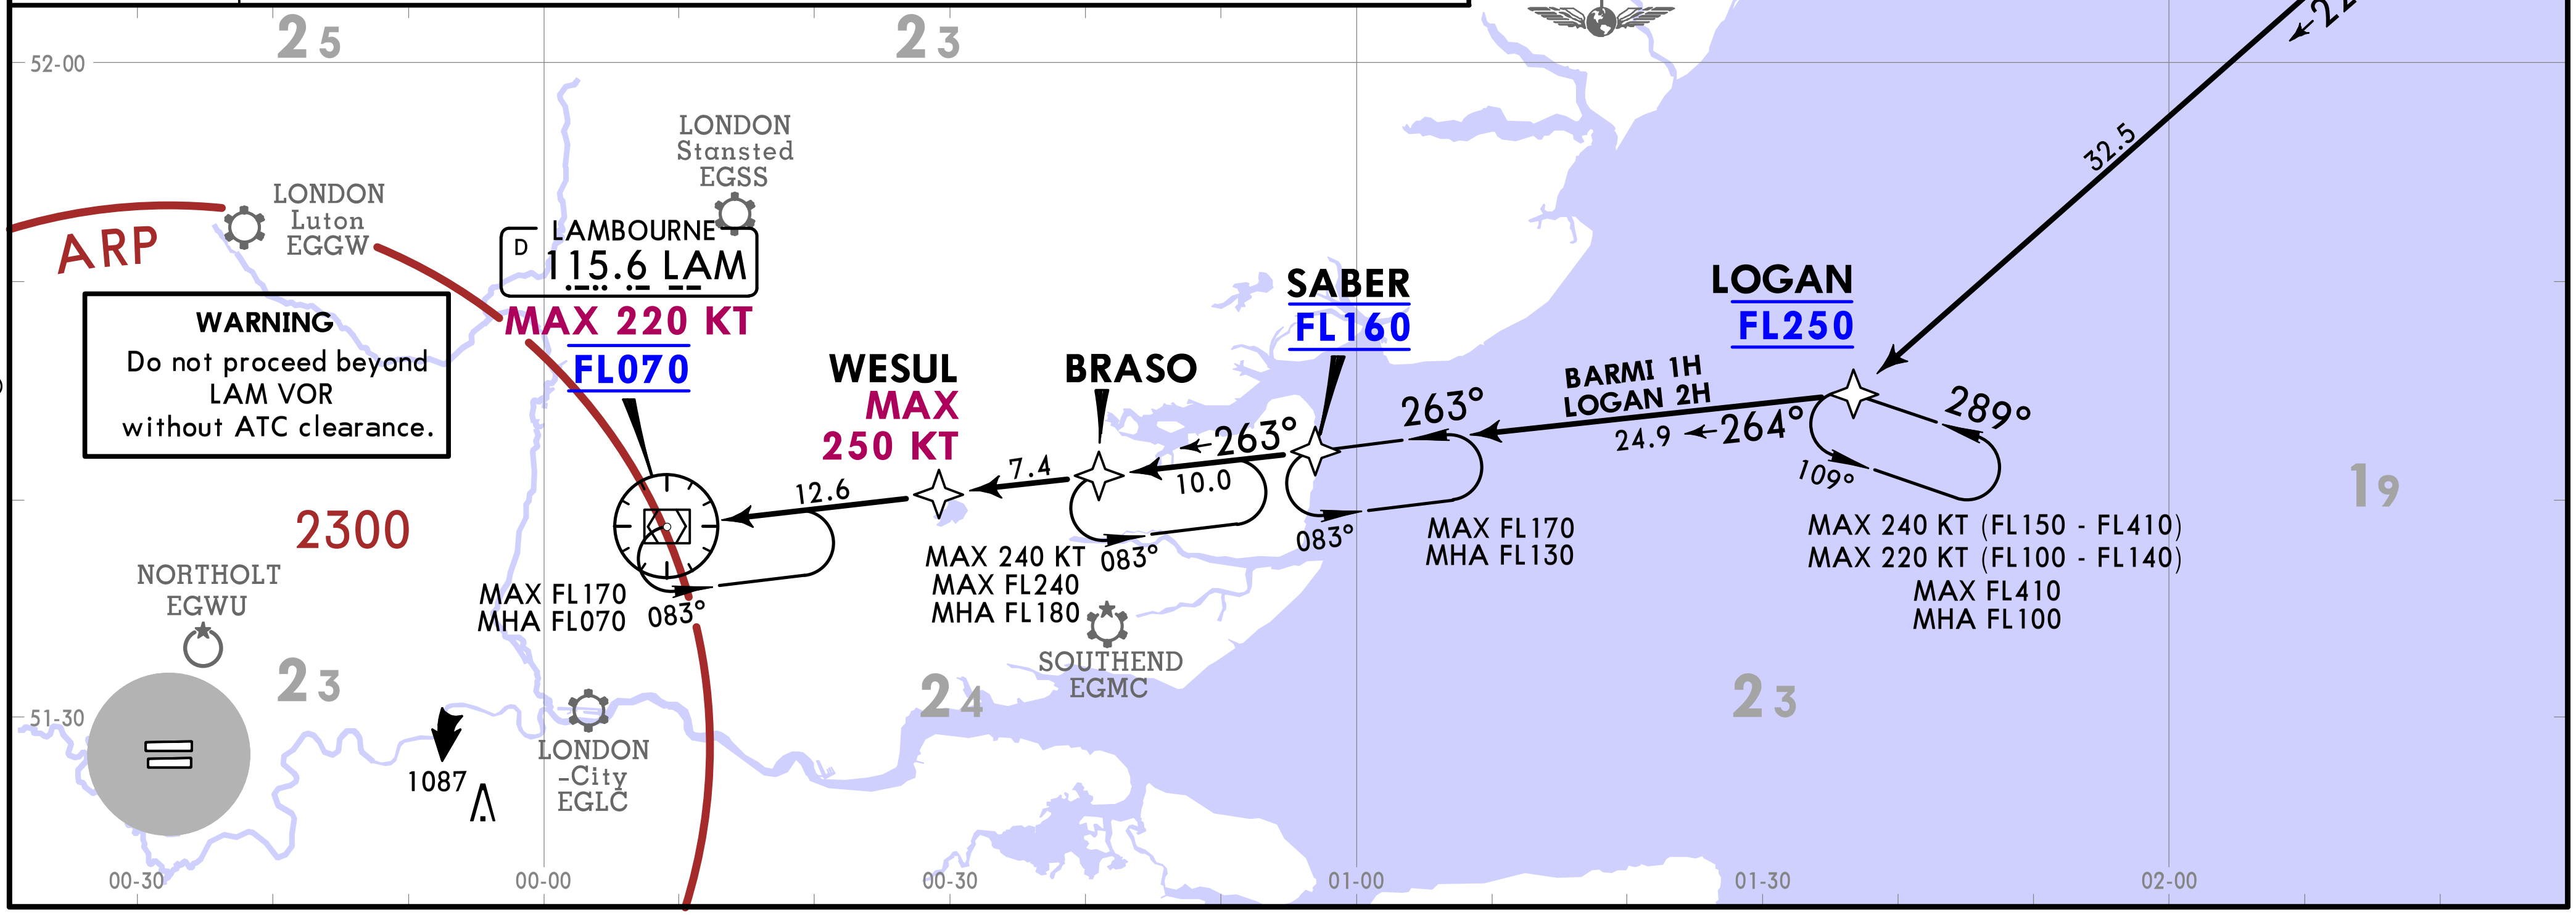

CHANGES: Reissue.

D-ATIS			Apt Elev
113.750	117.0	128.080	83

Alt Set: hPa Trans level: By ATC

RNAV 5

1. Standard routes may be varied by ATC.
2. ACFT may be instructed 'direct to' (wpt) following RADAR vectoring.

TOBID 1X [TOBI1X] ❶
RNAV (DME/DME or GNSS) ARRIVAL

DURING PERIODS OF CONGESTION TRAFFIC MAY BE ROUTED VIA OCK 1Z AS DIRECTED BY ATC
NOT TO BE USED FOR FLIGHT PLANNING PURPOSES

DESCENT PLANNING
Pilots should plan for possible descent clearance as follows:
FL070 by OCK VOR.
ACTUAL DESCENT CLEARANCE WILL BE AS DIRECTED BY ATC.

ROUTING
TOBID - WOD NDB - LLWØ2 (K250-) - OCK VOR (K220-; FL070).

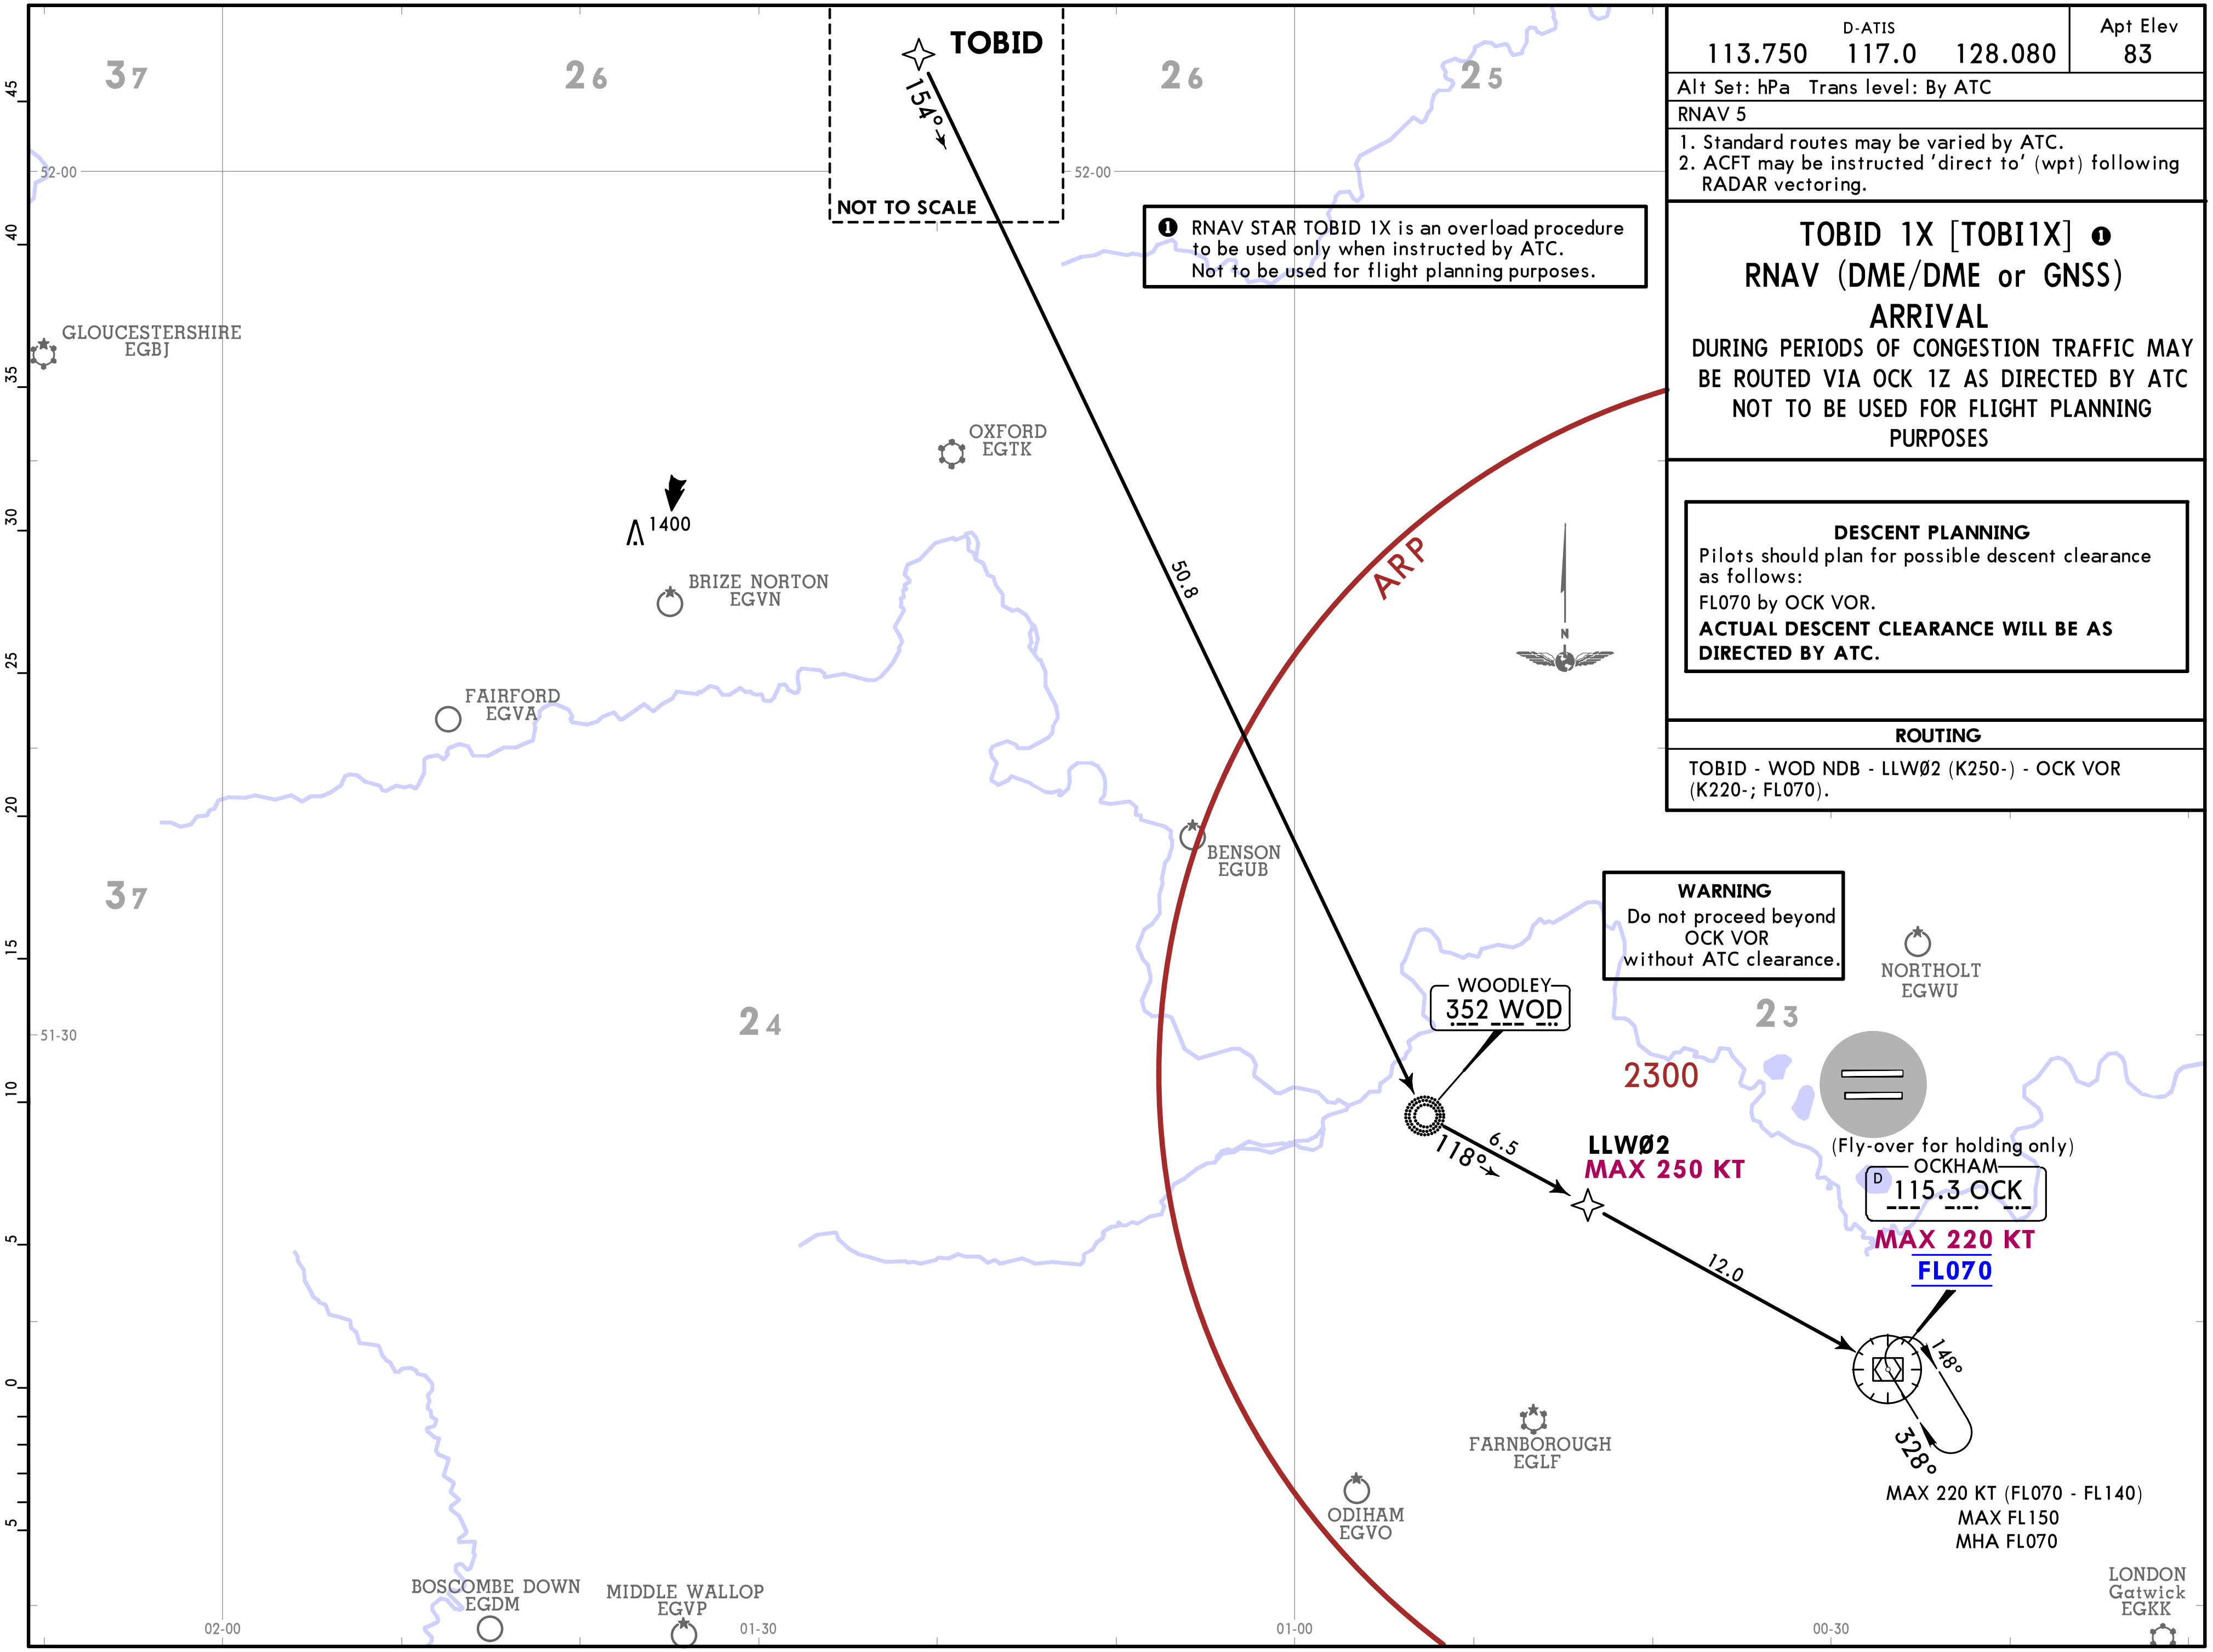

CHANGES: None.

D-ATIS	Apt Elev	Alt Set: hPa Trans level: By ATC
113.750 117.0 128.080	83	RNAV 5 1. Standard routes may be varied by ATC. 2. ACFT may be instructed 'direct to' (wpt) following RADAR vectoring.

LAM 1Z [LAM1Z] ❶
NUGRA 2H [NUGR2H]
RNAV (DME/DME or GNSS) ARRIVALS

SPEED: MAX 250 KT BELOW FL100 UNLESS OTHERWISE AUTHORIZED

❶ RNAV STAR LAM 1Z is an overload procedure to be used only when instructed by ATC. Not to be used for flight planning purposes.

DESCENT PLANNING

Pilots should plan for possible descent clearance as follows:

LAM 1Z: FL070 by BNN VOR.
NUGRA 2H: FL200 by TOBID,
FL150 by SOPIT,
FL070 by BNN VOR.

ACTUAL DESCENT CLEARANCE WILL BE AS DIRECTED BY ATC.

STAR	ROUTING
LAM 1Z	LAM VOR (K250-) - DONNA (K220-), then turn RIGHT, 116° track to BNN VOR (K220-; FL070).
NUGRA 2H	NUGRA - TOBID (FL200) - SOPIT (FL150) - WEZKO (K220-) - BNN VOR (K220-; FL070).

WARNING
Do not proceed beyond BNN VOR without ATC clearance.

(Fly-over)
BNN VOR
116°
296°
MAX 220 KT (FL070 - FL140)
MAX FL170
MHA FL070

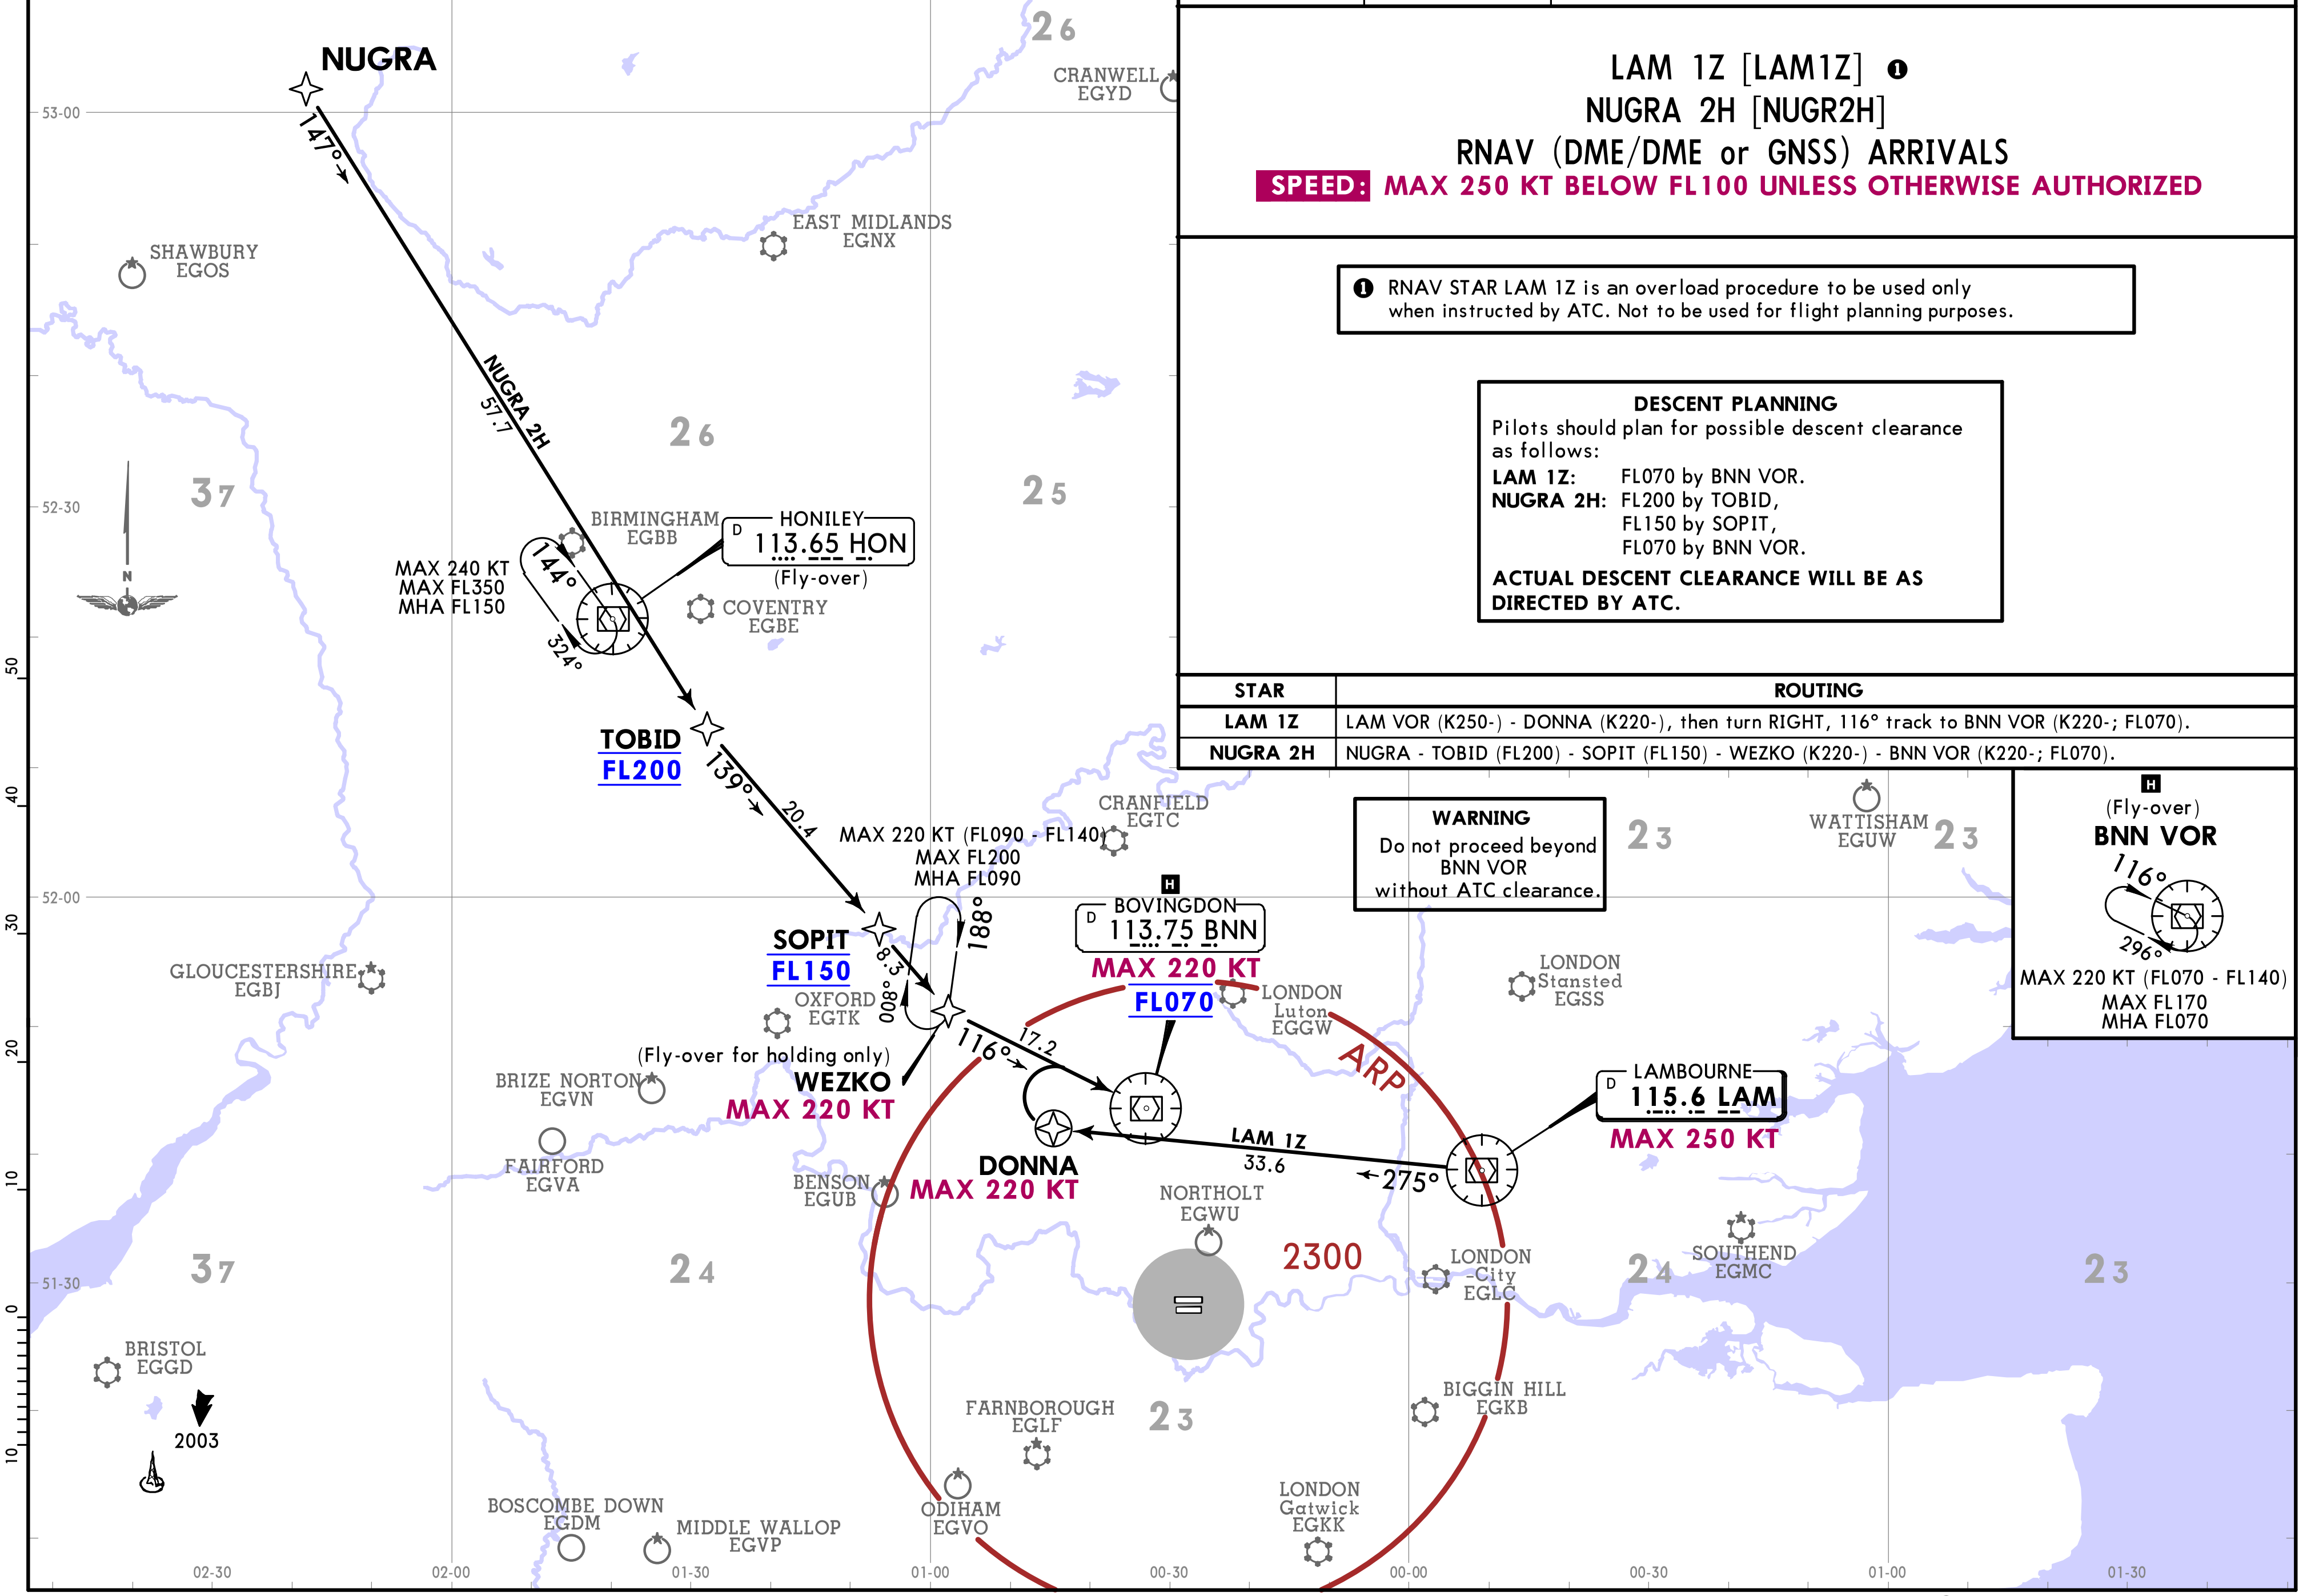

CHANGES: STAR NURGA 1H renumbered 2H, WCO NDB replaced by waypoint WEZKO.

D-ATIS			Apt Elev	
113.750	117.0	128.080	83	Alt Set: hPa Trans level: By ATC RNAV 5 1. Standard routes may be varied by ATC. 2. ACFT may be instructed 'direct to' (wpt) following RADAR vectoring.

BIG 1Z
RNAV (DME/DME or GNSS) ARRIVAL

STAR IS TO FACILITATE THE TRANSFER OF TRAFFIC BETWEEN TERMINAL HOLDING FACILITIES AND ARE FOR USE ONLY AS DIRECTED BY ATC
NOT TO BE USED FOR FLIGHT PLANNING PURPOSES
DURING PERIODS OF CONGESTION TRAFFIC MAY BE ROUTED VIA OCK 1Z AS DIRECTED BY ATC

DESCENT PLANNING
Pilots should plan for possible descent clearance as follows:
FL070 by OCK VOR.
ACTUAL DESCENT CLEARANCE WILL BE AS DIRECTED BY ATC.

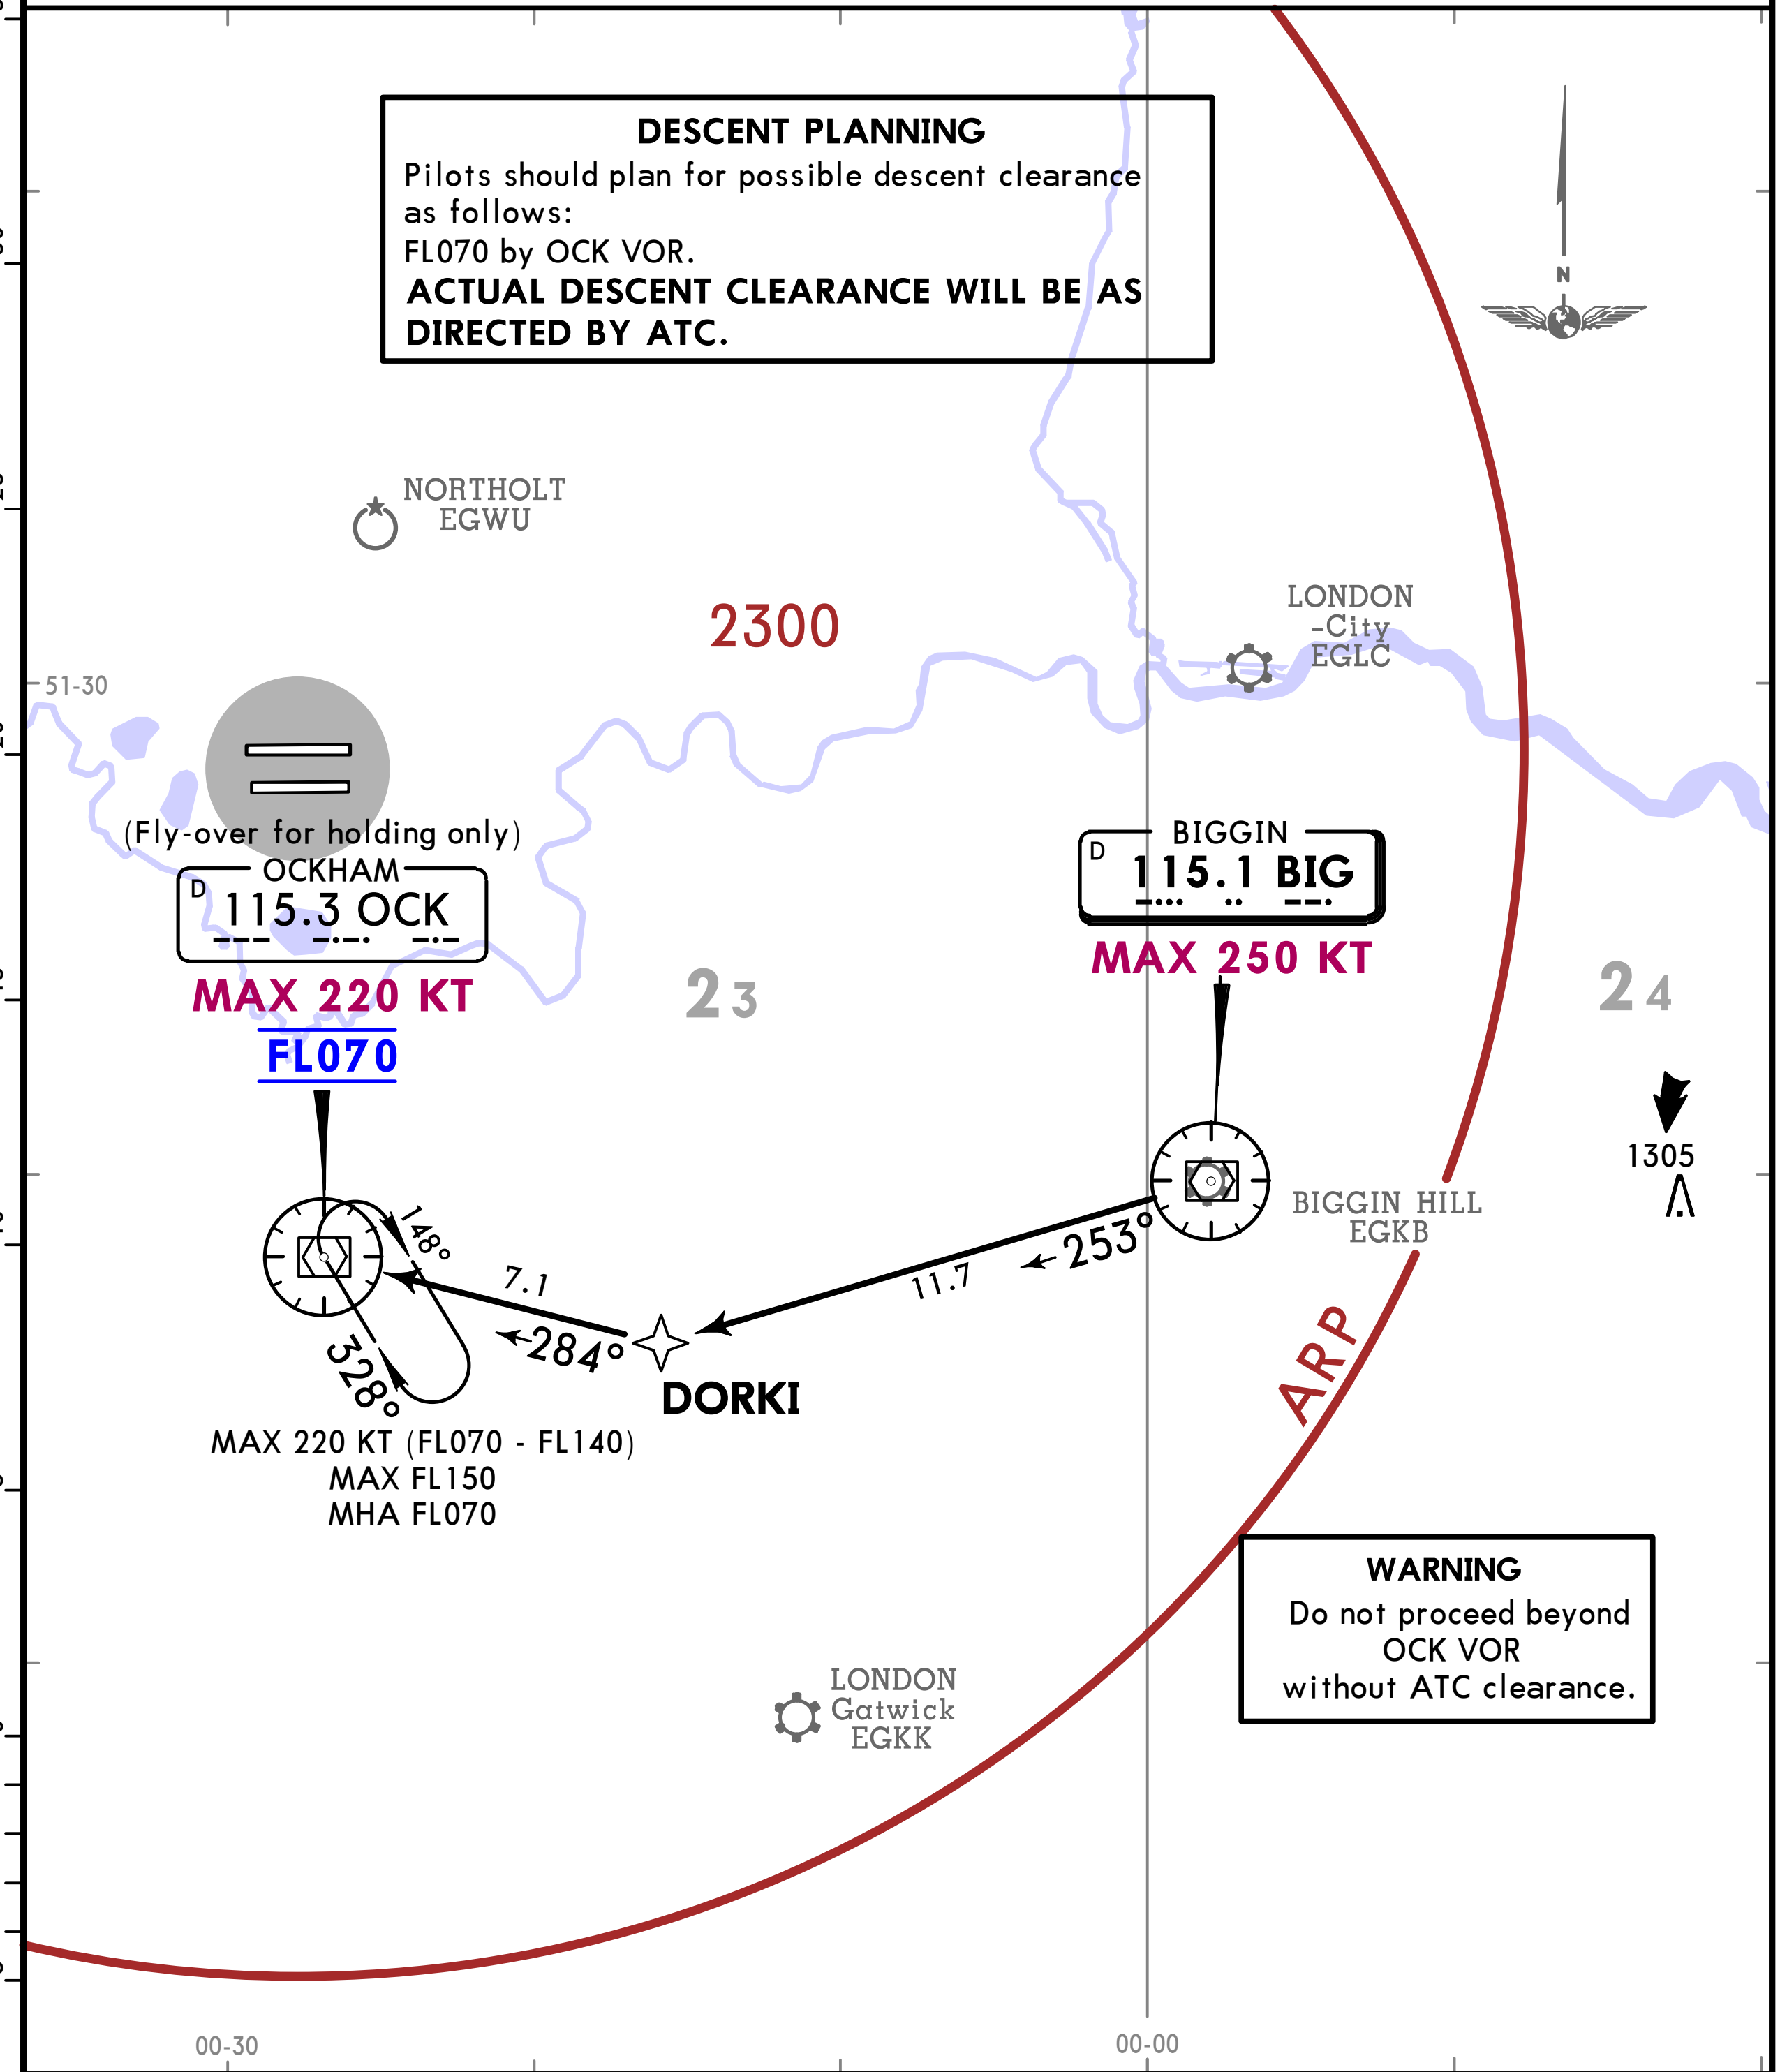

WARNING
Do not proceed beyond OCK VOR without ATC clearance.

ROUTING

BIG VOR (K250-) - DORKI - OCK VOR (K220-; FL070).

CHANGES: None.

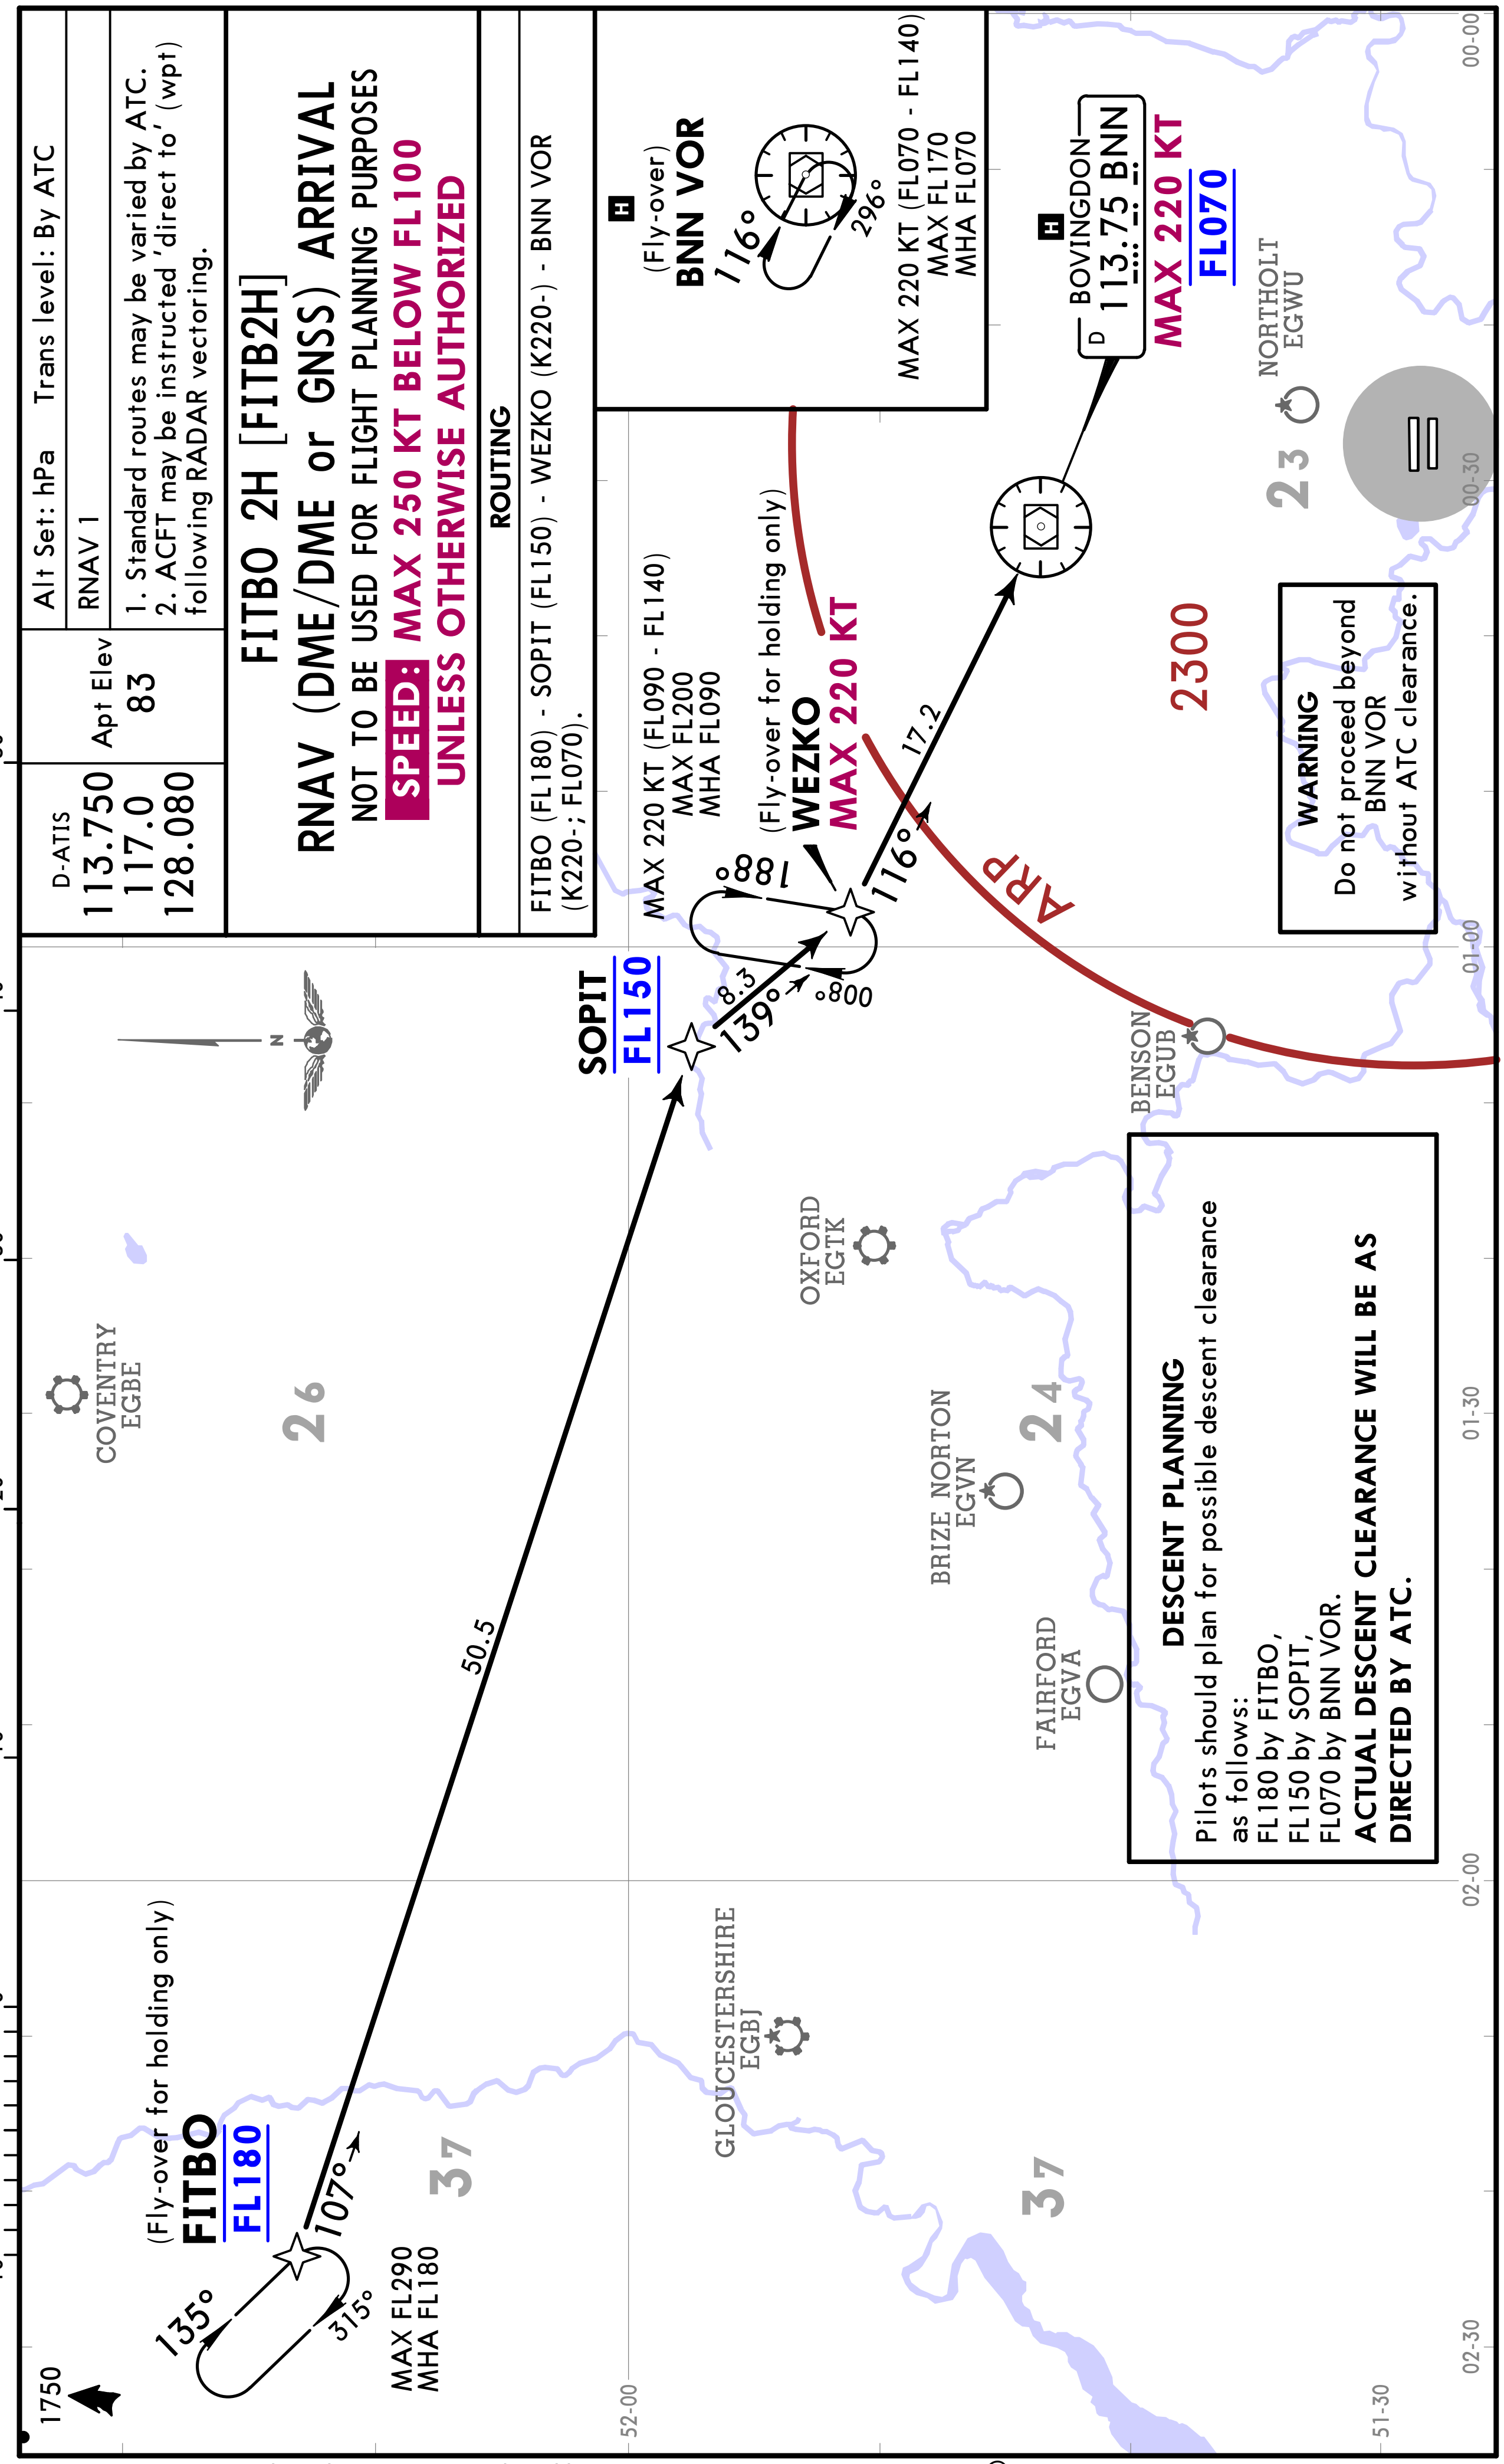

CHANGES: STAR renumbered, WCO NDB replaced by waypoint WEZKO.

	D-ATIS		Apt Elev	Alt Set: hPa Trans level: By ATC
113.750	117.0	128.080	83	RNAV 5 1. Standard routes may be varied by ATC. 2. ACFT may be instructed 'direct to' (wpt) following RADAR vectoring.

HAZEL 1H [HAZE1H]
RNAV (DME/DME or GNSS) ARRIVAL

DURING PERIODS OF CONGESTION TRAFFIC MAY
BE ROUTED VIA OCK 1Z AS DIRECTED BY ATC
NOT TO BE USED FOR FLIGHT PLANNING PURPOSES

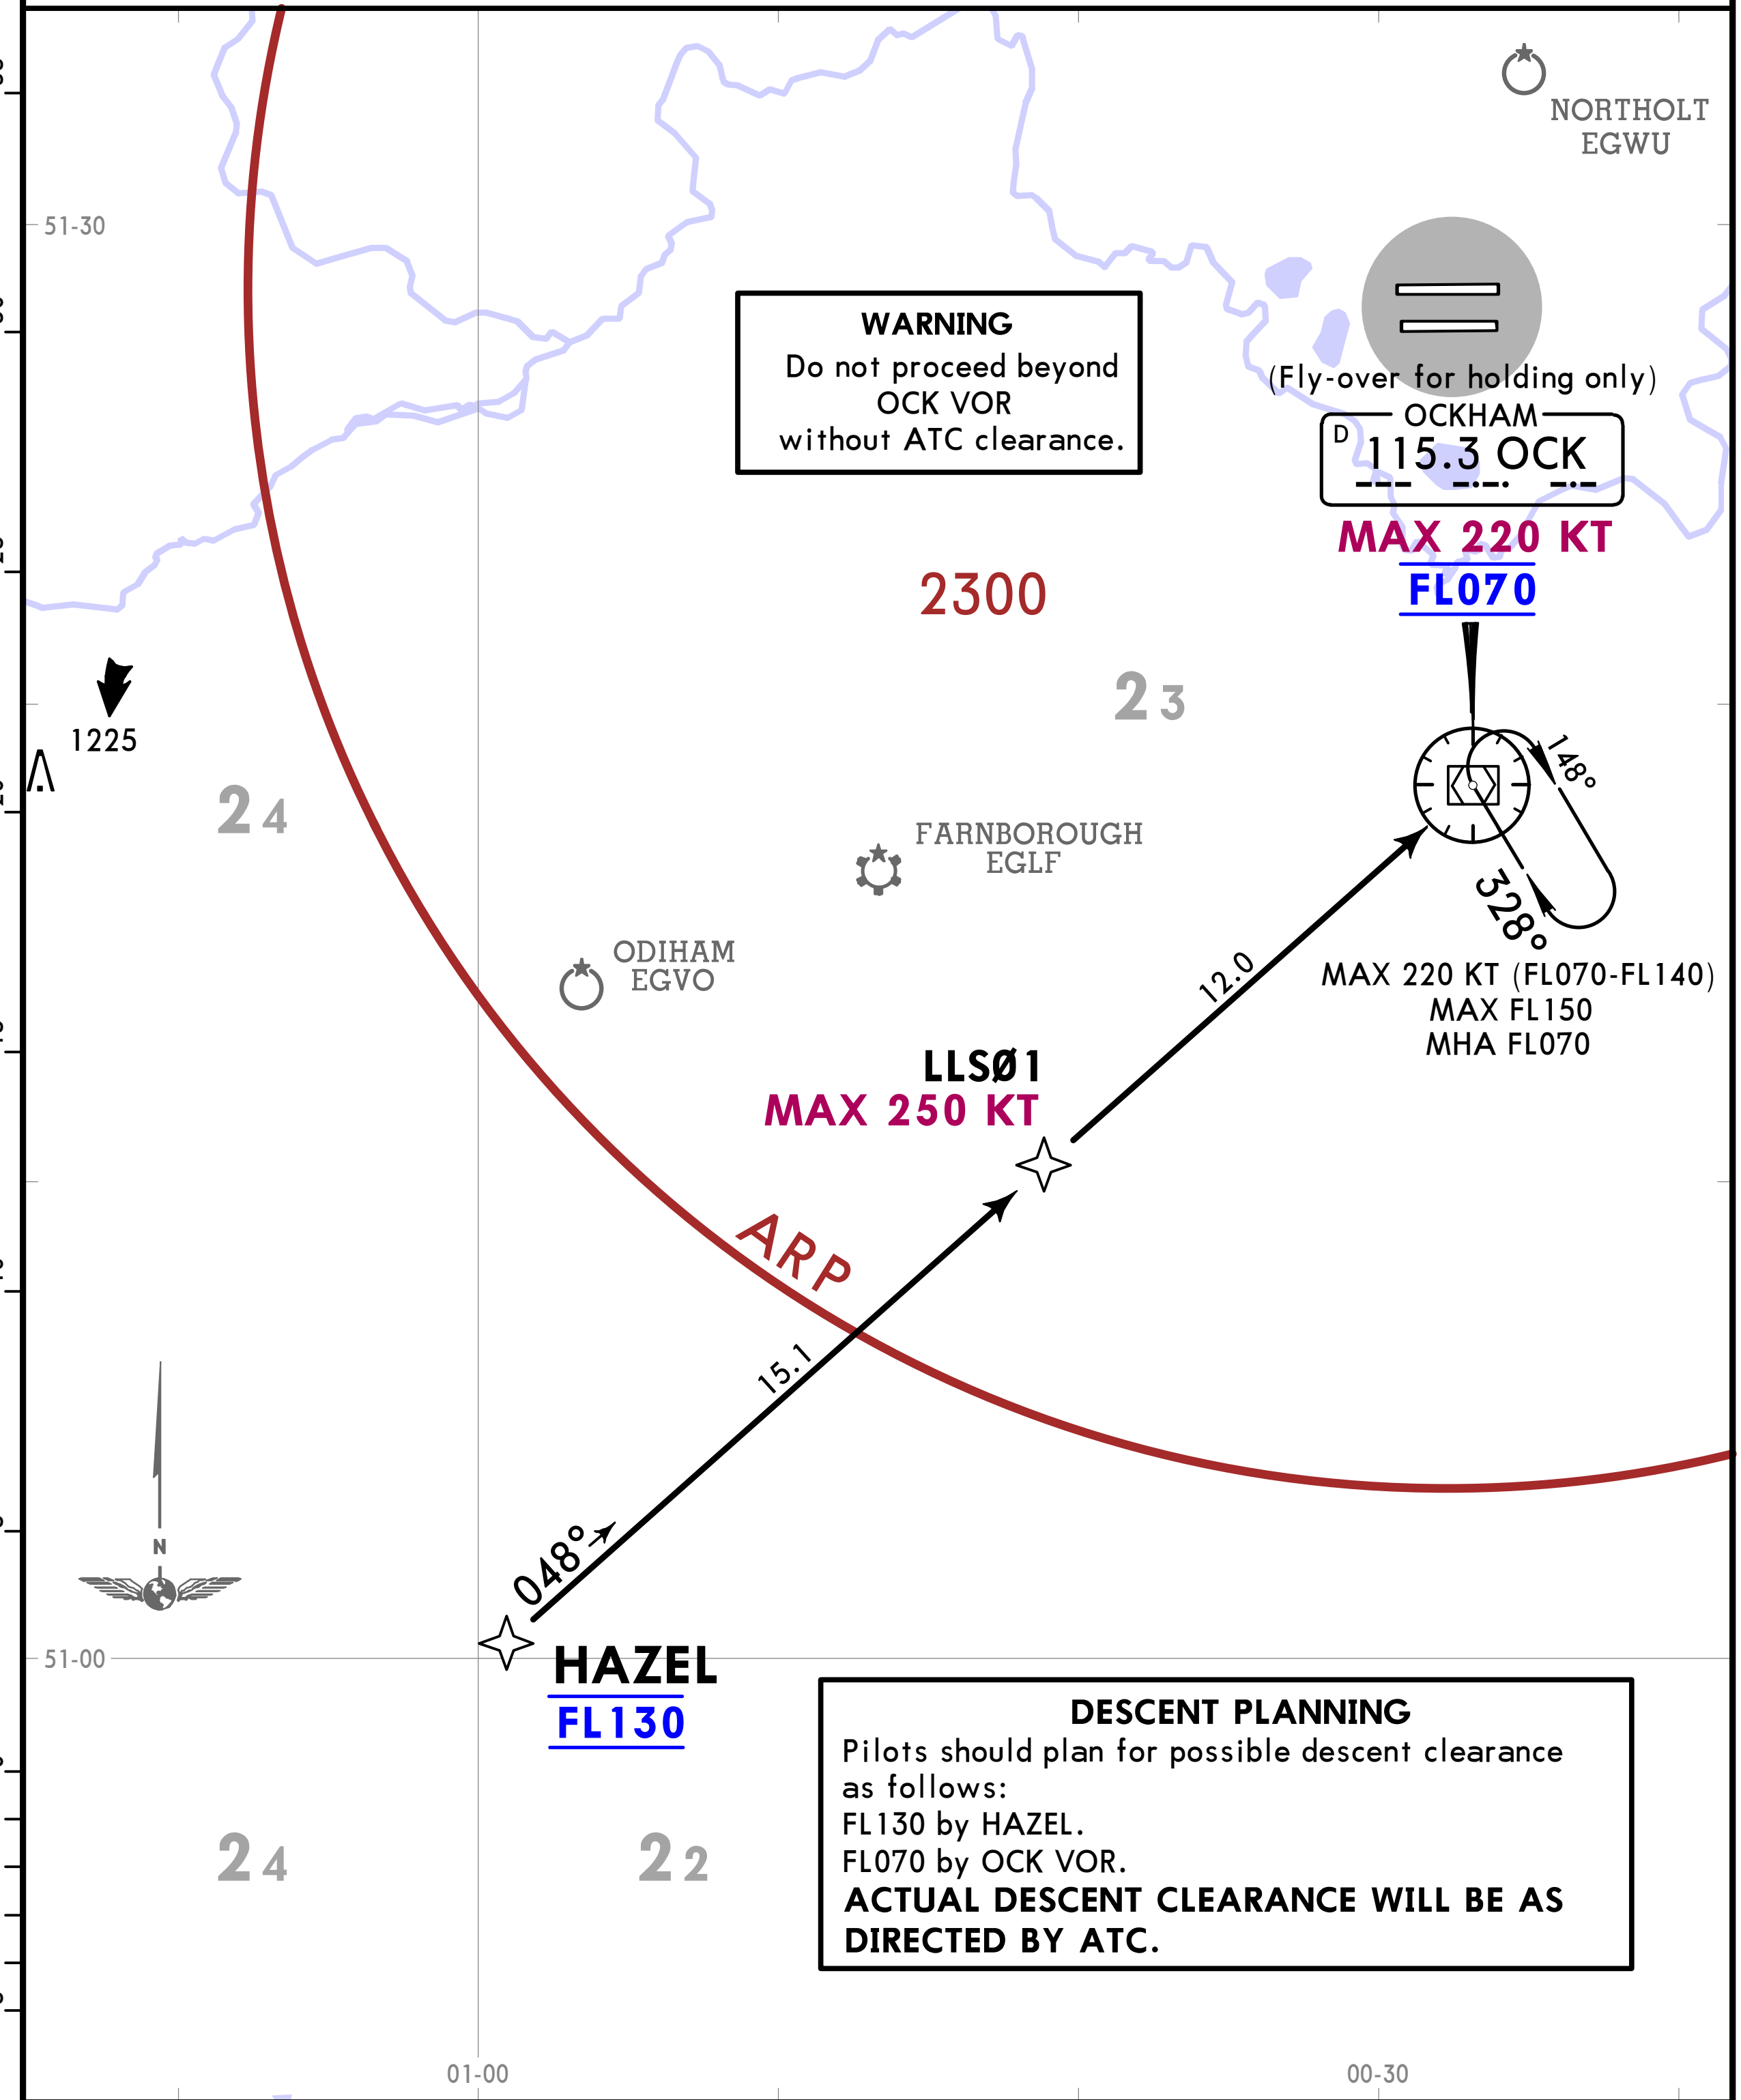

ROUTING

HAZEL (FL130) - LLSØ1 (K250-) - OCK VOR (K220-; FL070).

CHANGES: None.

D-ATIS			Apt Elev	Alt Set: hPa Trans level: By ATC
113.750	117.0	128.080	83	RNAV 5 1. Standard routes may be varied by ATC. 2. ACFT may be instructed 'direct to' (wpt) following RADAR vectoring.

HON 2H RNAV (DME/DME or GNSS) ARRIVAL

SPEED: MAX 250 KT BELOW FL100 UNLESS AUTHORIZED BY ATC

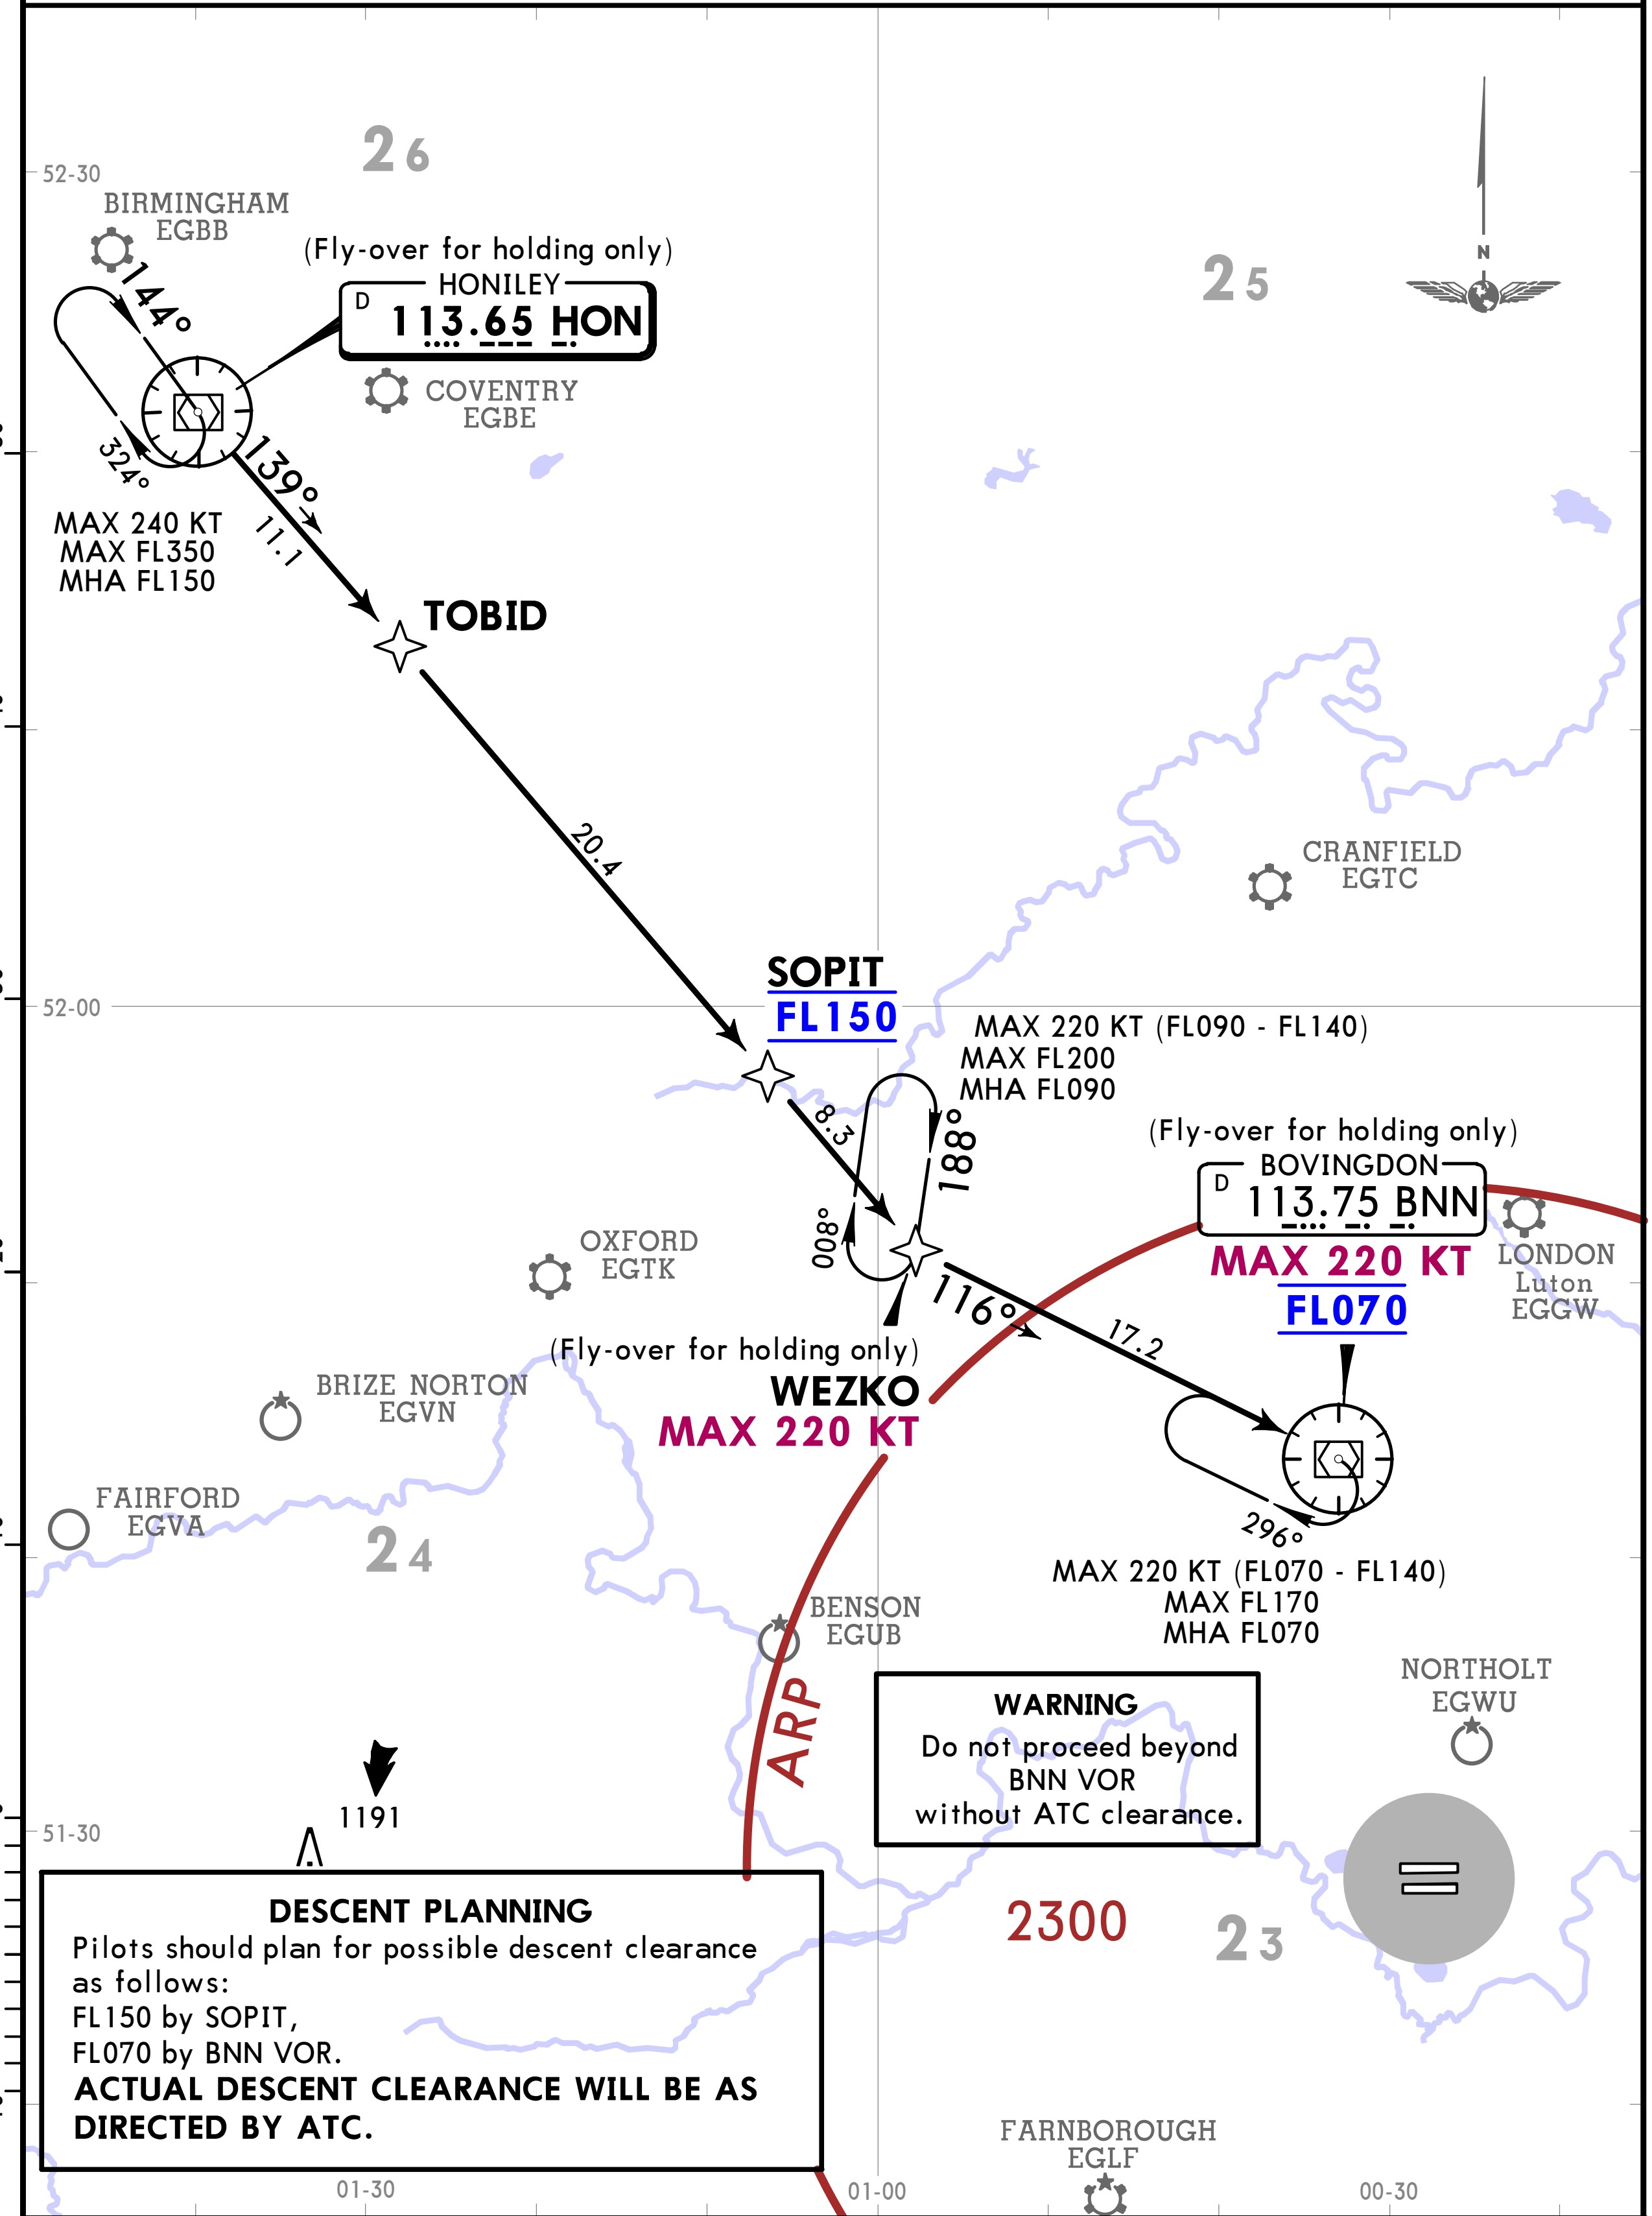

ROUTING

HON VOR - TOBID - SOPIT (FL150) - WEZKO (K220-) - BNN VOR (K220-; FL070).

CHANGES: STAR renumbered, WCO NDB replaced by waypoint WEZKO.

EGLL/LHR
HEATHROW

JEPPESEN
31 JAN 25 10-2D

LONDON, UK
RNAV STAR

D-ATIS	Apt Elev	Alt Set: hPa Trans level: By ATC
113.750 117.0 128.080	83	RNAV 5
		1. Standard routes may be varied by ATC. 2. ACFT may be instructed 'direct to' (wpt) following RADAR vectoring.

LAM 1X [LAM1X] TANET 1Z [TANE1Z] RNAV (DME/DME or GNSS) ARRIVALS

OVERLOAD STARS

TO BE USED ONLY WHEN INSTRUCTED BY ATC

NOT TO BE USED FOR FLIGHT PLANNING PURPOSES

STAR	ROUTING
LAM 1X	LAM VOR (K250-) - HILLY (K220-), then turn RIGHT, 302° track to BIG VOR (K220-; FL070).
TANET 1Z	TANET - DET VOR - LLEØ2 (K250-) - BIG VOR (K220-; FL070).

DESCENT PLANNING

Pilots should plan for possible descent clearance as follows:
FL070 by BIG VOR.
ACTUAL DESCENT CLEARANCE WILL BE AS DIRECTED BY ATC.

WARNING

Do not proceed beyond BIG VOR without ATC clearance.

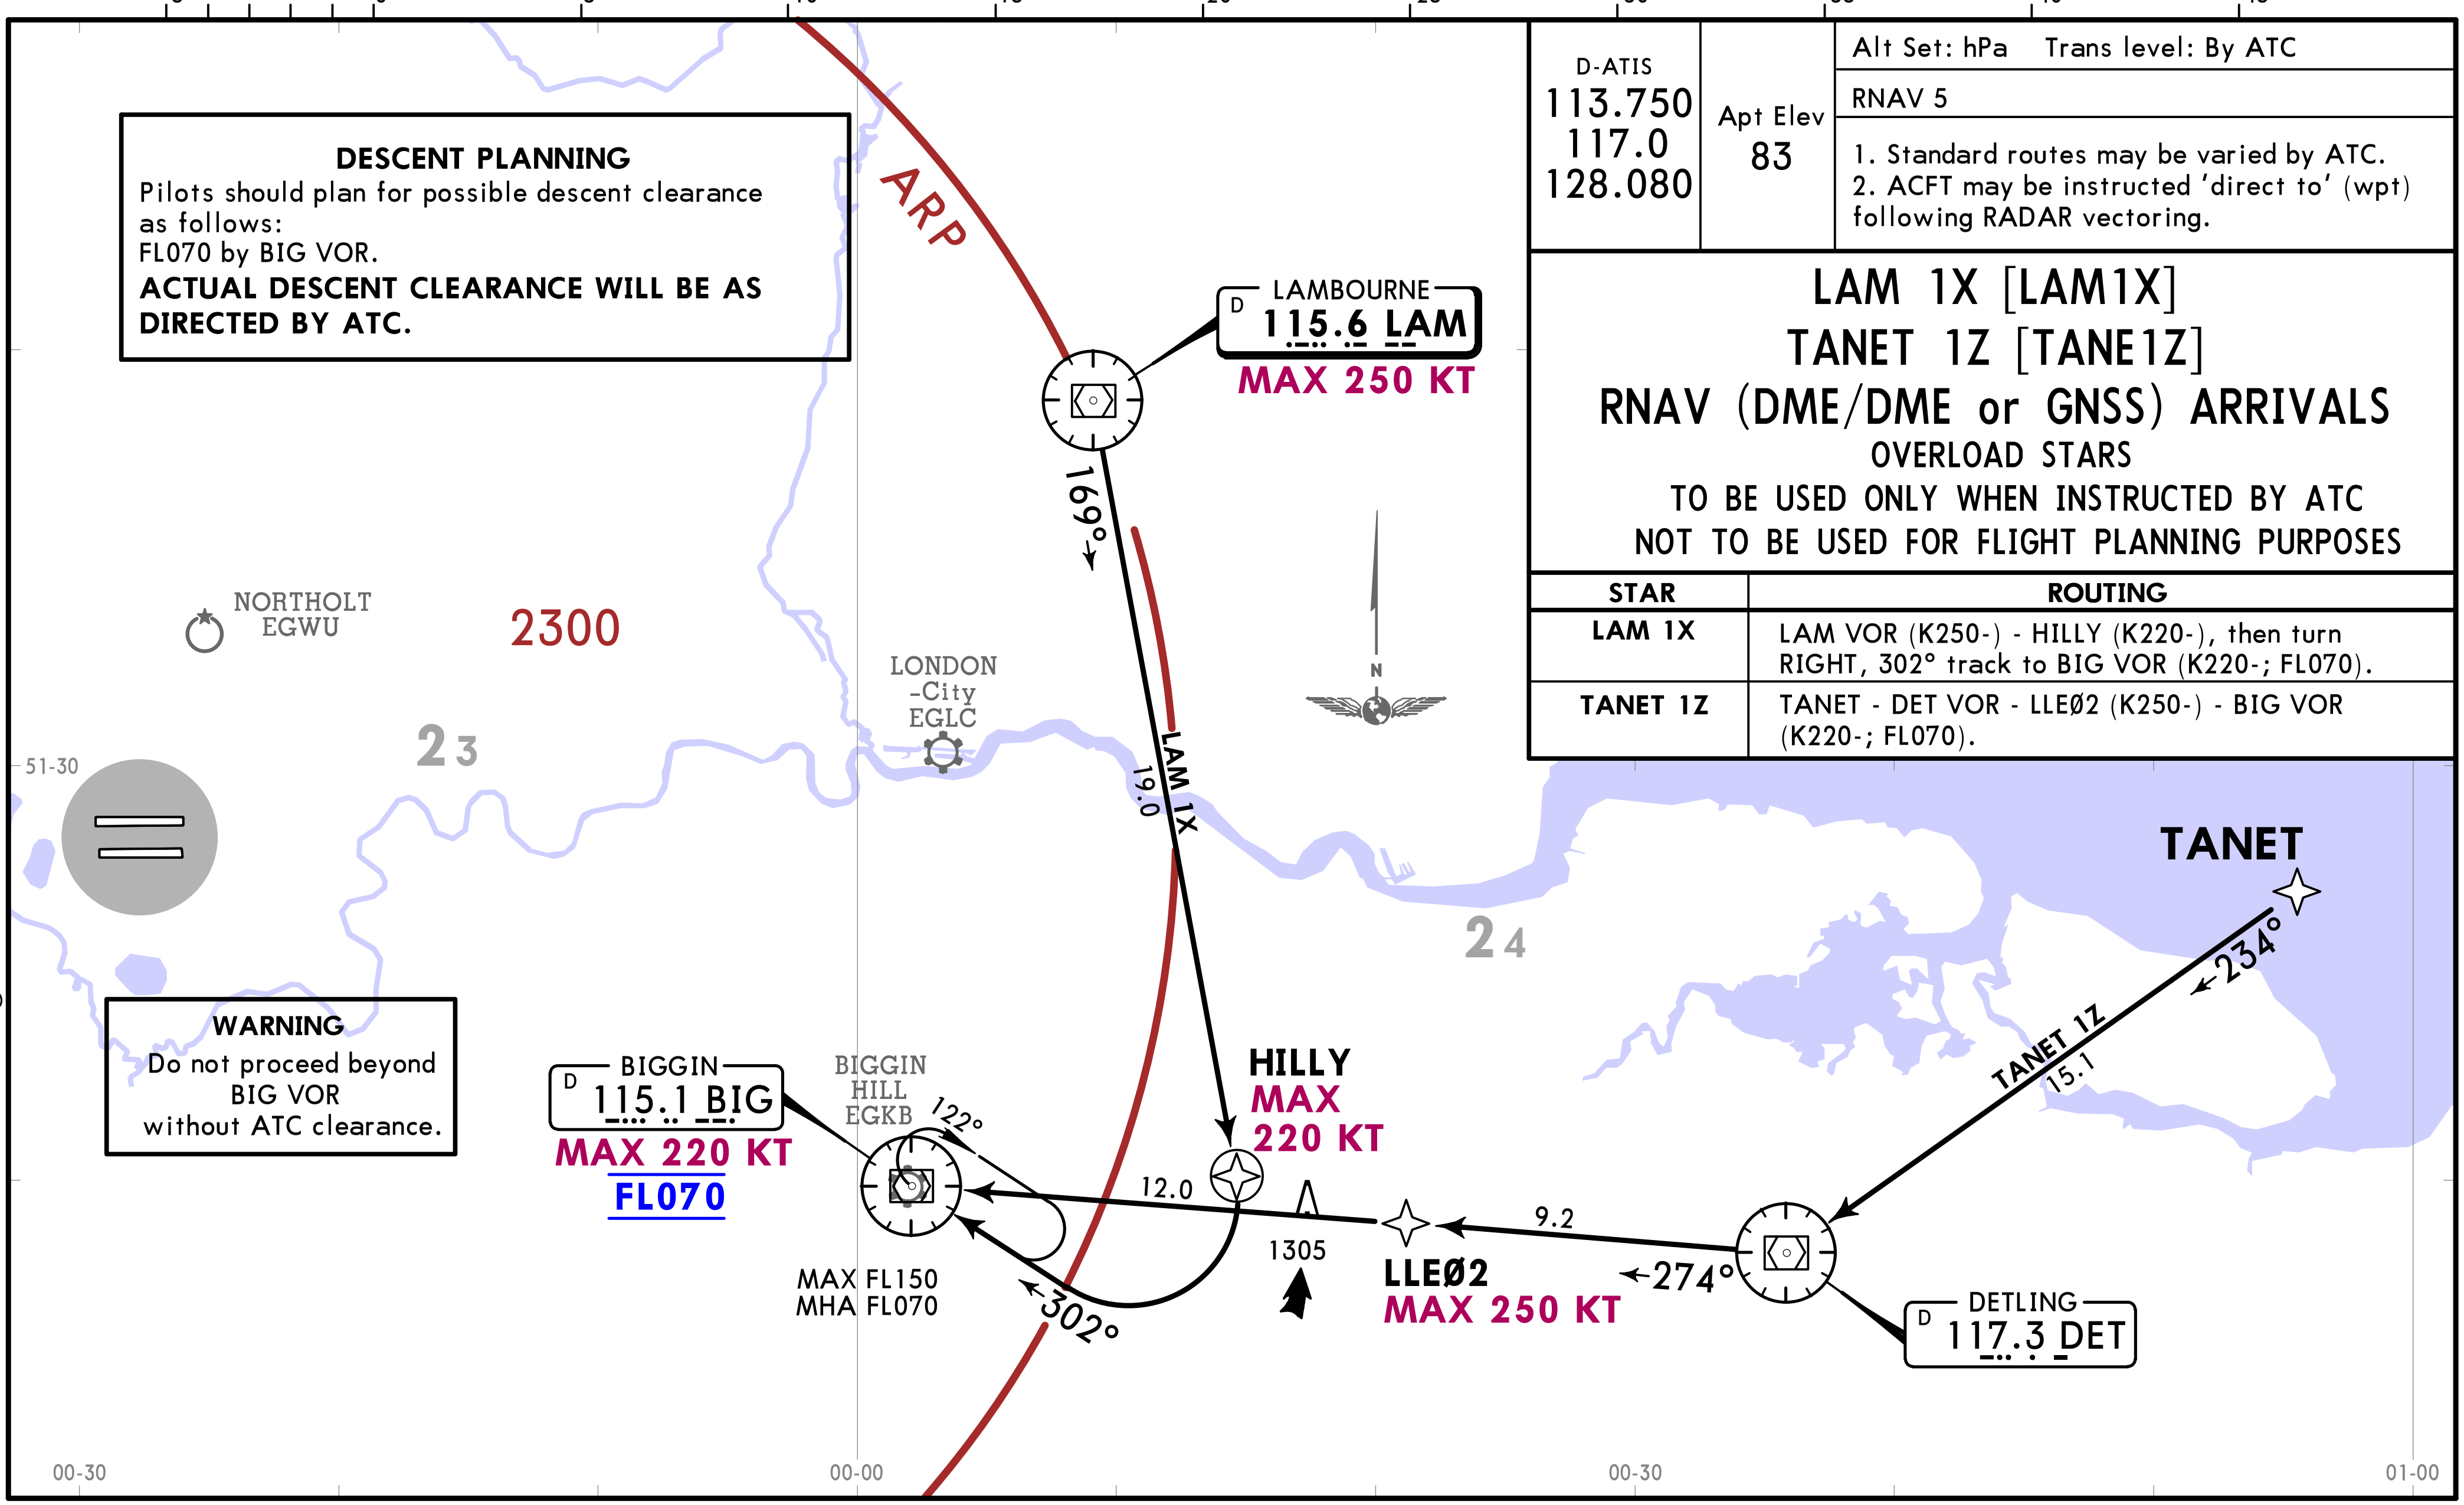

CHANGES: Reissue.

D-ATIS			Apt Elev	Alt Set: hPa Trans level: By ATC
113.750	117.0	128.080	83	RNAV 5 1. Standard routes may be varied by ATC. 2. ACFT may be instructed 'direct to' (wpt) following RADAR vectoring.

LAM 1Y
RNAV (DME/DME or GNSS) ARRIVAL

STAR IS TO FACILITATE THE TRANSFER OF TRAFFIC BETWEEN TERMINAL HOLDING FACILITIES AND ARE FOR USE ONLY AS DIRECTED BY ATC
NOT TO BE USED FOR FLIGHT PLANNING PURPOSES
DURING PERIODS OF CONGESTION TRAFFIC MAY BE ROUTED VIA OCK 1Z AS DIRECTED BY ATC

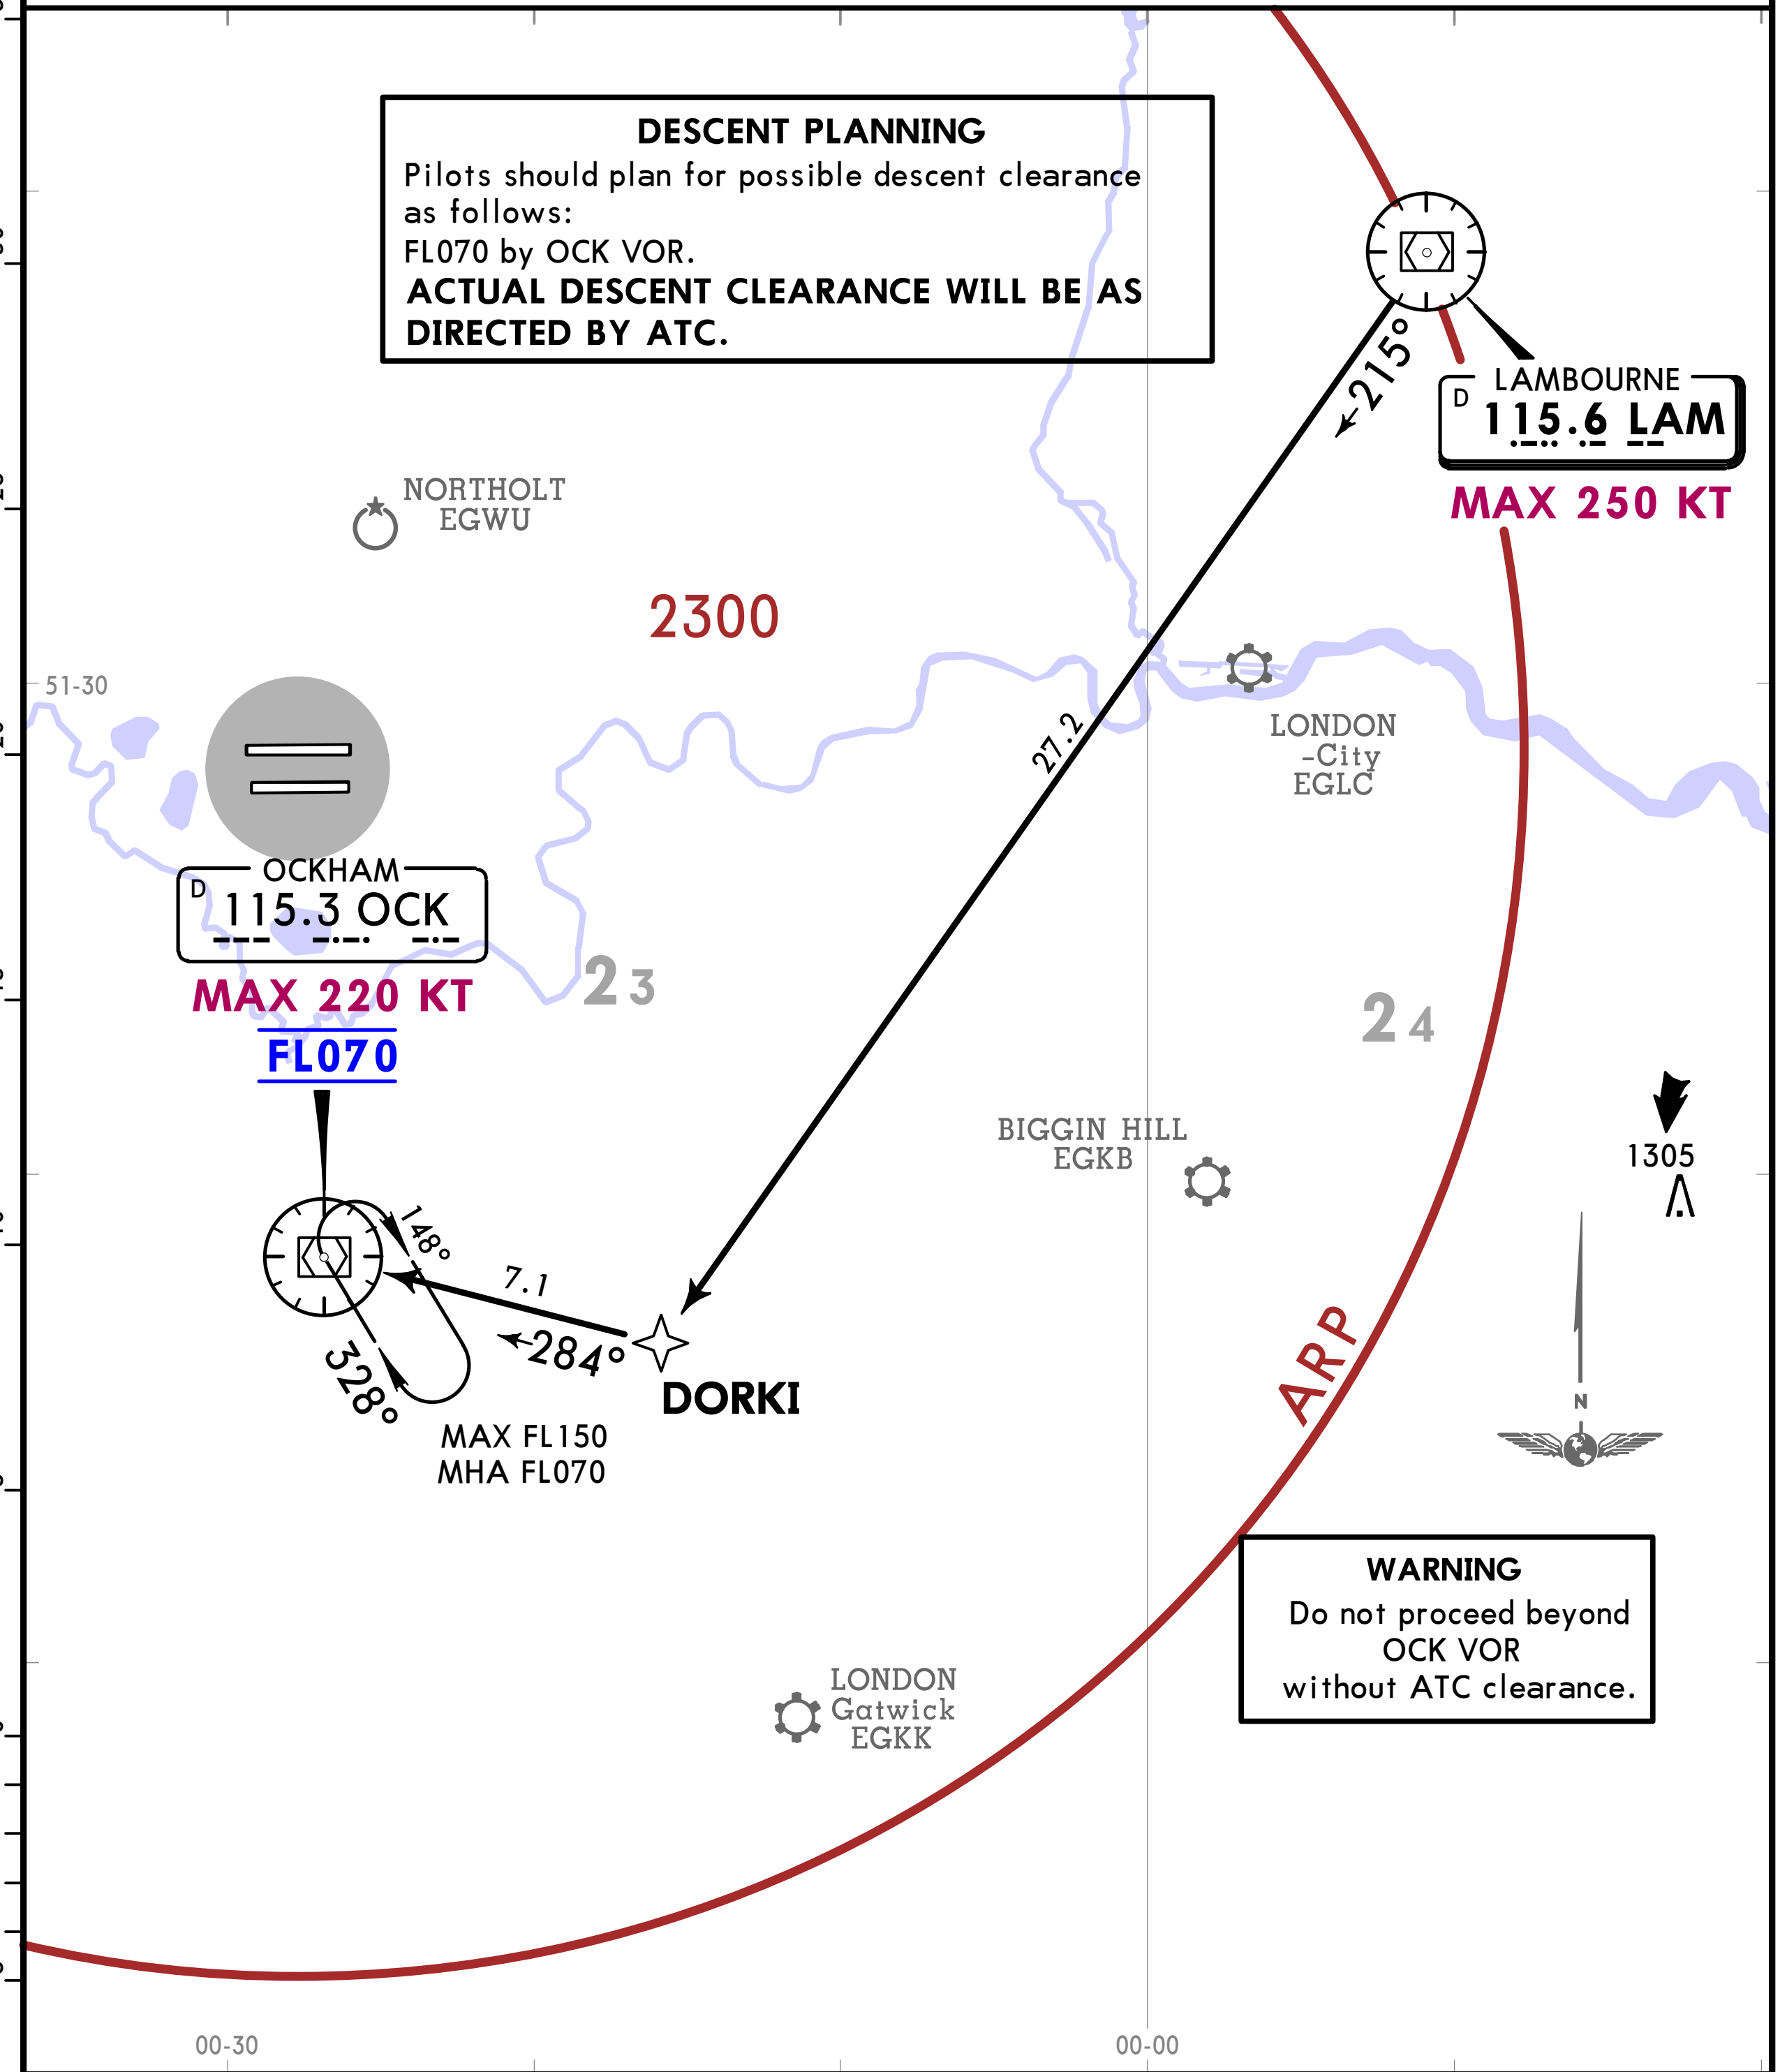

ROUTING

LAM (K250-) - DORKI - OCK VOR (K220-; FL070).

	*D-ATIS		Apt Elev	
113.750	117.0	128.080	83	Alt Set: hPa Trans level: By ATC **1. RNAV 5.** 2. Standard routes may be varied by ATC. 3. Acft may be instructed 'direct to' (wpt) following RADAR vectoring.

OCK 1Z
RNAV (DME/DME or GNSS) ARRIVAL

WARNING
Do not proceed beyond BIG without ATC clearance.

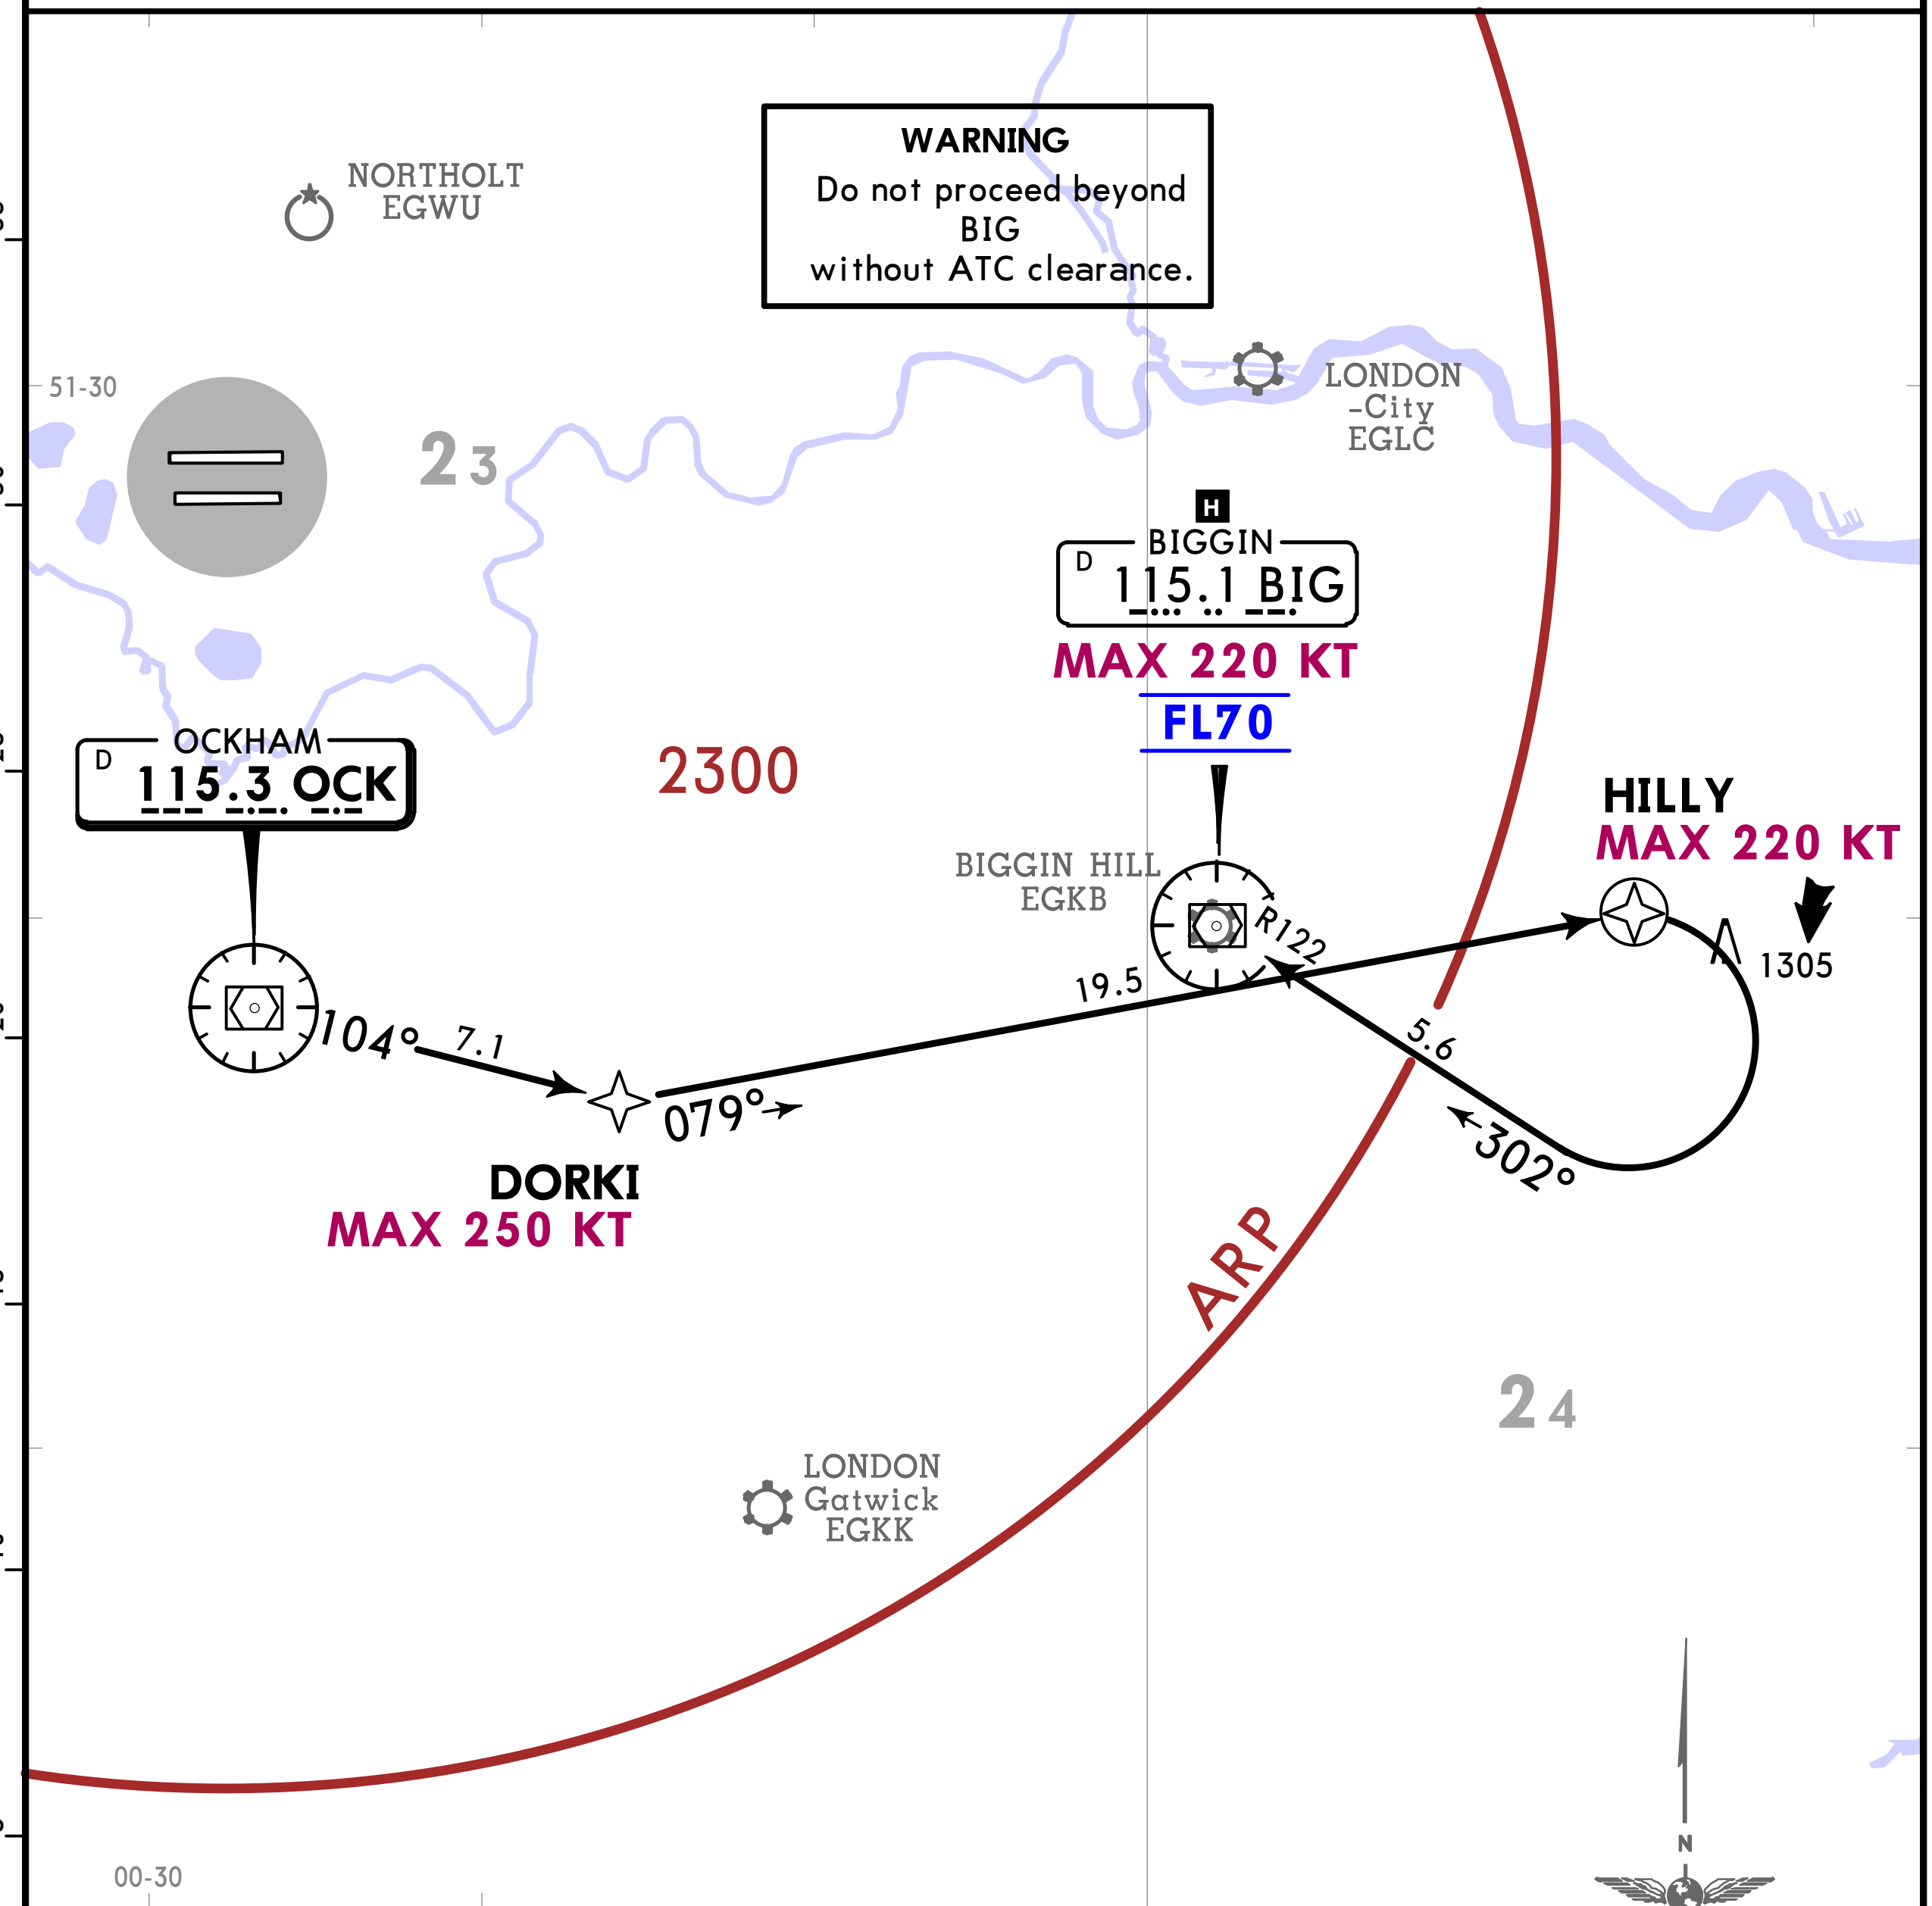

HOLDING OVER BIG



DESCENT PLANNING
Pilots should plan for possible descent clearance as follows:
FL70 by BIG.
ACTUAL DESCENT CLEARANCE WILL BE AS DIRECTED BY ATC.

ROUTING
OCK - DORKI (K250-) - HILLY (K220-), turn RIGHT, 302° track to BIG (K220-; FL70).

CHANGES: Procedure transferred; chart reindexed; tracks updated; communication.

*D-ATIS			Apt Elev
113.750	117.0	128.080	83

Alt Set: hPa
Trans level: By ATC
1. RNAV 1.
2. Standard routes may be varied by ATC.
3. ACFT may be instructed 'direct to' (wpt) following RADAR vectoring.

OTMET 1H [OTME1H]
RNAV (DME/DME or GNSS) ARRIVAL

DURING PERIODS OF CONGESTION TRAFFIC MAY BE ROUTED VIA OCK 1Z AS DIRECTED BY ATC

NOT FOR FLIGHT PLANNING PURPOSES

SPEED: MAX 250 KT BELOW FL100 UNLESS OTHERWISE AUTHORIZED

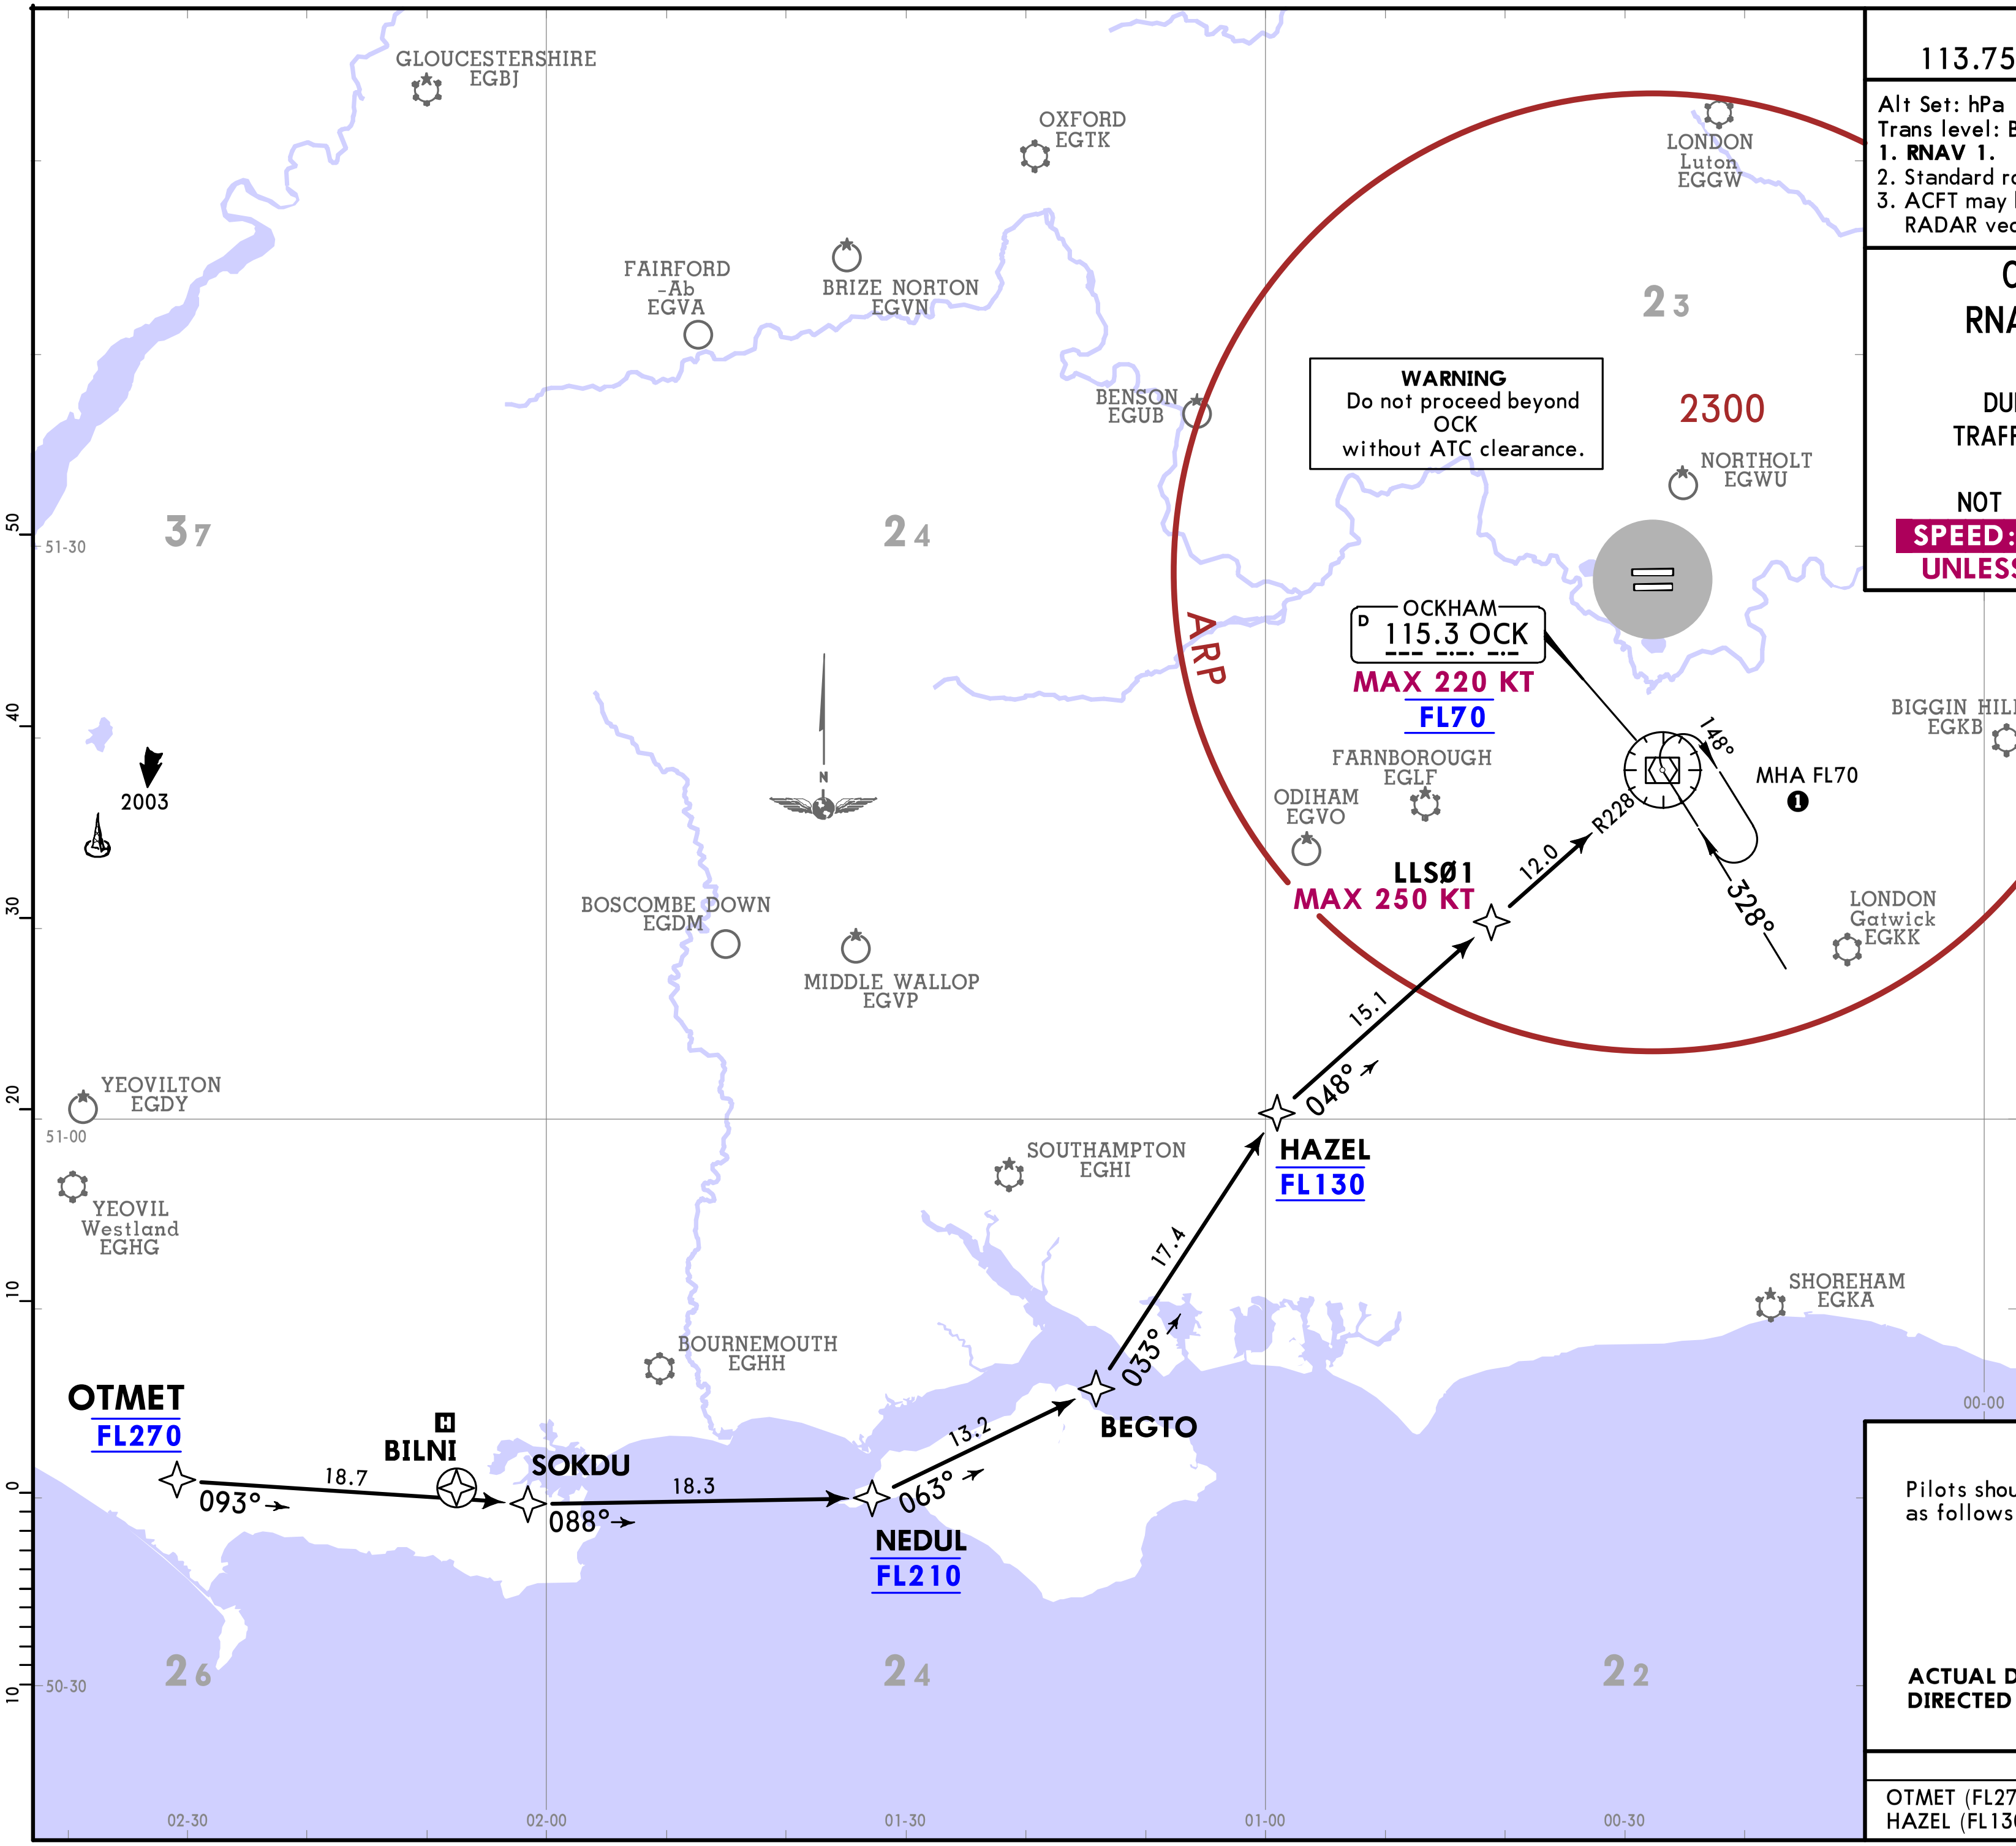

❶ Aircraft will be instructed by ATC to fly the appropriate FL.

HOLDING OVER
BILNI
By ATC
MAX FL300
MHA FL200
106°
286°

DESCENT PLANNING
Pilots should plan for possible descent clearance as follows:
FL270 by OTMET,
FL210 by NEDUL,
FL130 by HAZEL,
FL70 by OCK

ACTUAL DESCENT CLEARANCE WILL BE AS DIRECTED BY ATC.

ROUTING
OTMET (FL270) - SOKDU - NEDUL (FL210) - BEGTO - HAZEL (FL130) - LLSØ1 (K250-) - OCK (K220-; FL70).

CHANGES: Chart reindexed; tracks updated; communication.

*D-ATIS			Apt Elev
113.750	117.0	128.080	83

Alt Set: hPa
Trans level: By ATC
1. **RNAV 1.**
2. Standard routes may be varied by ATC.
3. ACFT may be instructed 'direct to' (wpt) following RADAR vectoring.

ROXOG 1H [ROXO1H]
RNAV (DME/DME or GNSS)
ARRIVAL

DURING PERIODS OF CONGESTION TRAFFIC MAY BE ROUTED VIA OCK 1Z AS DIRECTED BY ATC

NOT FOR FLIGHT PLANNING PURPOSES

SPEED: MAX 250 KT BELOW FL100 UNLESS OTHERWISE AUTHORIZED

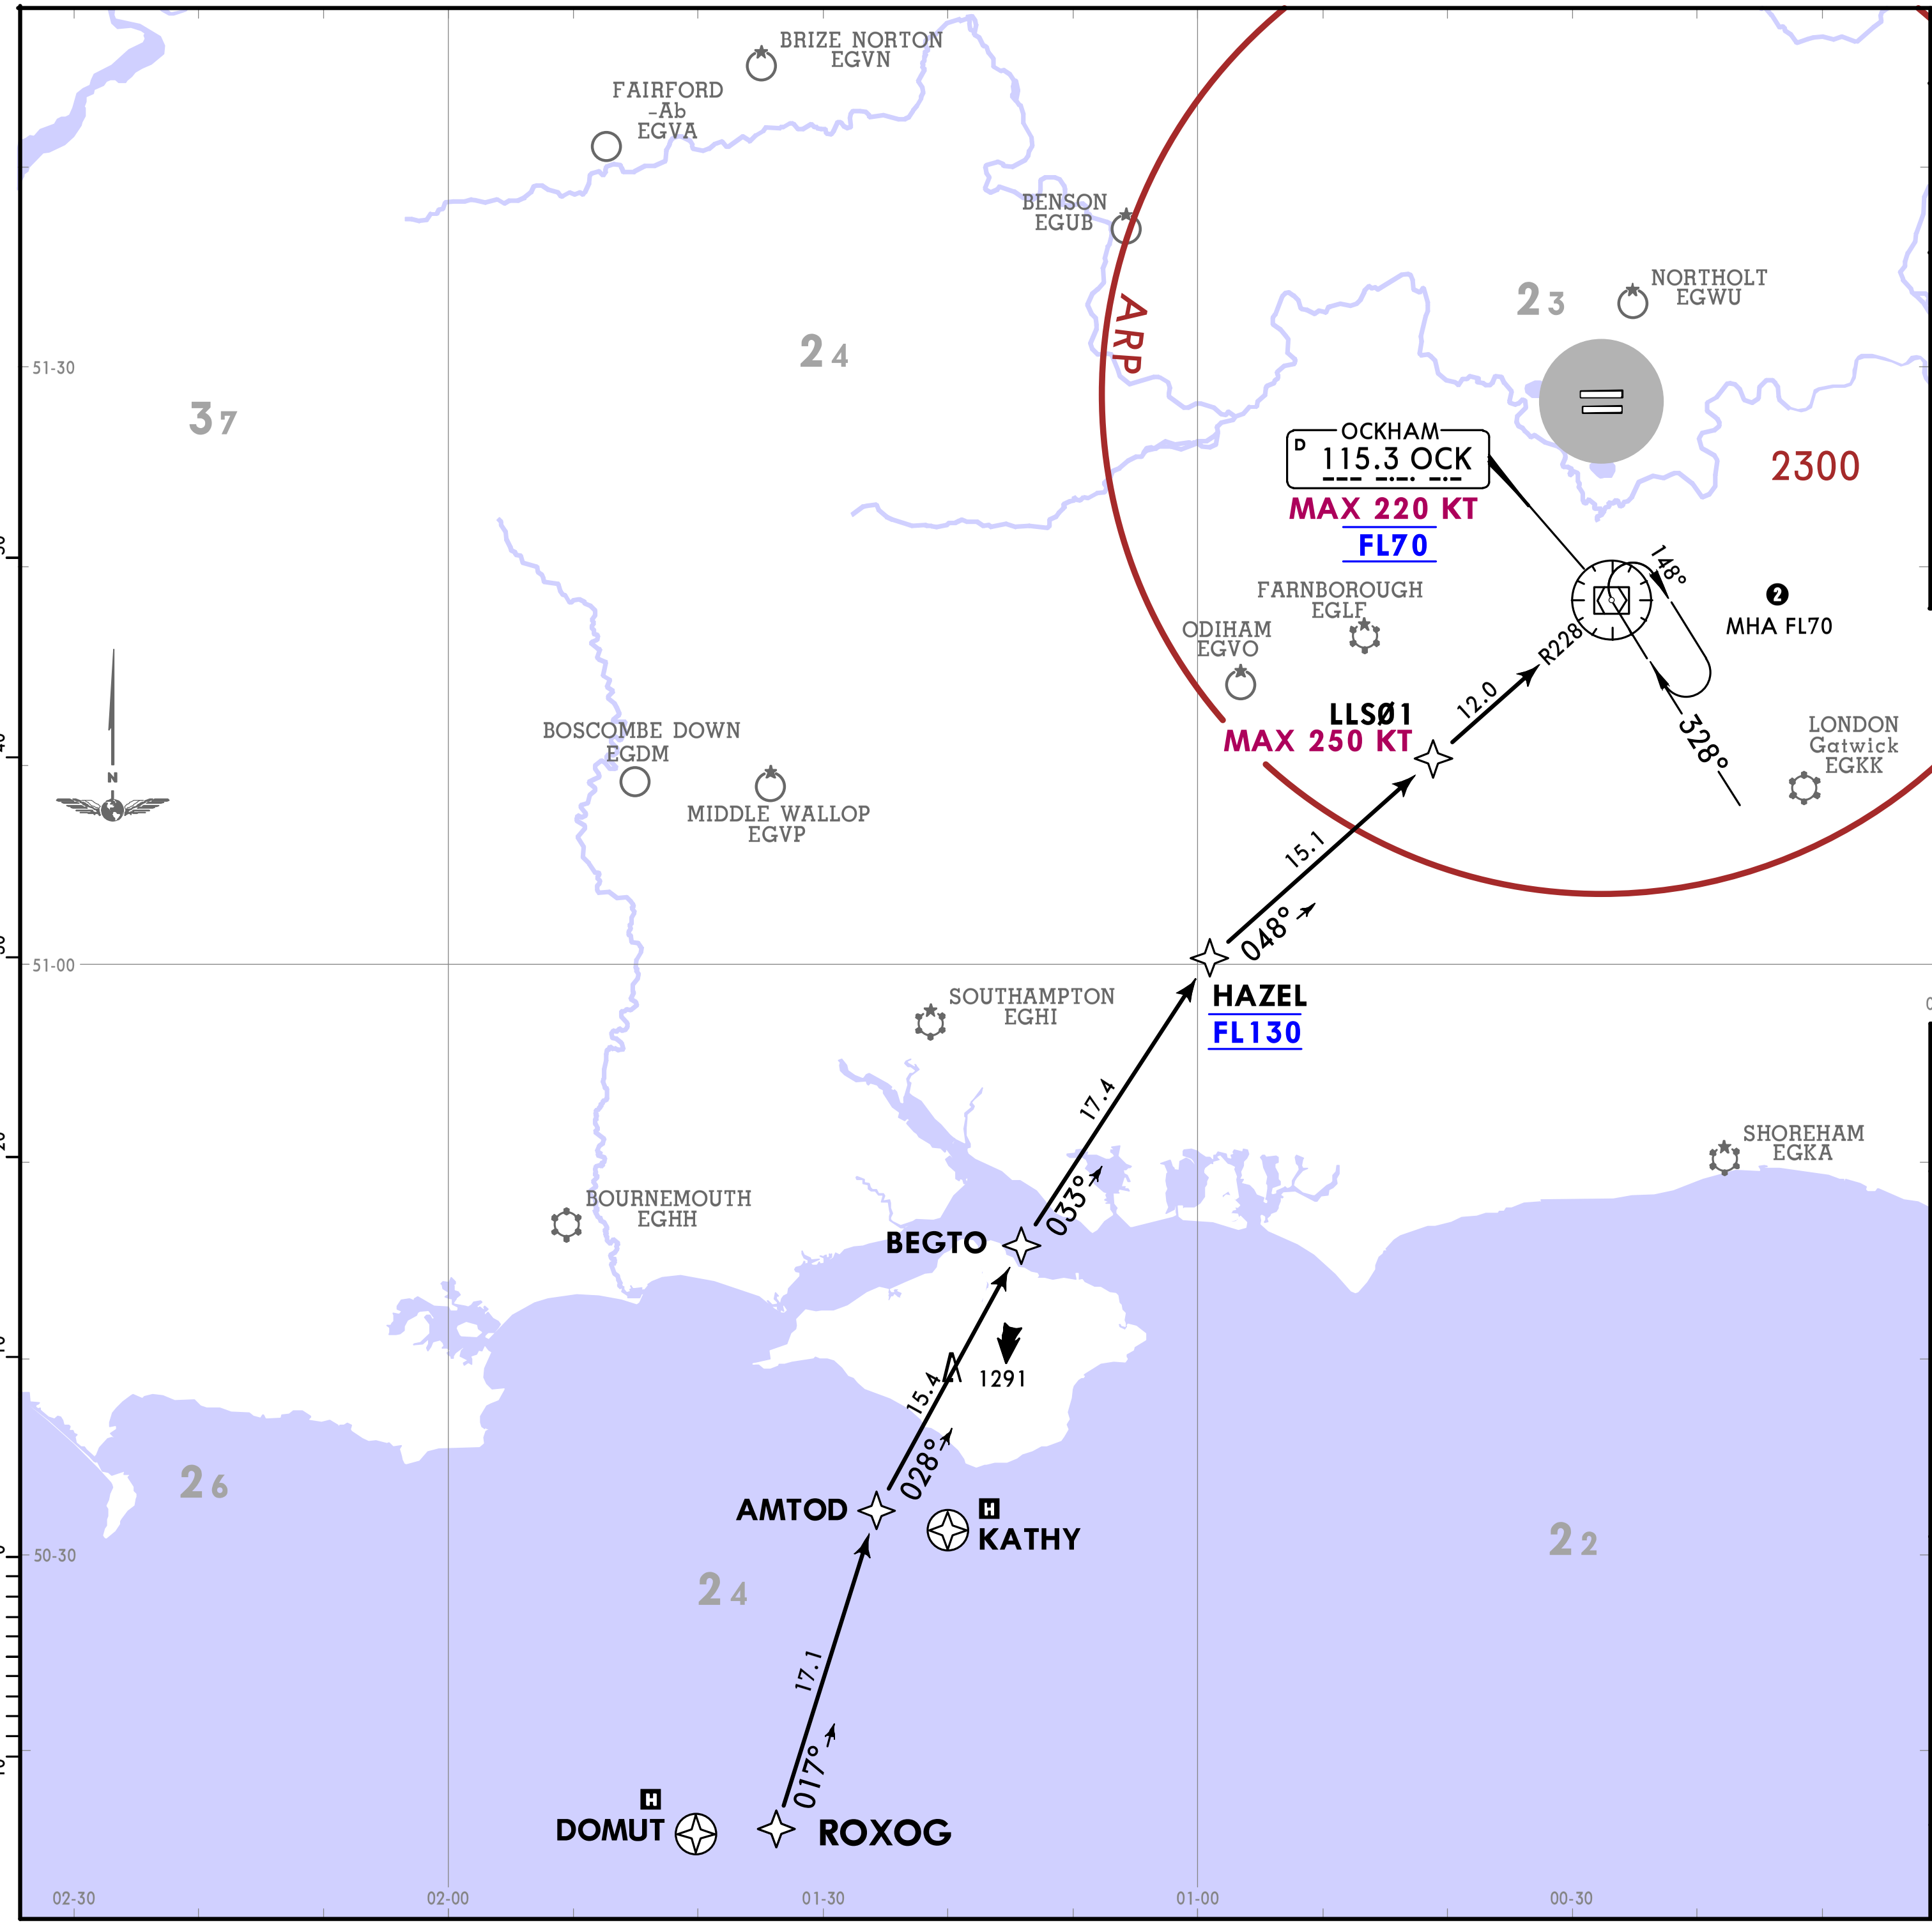

❶ Right hand pattern may be instructed by ATC.

❷ Aircraft will be instructed by ATC to fly the appropriate FL.

HOLDINGS OVER

DOMUT	KATHY ❶
By ATC	By ATC
MHA FL230	MAX FL190, MHA FL160
039°, 219°	039°, 219°

DESCENT PLANNING

Pilots should plan for possible descent clearance as follows:

FL130 by HAZEL,
FL70 by OCK

ACTUAL DESCENT CLEARANCE WILL BE AS DIRECTED BY ATC.

ROUTING

ROXOG - AMTOD - BEGTO - HAZEL (FL130) - LLSØ1 (K250-) - OCK (K220-; FL70).

CHANGES: Chart reindexed; tracks updated; communication.

D-ATIS			Apt Elev
113.750	117.0	128.080	83

Alt Set: hPa Trans level: By ATC

RNAV 1

1. Standard routes may be varied by ATC.
2. ACFT may be instructed 'direct to' (wpt) following RADAR vectoring.

SIRIC 1H [SIRI1H]
RNAV (DME/DME or GNSS)
ARRIVAL

DURING PERIODS OF CONGESTION TRAFFIC MAY BE ROUTED VIA OCK 1Z AS DIRECTED BY ATC NOT TO BE USED FOR FLIGHT PLANNING PURPOSES

SPEED: MAX 250 KT BELOW FL100 UNLESS OTHERWISE AUTHORIZED

DESCENT PLANNING
Pilots should plan for possible descent clearance as follows:
FL140 by SIRIC,
FL070 by OCK VOR.
ACTUAL DESCENT CLEARANCE WILL BE AS DIRECTED BY ATC.

ROUTING
SIRIC (FL140) - NIGIT - LLWØ3 (K250-) - OCK VOR (K220-; FL070).

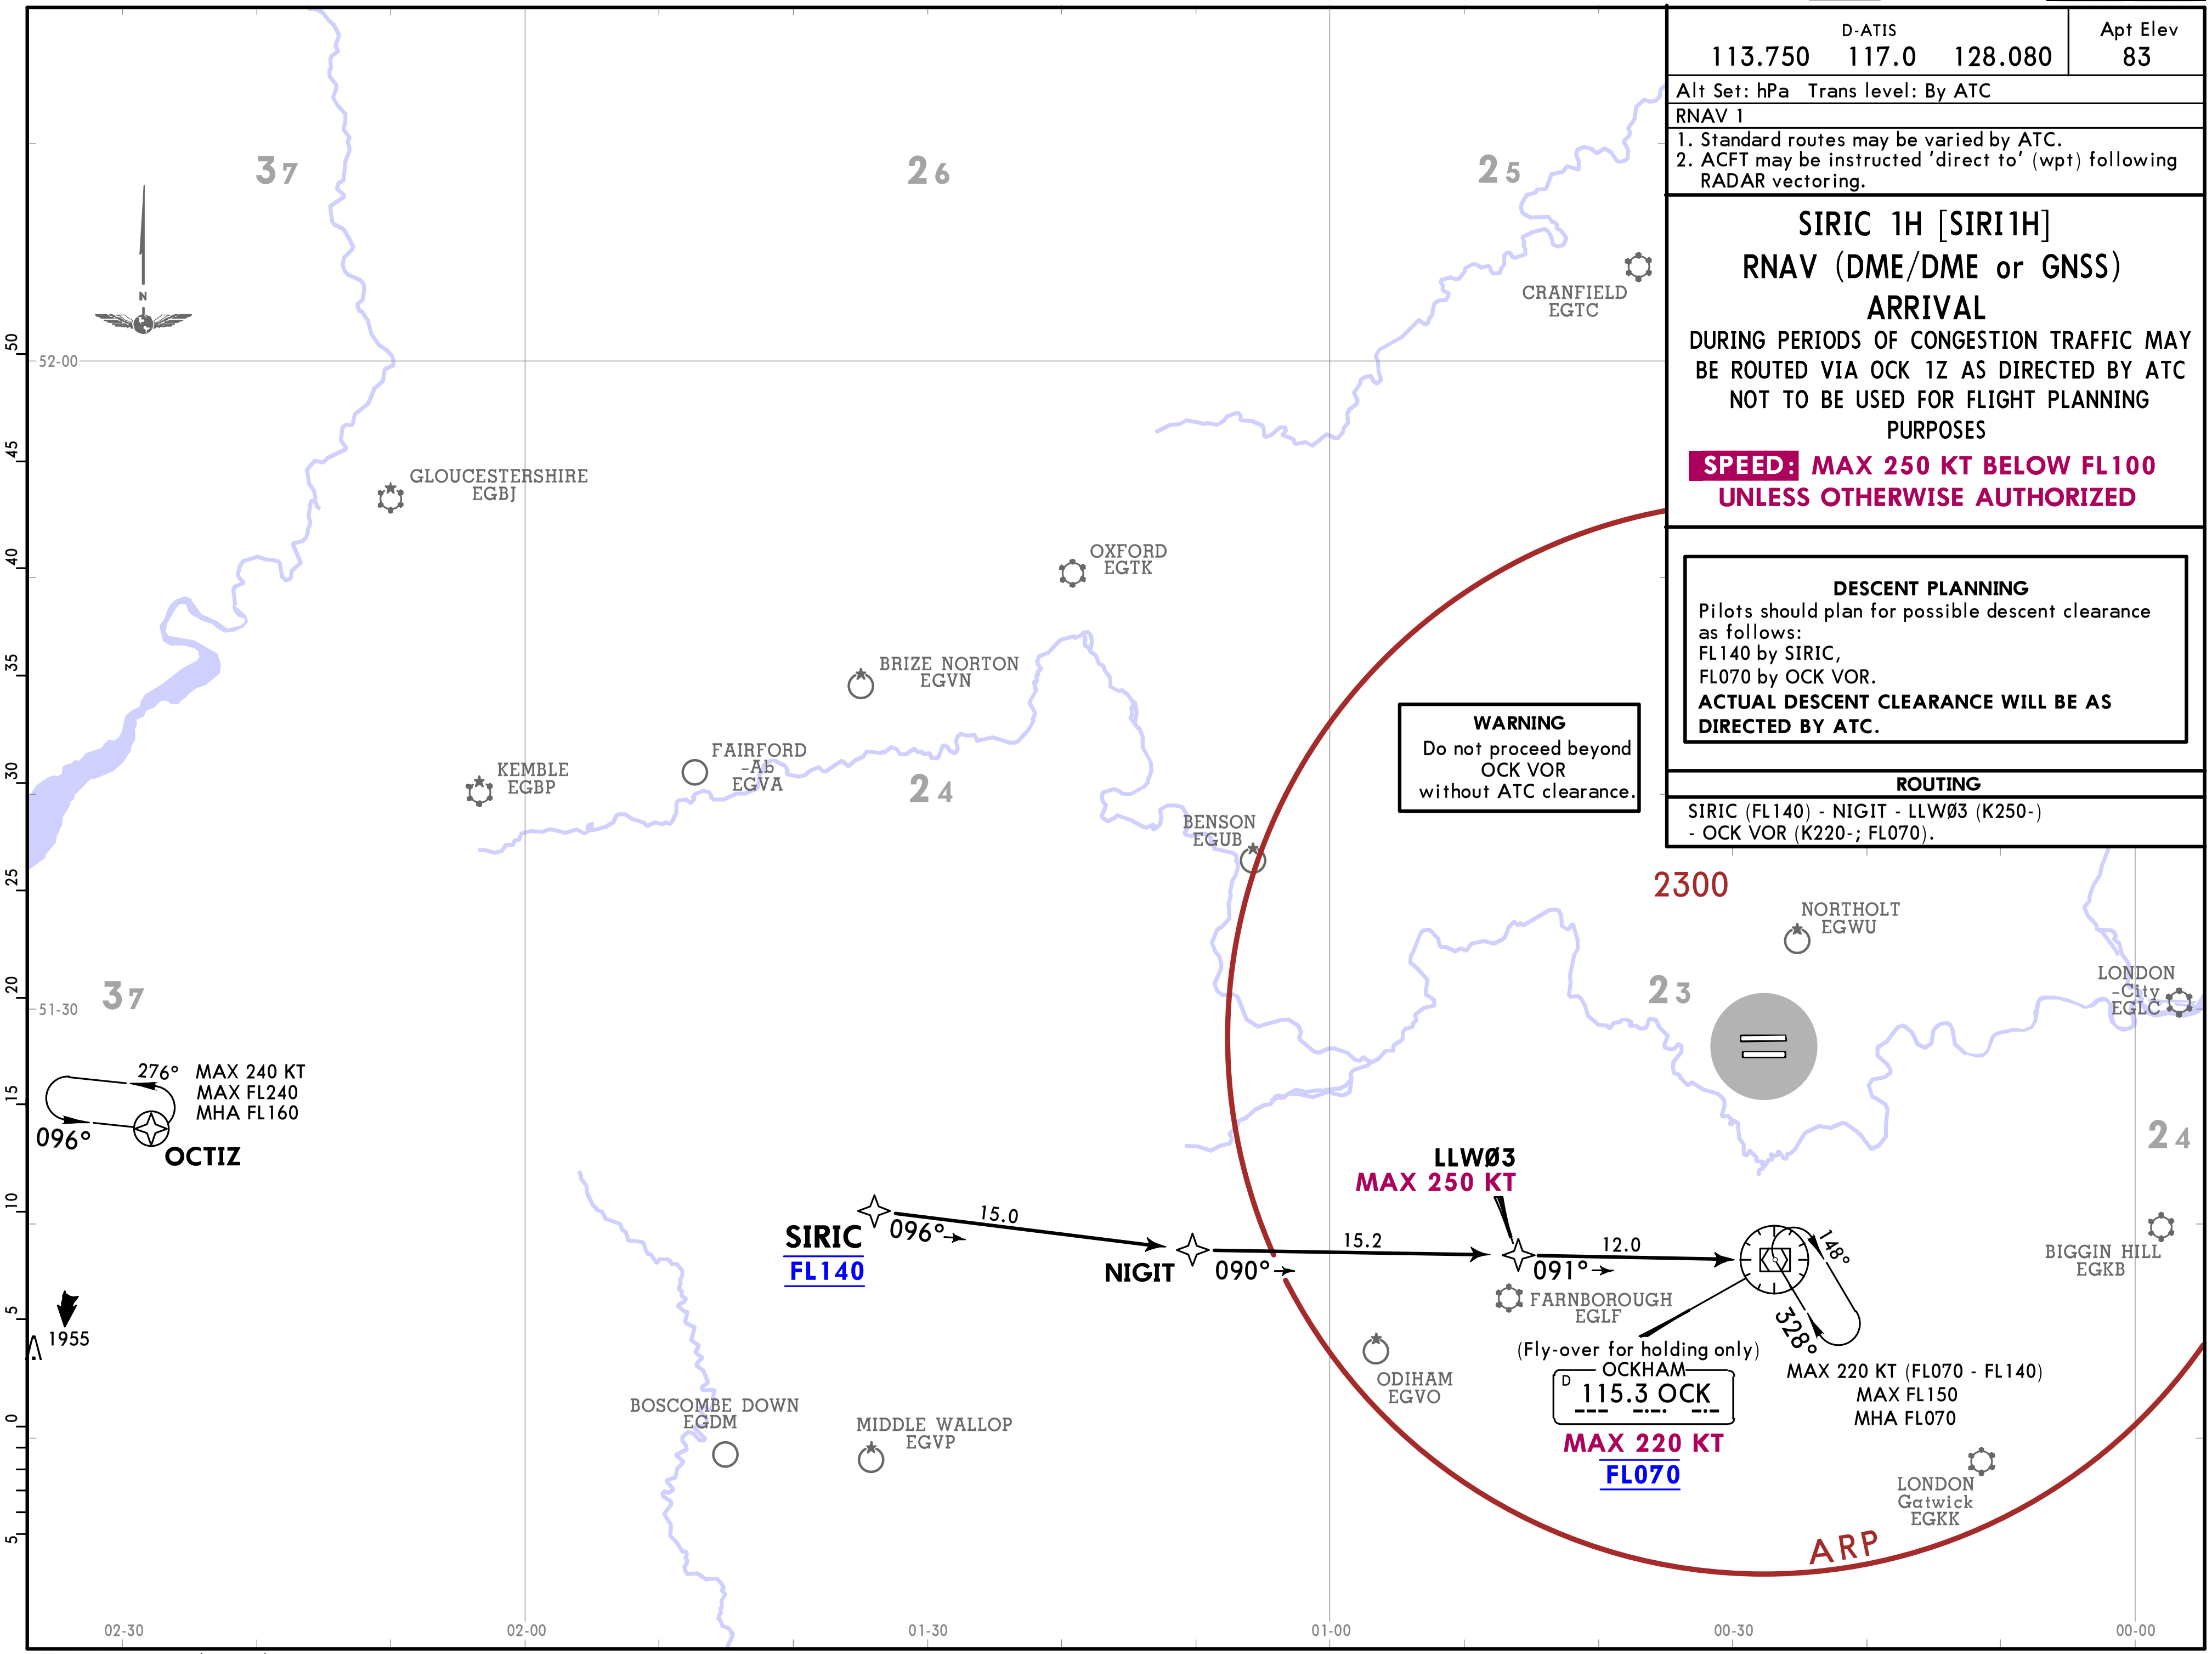

D-ATIS	Apt Elev	Alt Set: hPa Trans level: By ATC
113.750 117.0 128.080	83	RNAV 1 1. Standard routes may be varied by ATC. 2. ACFT may be instructed 'direct to' (wpt) following RADAR vectoring.

SIRIC 1Z [SIRI1Z] ❶
RNAV (DME/DME or GNSS) ARRIVAL

SPEED: MAX 250 KT BELOW FL100 UNLESS OTHERWISE AUTHORIZED

❶ RNAV STAR SIRIC 1Z is an overload procedure to be used only when instructed by ATC. Not to be used for flight planning purposes.

DESCENT PLANNING
Pilots should plan for possible descent clearance as follows:
FL140 by SIRIC,
FL070 by BNN VOR.
ACTUAL DESCENT CLEARANCE WILL BE AS DIRECTED BY ATC.

ROUTING

SIRIC (FL140) - CPT VOR (K250-) - BNN VOR (K220-; FL070).

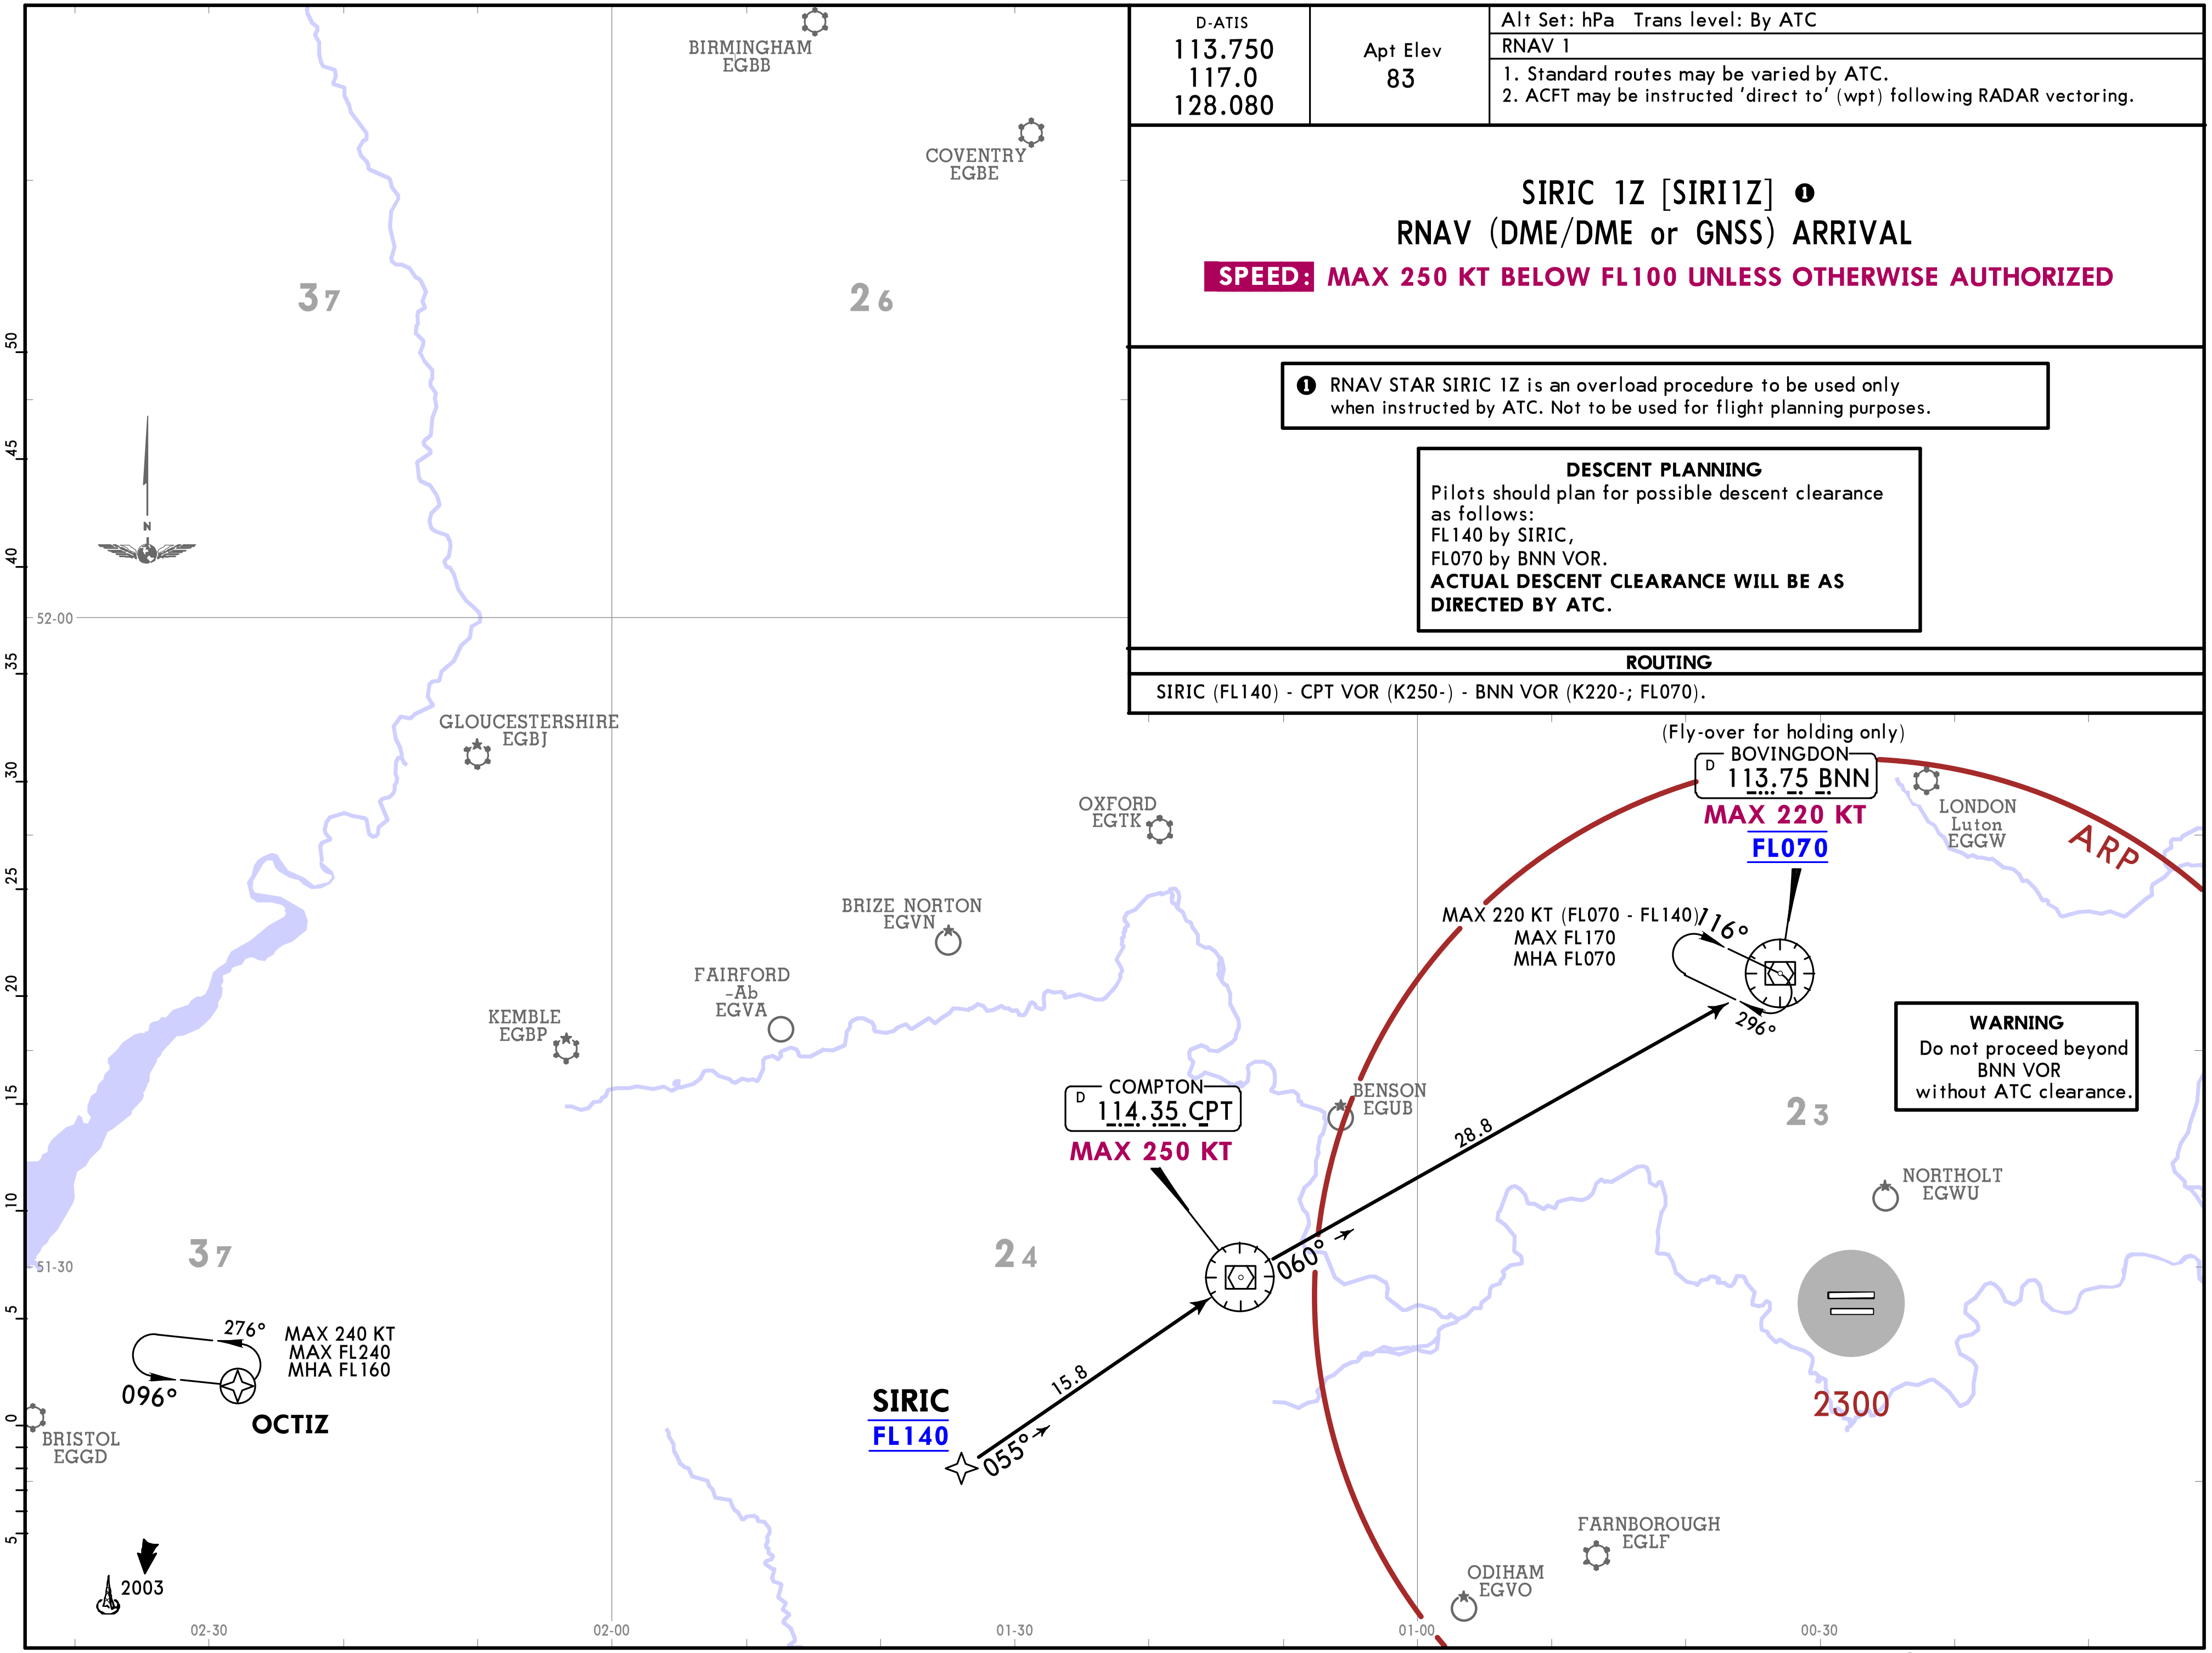

D-ATIS	Apt Elev
113.750 117.0 128.080	83

Alt Set: hPa Trans level: By ATC
1. Minimum holding level (Flight Level equivalent of 7000) is above TA and will be allocated by ATC.
2. Initial approach procedures are designed for manoeuvring speeds up to 220 KT and assume ACFT can maintain a descent gradient of approximately 320 per NM.
3. Continuous descent approach should be used whenever practicable unless otherwise instructed by ATC. Procedure design is compatible with 3° descent path from 6000.
4. Approximate distances to touchdown are indicated in round brackets.

INITIAL APPROACH
(RWYS 09L/R)
FROM BIG TO ILS

FOR FINAL APPROACH SEE APPROACH CHARTS

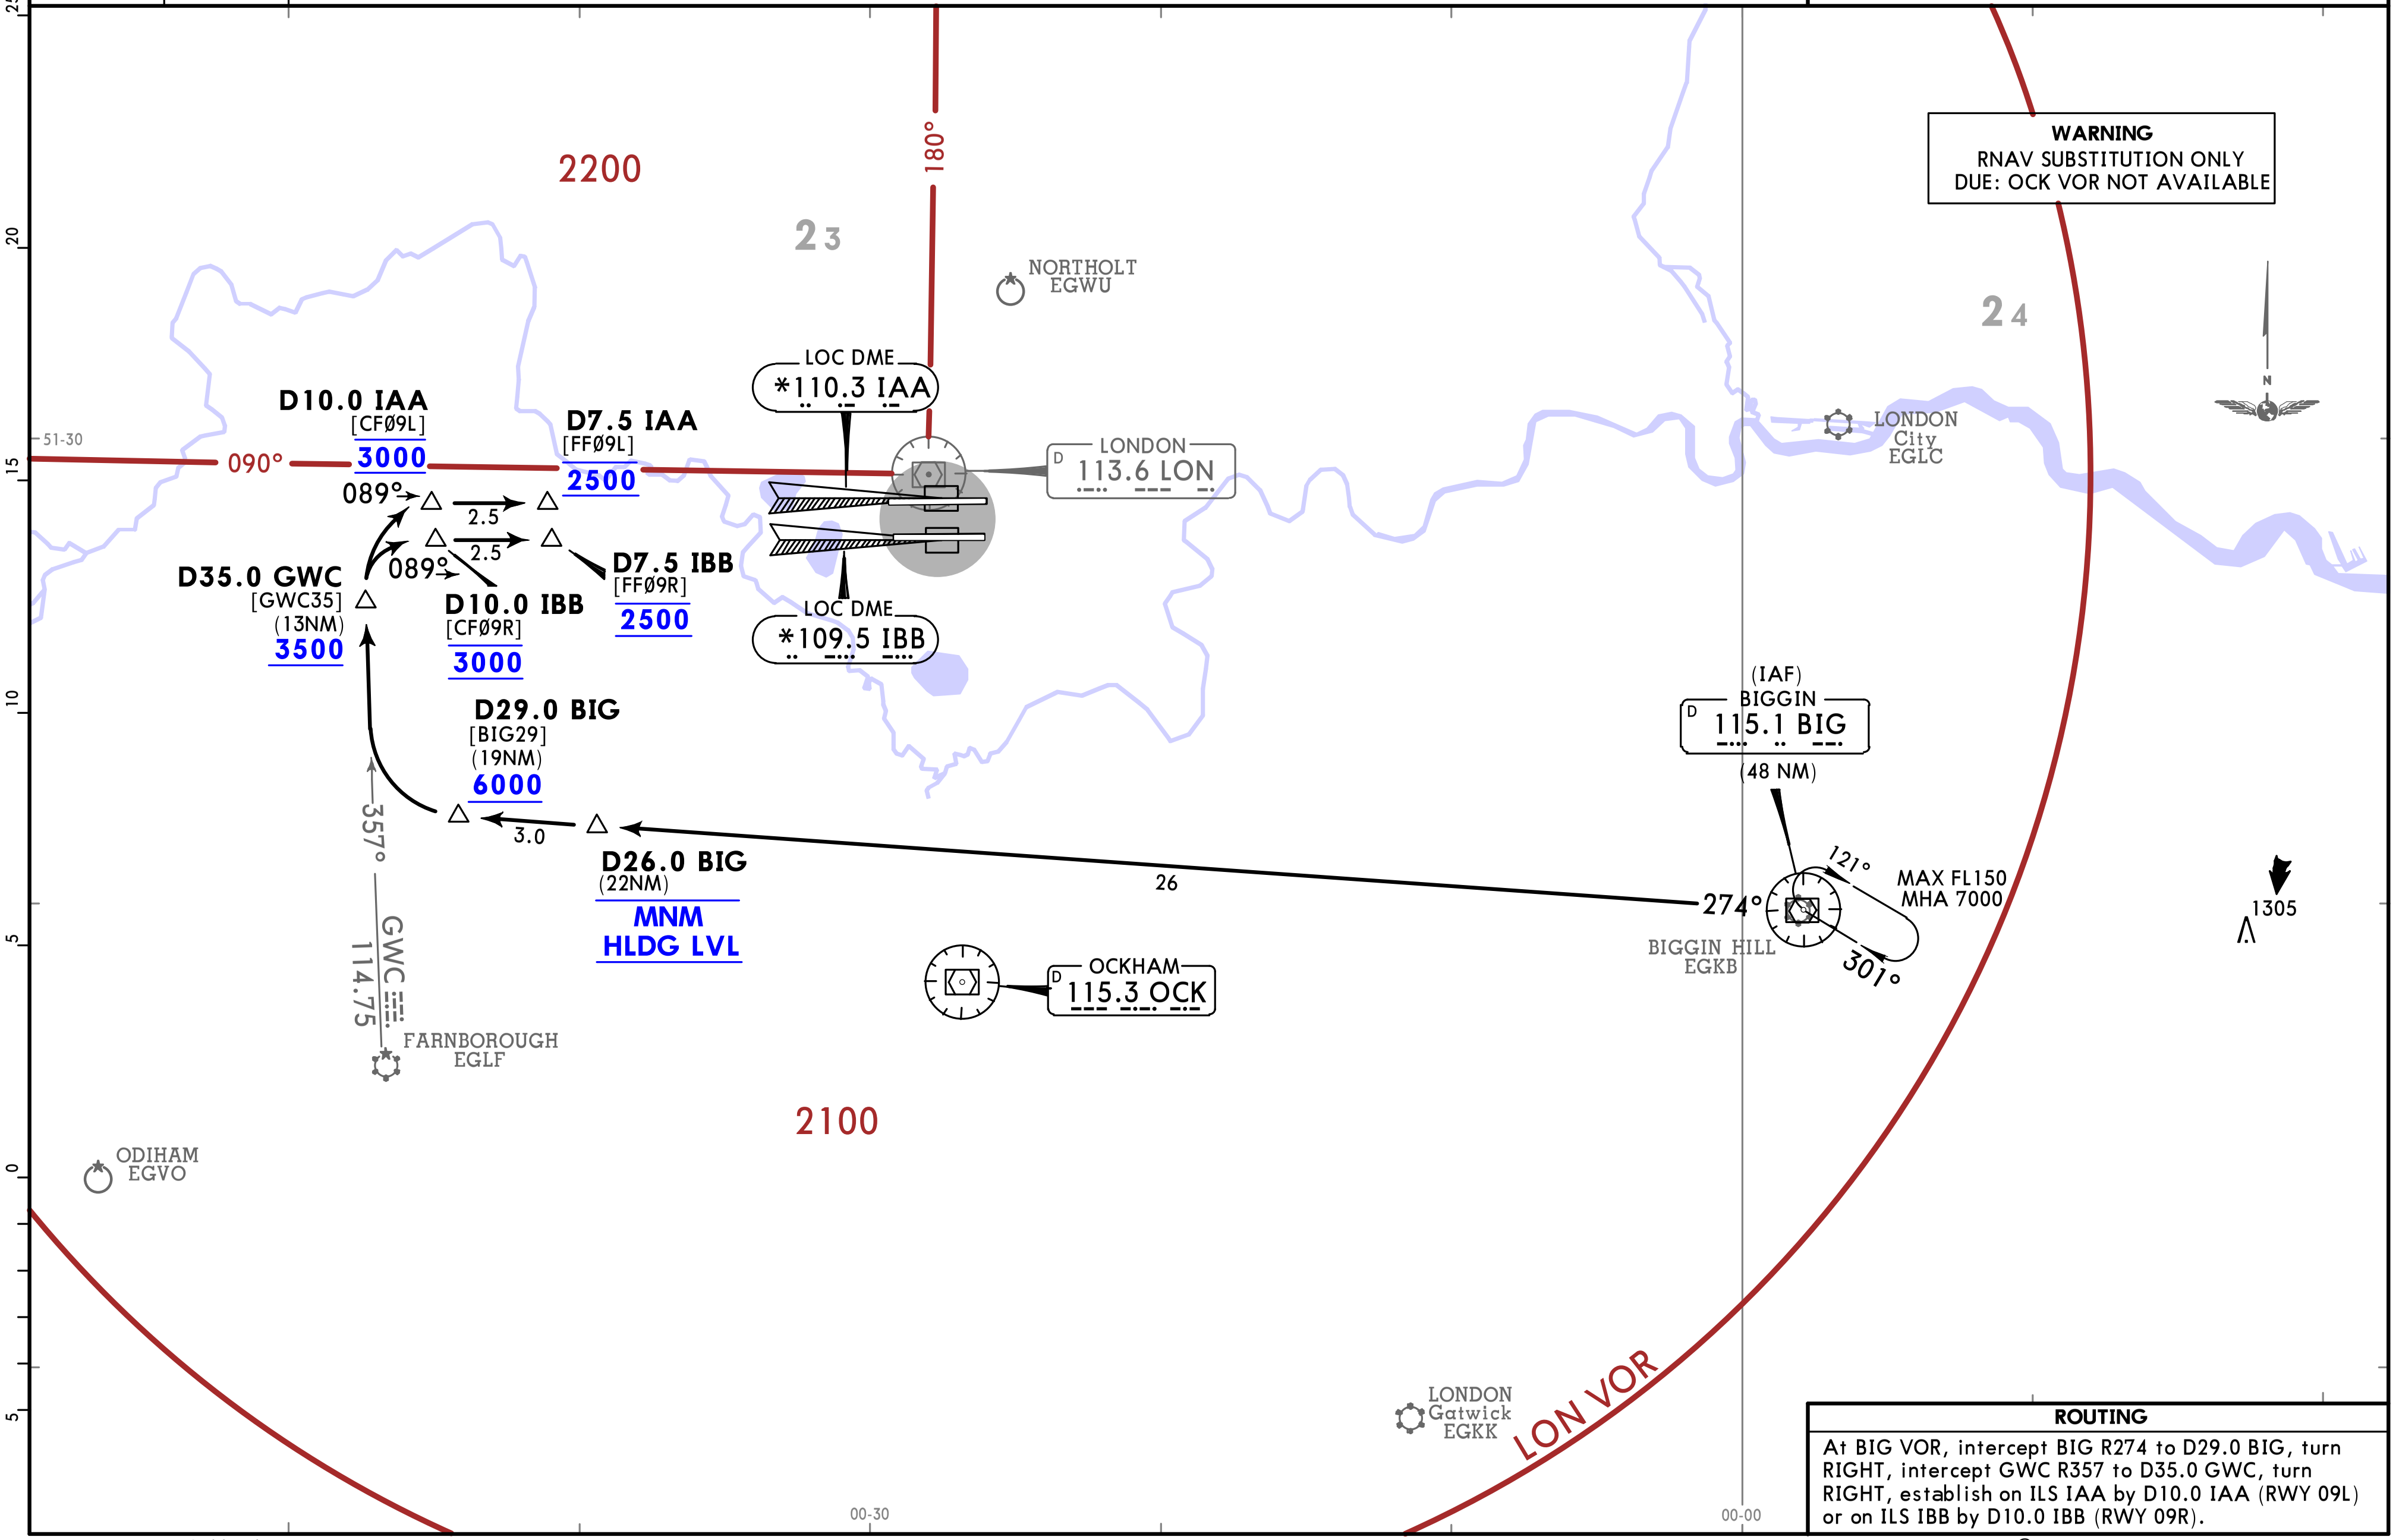

ROUTING

At BIG VOR, intercept BIG R274 to D29.0 BIG, turn RIGHT, intercept GWC R357 to D35.0 GWC, turn RIGHT, establish on ILS IAA by D10.0 IAA (RWY 09L) or on ILS IBB by D10.0 IBB (RWY 09R).

CHANGES: BIG VOR holding bearings.

D-ATIS	Apt Elev	
113.750 117.0 128.080	83	Alt Set: hPa Trans level: By ATC 1. Minimum holding level (Flight Level equivalent of 7000) is above TA and will be allocated by ATC. 2. Initial approach procedures are designed for manoeuvring speeds up to 220 KT and assume ACFT can maintain a descent gradient of approximately 320 per NM. 3. Continuous descent approach should be used whenever practicable unless otherwise instructed by ATC. Procedure design is compatible with 3° descent path from 6000. 4. Approximate distances to touchdown are indicated in round brackets.

INITIAL APPROACH
(RWYS 27L/R)
WITHOUT RADAR CONTROL
FROM BIG TO ILS

FOR FINAL APPROACH SEE APPROACH CHARTS

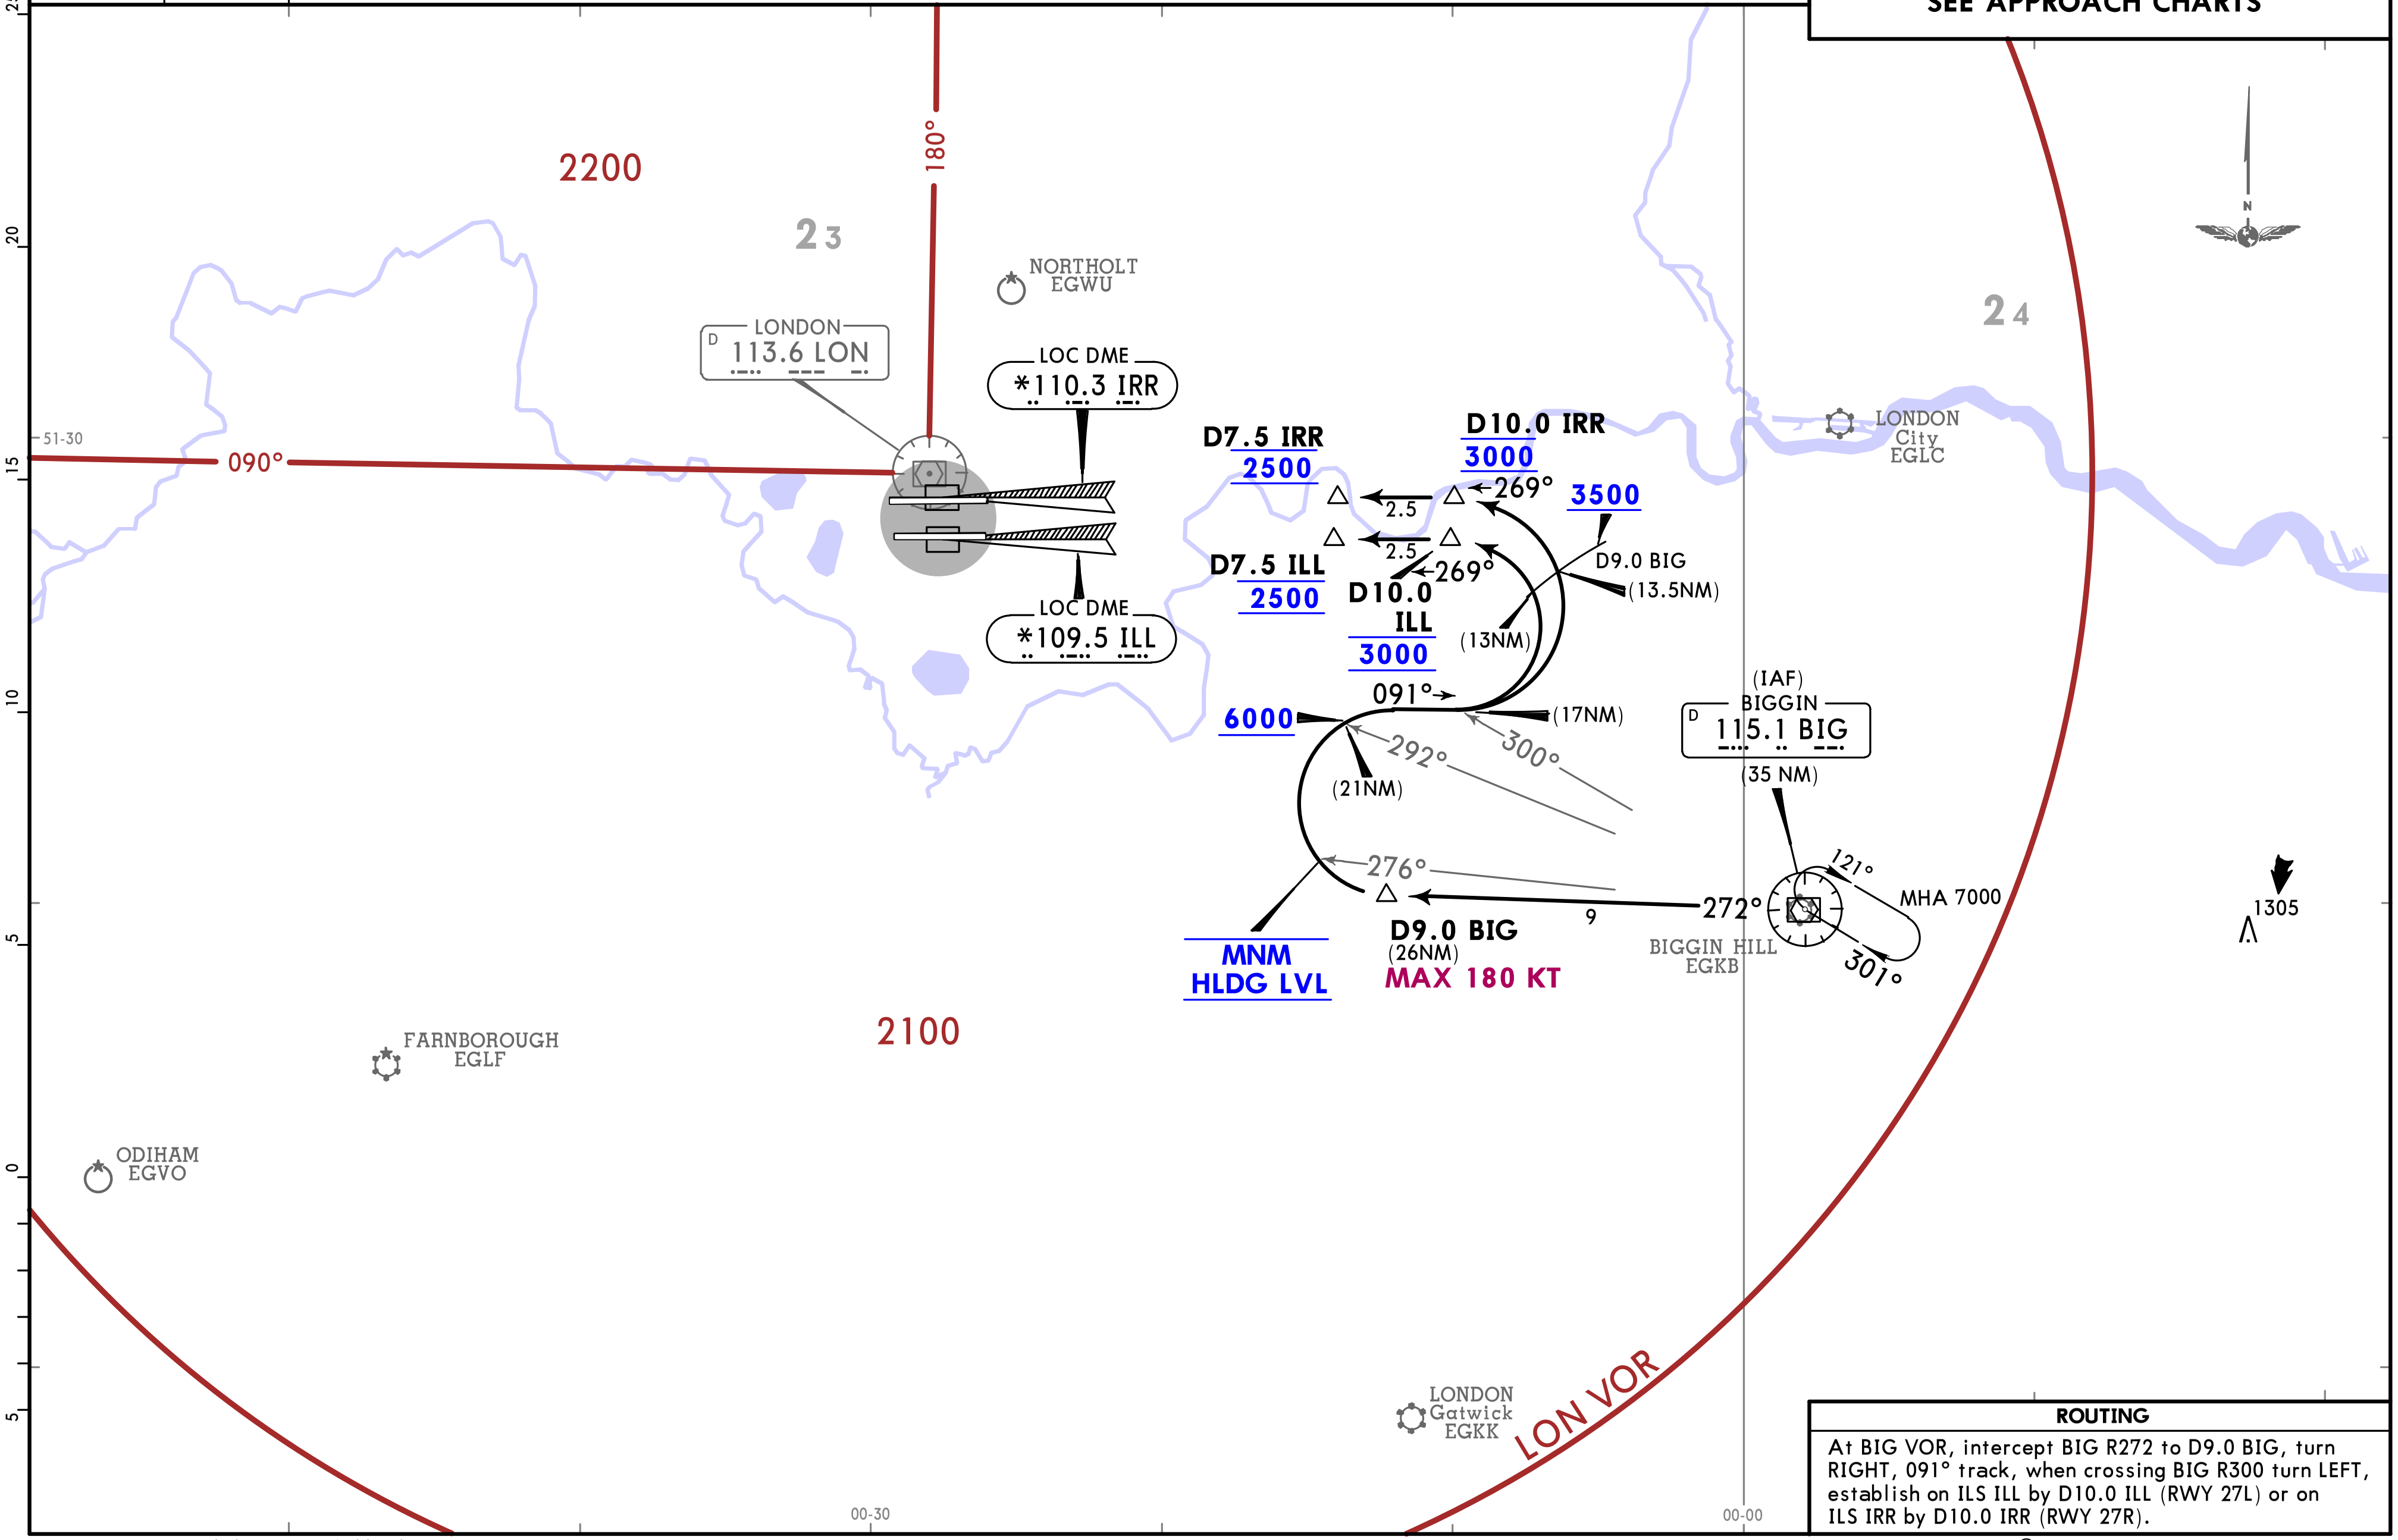

ROUTING

At BIG VOR, intercept BIG R272 to D9.0 BIG, turn RIGHT, 091° track, when crossing BIG R300 turn LEFT, establish on ILS ILL by D10.0 ILL (RWY 27L) or on ILS IRR by D10.0 IRR (RWY 27R).

CHANGES: BIG VOR radials, BIG VOR holding bearings.

D-ATIS	Apt Elev	
113.750 117.0 128.080	83	Alt Set: hPa Trans level: By ATC 1. Minimum holding level (Flight Level equivalent of 7000) is above TA and will be allocated by ATC. 2. Initial approach procedures are designed for manoeuvring speeds up to 220 KT and assume ACFT can maintain a descent gradient of approximately 320 per NM. 3. Continuous descent approach should be used whenever practicable unless otherwise instructed by ATC. Procedure design is compatible with 3° descent path from 6000. 4. Approximate distances to touchdown are indicated in round brackets.

INITIAL APPROACH (ALL RWYS)

WITHOUT RADAR CONTROL FROM BNN TO ILS

FOR FINAL APPROACH SEE APPROACH CHARTS

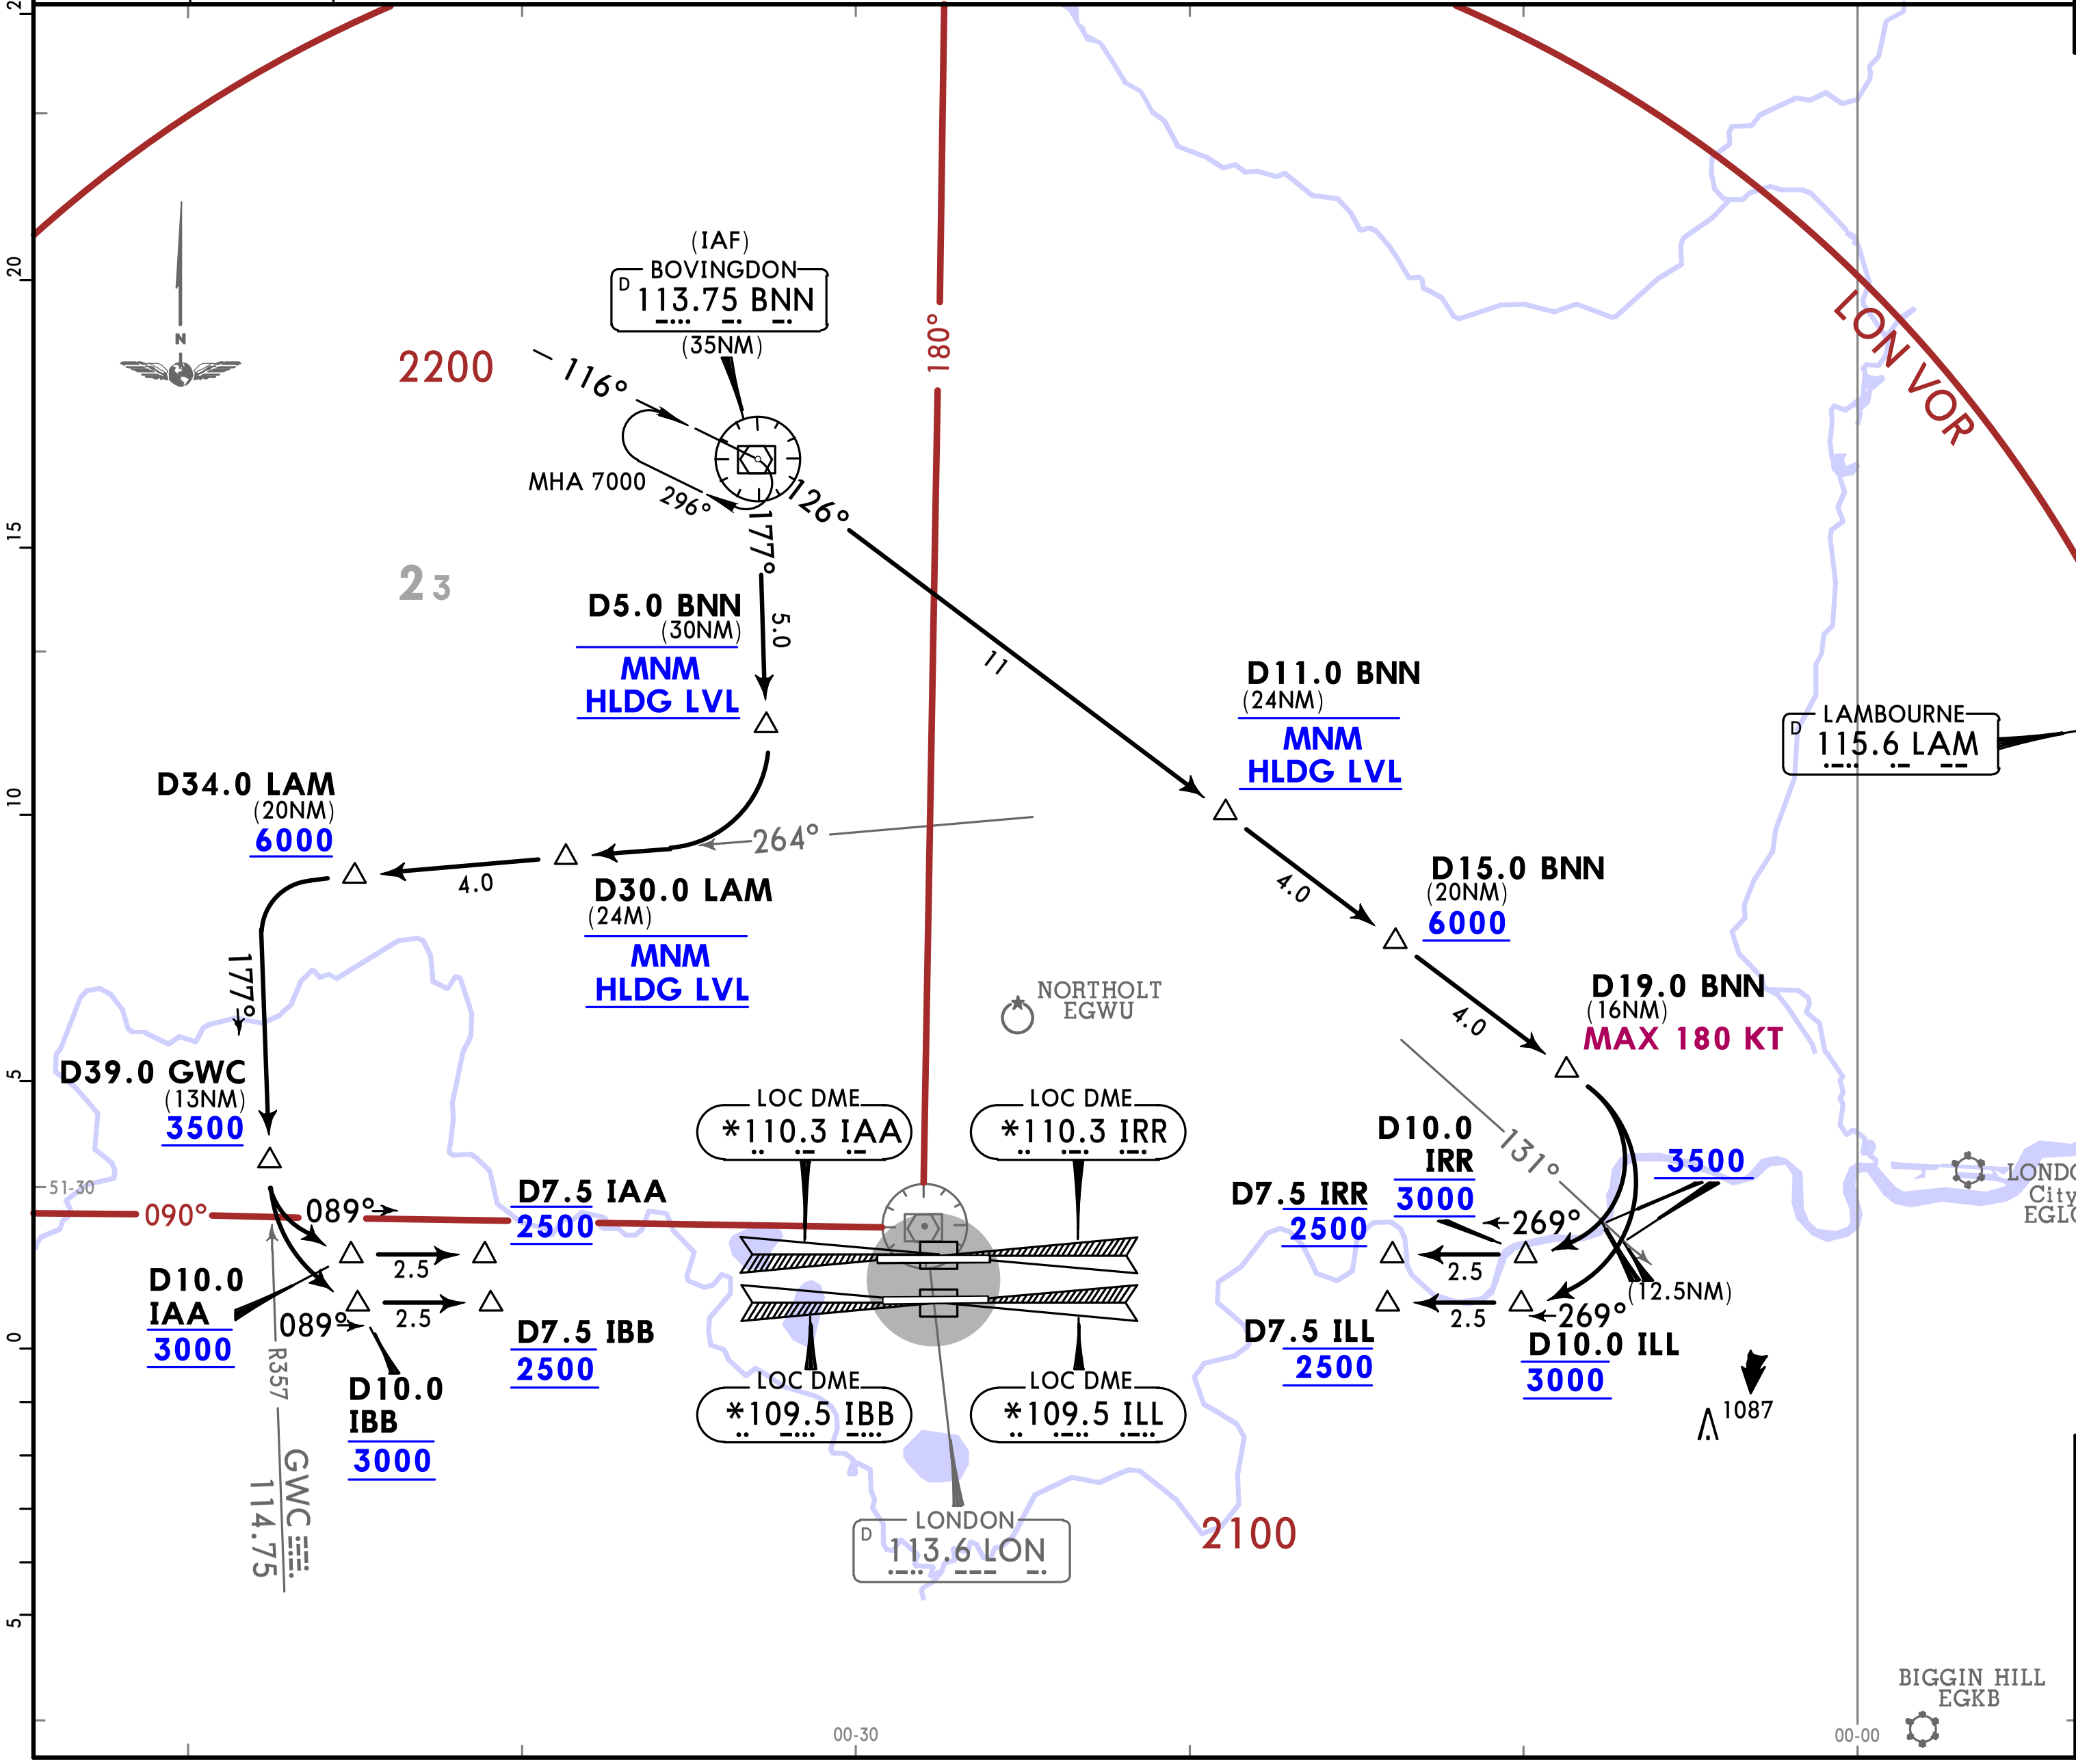

RWY	ROUTING
09L/R	At BNN, intercept BNN R177 to D5.0 BNN, turn RIGHT, intercept LAM R264 to D34.0 LAM, turn LEFT, intercept GWC R357 inbound to D39.0 GWC, turn LEFT, establish on ILS IAA by D10.0 IAA (RWY 09L) or on ILS IBB by D10.0 IBB (RWY 09R).
27L/R	At BNN, intercept BNN R126 to D19.0 BNN, turn RIGHT, establish on ILS ILL by D10.0 ILL (RWY 27L) or on ILS IRR by D10.0 IRR (RWY 27R).

CHANGES: None.

D-ATIS	Apt Elev	
113.750 117.0 128.080	83	Alt Set: hPa Trans level: By ATC 1. Minimum holding level (Flight Level equivalent of 7000) is above TA and will be allocated by ATC. 2. Initial approach procedures are designed for manoeuvring speeds up to 220 KT and assume ACFT can maintain a descent gradient of approximately 320 per NM. 3. Continuous descent approach should be used whenever practicable unless otherwise instructed by ATC. Procedure design is compatible with 3° descent path from 6000. 4. Approximate distances to touchdown are indicated in round brackets.

INITIAL APPROACH
(ALL RWYS)
WITHOUT RADAR CONTROL
FROM LAM TO ILS

**FOR FINAL APPROACH
SEE APPROACH CHARTS**

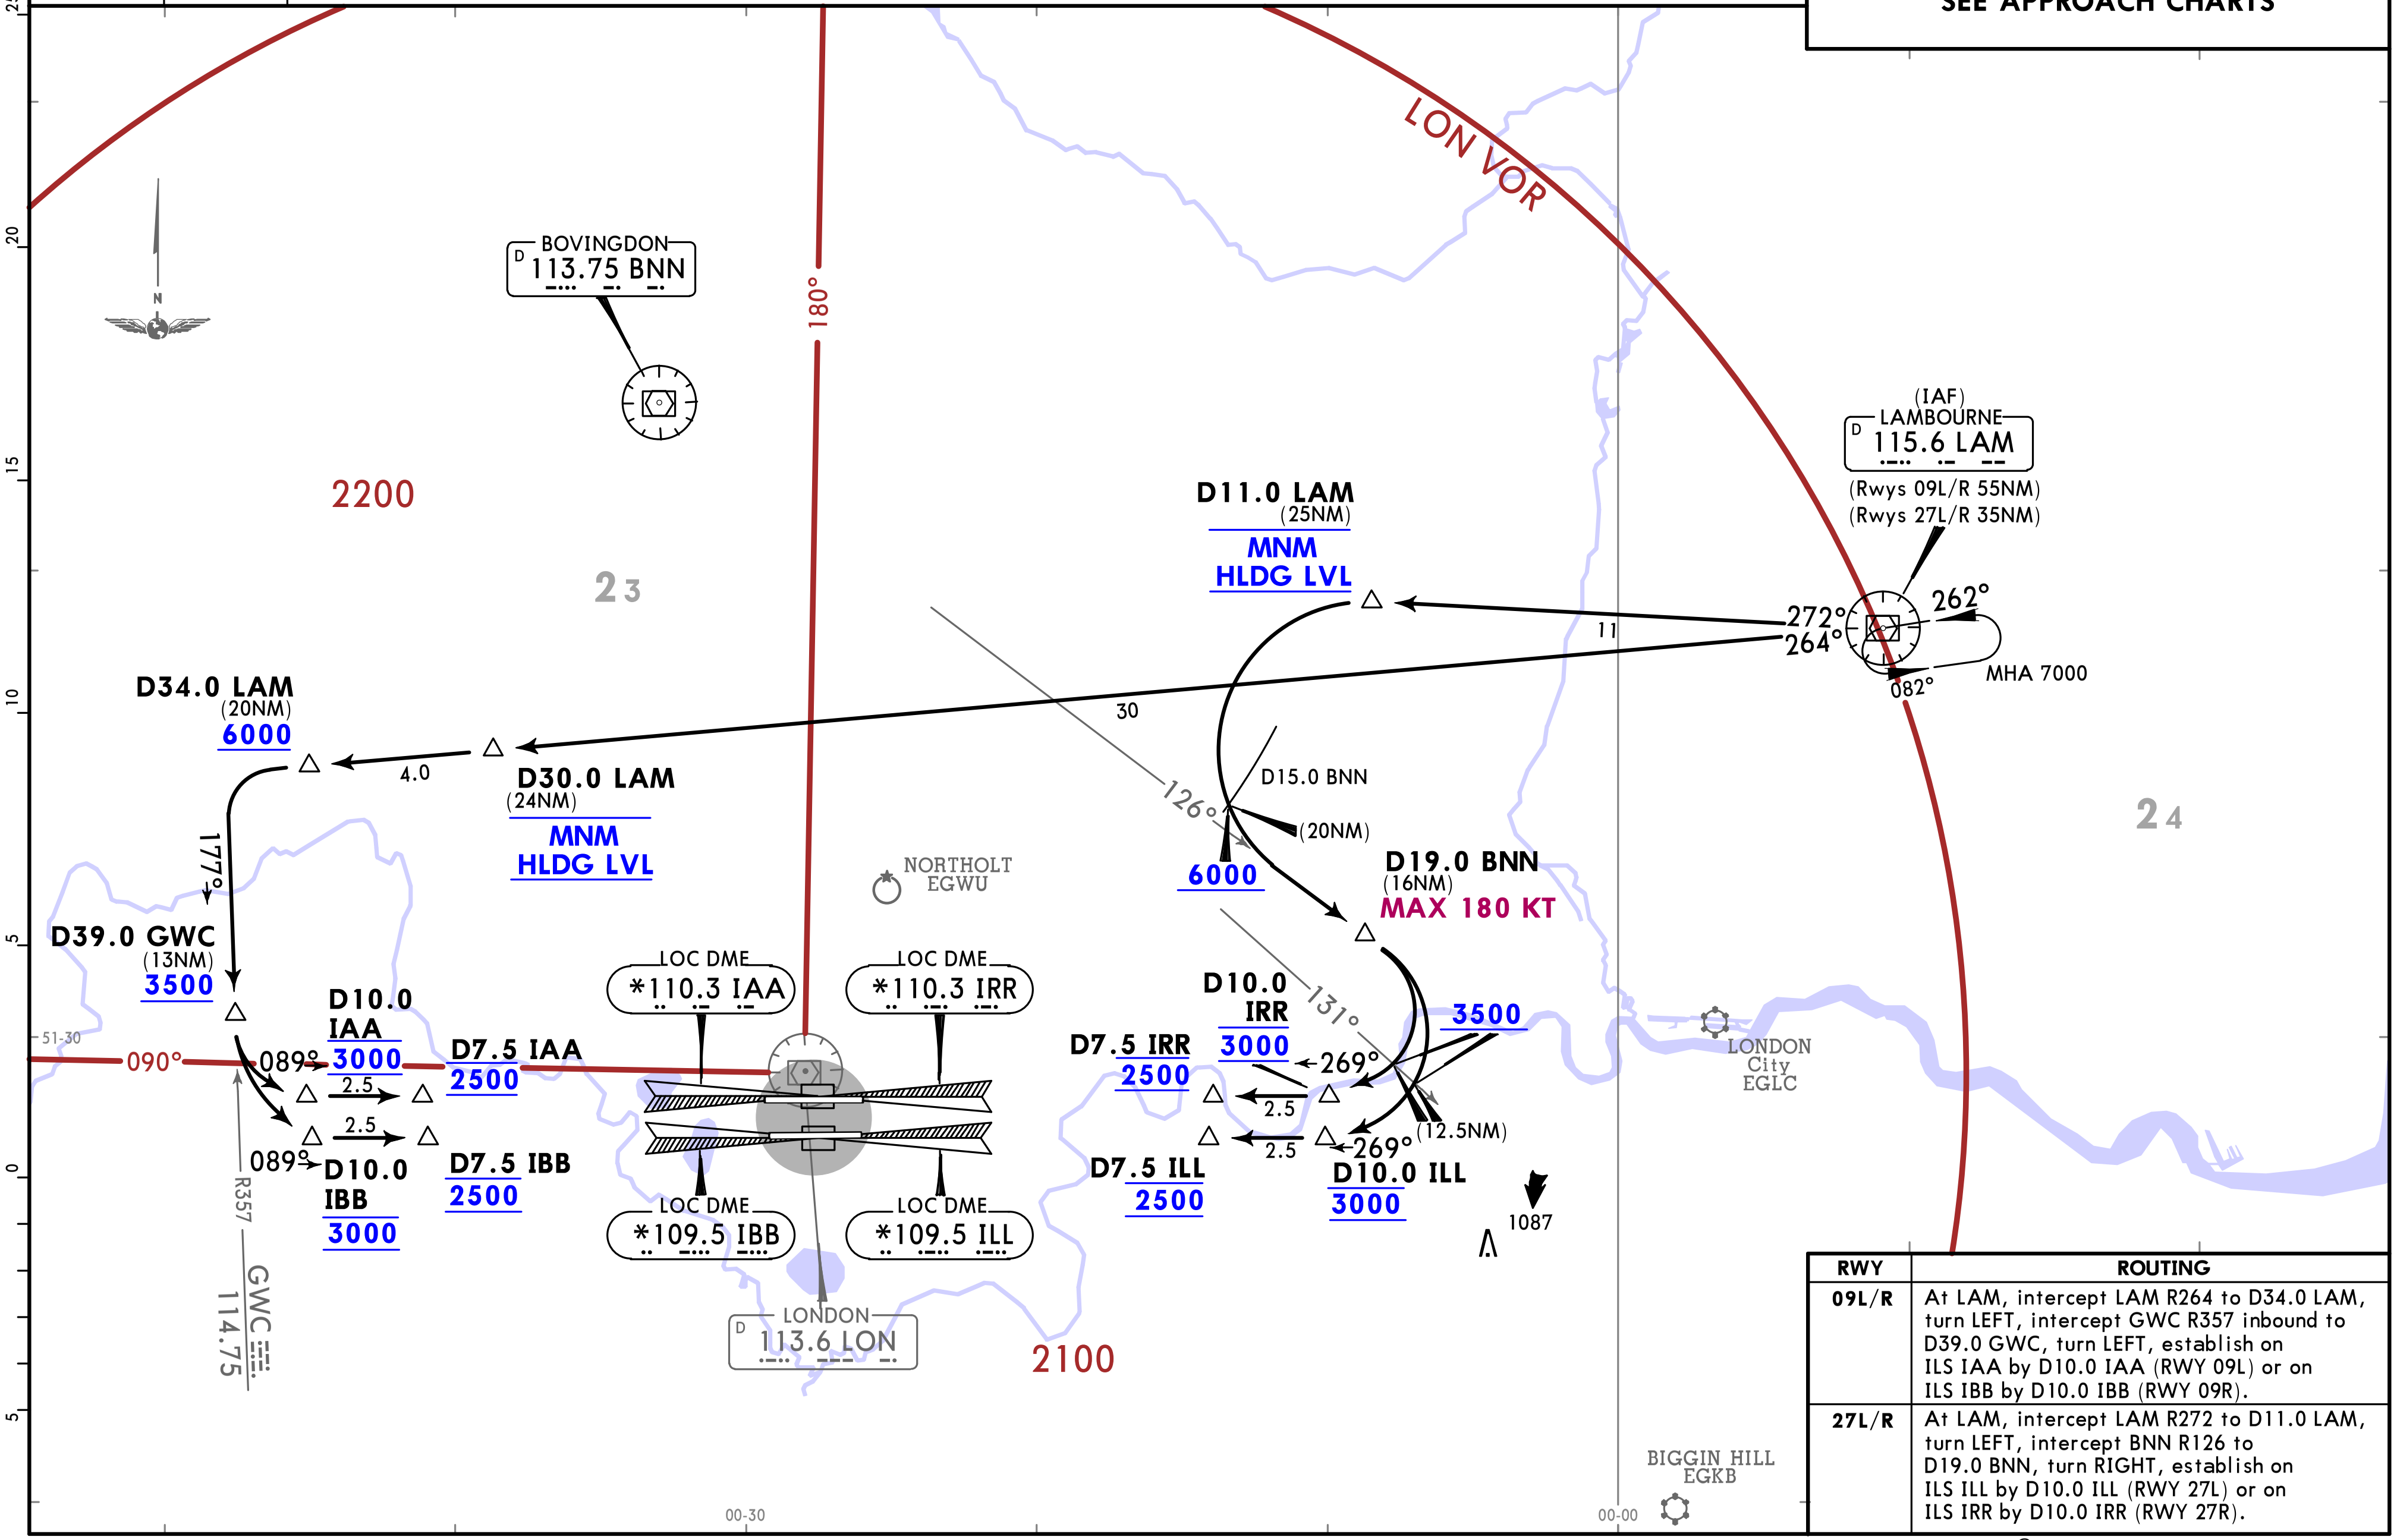

RWY	ROUTING
09L/R	At LAM, intercept LAM R264 to D34.0 LAM, turn LEFT, intercept GWC R357 inbound to D39.0 GWC, turn LEFT, establish on ILS IAA by D10.0 IAA (RWY 09L) or on ILS IBB by D10.0 IBB (RWY 09R).
27L/R	At LAM, intercept LAM R272 to D11.0 LAM, turn LEFT, intercept BNN R126 to D19.0 BNN, turn RIGHT, establish on ILS ILL by D10.0 ILL (RWY 27L) or on ILS IRR by D10.0 IRR (RWY 27R).

CHANGES: None.

D-ATIS	Apt Elev	
113.750 117.0 128.080	83	Alt Set: hPa Trans level: By ATC 1. Minimum holding level (Flight Level equivalent of 7000) is above TA and will be allocated by ATC. 2. Initial approach procedures are designed for manoeuvring speeds up to 220 KT and assume ACFT can maintain a descent gradient of approximately 320 per NM. 3. Continuous descent approach should be used whenever practicable unless otherwise instructed by ATC. Procedure design is compatible with 3° descent path from 6000. 4. Approximate distances to touchdown are indicated in round brackets.

INITIAL APPROACH
(ALL RWYS)
FROM OCK TO ILS

FOR FINAL APPROACH SEE APPROACH CHARTS

WARNING
RNAV SUBSTITUTION ONLY
DUE: OCK VOR NOT AVAILABLE

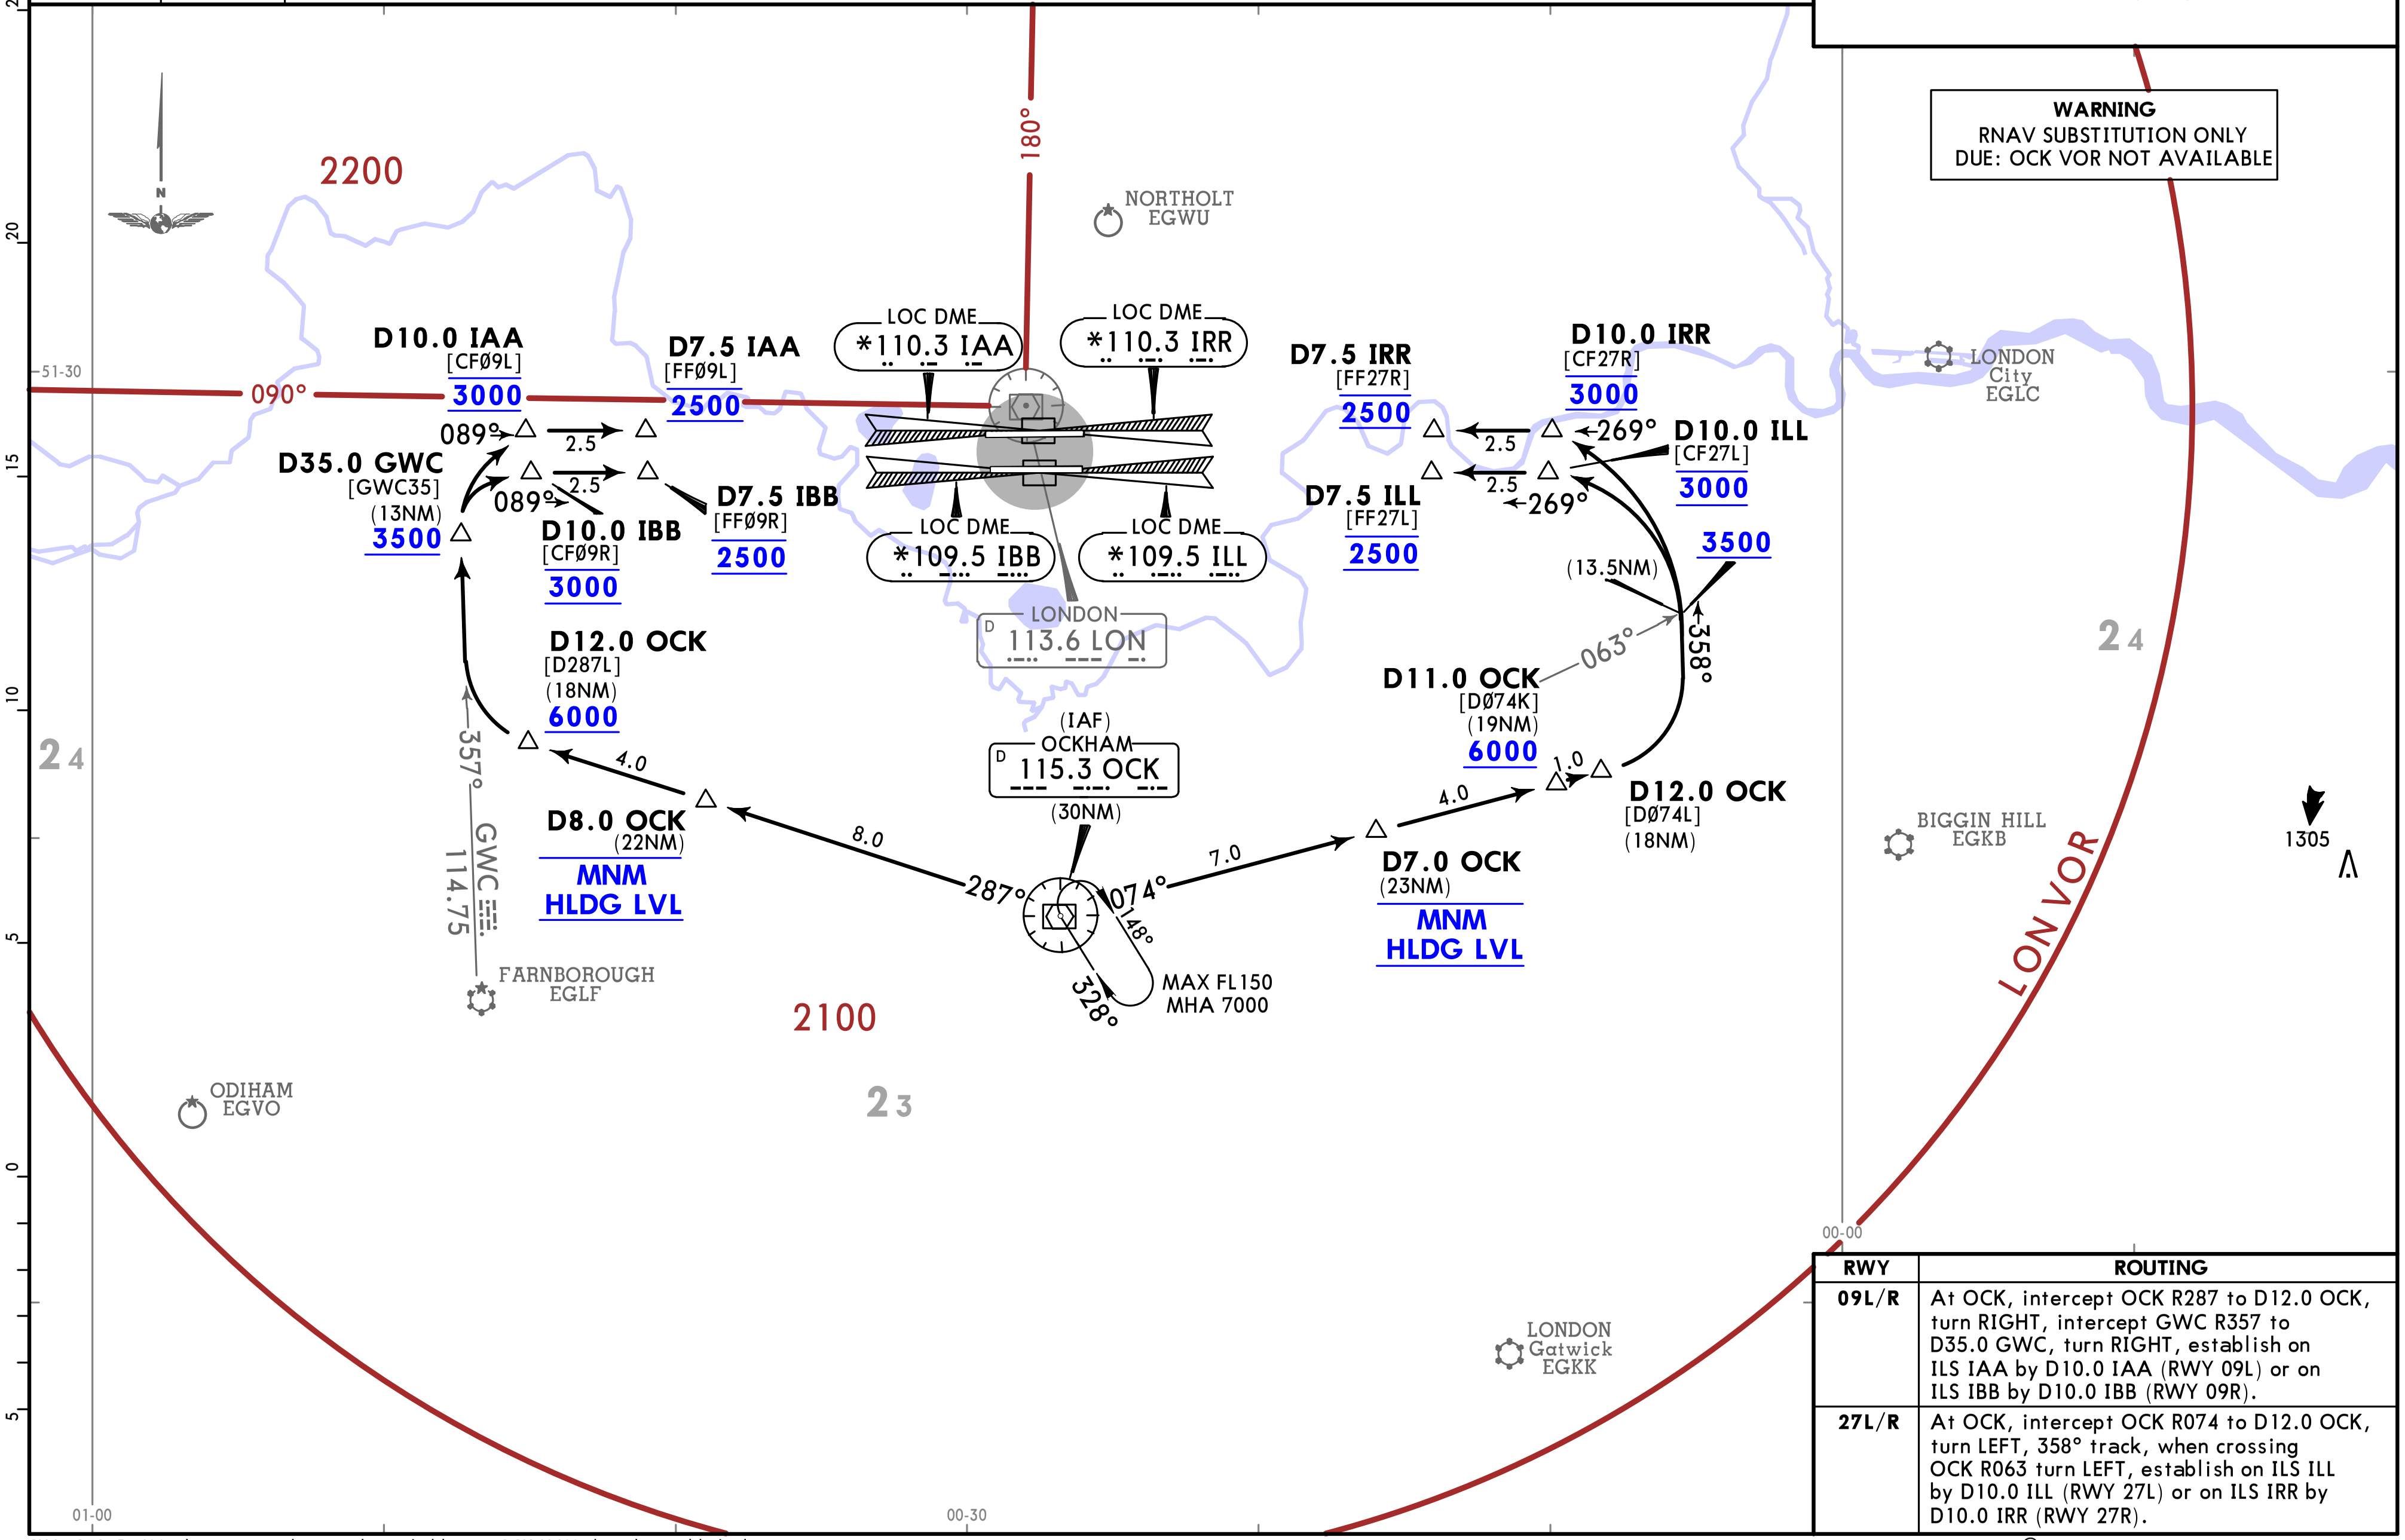

RWY	ROUTING
09L/R	At OCK, intercept OCK R287 to D12.0 OCK, turn RIGHT, intercept GWC R357 to D35.0 GWC, turn RIGHT, establish on ILS IAA by D10.0 IAA (RWY 09L) or on ILS IBB by D10.0 IBB (RWY 09R).
27L/R	At OCK, intercept OCK R074 to D12.0 OCK, turn LEFT, 358° track, when crossing OCK R063 turn LEFT, establish on ILS ILL by D10.0 ILL (RWY 27L) or on ILS IRR by D10.0 IRR (RWY 27R).

CHANGES: RNAV substitution only procedures, holding at OCK MAX altitude established.