





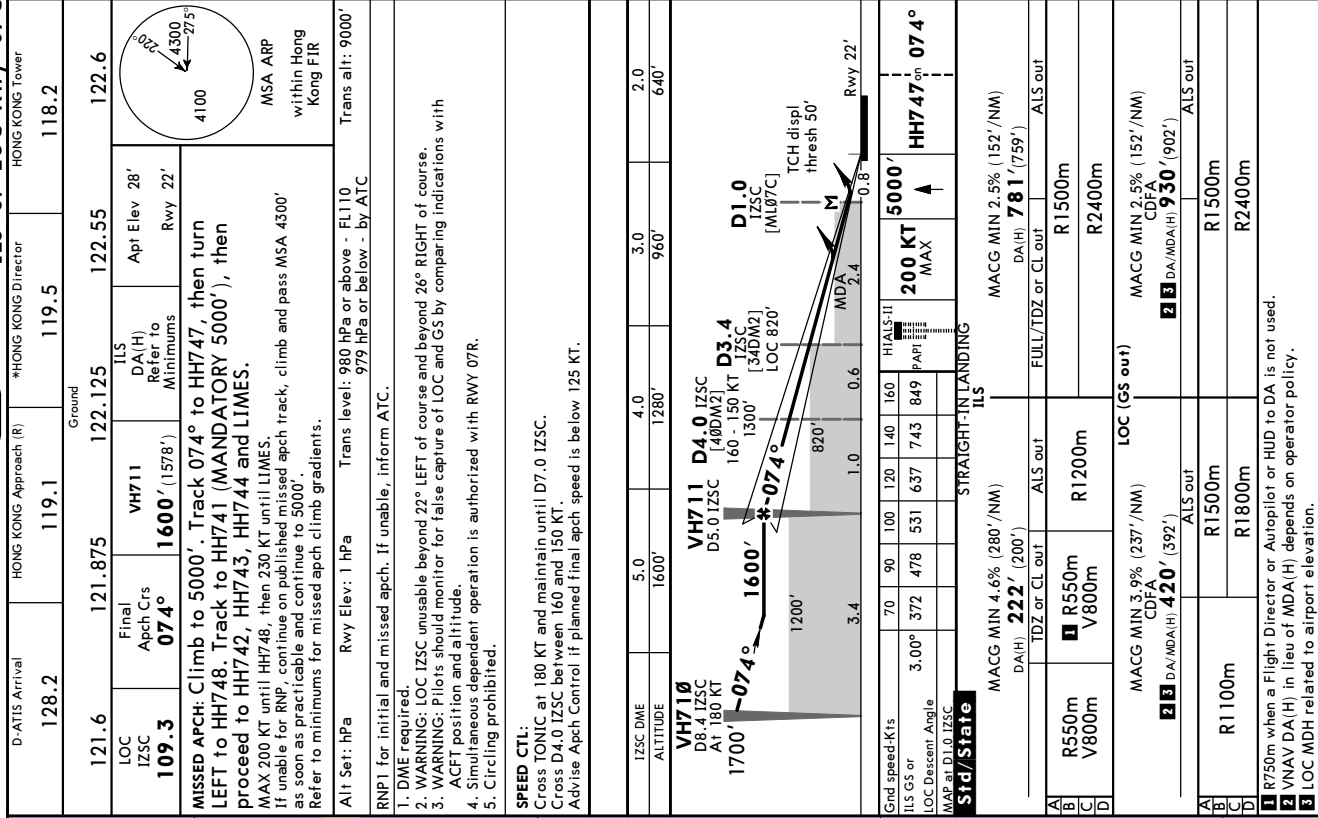

VHHH/HKG
HONG KONG INTL

JEPPESSEN HONG KONG, PR OF CHINA
22 NOV 24 **11-3** **Eff 28 Nov** ILS RWY 07R

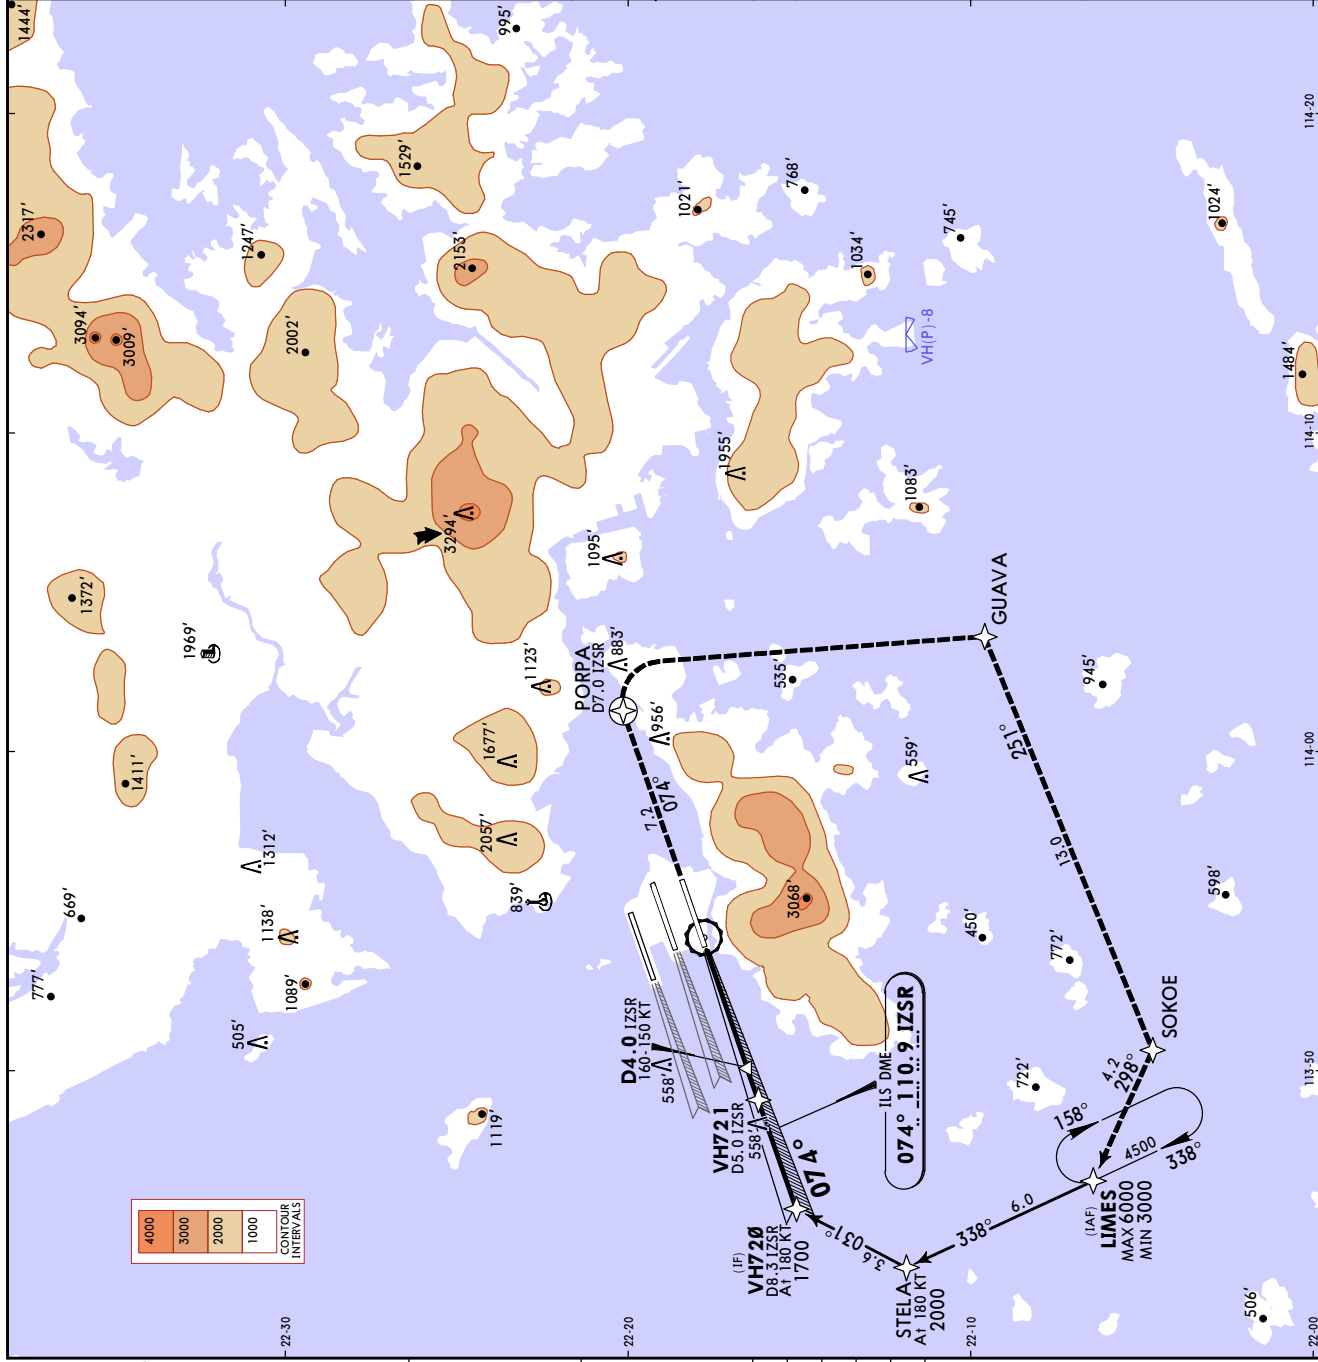

D-ATIS Arrival	HONG KONG Approach (R)	*HONG KONG Director	HONG KONG Tower
128.2	119.1	119.5	118.4
Ground			
121.6	121.875	122.125	122.55
122.6	122.6		
LOC IZSR 110.9	Final Apch Crs 074°	VH721 1600' (1573')	DA (H) Refer to Minimums Rwy 27'
MISSED APCH: Climb to 5000'. Track to PORPA (MAX 5000'), then turn RIGHT direct to GUAVA, then SOKOE, then LIMES, join holding or as directed. MAX 210 KT until established on track to GUAVA, cross GUAVA at 210 KT, then maintain 230 KT until LIMES. Do not turn before PORPA. If unable RNP, continue on published missed apch track, climb and pass MSA 4300' as soon as practicable and continue to 5000'. Refer to minimums for missed apch climb gradients. Alt Set: hPa Rwy Elev: 1 hPa Trans level: 980 hPa or above - FL110 Trans alt: 9000' RNP1 for initial and missed apch. If unable, inform ATC. 1. DME required. If unable to receive IZSR DME, advise ATC. 2. WARNING: LOC IZSR unusable beyond 19° RIGHT of course. 3. WARNING: GS signal might be interfered by ground traffic. 4. WARNING: Pilots should monitor for false capture of LOC and GS by comparing indications with ACFT position and altitude. 5. Circling prohibited. 6. Simultaneous dependent operation is authorized with RWY 07L or RWY 07C.			
SPEED CTL: Cross STELA at 180 KT and maintain until D7.0 IZSR. Cross D4.0 IZSR between 160 and 150 KT. Advise Apch Control if planned final apch speed is below 125 KT.			
IZSR DME ALTITUDE	5.0 1600'	4.0 1300'	3.0 980'
		2.0 660'	1.0 340'
VH726 D8.3 IZSR A: 180 KT 1700' -074° 1600' -074° D4.0 IZSR 160-150 KT 1300' VH721 D5.0 IZSR 1600' -074° 3.4 1.0 3.8 Rwy 27' TCH displ thresh 51'			
Grnd speed-Kts	70	90	100
GS	3.00°	372	478
		531	637
		743	849
Sid/State STRAIGHT-IN LANDING ILS Missed apch climb grad MIN 3.6% (219' /NM) up to 1400' DA(H) 227' (200') Full TDZ or CL out ALS out R1500m R2400m Missed apch climb grad MIN 2.5% (152' /NM) DA(H) A: 594' (567') C: 615' (588') B: 606' (579') D: 625' (598') Full TDZ or CL out ALS out R1500m R2400m			
A B C D 1 R750m when a Flight Director or Autopilot or HUD to DA is not used.			


VHHH/HKG
HONG KONG INTL


JEPPES HONG KONG, PR OF CHINA
22 NOV 24 (11-3A) **Eff 28 Nov** CAT II ILS Rwy 07R

D-ATIS Arrival		HONG KONG Approach (R)		*HONG KONG Director		HONG KONG Tower	
128.2		119.1		119.5		118.4	
121.6		121.875		122.125		122.55	
LOC IZSR		Final Apch Crs		CAT II ILS		Ground	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°		VH721 DA(H) 127' (100')		122.6	
110.9		074°					

VHHH /HKG
HONG KONG INTL

JEPPESON HONG KONG, PR OF CHINA
22 NOV 24 **11-4** **Eff 28 Nov**
LOC RWY 07R

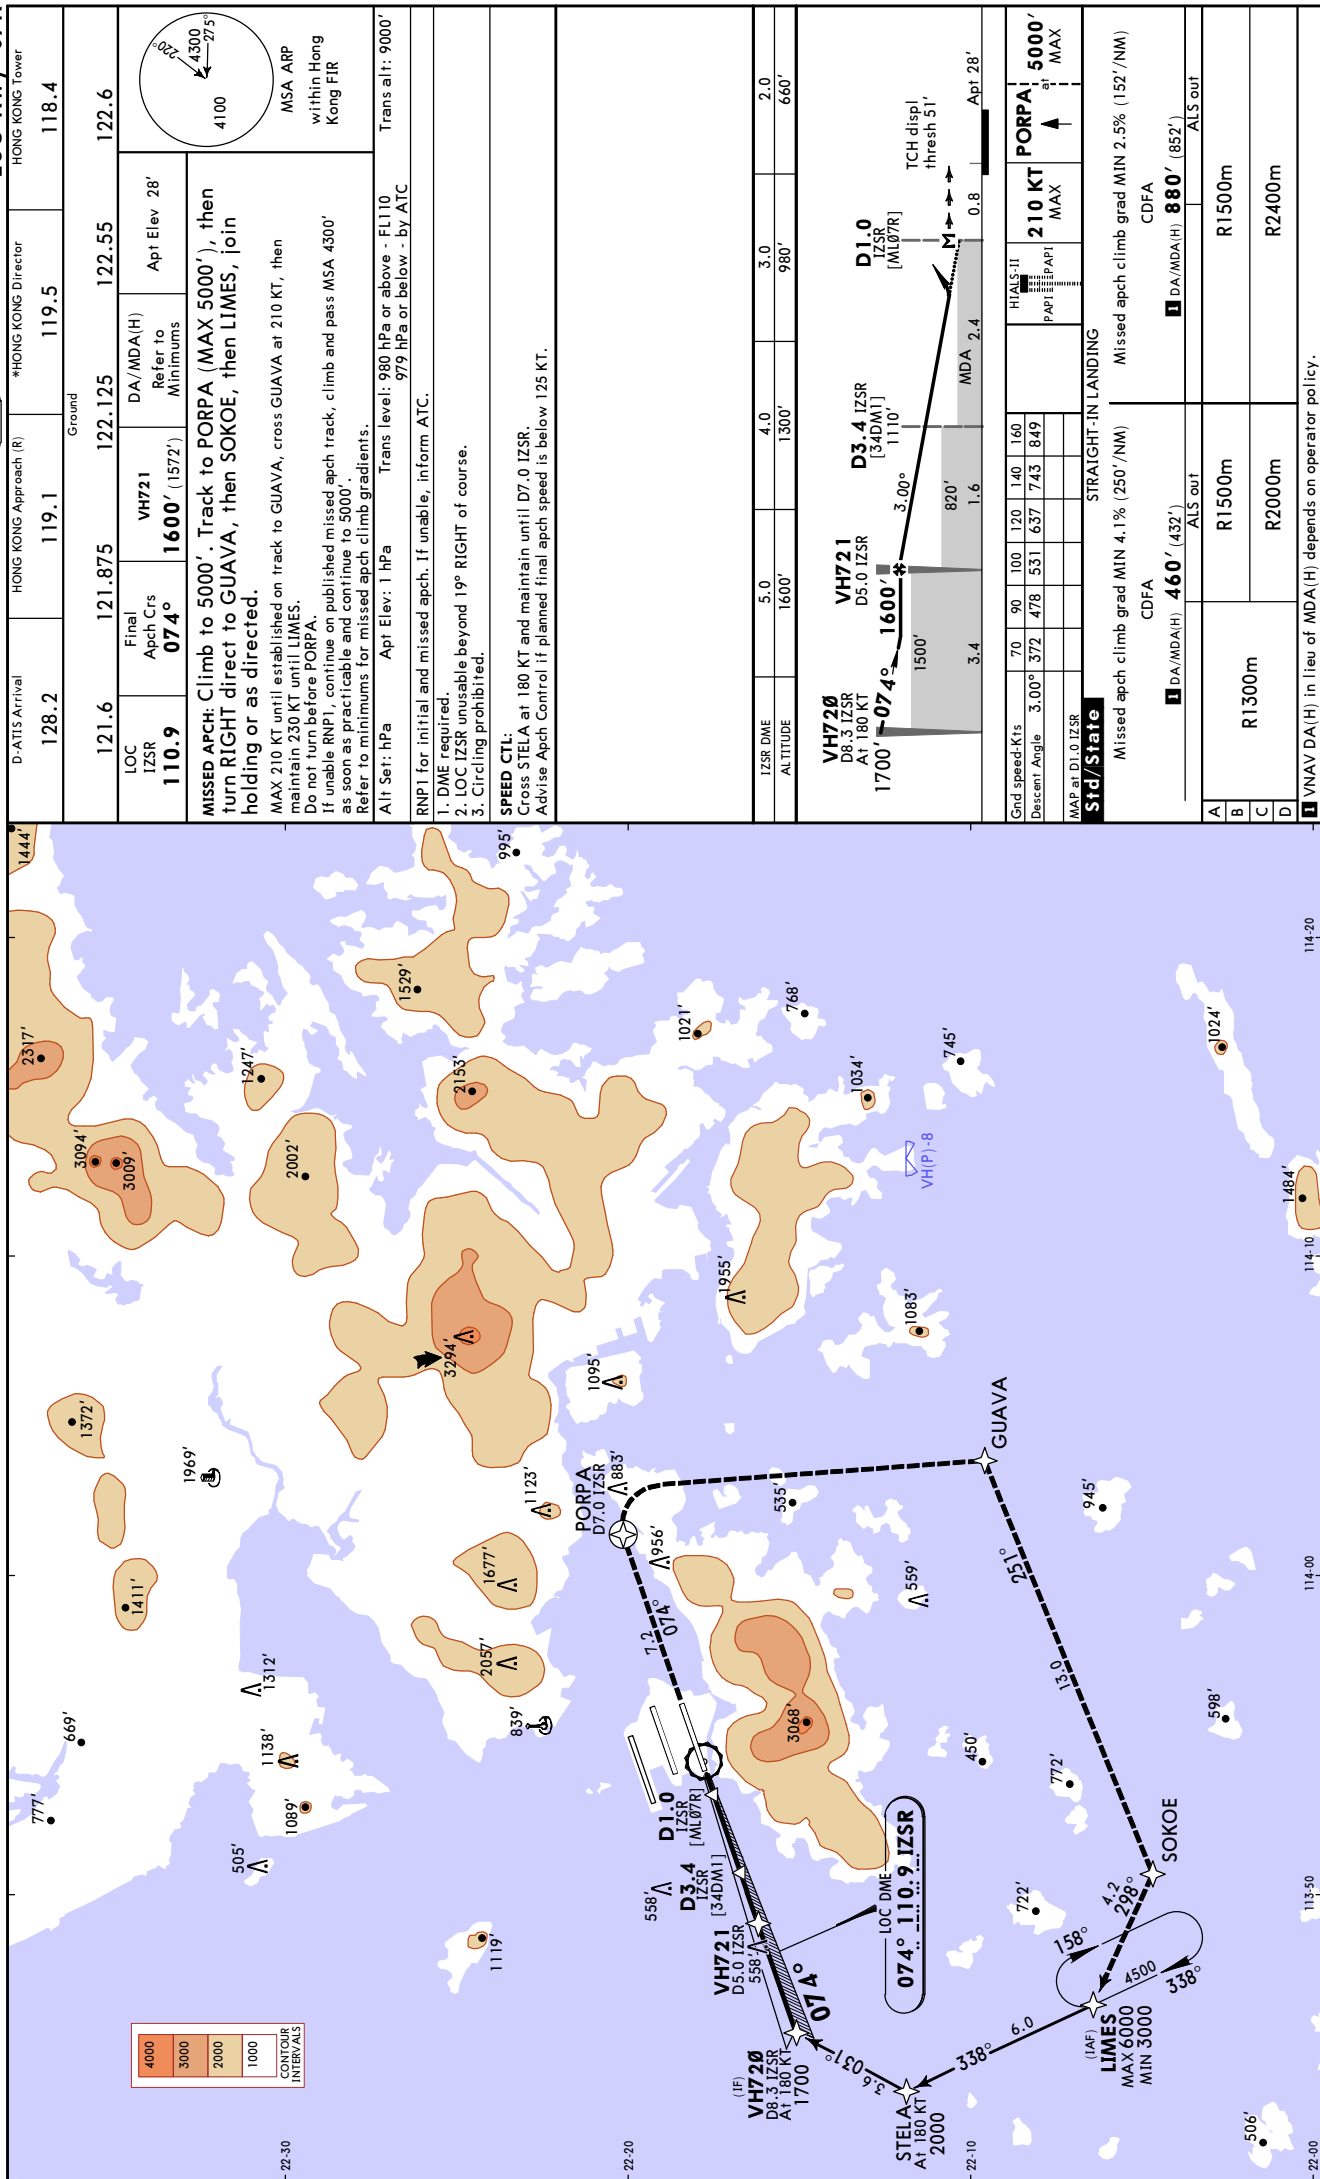




© JEPPESEN, 1998, 2024. ALL RIGHTS RESERVED.

VHHH / HKG
HONG KONG INTL

JEPPES HONG KONG, PR OF CHINA
22 NOV 24 (11-6) **Eff 28 Nov**

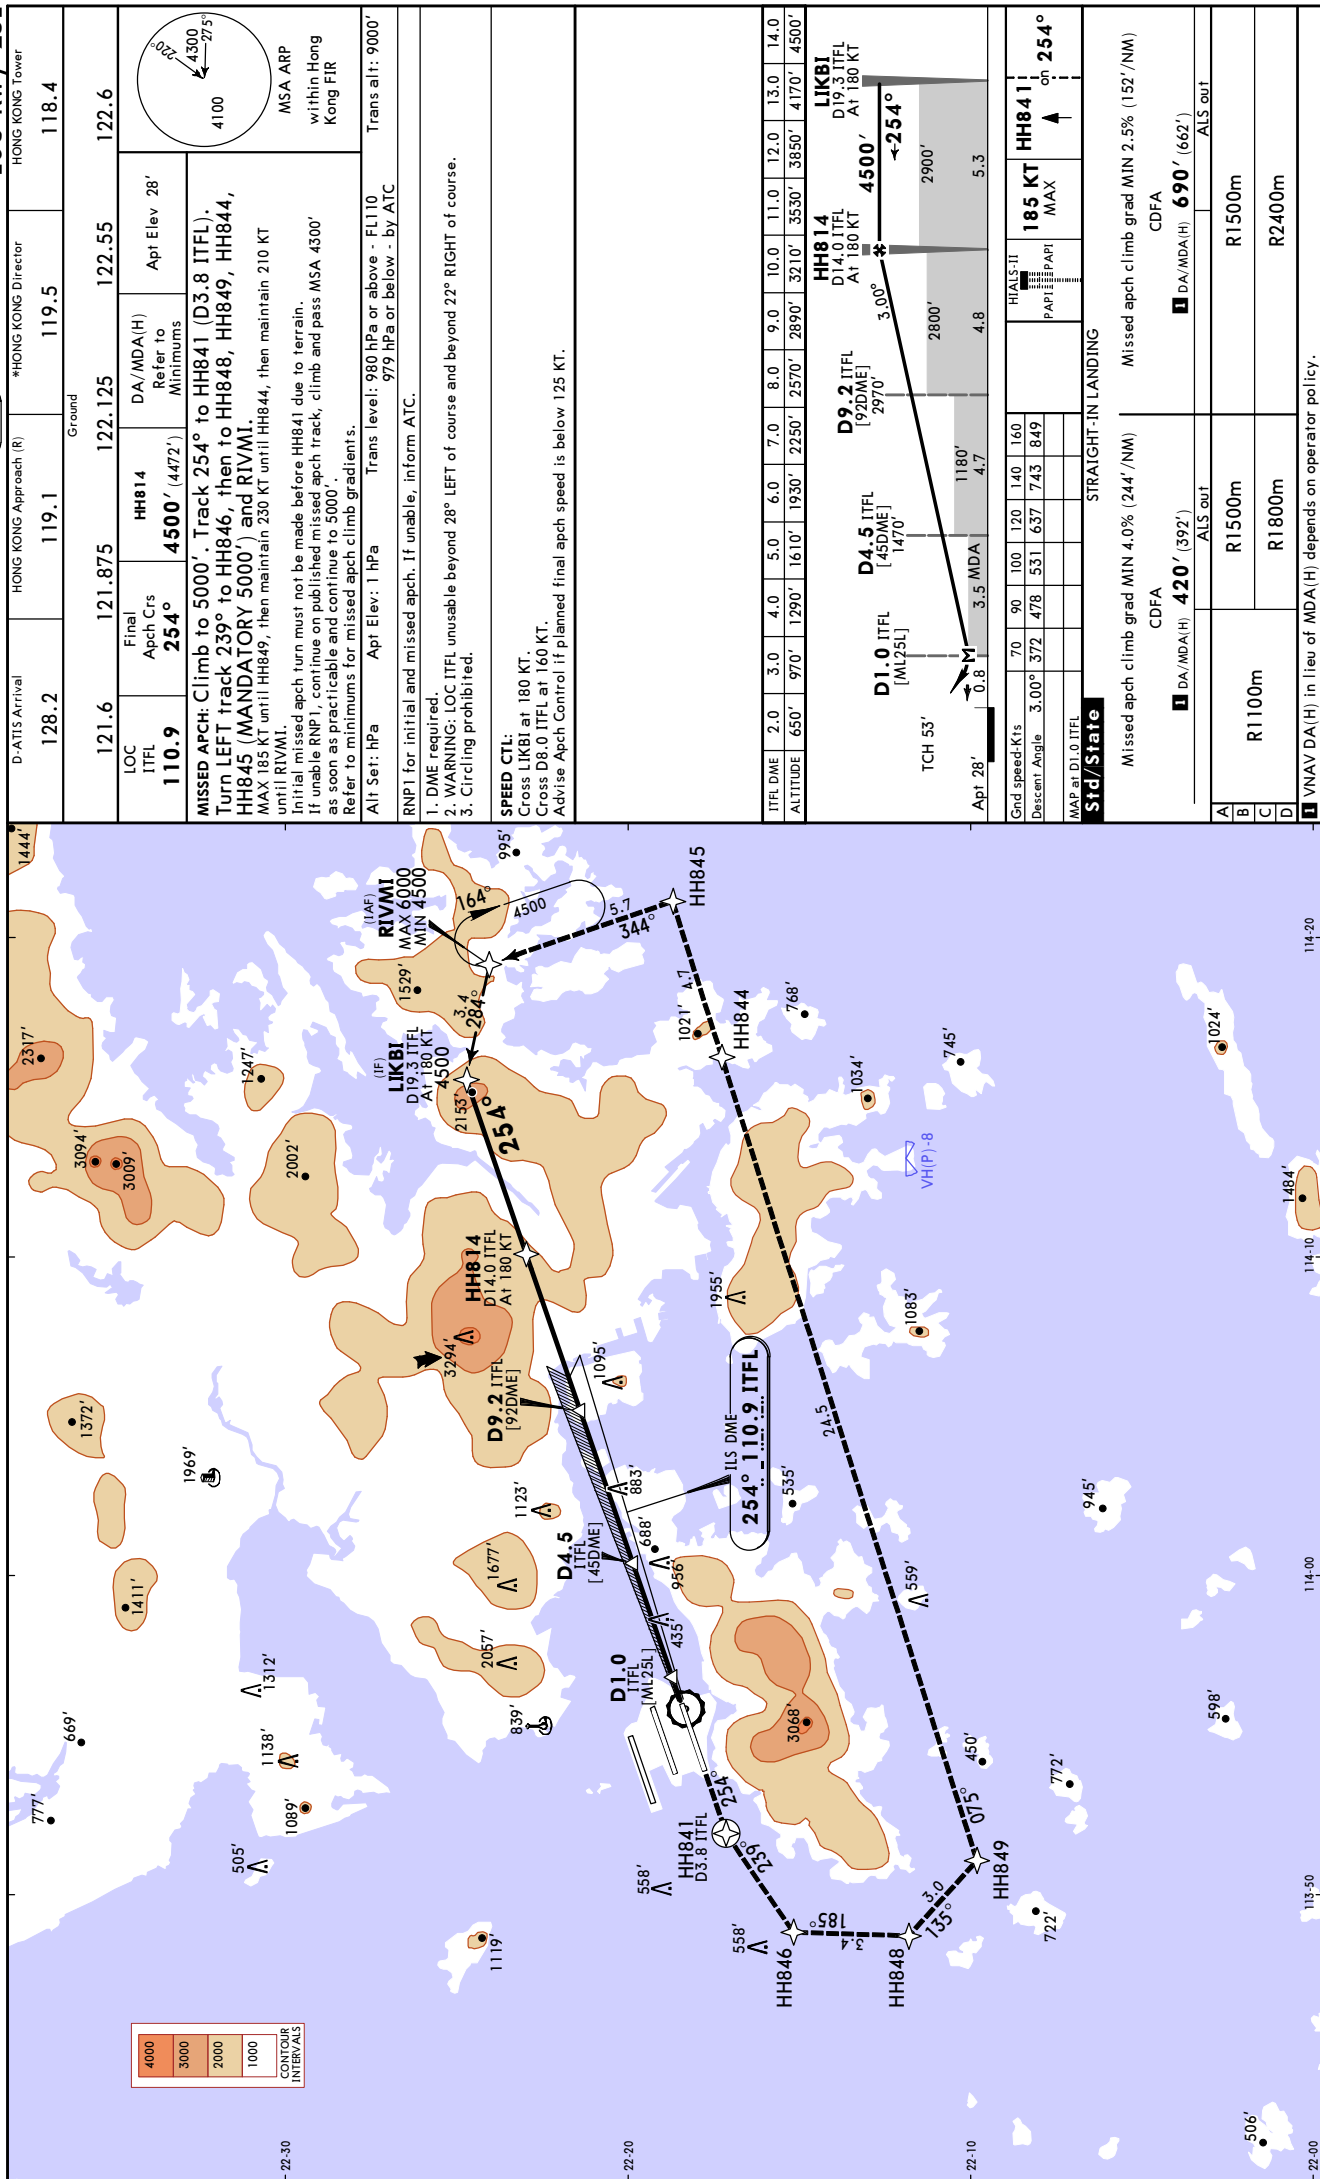

VHHH /HKG

HONG KONG INTL

 **JEPPESSEN HONG KONG, PR OF CHINA**
20 DEC 24 **(11-7)** **ILS Rwy 25C**

D-ATIS Arrival

HONG KONG Approach (ft)

HONG KONG Director

HONG KONG Tower

128.2

119.1

119.5

118.2

121.6

121.875

122.125

122.55

122.6

LOC ITC

Final Appch Crs

HH832

DA(H) Refer to Minimums

Apt Elev

Rwy 22'

109.3

254°

4500' (4478')

28'

22'

MISSED APCH: Climb initially to 4000' and track 254° to HH821, then turn RIGHT to HH822. Proceed to VH523 and cross VH523 between 3000' and 4000'. From VH523, climb to 5000' and track to VH526 and GONAT.

MAX 185 KT until VH523, then maintain 230 KT until VH526, then maintain 210 KT until GONAT.

If unable for RNP 1, continue on published missed apch track, climb and pass MSA 4300' as soon as practicable and continue to 5000'.

Refer to minimums for missed apch climb gradients.

Alt Set: hPa

Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110

979 hPa or below - by ATC

Trans alt: 9000'

RNP1 for initial and missed apch. If unable, inform ATC.

1. DME required. If unable to receive ITFC DME, advise ATC.

2. WARNING: LOC ITFC unusable beyond 19° RIGHT of course.

3. WARNING: Pilots should monitor for false capture of LOC and GS by comparing indications with ACFT position and altitude.

4. Simultaneous dependent operation is authorized with Rwy 25L.

5. Circling prohibited.

SPEED CTL:

Cross CANUP at 180 KT and maintain until D7.0 ITFC.

Cross D4.0 ITFC between 160 and 150 KT.

Advise Apch Control if planned final apch speed is below 125 KT.

HH832

D18.0 ITFC

AT 180 KT

CANUP

D18.0 ITFC

AT 180 KT

D4.0 ITFC

160 - 150 KT

1290'

TCH displ

thresh 51'

Rwy 22'

3.8

9.6

4.4

254°

4500'

4300'

Grnd speed-Kts	70	90	100	120	140	160	
GS	3,000'	372	478	531	637	743	849

HI/ALS-II

PAP

185 KT

MAX

4000'

HH821 on

254°

Std/State

MACG MIN 4.0% (244' /NM)

MACG MIN 2.5% (152' /NM)

DA(H) 222' (200')

TDZ or CL out

ALS out

FULL/TDZ or CL out

ALS out

R1500m

R1500m

R2200m


A

B

C

D

R750m when a Flight Director or Autopilot or HUD to DA is not used.

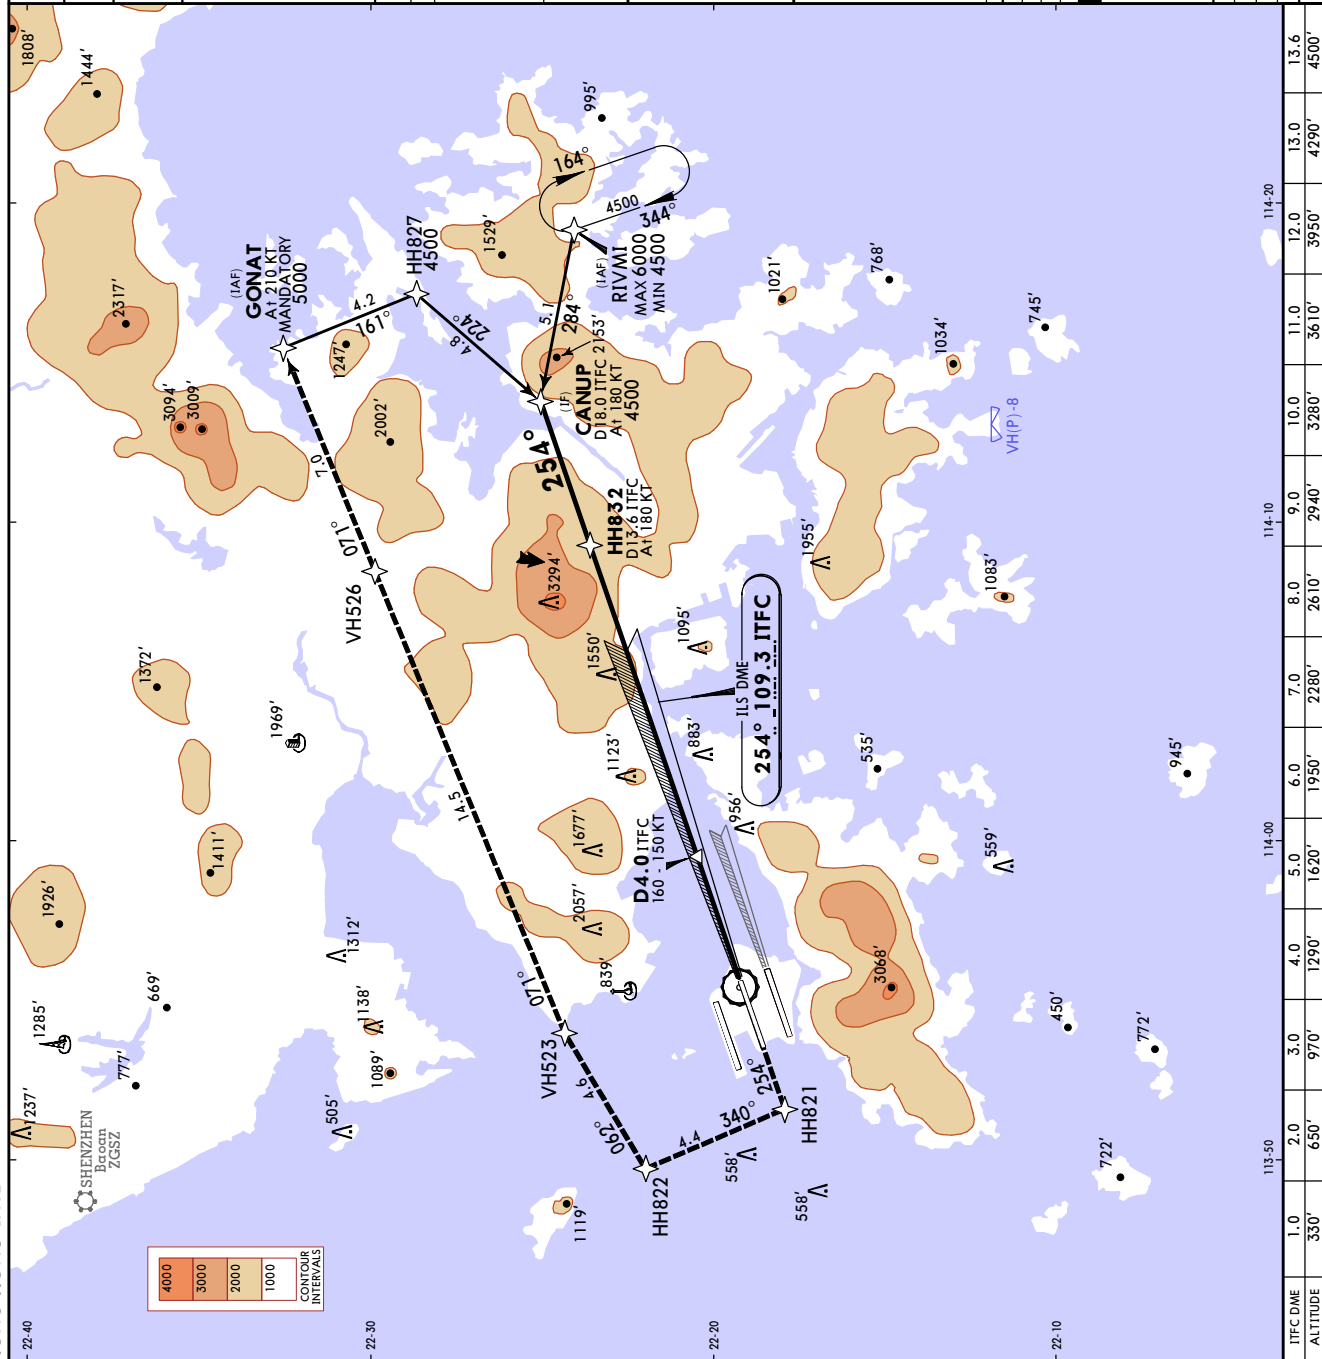

CHANGES: Speeds at GONAT and HH832 added.

VHHH /HKG

HONG KONG INTL

JEPPESEN HONG KONG, PR OF CHINA
20 DEC 24 (11-7A)
CAT II/III ILS RWY 25C

D-ATIS Arrival 128.2 HONG KONG Approach (R) 119.1 *HONG KONG Director 119.5 HONG KONG Tower 118.2

LOC ITCF	109.3	Final Appch Crs	254°	HH832	121.875	CAT III ILS	122.125	CAT II ILS	122.55	Apt Elev	28'
						Refer to Minimums		RA 100'			Rwy 22'

MISSD APCH: Climb initially to 4000' and track 254° to HH821, then turn RIGHT to HH822. Proceed to VH523 and cross VH523 between 3000' and 4000'. From VH523, climb to 5000' and track to VH526 and GONAT.

MAX 185 KT until VH523, then maintain 230 KT until VH526, then maintain 210 KT until GONAT.
If unable for RNP 1, continue on published missed apch track, climb and pass MSA 4300' as soon as practicable and continue to 5000'.
Refer to minimums for missed apch climb gradients.

Alt Set: hPa Rwy Elev: 1 hPa Trans level: 980 hPa or above - FL110 979 hPa or below - by ATC

RNP1 for initial and missed apch. If unable, inform ATC.

1. DME required. If unable to receive ITCF DME, advise ATC.
2. WARNING: LOC ITCF unusable beyond 19° RIGHT of course.
3. WARNING: Pilots should monitor for false capture of LOC and GS by comparing indications with ACFT position and altitude.
4. Special Aircrew & Acft Certification Required.
5. Simultaneous dependent operation is authorized with RWY 25L.

SPEED CTL:
Cross CANUP at 180 KT and maintain until D7.0 ITCF.
Cross D4.0 ITCF between 160 and 150 KT.
Advise Apch Control if planned final apch speed is below 125 KT.

CAT III MMACG shall normally be determined by operators based on specific CAT III systems/operations and Decision Height/Alert Height authorized. For reference, RWY 25C CAT III MMACG is calculated to be at 4.4% (268'/NM) assuming the start of missed approach climb is at 1800m after threshold.
If the start of missed approach climb is beyond 1800m after threshold or the required MMACG of concerned ACFT cannot be achieved, operators shall establish operating procedures to ensure adequate terrain clearance can be maintained in the event of missed approach.

HH832 D18.0 ITCF At 180 KT
CANUP D18.0 ITCF At 180 KT
D4.0 ITCF 160-150 KT 1290'


HH821 on 254°
4000' 185 KT MAX
CAT II ILS
MACG MIN 4.0% (244'/NM)
RA 100'
DA(H) 122' (100')

Std/State
CAT III ILS
CAT II ILS
MACG MIN 4.0% (244'/NM)
RA 100'
DA(H) 122' (100')

A R75m
B R100m
C
D

1 CAT D without autoland: R350m.

© JEPPESEN, 2024. ALL RIGHTS RESERVED.

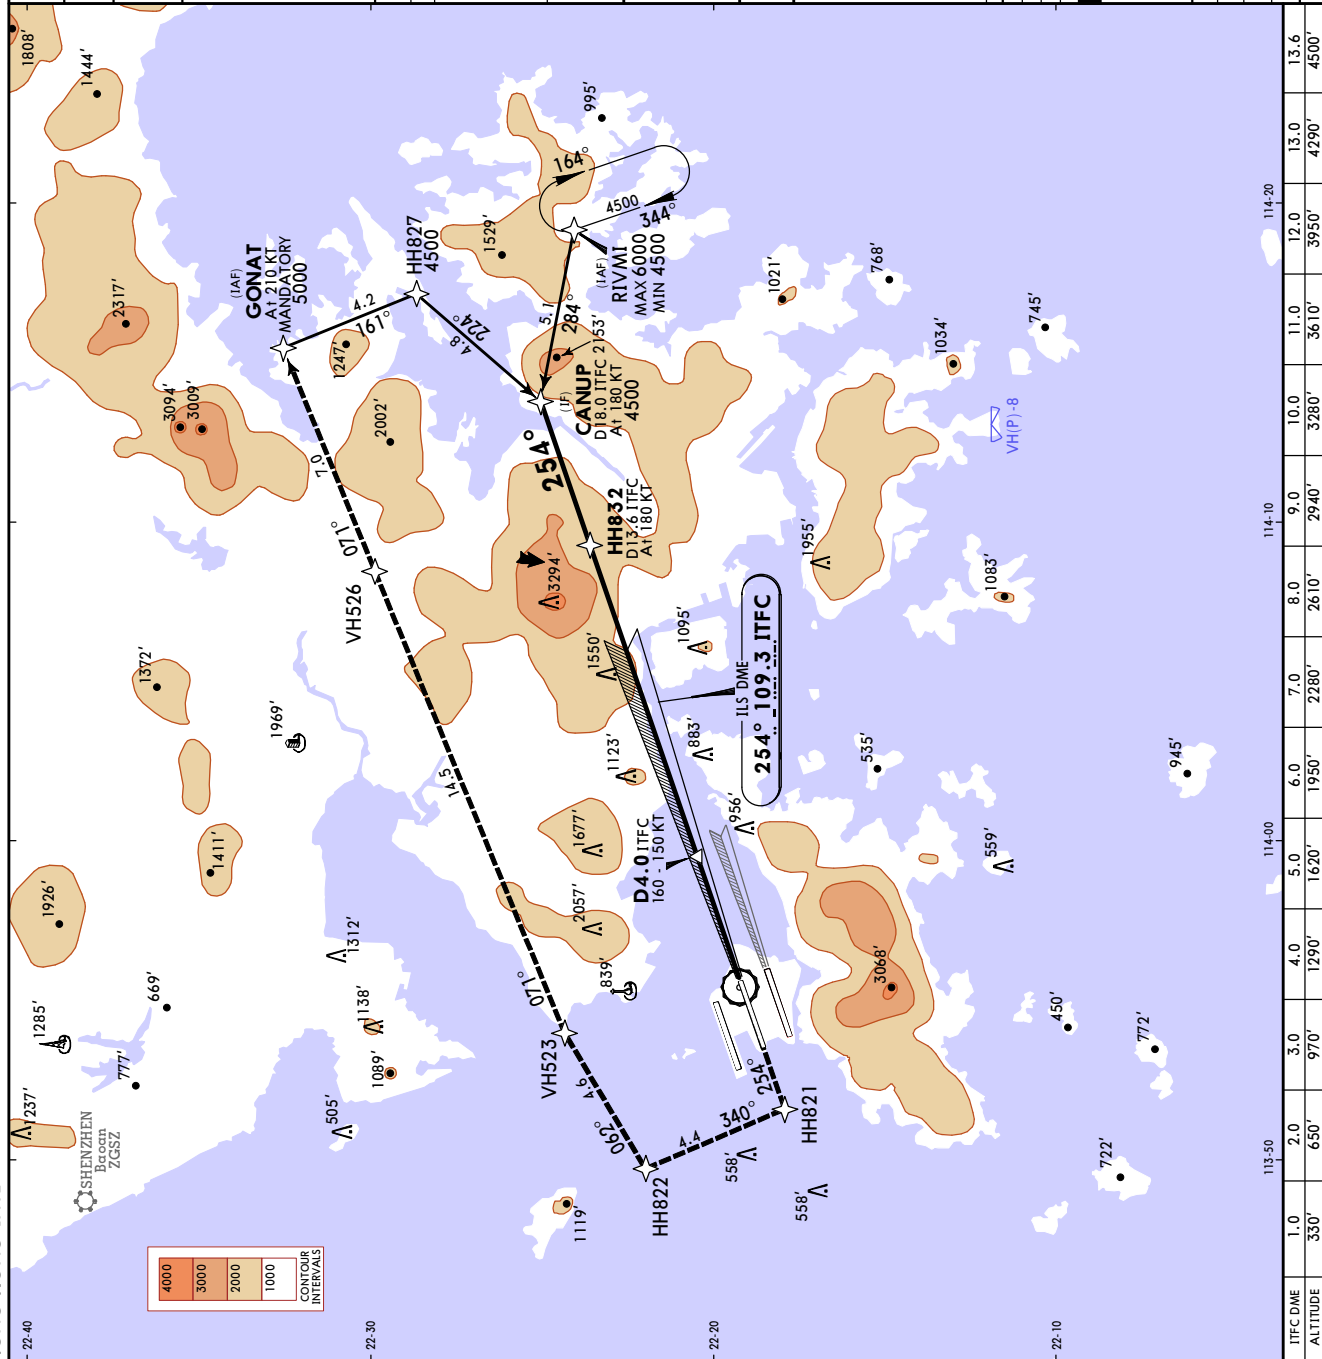


CHANGES: Speeds at GONAT and HH832 added.

VHHH /HKG

HONG KONG INTL

JEPPESEN HONG KONG, PR OF CHINA
20 DEC 24 (11-8) **LOC Rwy 25C**

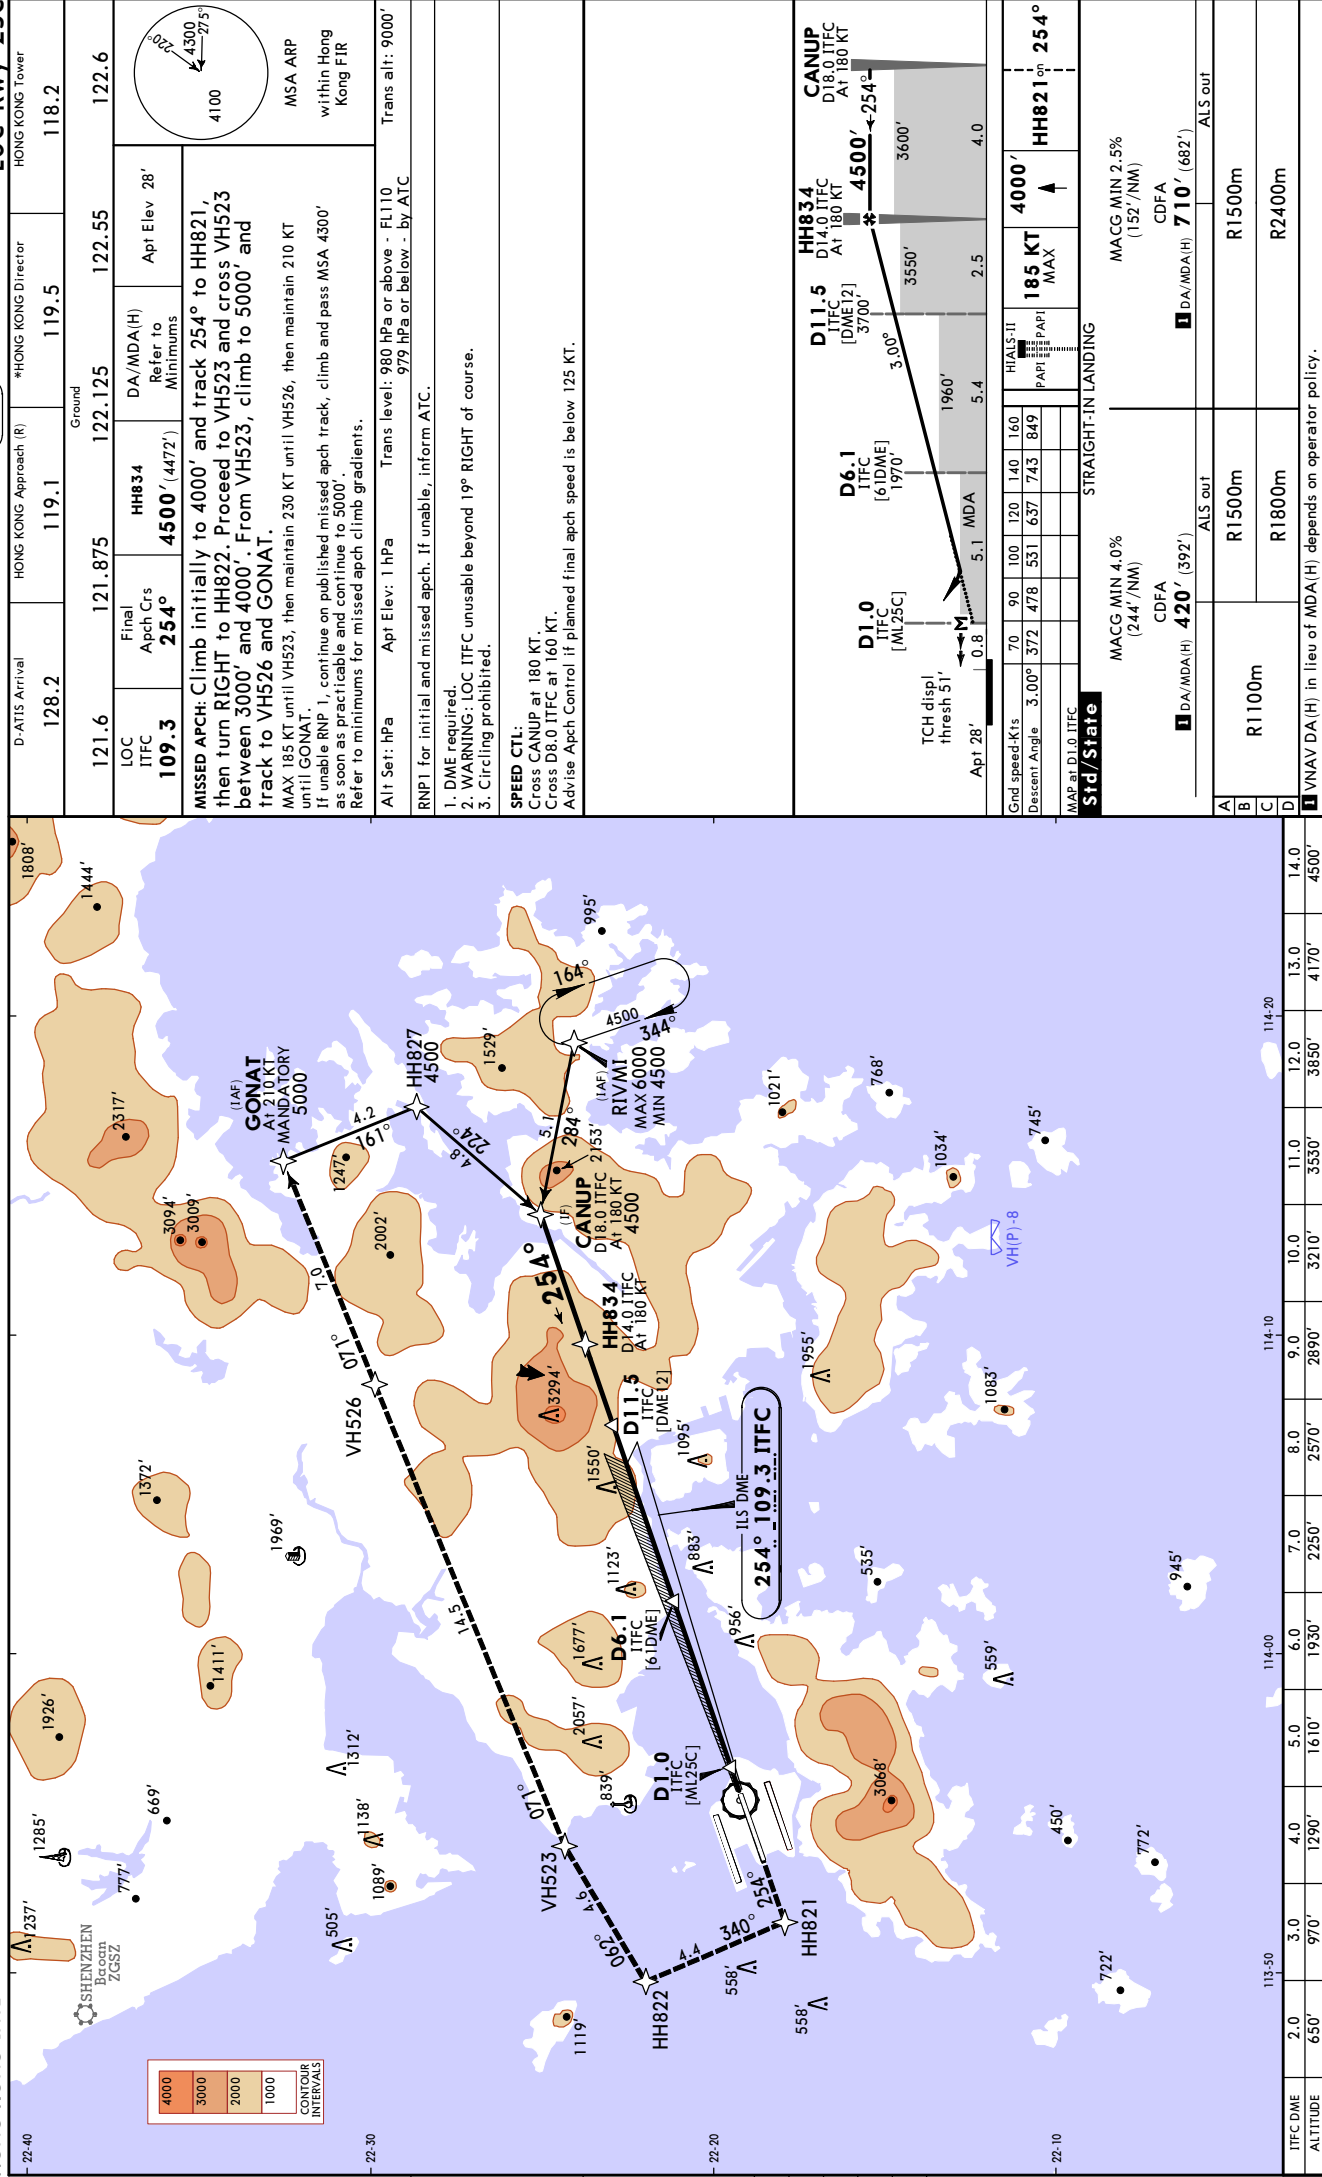


CHANGES: Speeds at GONAT and HH834 added.

© JEPPESEN, 2024. ALL RIGHTS RESERVED.

VHHH /HKG
HONG KONG INTL


JEPPES**HONG KONG, PR OF CHINA**
9 MAY 25 (11-9) **EFF 15 May** **ILS or LOC Rwy 07L**

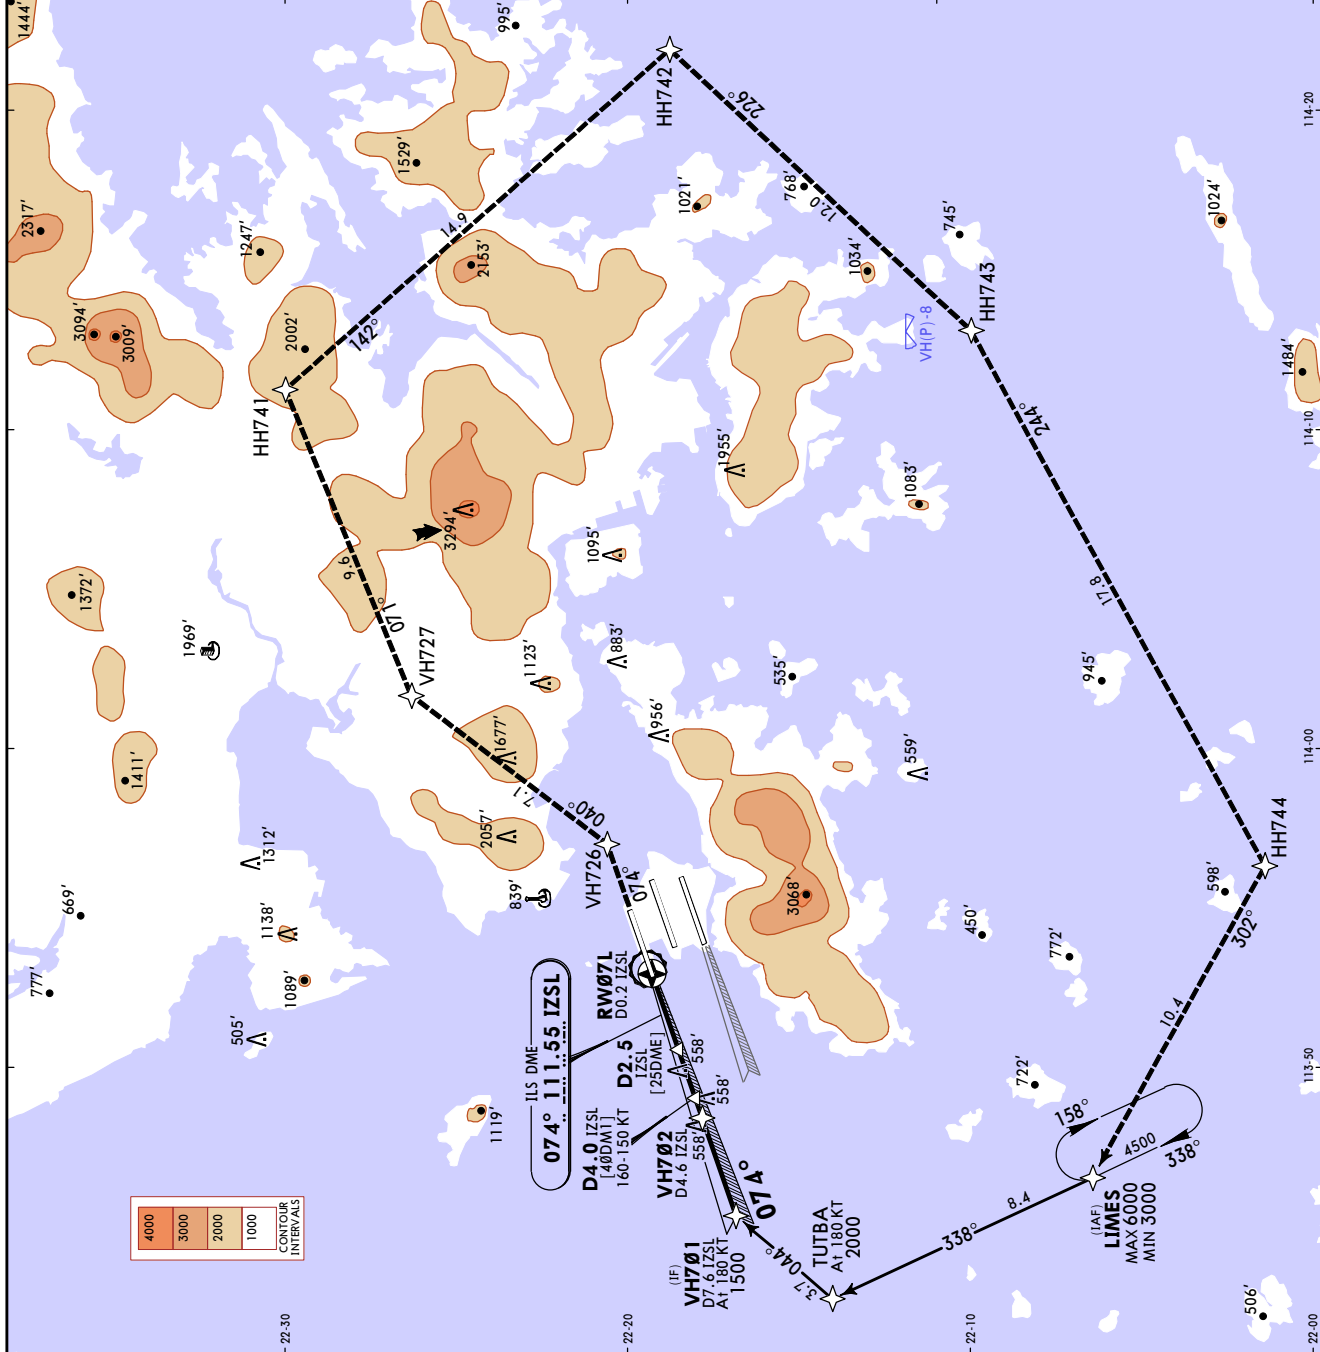


D-ATIS Arrival		HONG KONG Approach (R)		*HONG KONG Director		HONG KONG Tower	
128.2		119.1		119.5		118.7	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	

VHHH /HKG
HONG KONG INTL

22 NOV 24
JEPPESEN HONG KONG, PR OF CHINA
11-10 RNAV TRANSITION TO ILS RWY 25R

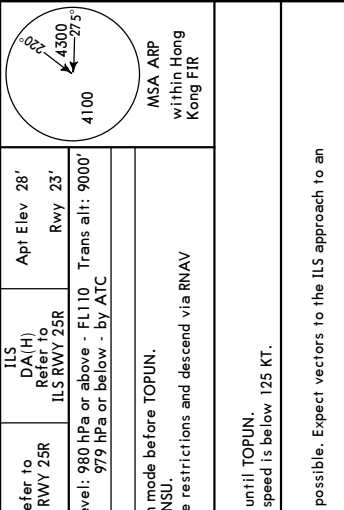
D-ATIS Arrival		HONG KONG Approach (R)		*HONG KONG Director		HONG KONG Tower	
128.2		119.1		119.5		118.7	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.6	
RNAV	Final	Refer to ILS RWY 25R		ILS DA(H) Refer to ILS RWY 25R		Apt Elev 28' Rwy 23'	
	Apch Crs	254°		ILS RWY 25R		Rwy 23'	
Alt Set: hPa Rwy Elev: 1 hPa Trans level: 980 hPa or above - FL110 Trans alt: 9000' 979 hPa or below - by ATC							
RNP 1							
1. WARNING: Do not select ILS approach mode before TOPUN. 2. Do not accept radar vectors inside RUNSU. 3. Strictly comply with all charted altitude restrictions and descend via RNAV transition profile to FAP altitude.							
SPEED CTL: Cross RUNSU at 180 KT, maintain 180 KT until TOPUN. Advise Apch Control if planned final apch speed is below 125 KT.							
HANDLING: 1. If unable RNP 1, notify ATC as soon as possible. Expect vectors to the ILS approach to an alternative Rwy. 2. Due obstacle clearance constraints, ATC vectors to Intercept ILS RWY 25R from headings are not allowed. ATC will issue ILS approach clearance to Acft correctly following RNAV transition procedure. Non-compliant Acft will have their clearance cancelled and will be repositioned. 3. In busy traffic, expect ATC vectors for inter-arrival spacing purposes followed by instruction direct to either RVM1 or RUNSU to re-join RNAV transition. Resume own navigation from instructed waypoint. Be reminded not to delete RNAV waypoint sequence between RVM1 and TOPUN 4. When instructed "FROM [waypoint] DESCEND VIA RNAV TRANSITION", join the RNAV transition procedure and descend in compliance with the altitude restrictions to the FAP. Engage the appropriate lateral and vertical modes to ensure compliance with the profile constraints of the RNAV transition. Engagement of the ILS modes (i.e. LOC and G/S) before crossing TOPUN will not conform to the required obstacle clearance. 5. When Acft is on the extended Rwy centerline track, ATC will issue the ILS approach clearance: "FROM TOPUN, CLEARED ILS APPROACH RWY 25R." Engage the ILS mode after passing TOPUN. 6. During hot weather conditions, Acft maintaining the published 3800' at SAGNI may be above glide path. Descend via the RNAV transition complying with altitude restrictions. The mandatory altitude of 1800' at VH536 will facilitate Acft to intercept the glide path from below. After TOPUN, cross VH536 at 1800' unless established on glide path. 7. Follow the prescribed operating procedures for obstacle clearance and possible ILS signal coverage issues. RNP 2 Rwy 25R and LOC Rwy 25R approach procedures are available on request if pilots are unfamiliar with these operating requirements.							
							

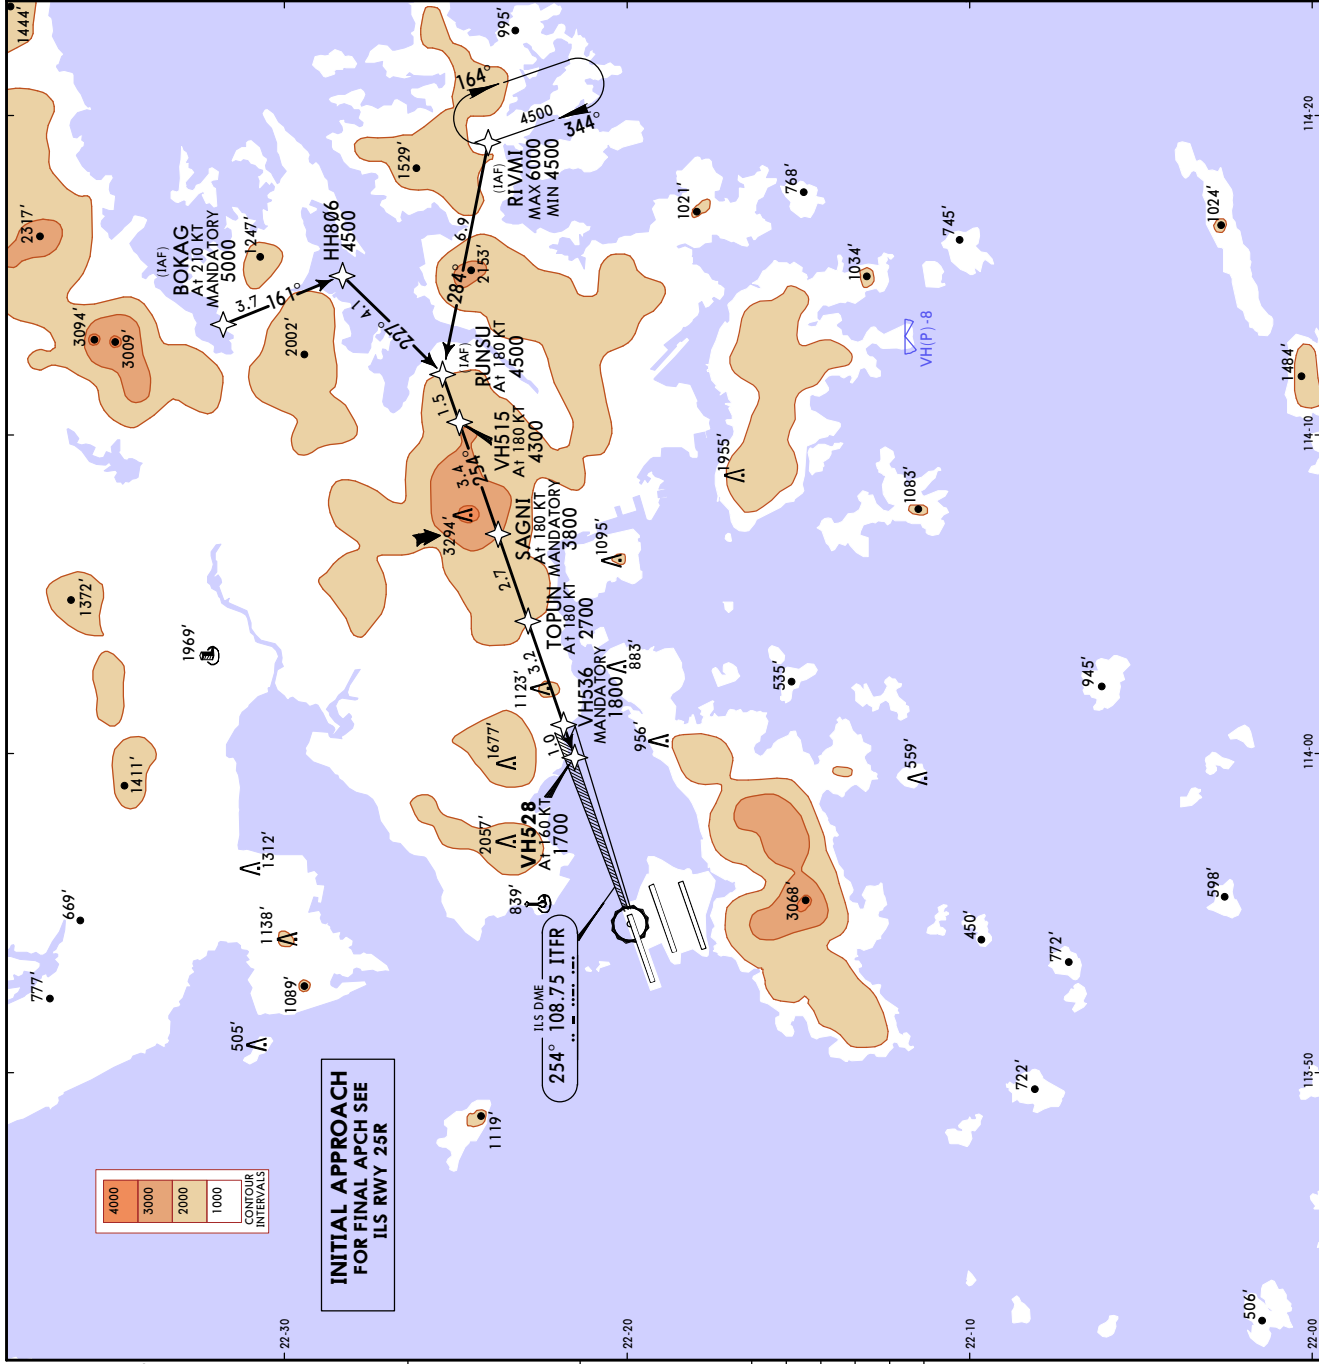


VHHH /HKG
HONG KONG INTL

22 NOV 24
JEPPesen HONG KONG, PR OF CHINA
Eff 28 Nov 12-1 RNP Rwy 07L (LNAV/VNAV only)

D-ATIS Arrival		HONG KONG Approach (R)		*HONG KONG Director		HONG KONG Tower	
128.2		119.1		119.5		118.7	
Ground							
121.6		121.875		122.125		122.55	
122.6		122.125		122.55		122.6	
RNAV		Final Apch Crs 074°		VH708 MANDATORY 1500' (1477')		LNAV/VNAV DA(H) Refer to Minimums	
						Apt Elev 28' Rwy 23'	
MISSED APCH: Climb to 5000'. From RW07L track 074° to VH726. Then proceed to VH727, HH741 (MANDATORY 5000'), HH742, HH743, HH744 and LIMES. MAX 200 KT until VH727, then maintain 230 KT until LIMES. Missed apch requires a minimum climb gradient of 6.6% (402'/NM).							
Alt Set: hPa		Rwy Elev: 1 hPa		Trans level: 980 hPa or above - FL110 979 hPa or below - by ATC		Trans alt: 9000'	
RNP Apch							
1. Baro-VNAV not authorized below 0°C.							
2. Simultaneous dependent operation is authorized with RWY 07R.							
3. Circling prohibited.							
SPEED CTL:							
Cross TUTBA at 180 KT and maintain until 7.0 NM before threshold.							
Cross 4.0 NM before threshold between 160 and 150 KT. -25 KT.							
Advise Apch Control if planned final apch speed is below 125 KT.							
DIST to RW07L		4.6		4.0		3.0	
ALTITUDE		1500'		1300'		1000'	
VH701 At 180 KT				VH708 160-150 KT			
MANDATORY		1500' - 074°		1500'			
1200'		2.8		4.6		DA 4.6	
2.90°		2.90°		RW07L		TCH displ thresh 50'	
Rwy 23'		Rwy 23'		Rwy 23'		Rwy 23'	
TO DISPL THRESH 7.4		7.4		4.6		0	
Gnd speed-Kts		70		90		100	
Glide Path Angle		2.90°		359		462	
		513		616		718	
		821					
MAP at RW07L							
Std/State							
STRAIGHT-IN LANDING							
LNAV/VNAV							
DA(H) A: 302' (279') C: 322' (299') B: 312' (289') D: 332' (309')							
ALS out							
R1300m							
R1400m							

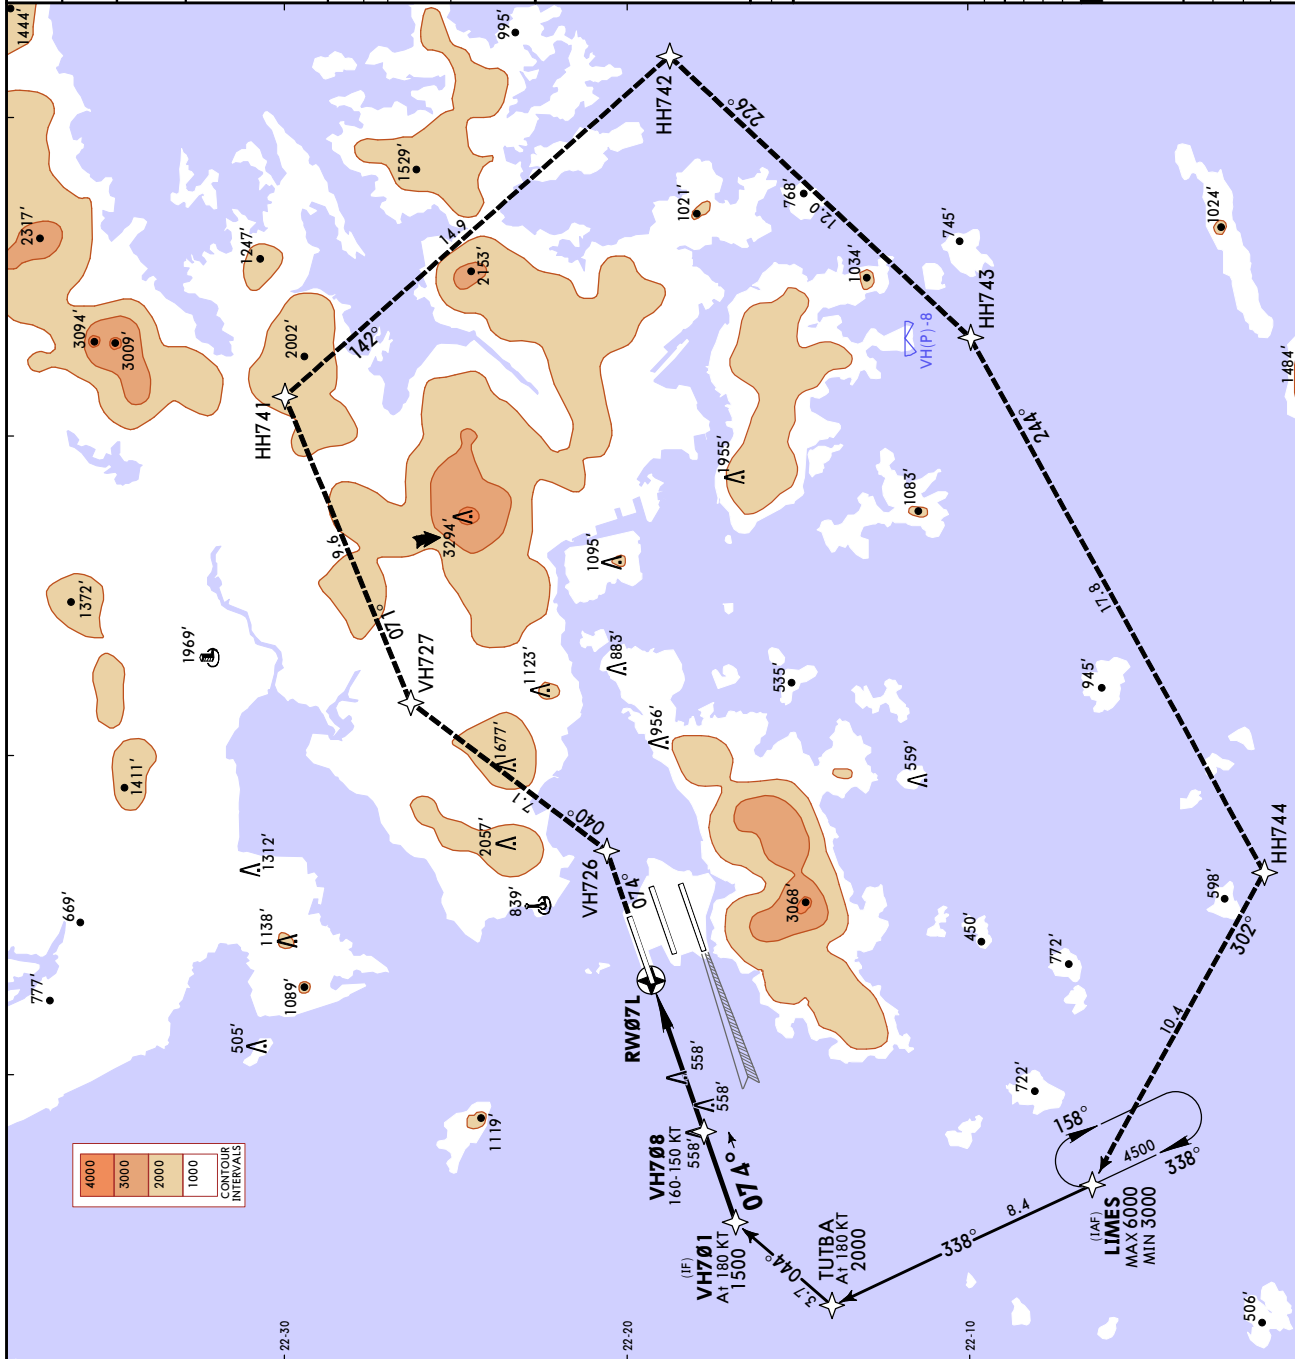



WCS	NAME	ST	IP	PORT	Std/State	STRAIGHT-IN LANDING

VHHH /HKG
HONG KONG INTL

22 NOV 24
JEPPESON HONG KONG, PR OF CHINA
12-3 RNP Rwy 07C (LNAV/VNAV only)
EFT 28 Nov

D-ATIS Arrival		HONG KONG Approach (R)		*HONG KONG Director		HONG KONG Tower	
128.2		119.1		119.5		118.2	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
RNAV		Final Apch Crs 074°		LNAV/VNAV DA(H) Refer to Minimums		Apt Elev 28' Rwy 22'	
		HH730 MANDATORY 1600' (1578')					

CHANGES: New procedure.

© JEPPESON, 2024. ALL RIGHTS RESERVED.

VHHH /HKG

HONG KONG INTL

22 NOV 24
JEPPESSEN HONG KONG, PR OF CHINA
12-4 RNP Z Rwy 25C (LNAV/VNAV only)

D-ATIS Arrival
128.2

HONG KONG Approach (R)
119.1

HONG KONG Director
119.5

HONG KONG Tower
118.2

Ground
121.6

121.875

122.125

122.55

122.6

RNAV	Final Apch Crs 254°	HH835 MANDATORY DA(H) 4500' (4478')	LNAV/VNAV DA(H) 500' (478')	Apch Elev 28'	Rwy 22'
------	---------------------------	--	-----------------------------------	---------------	---------

MISSED APCH: Climb initially to 4000', from RW25C, track 254° to HH821, then turn RIGHT to HH822. Proceed to VH523 and cross VH523 between 3000' and 4000'. From VH523, climb to 5000' and track to VH526 and GONAT.

MAX 185 KT until VH523, then maintain 230 KT until VH526, then maintain 210 KT until GONAT.

Alt Set: hPa Rwy Elev: 1 hPa Trans level: 980 hPa or above - FL110 979 hPa or below - by ATC

RNP Apch
1. Baro-VNAV not authorized below 0°C.
2. Simultaneous dependent operation is authorized with RWY 25L.
3. Circling prohibited.

SPEED CTL:
Cross CANUP at 180 KT and maintain until 7.0 NM before threshold.
Cross 4.0 NM before threshold between 160 and 150 KT.
Advise Apch Control if planned final apch speed is below 125 KT.

HH835
AT 180 KT
MANDATORY
4500' 254° 4500'

HH821
AT 180 KT
MANDATORY
4500' 254° 4500'

HH822
AT 180 KT
MANDATORY
4500' 254° 4500'

HH827
AT 180 KT
MANDATORY
4500' 254° 4500'

HH835
AT 180 KT
MANDATORY
4500' 254° 4500'

HH821
AT 180 KT
MANDATORY
4500' 254° 4500'

HH822
AT 180 KT
MANDATORY
4500' 254° 4500'

HH827
AT 180 KT
MANDATORY
4500' 254° 4500'

HH835
AT 180 KT
MANDATORY
4500' 254° 4500'

HH821
AT 180 KT
MANDATORY
4500' 254° 4500'

HH822
AT 180 KT
MANDATORY
4500' 254° 4500'

HH827
AT 180 KT
MANDATORY
4500' 254° 4500'

HH835
AT 180 KT
MANDATORY
4500' 254° 4500'

HH821
AT 180 KT
MANDATORY
4500' 254° 4500'

HH822
AT 180 KT
MANDATORY
4500' 254° 4500'

HH827
AT 180 KT
MANDATORY
4500' 254° 4500'

HH835
AT 180 KT
MANDATORY
4500' 254° 4500'

HH821
AT 180 KT
MANDATORY
4500' 254° 4500'

HH822
AT 180 KT
MANDATORY
4500' 254° 4500'


HH827
AT 180 KT
MANDATORY
4500' 254° 4500'

HH835
AT 180 KT
MANDATORY
4500' 254° 4500'

HH821
AT 180 KT
MANDATORY
4500' 254° 4500'

HH822
AT 180 KT
MANDATORY
4500' 254° 4500'

HH827
AT 180 KT
MANDATORY
4500' 254° 4500'

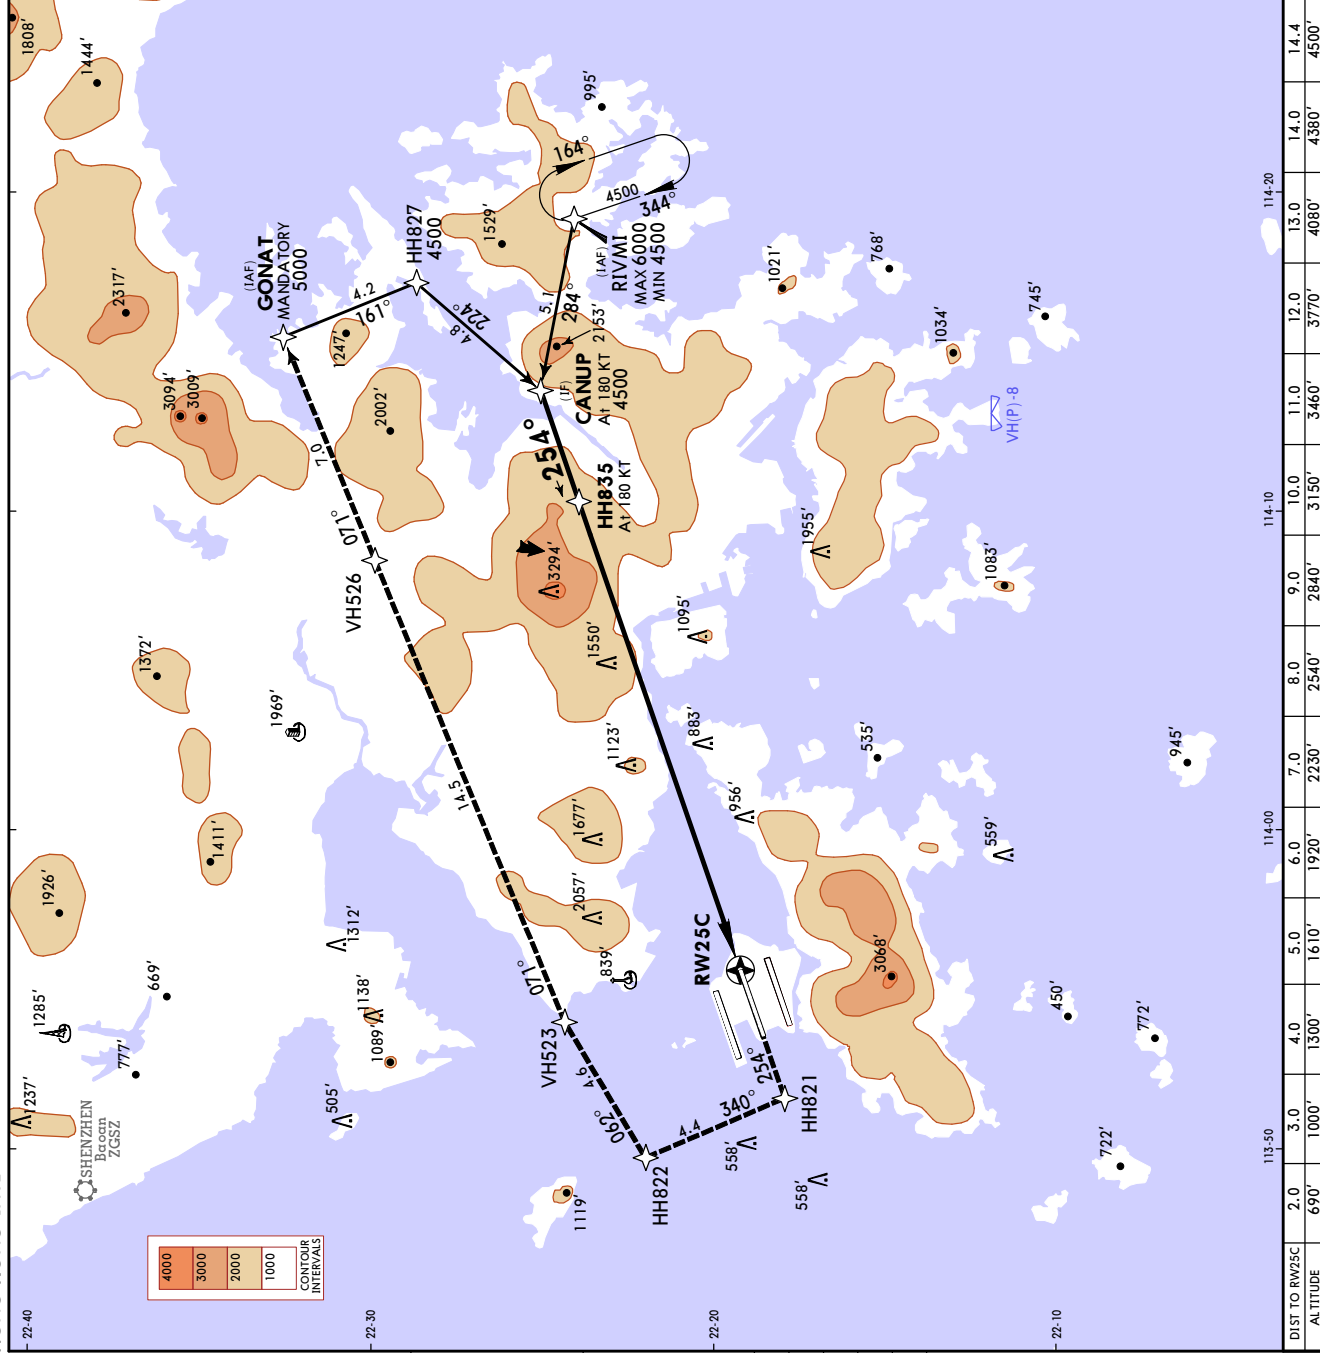

HH835
AT 180 KT
MANDATORY
4500' 254° 4500'

HH821
AT 180 KT
MANDATORY
4500' 254° 4500'

HH822
AT 180 KT
MANDATORY
4500' 254° 4500'

HH827
AT 180 KT
MANDATORY
4500' 254° 4500'

113-50

113-40

114-00

114-10

114-20

114-30

114-40

114-50

115-00

115-10

115-20

115-30

115-40

115-50

116-00

116-10

116-20

116-30

116-40

116-50

117-00

117-10

117-20

117-30

117-40

117-50

118-00

118-10

118-20

118-30

118-40

118-50

119-00

119-10

119-20

119-30

119-40

119-50

120-00

120-10

120-20

120-30

120-40

120-50

121-00

121-10

121-20

121-30

121-40

121-50

122-00

122-10

122-20

122-30

122-40

122-50

123-00

123-10

123-20

123-30

123-40

123-50

124-00

124-10

124-20

124-30

124-40

124-50

125-00

125-10

125-20

125-30

125-40

125-50

126-00

126-10

126-20

126-30

126-40

126-50

127-00

127-10

127-20

127-30

127-40

127-50

128-00

128-10

128-20

128-30

128-40

128-50

129-00

129-10

129-20

129-30

129-40

129-50

130-00

130-10

130-20

130-30

130-40

130-50

131-00

131-10

131-20

131-30

131-40

131-50

132-00

132-10

132-20

132-30

132-40

132-50

133-00

133-10

133-20

133-30

133-40

133-50

134-00

134-10

134-20

134-30

134-40

134-50

135-00

135-10


CHANGES: New procedure.


VHHH / HKG

HONG KONG INTL



22 NOV 24 (12-22) **Eff 28 Nov** RNP Z Rwy 07R (AR)

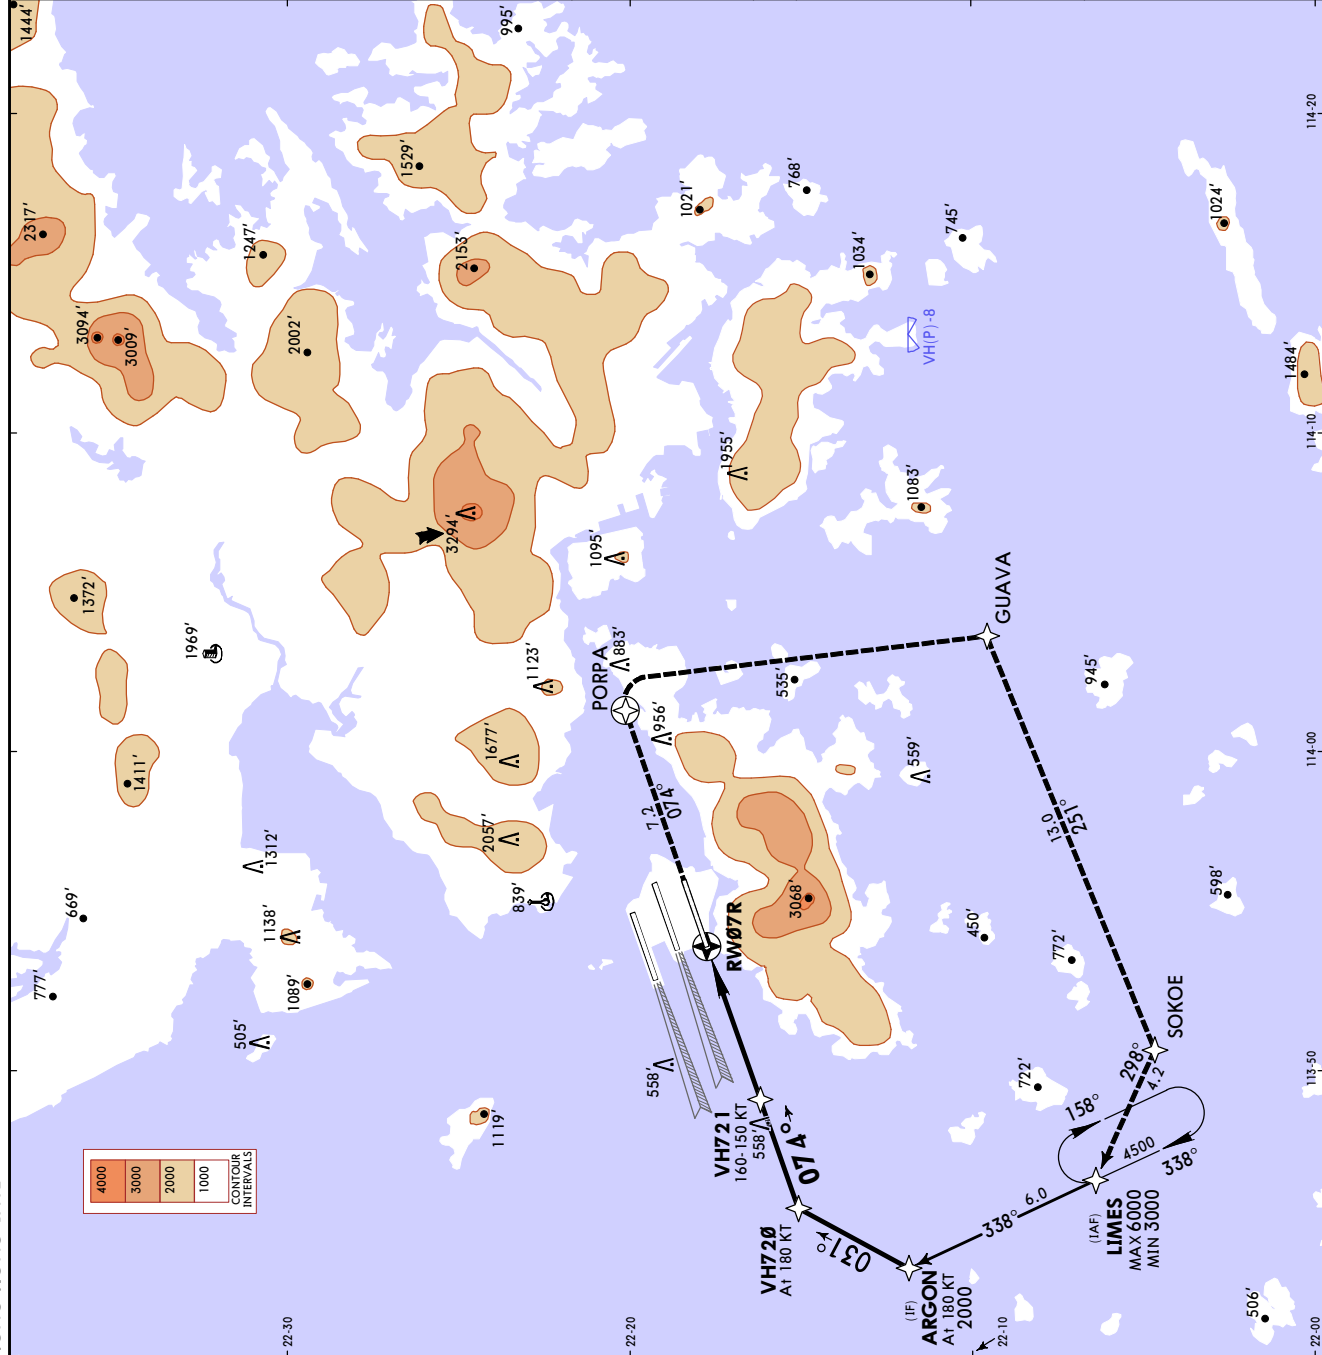

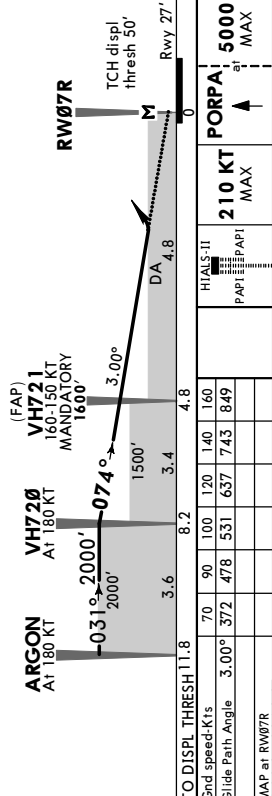
D-ATIS Arrival		HONG KONG Approach (R)		*HONG KONG Director		HONG KONG Tower	
128.2		119.1		119.5		118.4	
121.6		121.875		122.125		122.55	
122.125		122.125		122.55		122.6	
RNAV	Final	VH721		RNP 0.3		Apt Elev 28'	
	Apch Crs	MANDATORY		DA(H)		Rwy 27'	
074°		1600' (1573')		437' (410')			
MISSED APCH: Climb to 5000'. Track to PORPA (MAX 5000'), then turn RIGHT direct to GUAVA, then SOKOE, then LIMES, join holding or as directed.							
MAX 210 KT until established on track to GUAVA, cross GUAVA at 210 KT, then maintain 230 KT until LIMES.							
Alt Set: hPa		Rwy Elev: 1 hPa		Trans level: 980 hPa or above - FL110		Trans alt: 9000'	
				979 hPa or below - by ATC			
RNP AR Apch. RNP 0.3 in intermediate and missed apch segments.							
1. Authorization required.							
2. Do not accept radar vectors inside VH720.							
3. Baro-VNAV not authorized below 0°C.							
4. Simultaneous dependent operation is authorized with RWY 07L or RWY 07C.							
5. Circling prohibited.							
SPEED CTL:							
Cross ARGON at 180 KT and maintain until 7.0 NM before threshold.							
Cross 4.0 NM before threshold between 160 and 150 KT.							
Advise Apch Control if planned final apch speed is below 125 KT.							
DIST TO RW07R		4.8		4.0		3.0	
ALTITUDE		1600'		1350'		1030'	
						2.0	
						710'	
							
TO DISPL THRESH 11.8		8.2		4.8		0	
Gnd speed-Kts		70		90		100	
Glide Path Angle		3.00°		372		478	
MAP at RW07R							
Std/State							
STRAIGHT-IN LANDING							
RNP 0.3							
DA(H) 437' (410')							
ALS out							
A		R1200m		210 KT MAX		PORPA 5000' at MAX	
B							
C							
D							

CHANGES: Ground frequencies, notes, procedure.


© JEPPESEN, 2022, 2024. ALL RIGHTS RESERVED.

VHHH/HKG
HONG KONG INTL

 **JEPPESEN**HONG KONG, PR OF CHINA
22 NOV 24 (12-23) **Eff 28 Nov** **RNP Y RWY 07R (AR)**

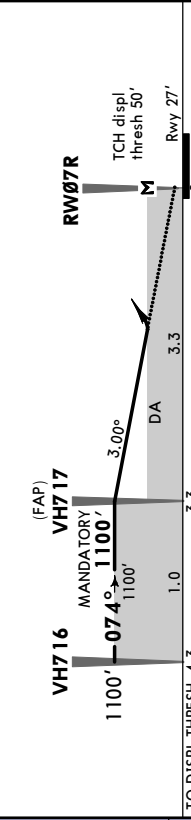
D-ATIS Arrival		HONG KONG Approach (R)		*HONG KONG Director		HONG KONG Tower	
128.2		119.1		119.5		118.4	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.55	
RNAV		Final ApcH Crs		VH717 MANDATORY		RNP 0.3 DA(H)	
		074°		1100' (1073')		437' (410')	
						Apt Elev 28' Rwy 27'	
MISSED APCH: Climb to 5000'. Track to PORPA (MAX 5000'), then to TD VOR, join holding or as directed. MAX 220 KT until TD, cross TD at 220 KT.							
Alt Set: hPa		Rwy Elev: 1 hPa		Trans level: 980 hPa or above - FL110 979 hPa or below - by ATC		Trans alt: 9000'	
RNP AR ApcH. RNP 0.3 within intermediate and missed apch segments.							
1. Authorization required. 2. Do not accept radar vectors inside NOLIB. 3. Baro-VNAV not authorized below 0°C. 4. Simultaneous dependent operation is authorized with RWY 07L or RWY 07C. 5. Circling prohibited. 6. To be used when flight path to Southwest is blocked. 7. Due to close FIR bndy, strict adherence to tracks necessary. If unable, fly missed apch and expect radar vectors.							
SPEED CTL: Cross NOLIB at 220 KT. Cross VH704 at 180 KT. Cross VH715 between 160 KT and 150 KT. Advise ApcH Control if planned final apch speed is below 125 KT.							
DIST TO RW07R		3.3		3.0		2.0	
ALTITUDE		1100'		1010'		700'	
							
TO DISPL THRESH		4.3		1.0		3.3	
Grnd speed-Kts		70		90		100	
Glide Path Angle		3.00°		372		478	
MAP at RW07R							
Std/State		STRAIGHT-IN LANDING		RNP 0.3		PORPA 5000' at MAX	
		DA(H) 437' (410')		ALS out			
A		R1200m		R1500m		R1900m	
B							
C							
D							

CHANGES: Ground frequencies, notes, recommended altitudes. © JEPPESSEN, 2022, 2024. ALL RIGHTS RESERVED.

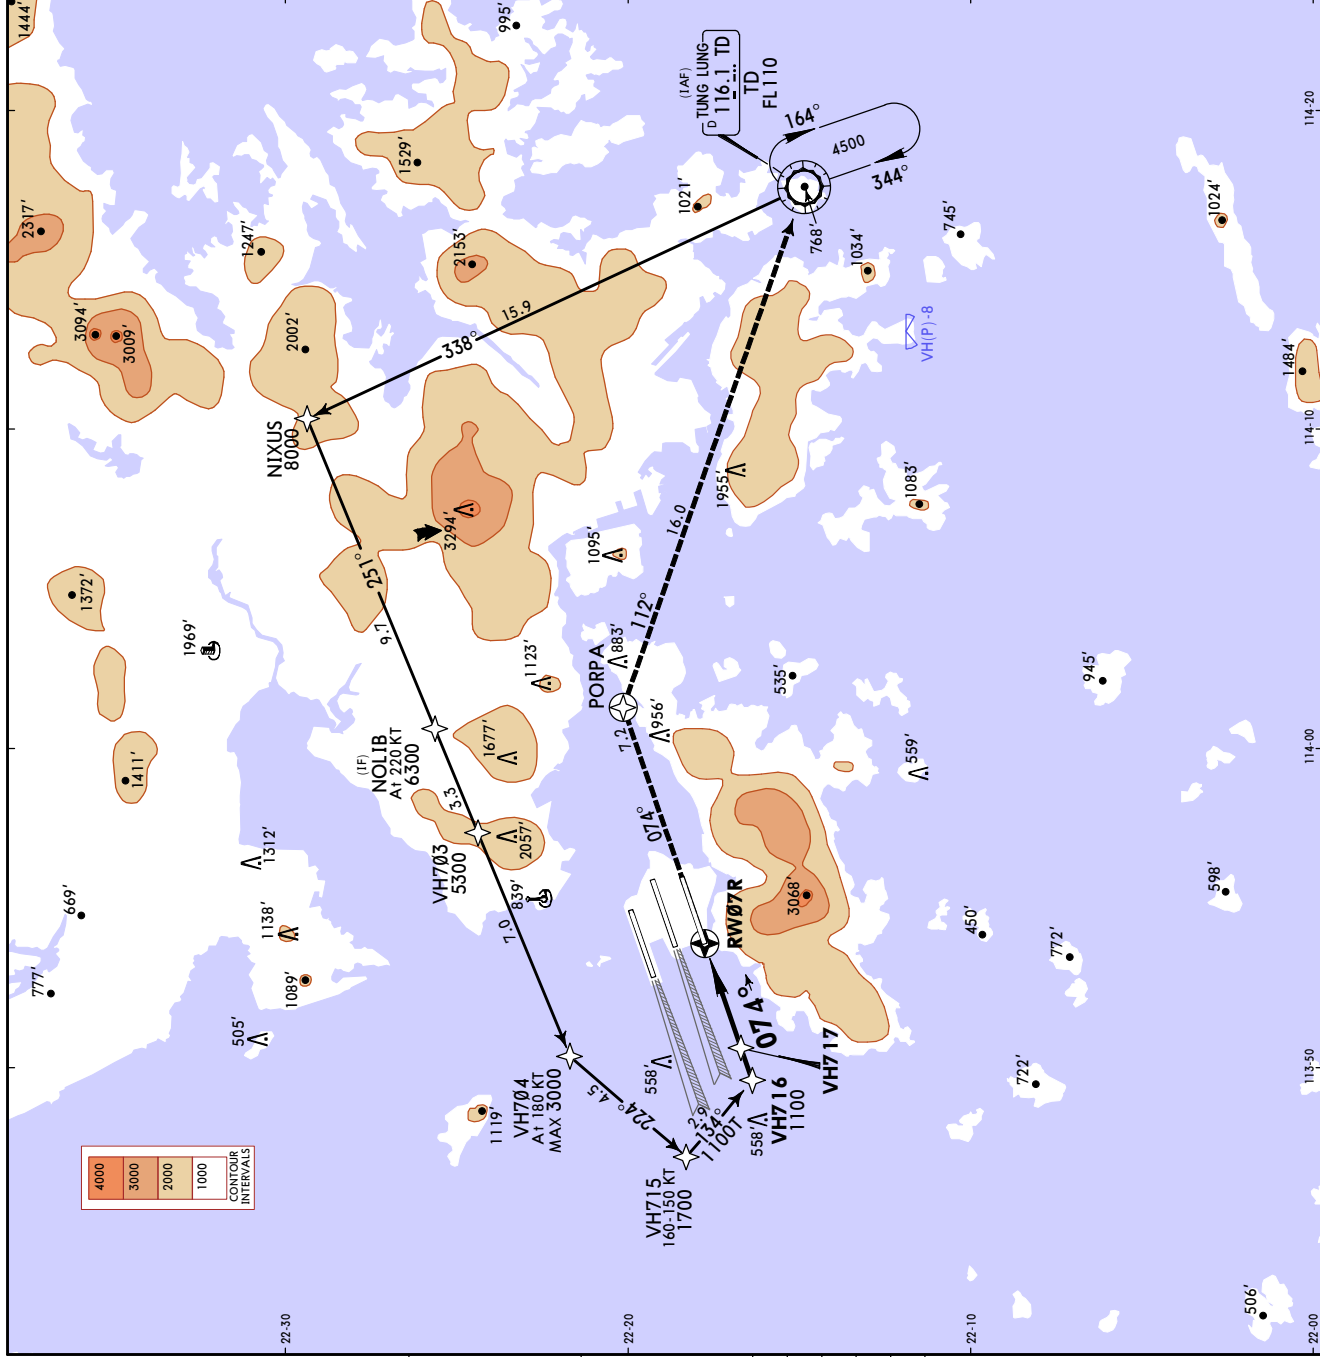

VHHH/HKG

HONG KONG INTL



22 NOV 24 (12-25) **Eff 28 Nov** RNP Y Rwy 25L (AR)



D-ATIS Arrival		HONG KONG Approach (R)		*HONG KONG Director		HONG KONG Tower	
128.2		119.1		119.5		118.4	
121.6		121.875		122.125		122.55	
121.6		121.875		122.125		122.6	
RNAV		Final Apch Crs		HH874 MANDATORY		RNP 0.3 DA(H) Refer to Minimums	
		254°		1400' (1373')		Rwy 27'	
MISSED APCH: Climb to 5000'. From RW25L track 254° to HH861. Proceed to HH862, HH865, then to LUDLA. MAX 185 KT until HH865, then maintain 230 KT until LUDLA.							
Alt Set: hPa		Rwy Elev: 1 hPa		Trans level: 980 hPa or above - FL110 979 hPa or below - by ATC		Trans alt: 9000'	
RNP AR Apch. RF required. RNP 0.3 within intermediate and missed apch segments.							
1. Authorization required.							
2. Do not accept radar vectors inside LUDLA.							
3. Baro-VNAV not authorized below 0°C.							
4. Simultaneous dependent operation is authorized with RWY 25R or RWY 25C.							
5. Circling prohibited.							
SPEED CTL: Cross HH871 and HH872 at 180 KT. Cross HH874 between 160 and 150 KT. Advise Apch Control if planned final apch speed is below 125 KT.							
DIST to RW25L		2.0		3.0		4.0	
ALTITUDE		690'		1000'		1310'	
						1400'	
						4.3	

VHHH /HKG

HONG KONG INTL

JEPPESON HONG KONG, PR OF CHINA
RNP Y RWY 25C (AR)

31 JAN 25 (12-27)

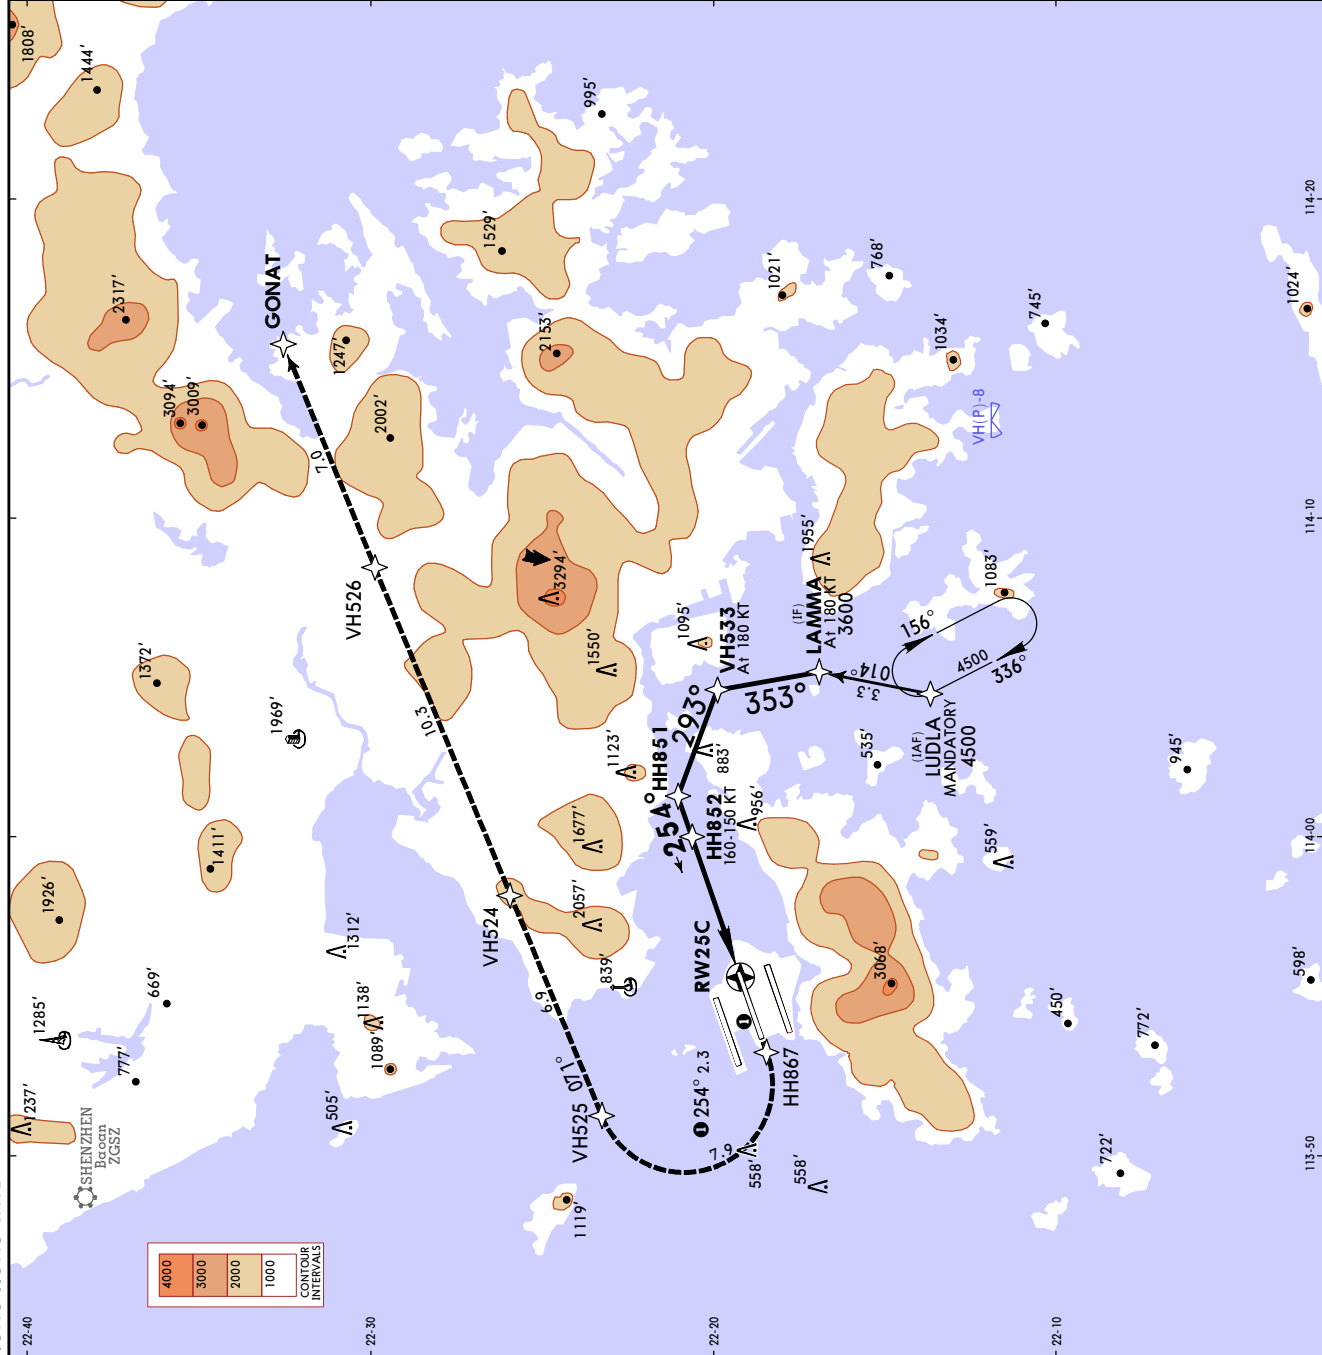


CHANGES: Distance and bearing added for first missed apch segment.

© JEPPESEN, 2024, 2025. ALL RIGHTS RESERVED.

D-ATIS Arrival		HONG KONG Approach (R)		*HONG KONG Director		HONG KONG Tower	
128.2		119.1		119.5		118.2	
121.6		121.875		122.125		122.55	
Ground		122.125		122.55		122.6	
RNAV		Final Apch Crs 254°		RNP 0.3 DA(H) Refer to Minimums		Apt Elev 28' Rwy 22'	
MISSED APCH: Climb initially to 4000', from RWY25C, track 254° to HH867, then turn RIGHT to VH525. Proceed to VH524 and cross VH524 at 4000'. From VH524, climb to 5000' and track to VH526 and GONAT (MANDATORY 5000').							
MAX 185 KT until VH525, then maintain 230 KT until VH526, then maintain 210 KT until GONAT.							
Alt Set: hPa		Rwy Elev: 1 hPa		Trans level: 980 hPa or above - FL110 979 hPa or below - by ATC		Trans alt: 9000'	
RNP AR Apch. RF required. RNP 0.3 within intermediate segment.							
1. Authorization required. 2. Do not accept radar vectors inside LUDLA. 3. Baro-VNAV not authorized below 0°C. 4. Simultaneous dependent operation is authorized with RWY 25L. 5. Circling prohibited.							
SPEED CTL: Cross LAMMA and VH533 at 180 KT. Cross HH852 between 160 KT and 150 KT. Advise Apch Control if planned final apch speed is below 125 KT.							
DIST TO RWY25C		2.0		3.0		4.0	
ALTITUDE		690'		1000'		1300'	
						4.3 1400'	
TCH displ thresh 50'		2.90°		254°		2700'	
Rwy 22'		4.3 DA		1.3		3.0	
		70		90		100	
Grad. speed Kts		2.90°		359		462	
Glide Path Angle				513		616	
				718		821	
MAP at RWY25C							
Std/State				STRAIGHT-IN LANDING		RNP 0.3	
				HH867 on 254°		4000'	
				185 KT MAX		4000'	
				HH867 on 254°		4000'	
				ALS out		R1500m	
				D: 500' (478')		R2200m	
				C: 490' (468')			
				B: 480' (458')			
				A: 470' (448')			
				D: 470' (448')			
				R1400m			
				R1500m			

VHHH/HKG
HONG KONG INTL

JEPPESEN HONG KONG, PR OF CHINA
22 NOV 24
12-28
RNP Y RWY 25R (AR)

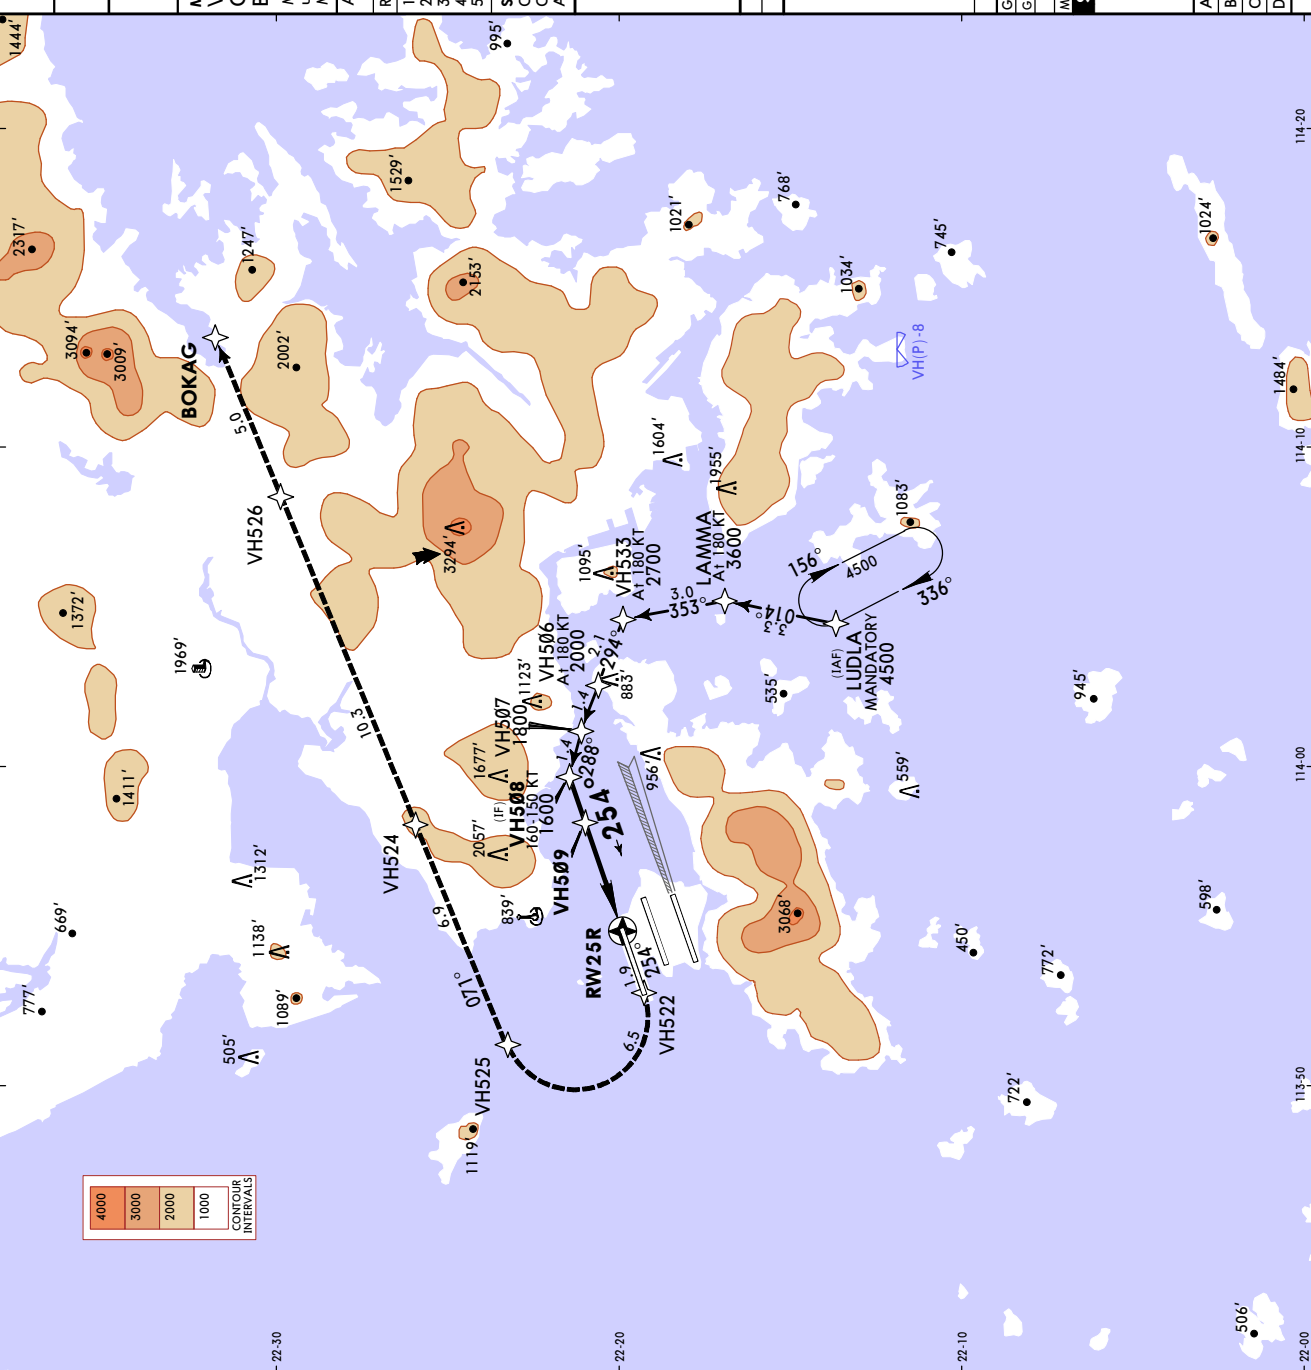

D-ATIS Arrival

128.2

HONG KONG Approach (R)

119.1

*HONG KONG Director

119.5

HONG KONG Tower

118.7

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

122.55

122.6

RNAV

Final
ApcH Crs
254°

VH509
MANDATORY
1100' (1077')

RNP 0.3
DA(H)
Refer to
Minimums

Apt Elev 28'
Rwy 23'

MISSSED APCH: Climb initially to 4000'. From RW25R track 254° to /H522, then turn RIGHT direct to VH525, then VH524 at 4000'.
Climb to 5000' and track to VH526 and
BOKAK (MANDATORY 5000').

MAX 185 KT until VH525, then maintain 210 KT
until BOKAK.
Missed apch requires a minimum climb gradient of 4.0% (244' /NM).

Alt Set: hPa
Rwy Elev: 1 hPa

Trans level: 980 hPa or above - FL110
979 hPa or below - by ATC

Trans alt: 9000'

121.6

121.875

122.125

1