



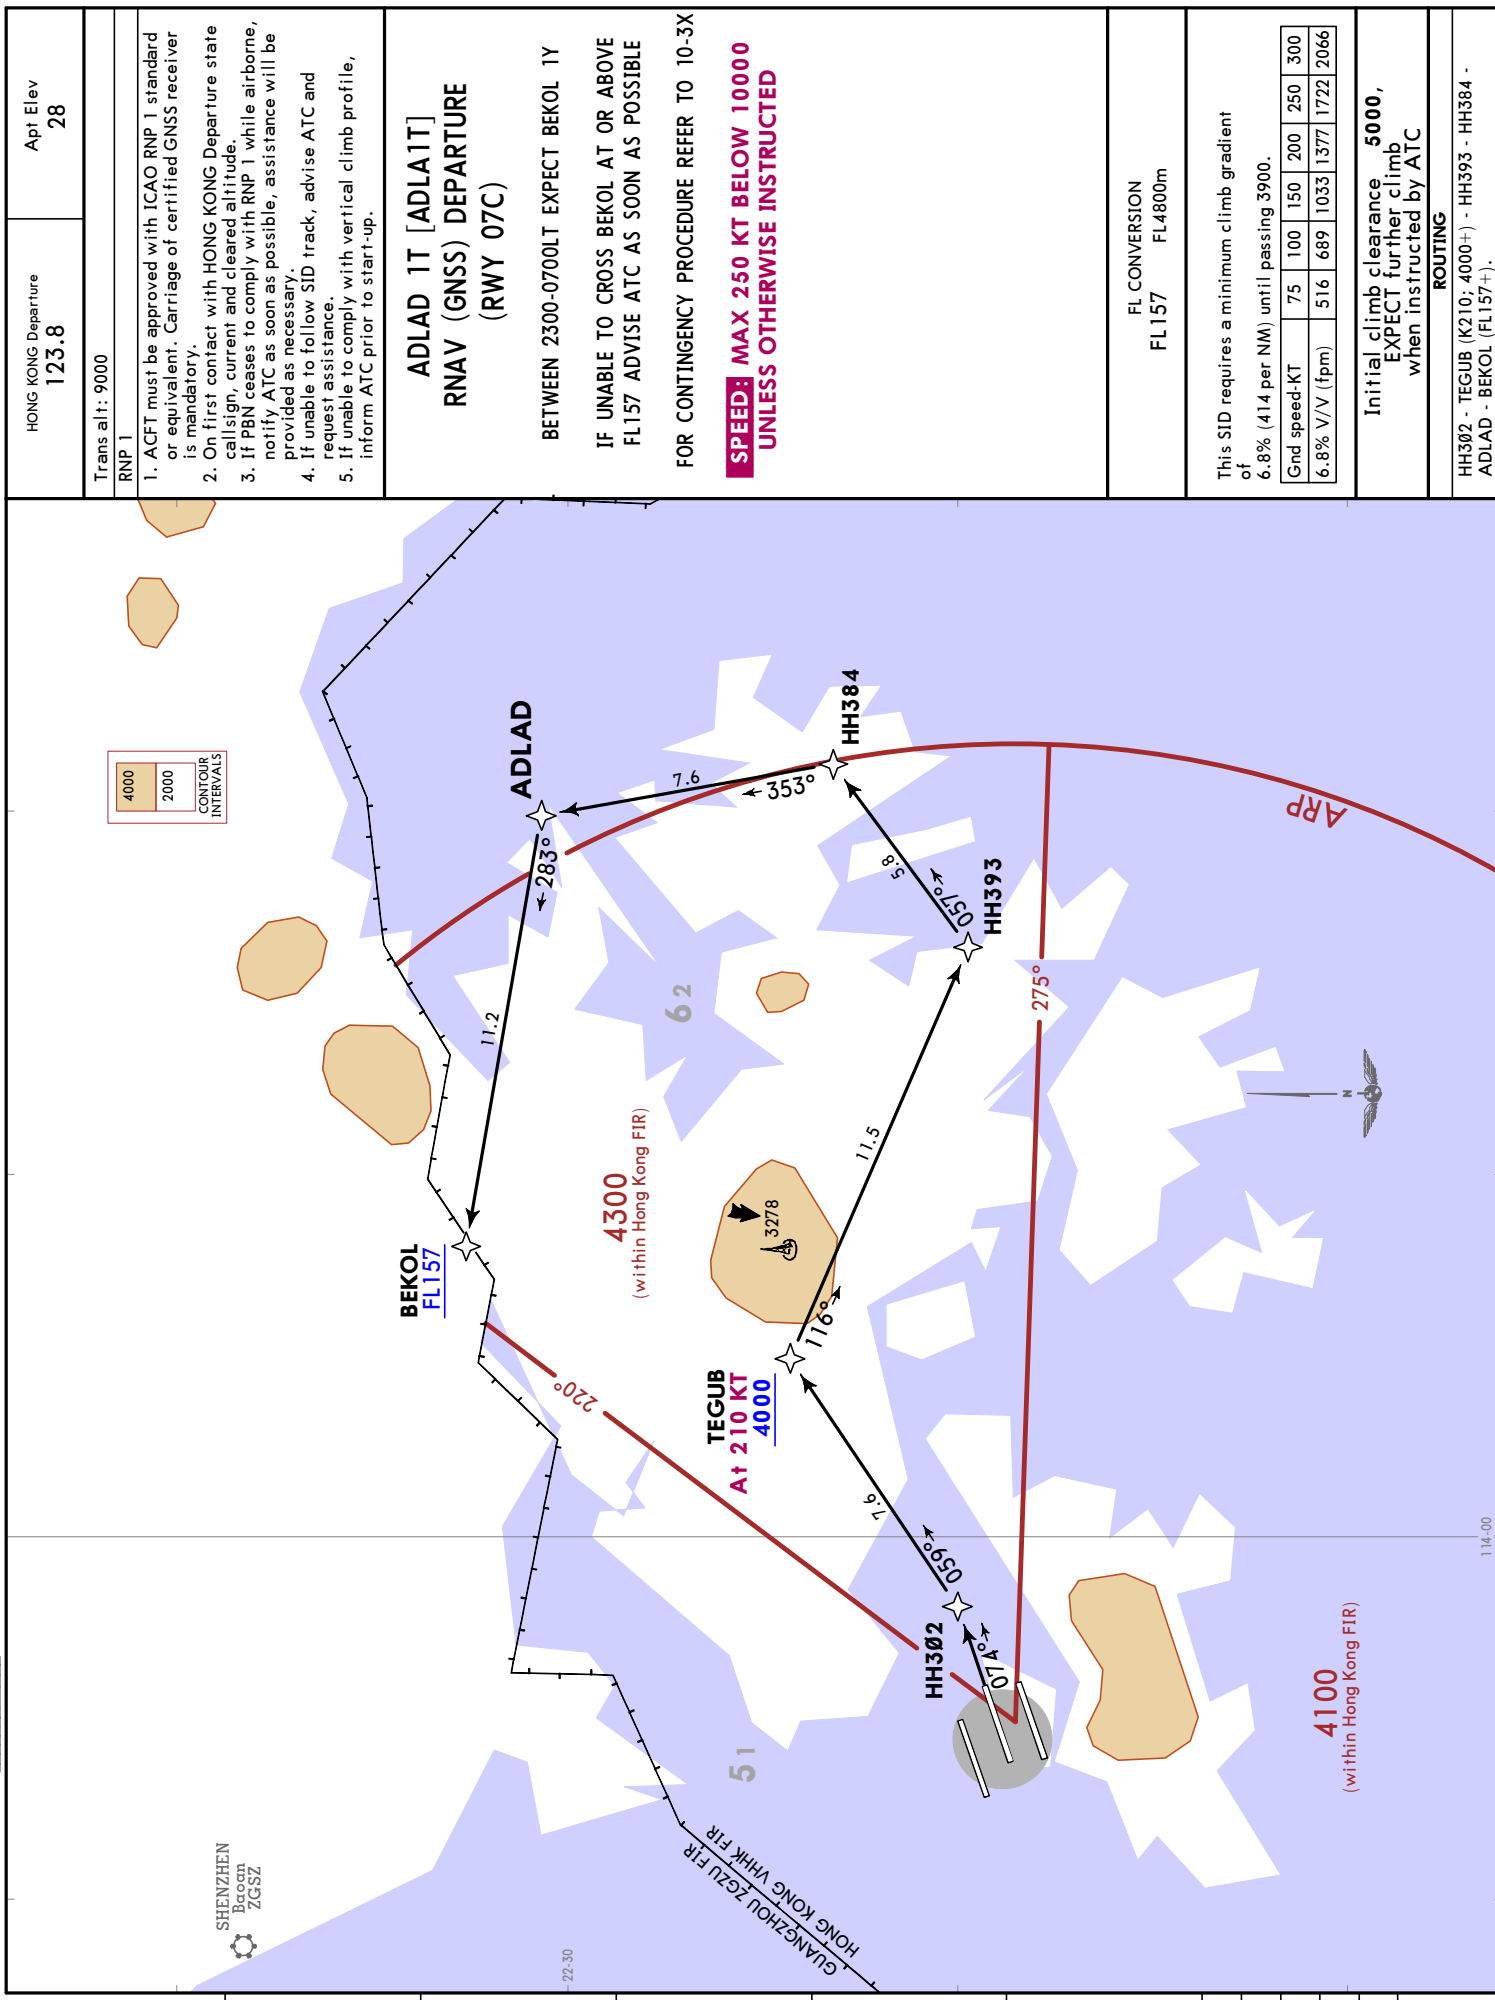

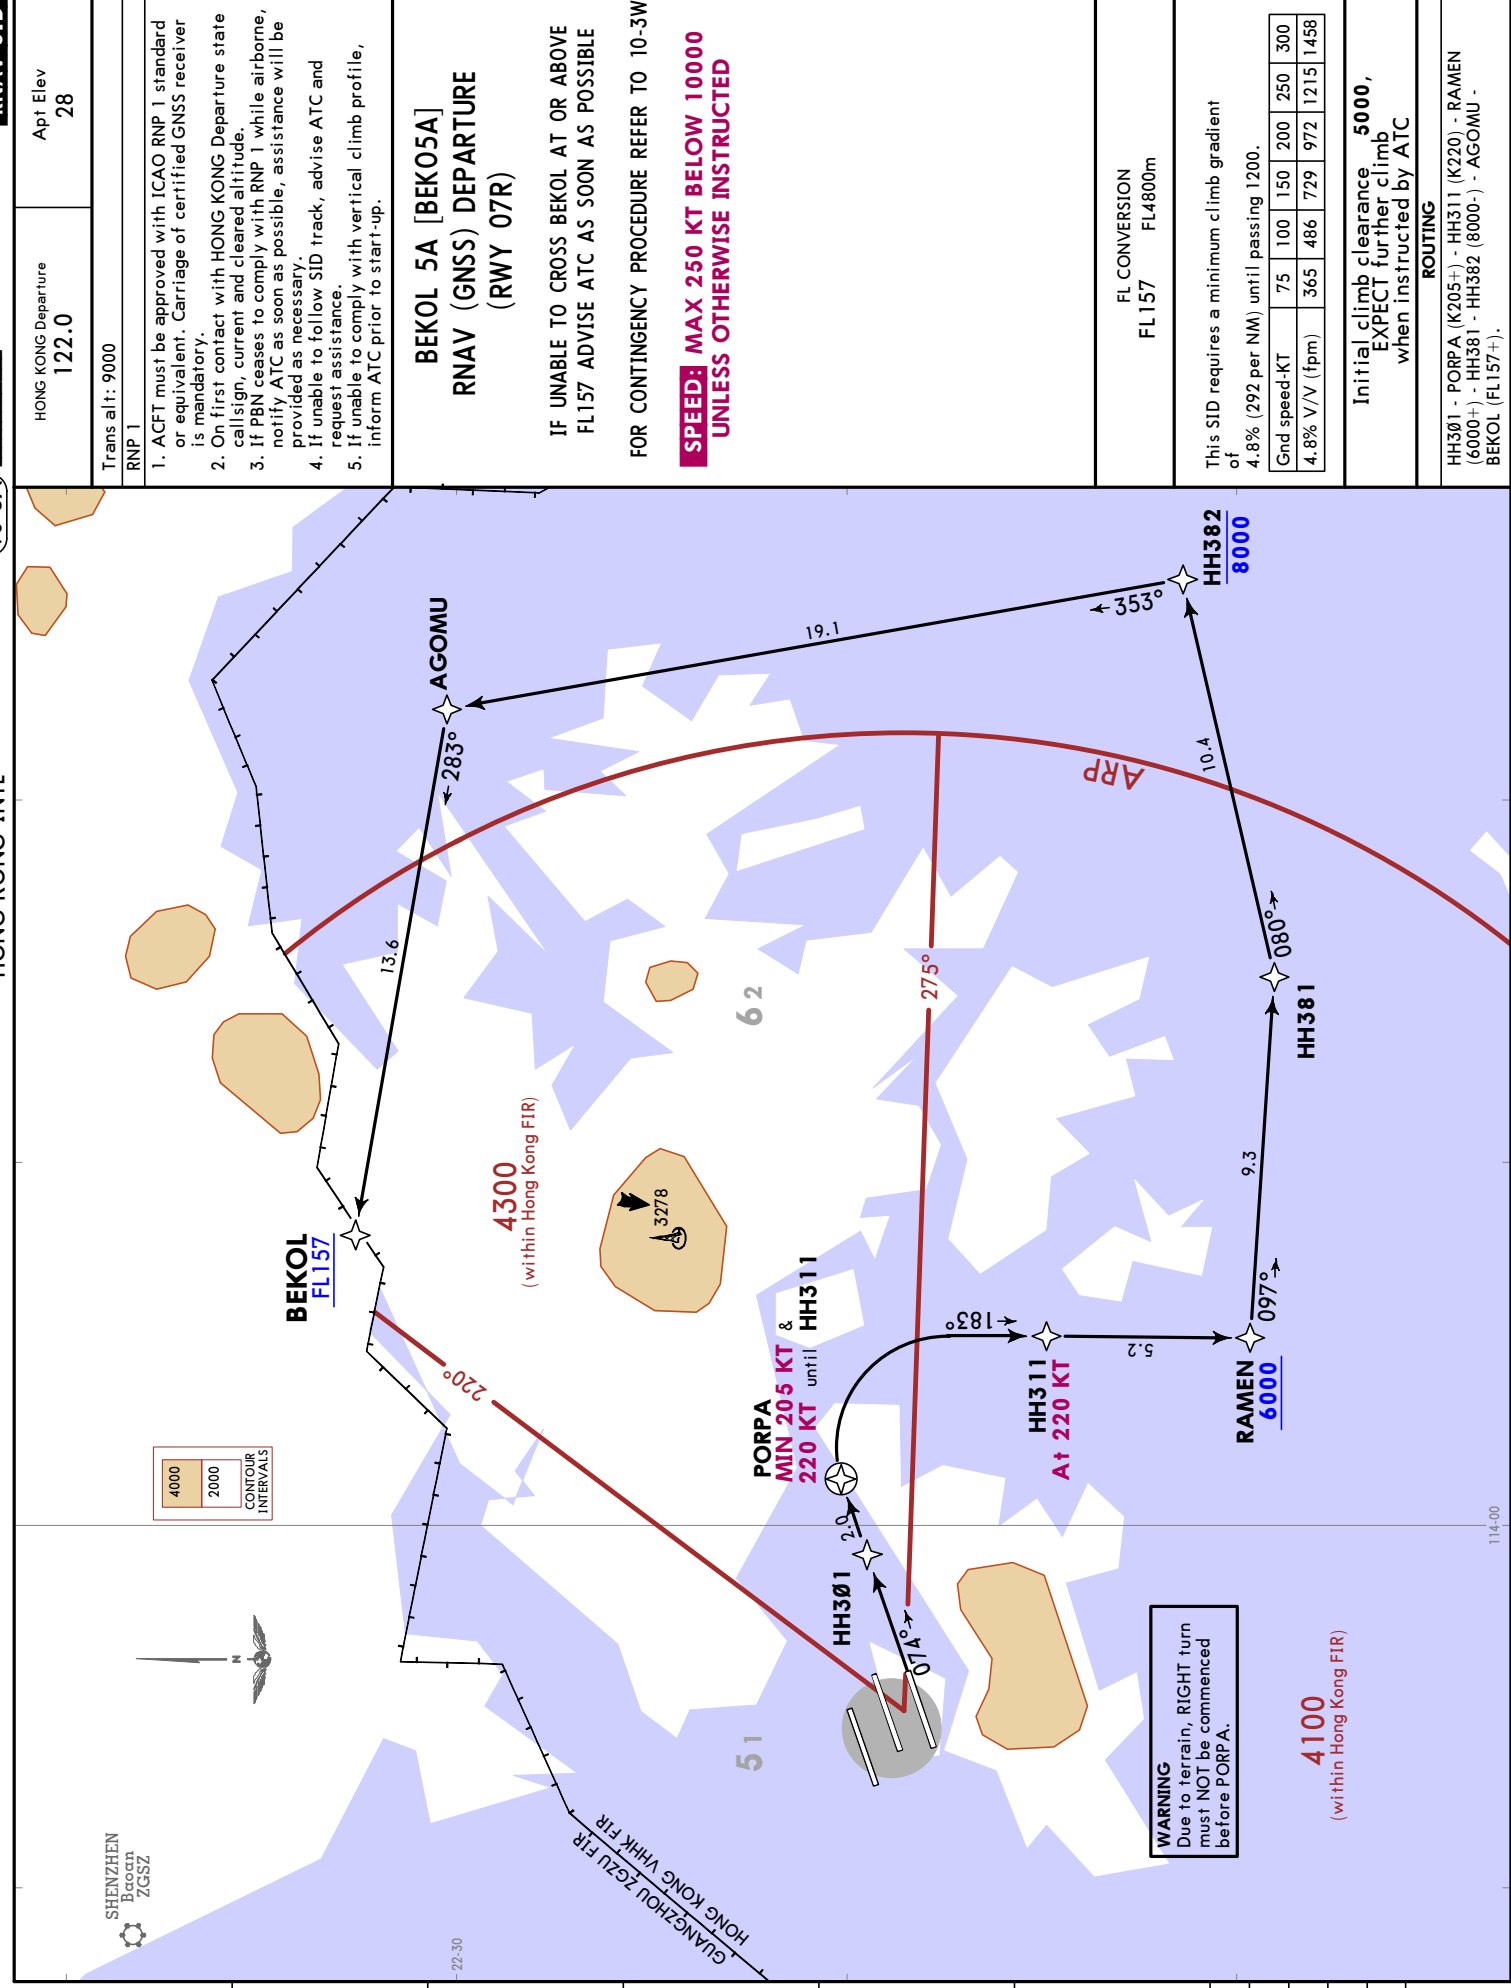


HONG KONG, PR OF CHINA

RNAV SID

VHHH/HKG
HONG KONG INTL

JEPPESSEN
22 NOV 24
Eff 28 Nov

10-3B

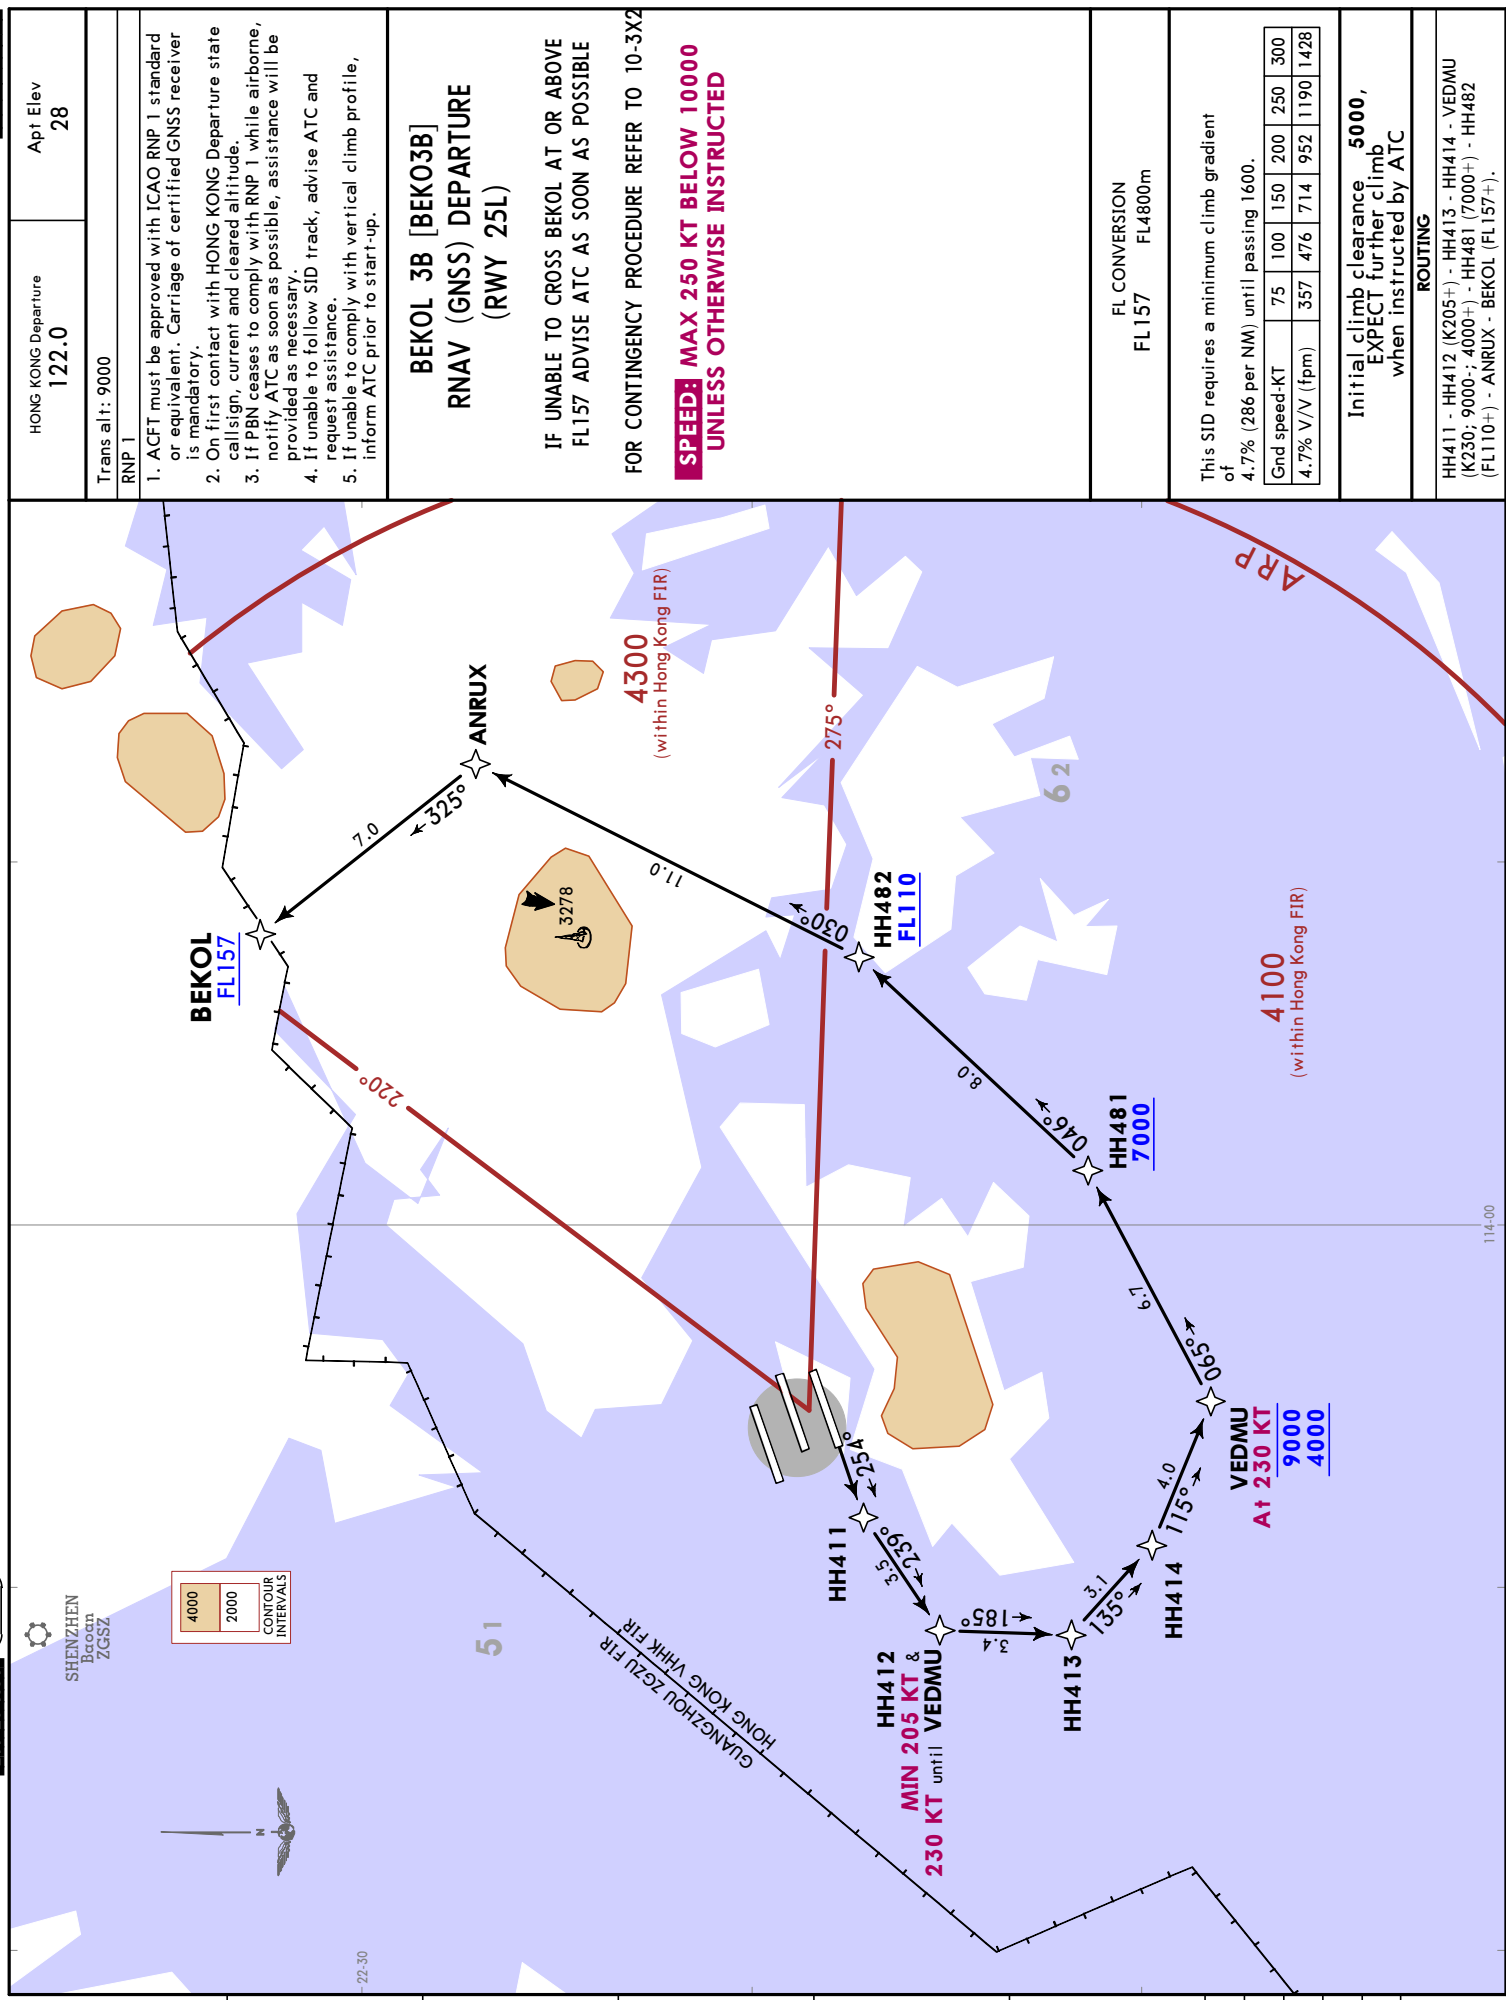

HONG KONG Departure 122.0		Apt Elev 28														
Trans alt: 9000																
RNP 1																
1. ACFT must be approved with ICAO RNP 1 standard or equivalent. Carriage of certified GNSS receiver is mandatory. 2. On first contact with HONG KONG Departure state call sign, current and cleared altitude. 3. If PBN ceases to comply with RNP 1 while airborne, notify ATC as soon as possible, assistance will be provided as necessary. 4. If unable to follow SID track, advise ATC and request assistance. 5. If unable to comply with vertical climb profile, inform ATC prior to start-up.																
BEKOL 3B [BEKO3B] RNAV (GNSS) DEPARTURE (RWY 25L)																
IF UNABLE TO CROSS BEKOL AT OR ABOVE FL157 ADVISE ATC AS SOON AS POSSIBLE FOR CONTINGENCY PROCEDURE REFER TO 10-3X2																
SPEED: MAX 250 KT BELOW 10000 UNLESS OTHERWISE INSTRUCTED																
FL CONVERSION FL 157 FL4800m																
This SID requires a minimum climb gradient of 4.7% (286 per NM) until passing 1600. <table><tr><td>Gnd speed-KT</td><td>75</td><td>100</td><td>150</td><td>200</td><td>250</td><td>300</td></tr><tr><td>4.7% V/V (fpm)</td><td>357</td><td>476</td><td>714</td><td>952</td><td>1190</td><td>1428</td></tr></table>			Gnd speed-KT	75	100	150	200	250	300	4.7% V/V (fpm)	357	476	714	952	1190	1428
Gnd speed-KT	75	100	150	200	250	300										
4.7% V/V (fpm)	357	476	714	952	1190	1428										
Initial climb clearance 5000, EXPECT further climb when instructed by ATC																
ROUTING																
HH411 - HH412 (K205+) - HH413 - HH414 - VEDMU (K230; 9000+; 4000+) - HH481 (7000+) - HH482 (FL110+) - ANRUX - BEKOL (FL157+).																

HONG KONG Departure	Apt Elev
123.8	28
Trans alt: 9000	
RNP 1	
1. ACFT must be approved with ICAO RNP 1 standard or equivalent. Carriage of certified GNSS receiver is mandatory.	
2. On first contact with HONG KONG Departure state call sign, current and cleared altitude.	
3. If PBN ceases to comply with RNP 1 while airborne, notify ATC as soon as possible, assistance will be provided as necessary.	
4. If unable to follow SID track, advise ATC and request assistance.	
5. If unable to comply with vertical climb profile, inform ATC prior to start-up.	

BEKOL 1C [BEKOL1C]
RNAV (GNSS) DEPARTURE
(RWY 07C)

IF UNABLE TO CROSS BEKOL AT OR ABOVE FL157 ADVISE ATC AS SOON AS POSSIBLE

FOR CONTINGENCY PROCEDURE REFER TO 10-3X

SPEED: MAX 250 KT BELOW 10000
UNLESS OTHERWISE INSTRUCTED


FL CONVERSION
FL157 FL4800m

This SID requires a minimum climb gradient of 3.8% (231 per NM) until passing 1300.	
Grd speed-KT	75 100 150 200 250 300
3.8% V/V (fpm)	289 385 577 770 962 1154

Initial climb clearance **5000**,
EXPECT further climb
when instructed by ATC

ROUTING

HH302 - ROVER (K205+) - HH322 (K220) - RAMEN (6000+) - HH381 - HH382 (8000-) - AGOMU - BEKOL (FL157+).

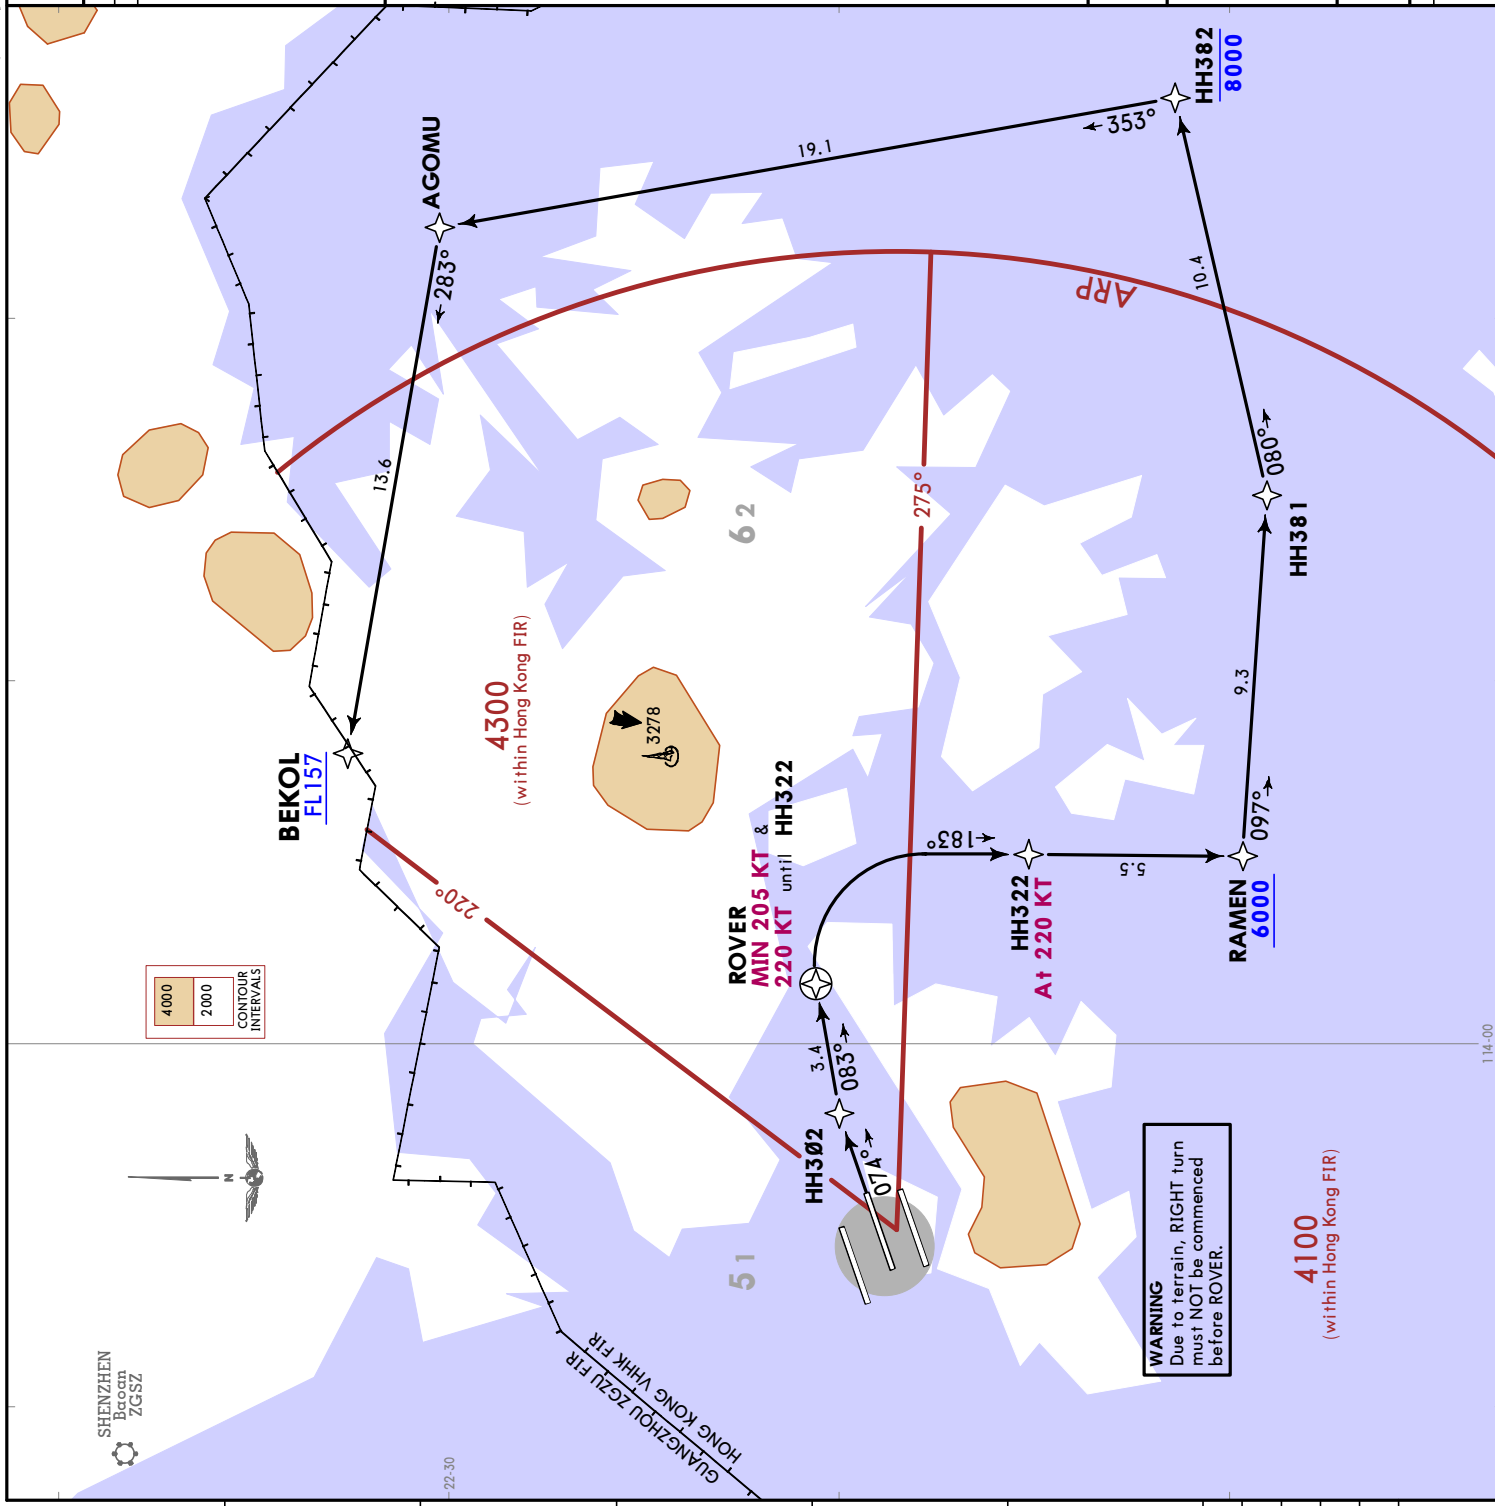











HONG KONG, PR OF CHINA

VHHH/HKG
HONG KONG INTL
22 NOV 24
JEPPESSEN
Eff 28 Nov 10-3E3

RNAV SID

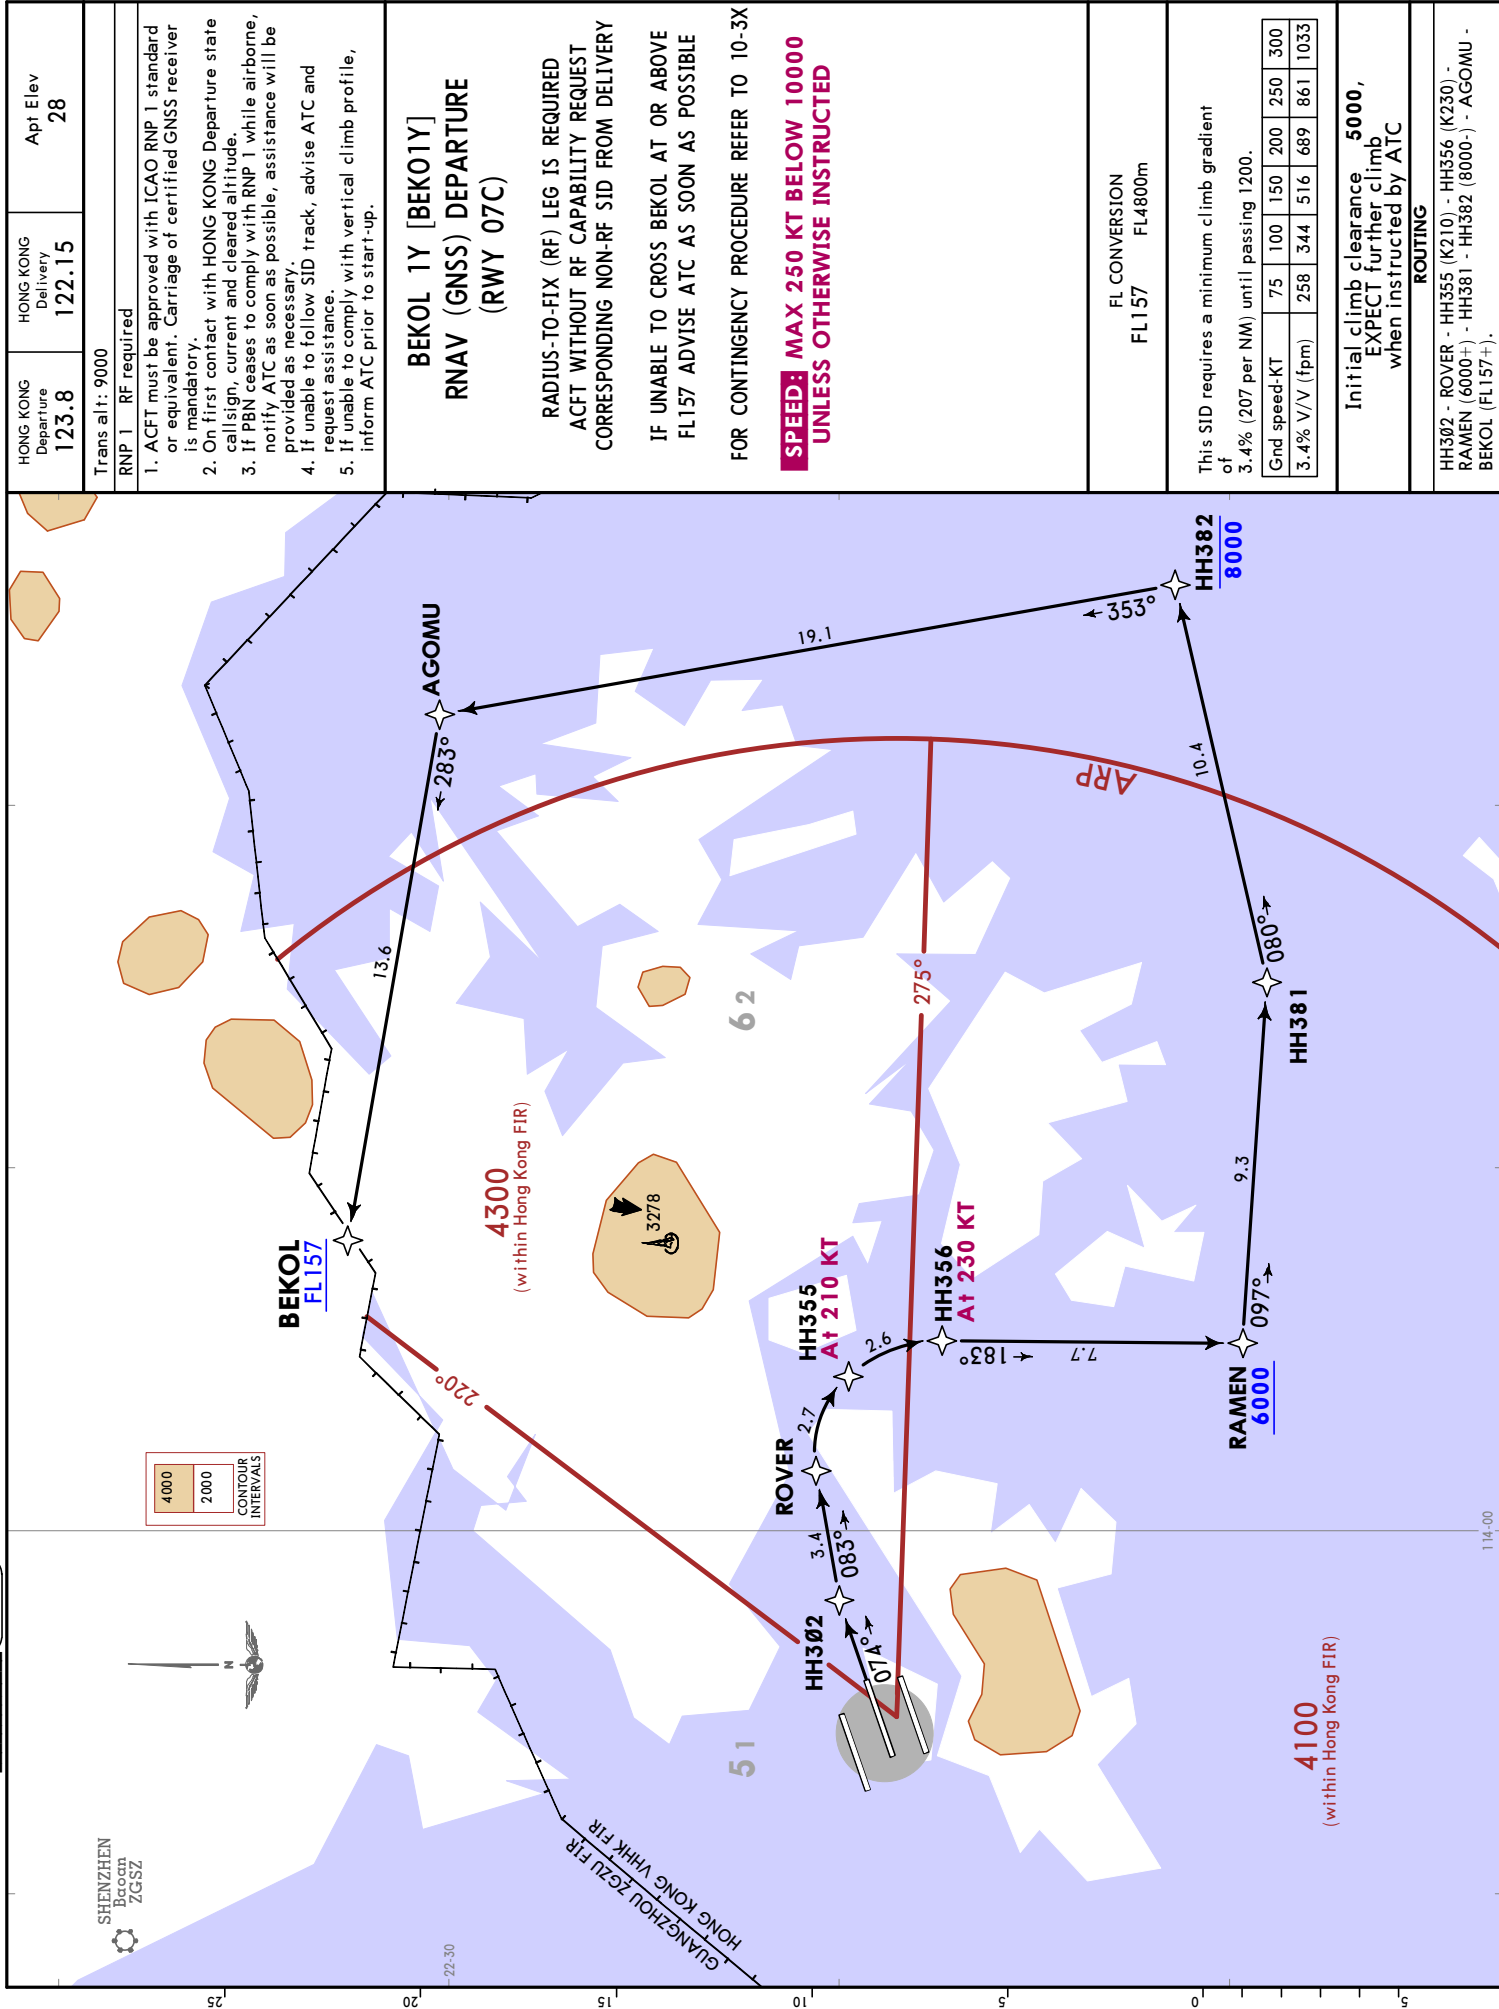



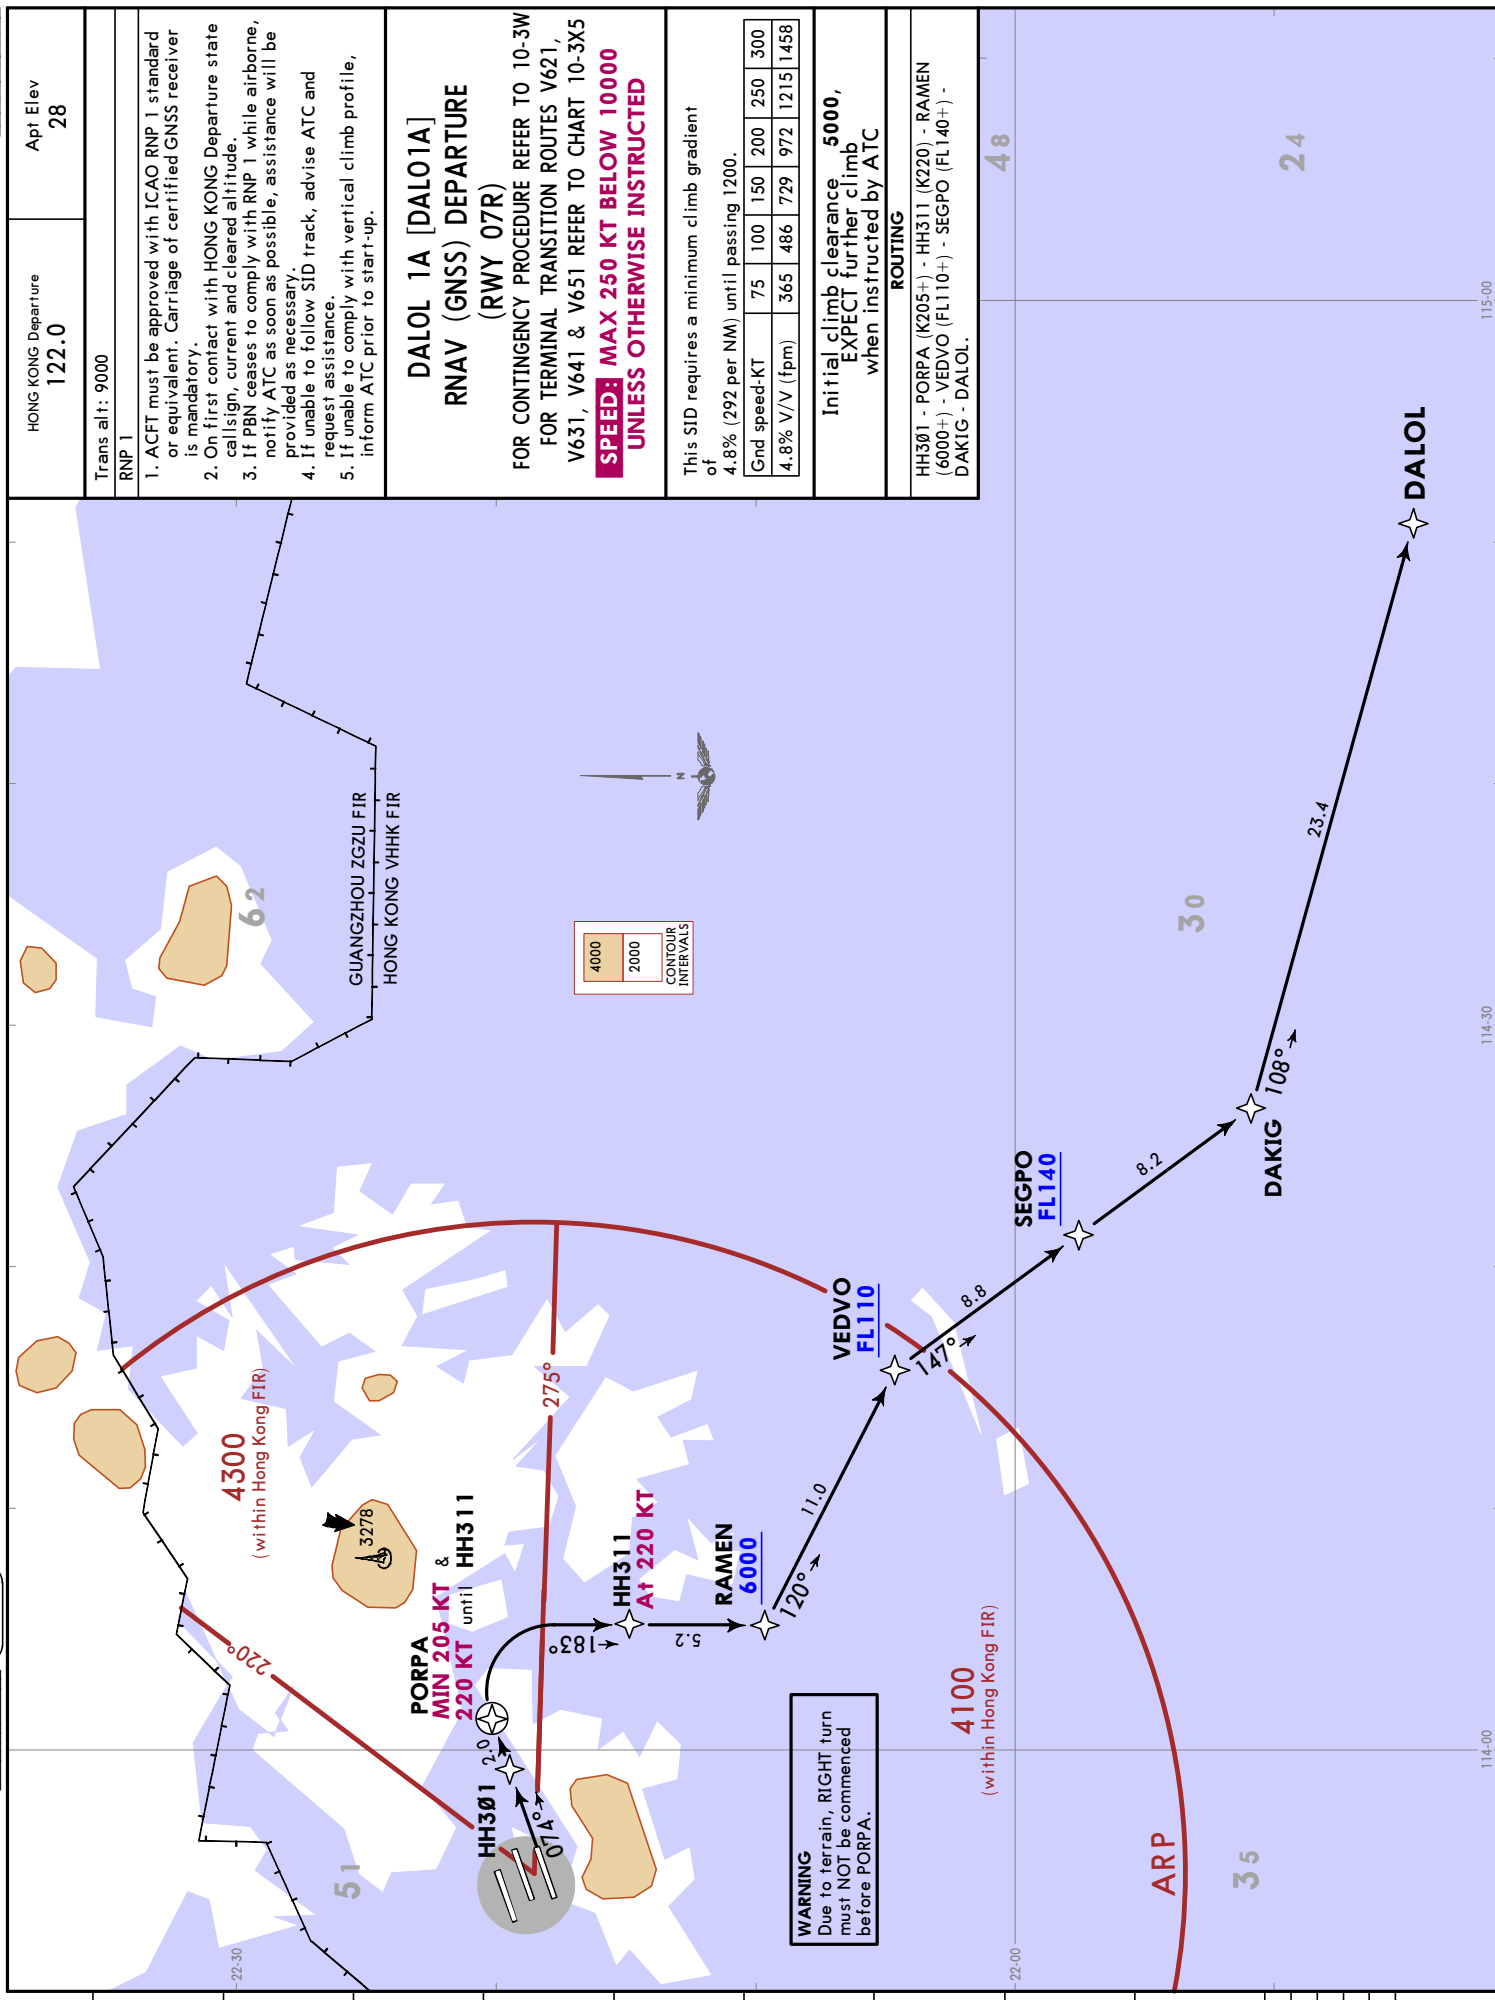

HONG KONG Departure
122.0

Apt Elev
28

Trans alt: 9000

RNP 1

1. ACFT must be approved with ICAO RNP 1 standard or equivalent. Carriage of certified GNSS receiver is mandatory.

2. On first contact with HONG KONG Departure state call sign, current and cleared altitude.

3. If PBN ceases to comply with RNP 1 while airborne, notify ATC as soon as possible, assistance will be provided as necessary.

4. If unable to follow SID track, advise ATC and request assistance.

5. If unable to comply with vertical climb profile, inform ATC prior to start-up.

DALOL 1A [DAL01A]

RNAV (GNSS) DEPARTURE
(RWY 07R)

FOR CONTINGENCY PROCEDURE REFER TO 10-3W FOR TERMINAL TRANSITION ROUTES V621, V631, V641 & V651 REFER TO CHART 10-3X5

SPEED: MAX 250 KT BELOW 10000 UNLESS OTHERWISE INSTRUCTED

This SID requires a minimum climb gradient of 4.8% (292 per NM) until passing 1200.


Grnd speed-KT	75	100	150	200	250	300
4.8% V/V (fpm)	365	486	729	972	1215	1458


Initial climb clearance **5000**, EXPECT further climb when instructed by ATC


ROUTING

HH301 - PORPA (K205+) - HH311 (K220) - RAMEN (6000+) - VEDVO (FL110+) - SEGPO (FL140+) - DAKIG - DALOL.



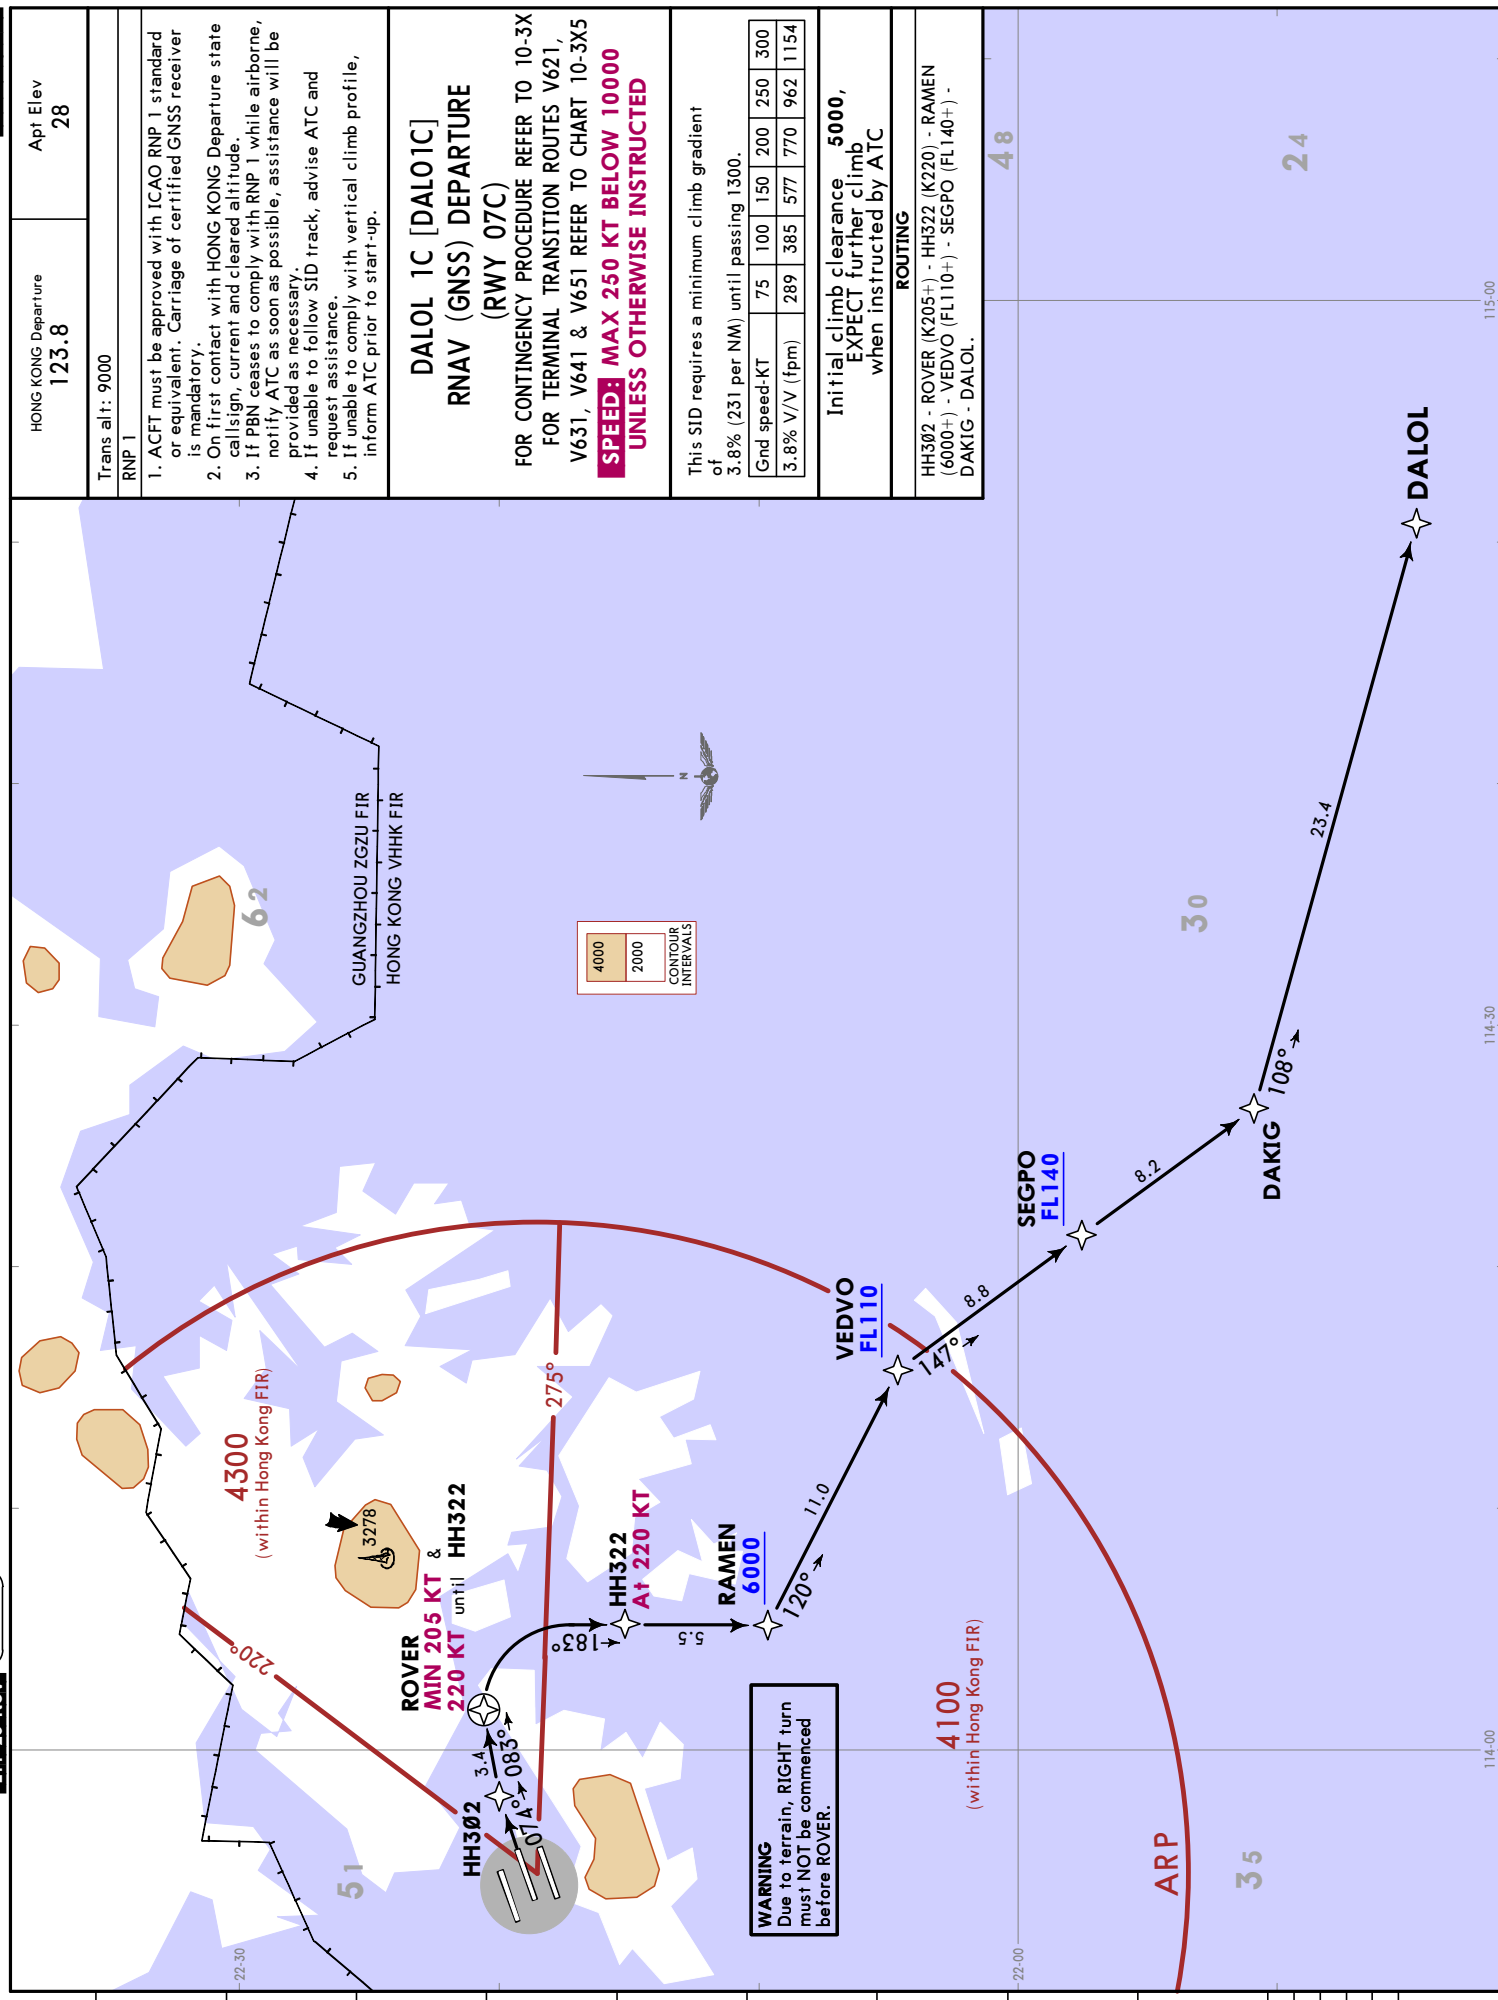

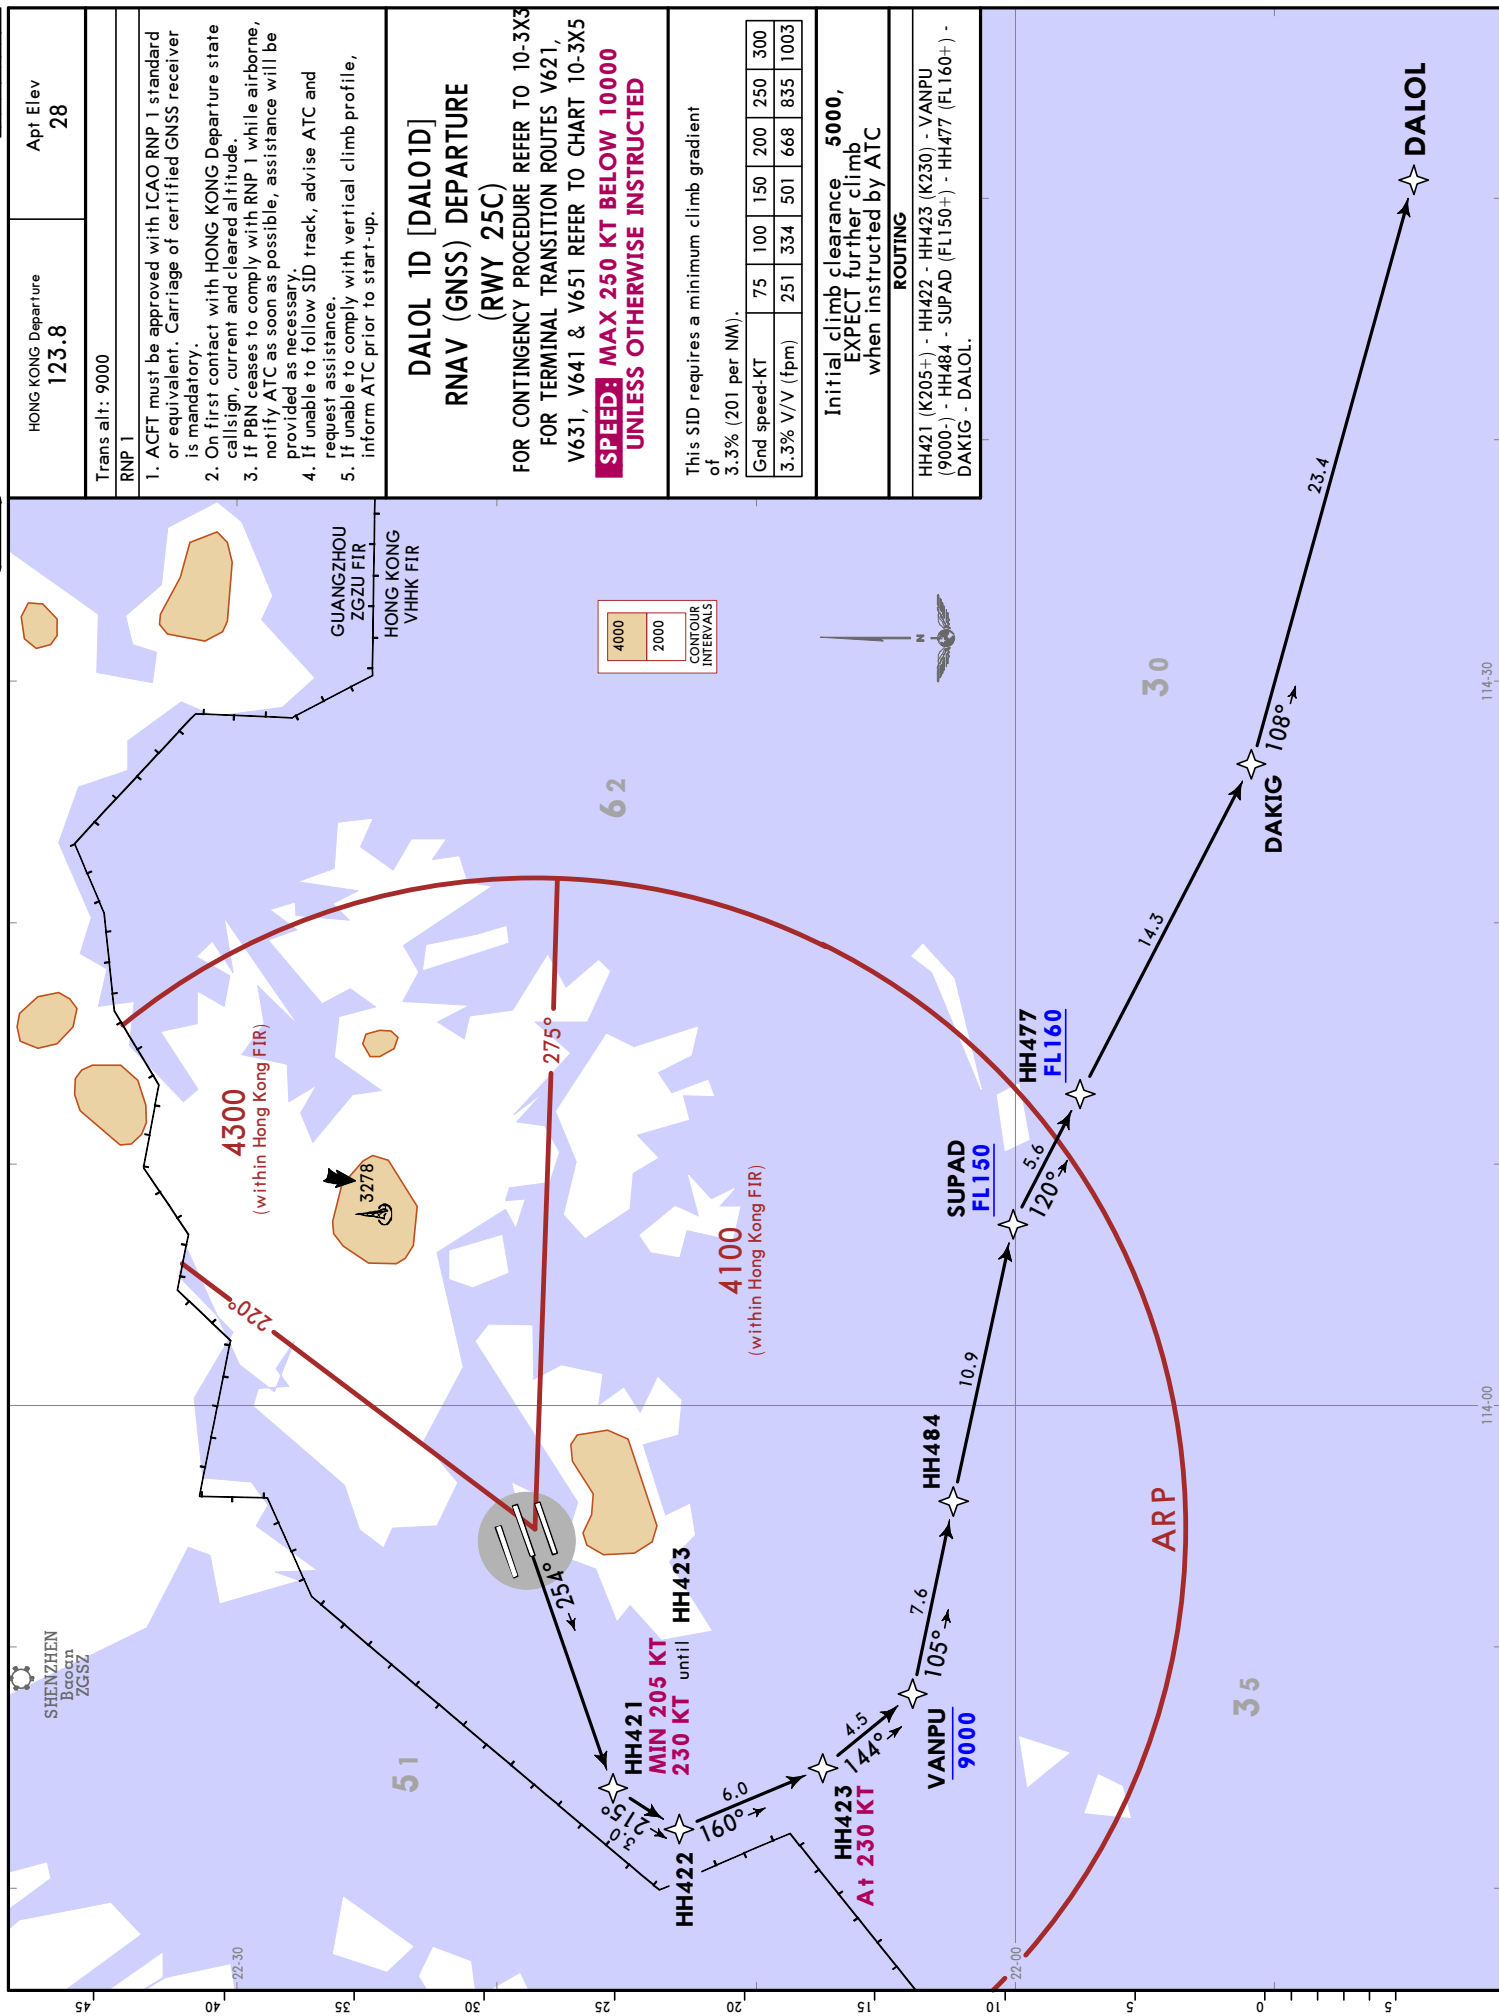

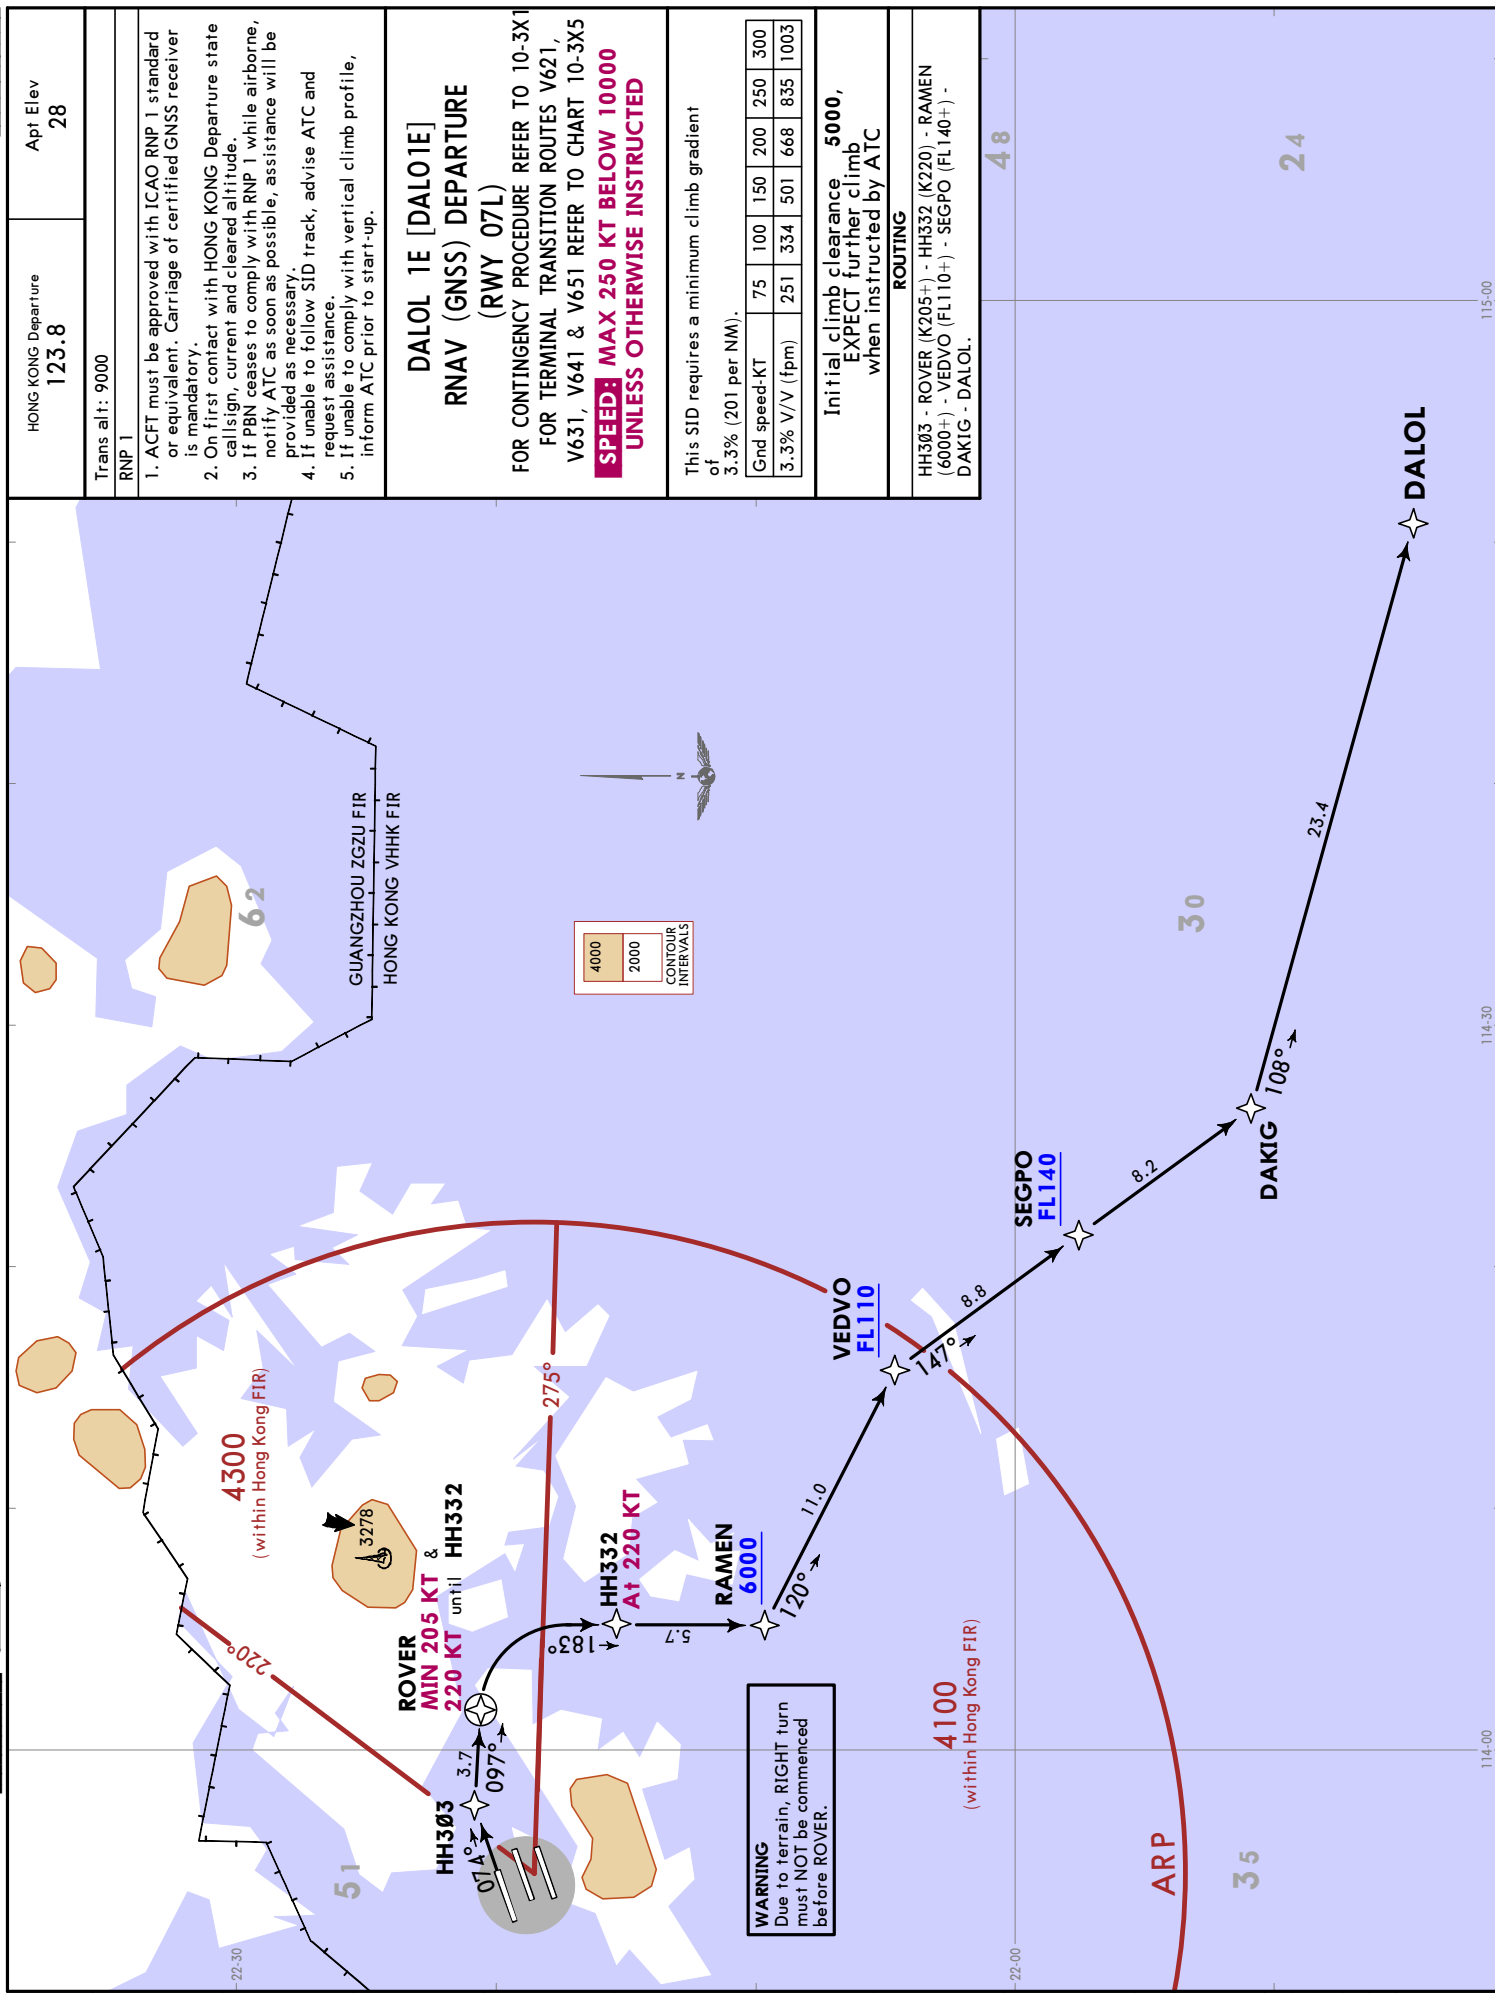

HONG KONG, PR OF CHINA

VHHH/HKG
HONG KONG INTL
JEPPESSEN
22 NOV 24
Eff 28 Nov
10-3L1

RNAV SID

HONG KONG Departure 122.0	HONG KONG Delivery 122.15	Apt Elev 28
Trans alt: 9000		
RNP 1 RF required		
1. ACFT must be approved with ICAO RNP 1 standard or equivalent. Carriage of certified GNSS receiver is mandatory.		
2. On first contact with HONG KONG Departure state call sign, current and cleared altitude.		
3. If PBN ceases to comply with RNP 1 while airborne, notify ATC as soon as possible, assistance will be provided as necessary.		
4. If unable to follow SID track, advise ATC and request assistance.		
5. If unable to comply with vertical climb profile, inform ATC prior to start-up.		


DALOL 1X [DAL01X]
RNAV (GNSS) DEPARTURE
(RWY 07R)

RADIUS-TO-FIX (RF) LEG IS REQUIRED
ACFT WITHOUT RF CAPABILITY REQUEST
CORRESPONDING NON-RF SID FROM DELIVERY

FOR CONTINGENCY PROCEDURE REFER TO 10-3W
FOR TERMINAL TRANSITION ROUTES V621,
V631, V641 & V651 REFER TO CHART 10-3X5

**SPEED: MAX 250 KT BELOW 10000
UNLESS OTHERWISE INSTRUCTED**

This SID requires a minimum climb gradient of 4.8% (292 per NM) until passing 1200.	
Grd speed-KT	75 100 150 200 250 300
4.8% V/V (fpm)	365 486 729 972 1215 1458
Initial climb clearance 5000, EXPECT further climb when instructed by ATC	
ROUTING	
HH301 - PORPA - HH341 (K210) - HH342 (K230) - RAMEN (6000+) - VEDVO (FL110+) - SEGPO (FL140+) - DAKIG - DALOL.	

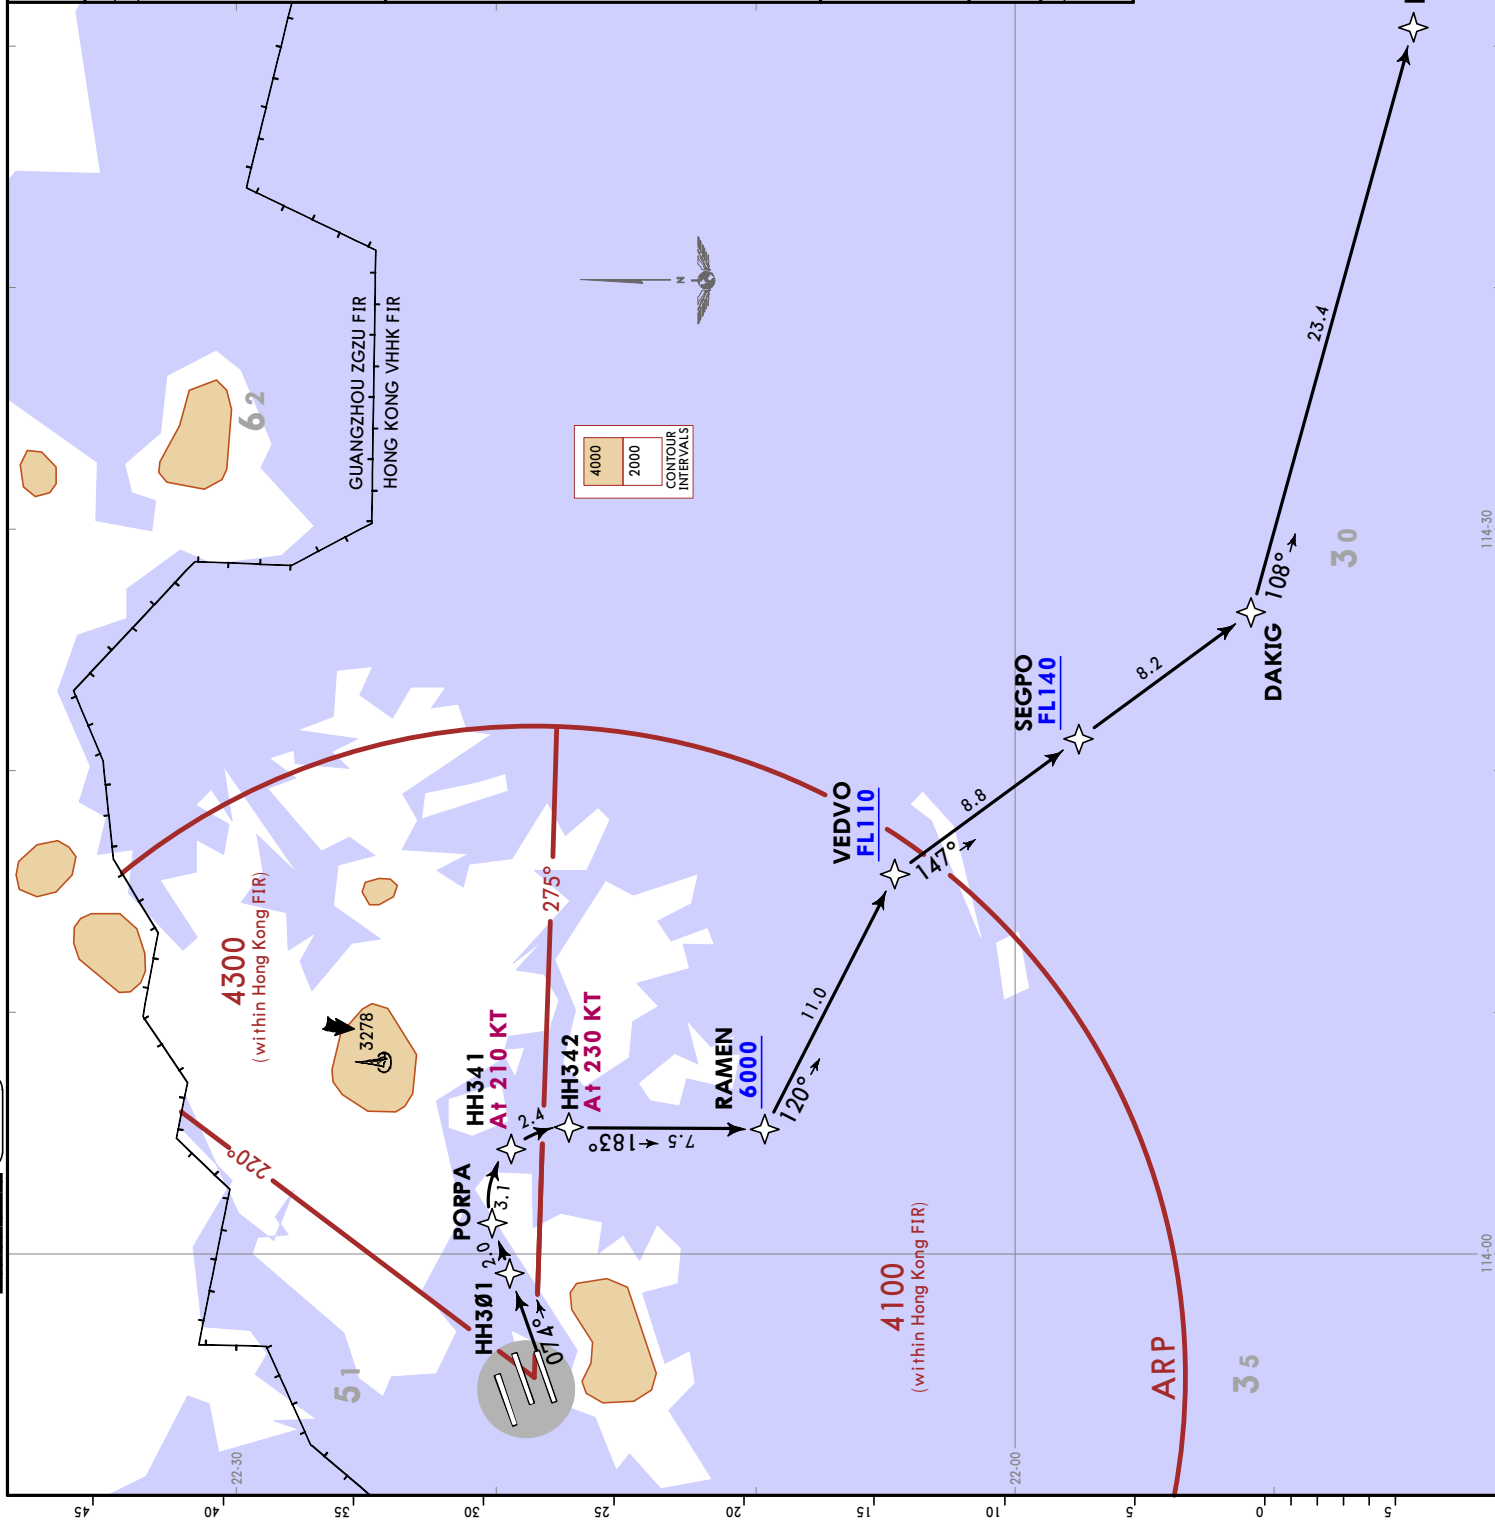

HONG KONG
Departure
123.8

HONG KONG
Delivery
122.15

Apt Elev
28

Trans alt: 9000

RNP 1 RF required

1. ACFT must be approved with ICAO RNP 1 standard or equivalent. Carriage of certified GNSS receiver is mandatory.

2. On first contact with HONG KONG Departure state call sign, current and cleared altitude.

3. If PBN ceases to comply with RNP 1 while airborne, notify ATC as soon as possible, assistance will be provided as necessary.

4. If unable to follow SID track, advise ATC and request assistance.

5. If unable to comply with vertical climb profile, inform ATC prior to start-up.

DALOL 1Y [DAL01Y]

RNAV (GNSS) DEPARTURE

(RWY 07C)

RADIUS-TO-FIX (RF) LEG IS REQUIRED

ACFT WITHOUT RF CAPABILITY REQUEST

CORRESPONDING NON-RF SID FROM DELIVERY

FOR CONTINGENCY PROCEDURE REFER TO 10-3X

FOR TERMINAL TRANSITION ROUTES V621

V631, V641 & V651 REFER TO CHART 10-3X5

SPEED: MAX 250 KT BELOW 10000

UNLESS OTHERWISE INSTRUCTED


This SID requires a minimum climb gradient of 3.4% (207 per NM) until leaving 1200.


Gnd speed-KT	75	100	150	200	250	300
3.4% V/V (fpm)	258	344	516	689	861	1033

Initial climb clearance 5000, EXPECT further climb when instructed by ATC

ROUTING


HH302 - ROVER - HH355 (K210) - HH356 (K230) - RAMEN (6000+) - VEDVO (FL110+) - SEGPO (FL140+) - DAKIG - DALOL.

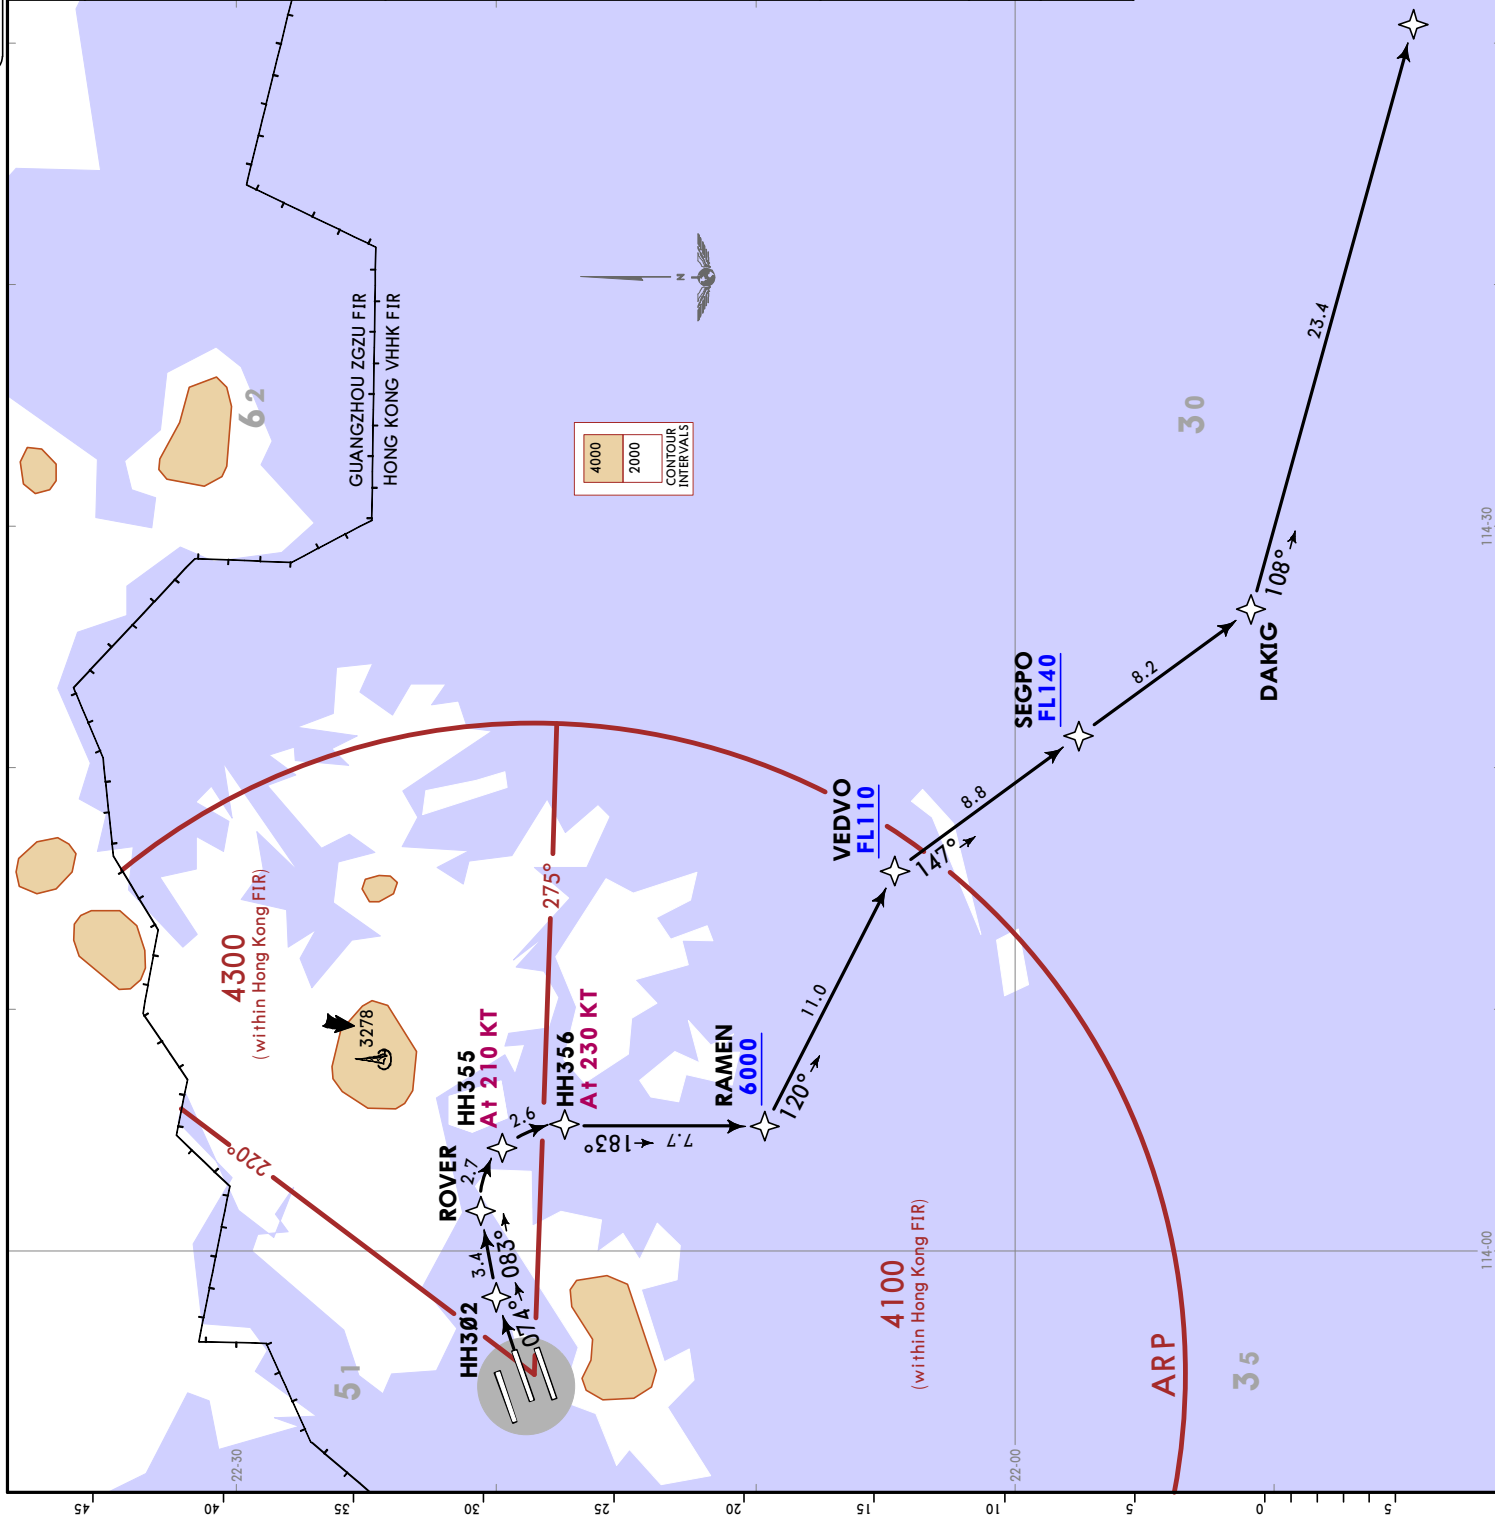

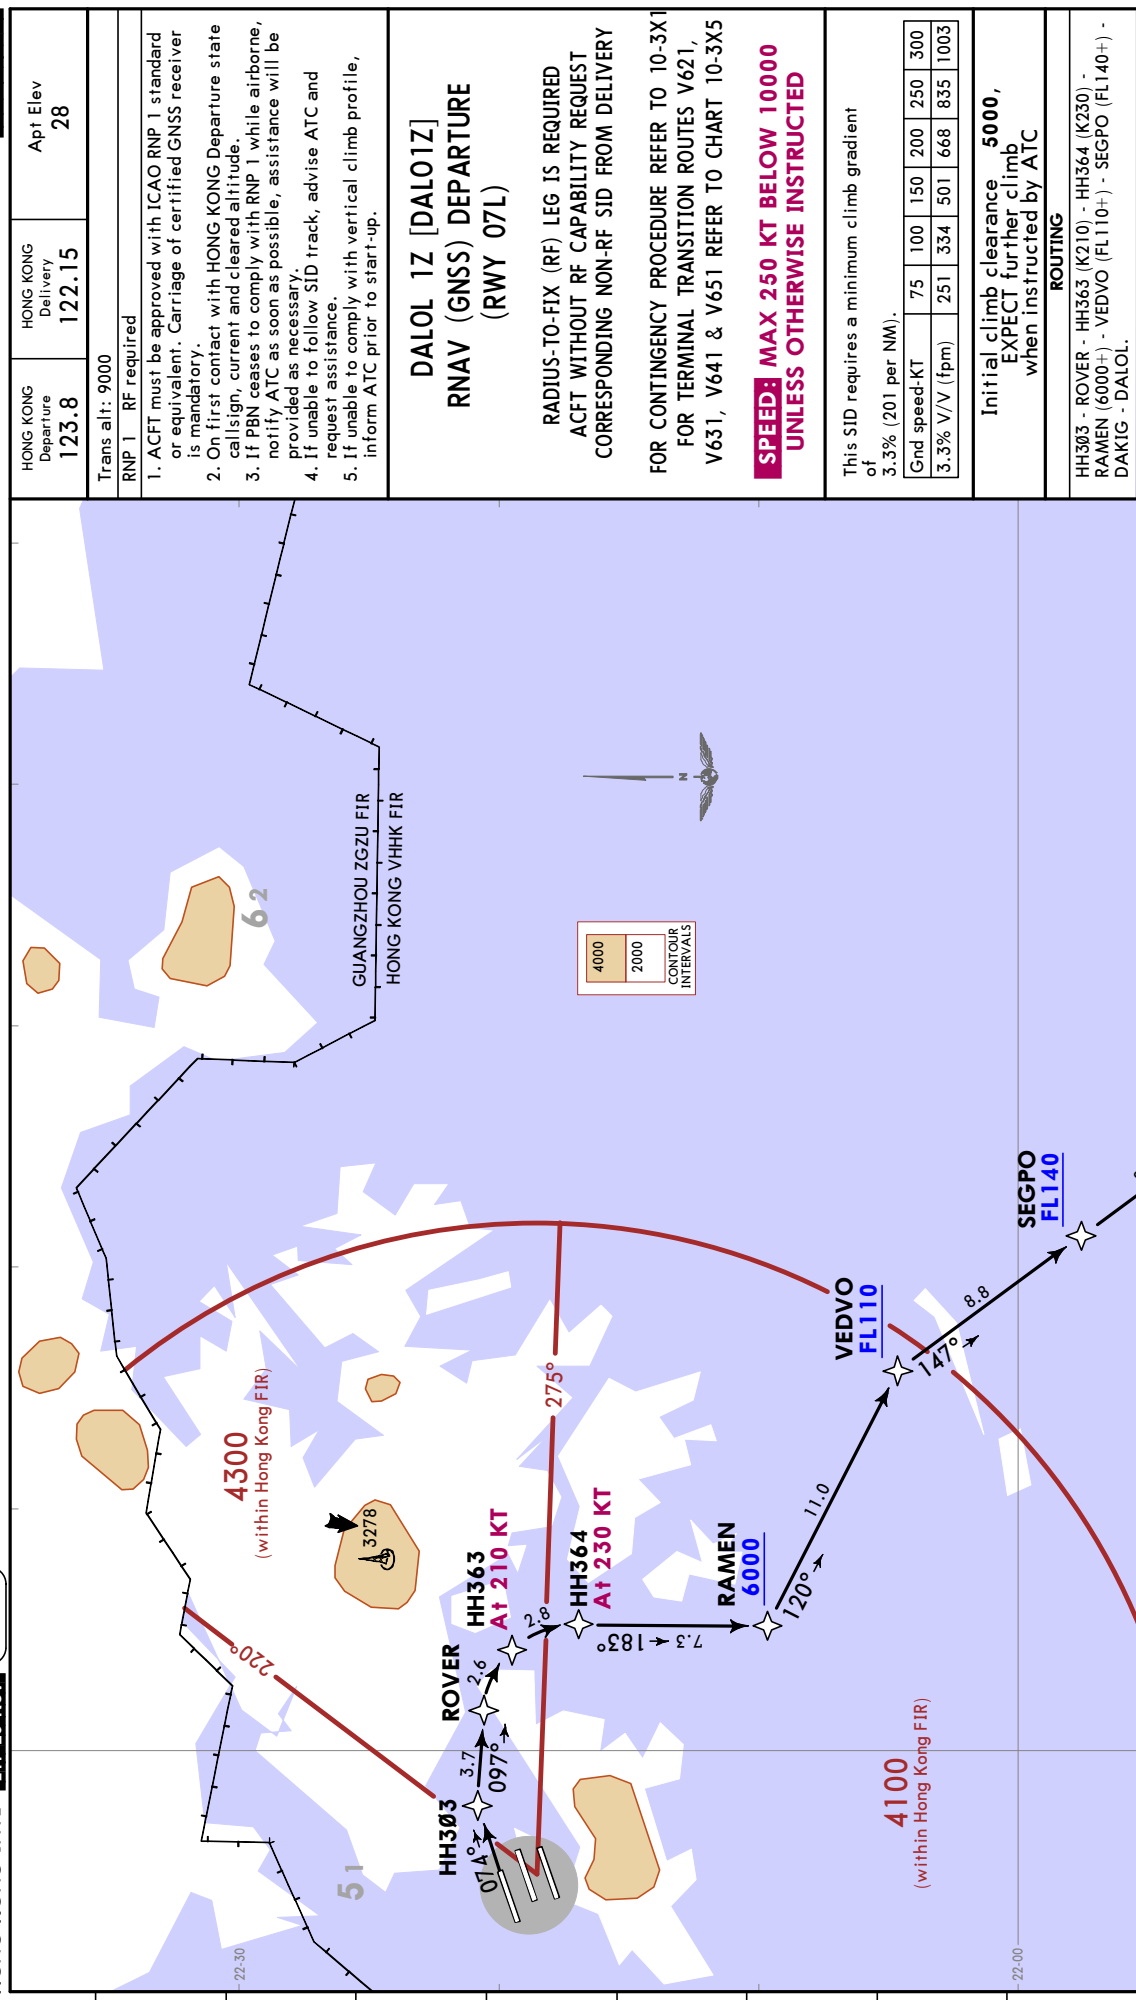




CHANGES: New procedure at this airport

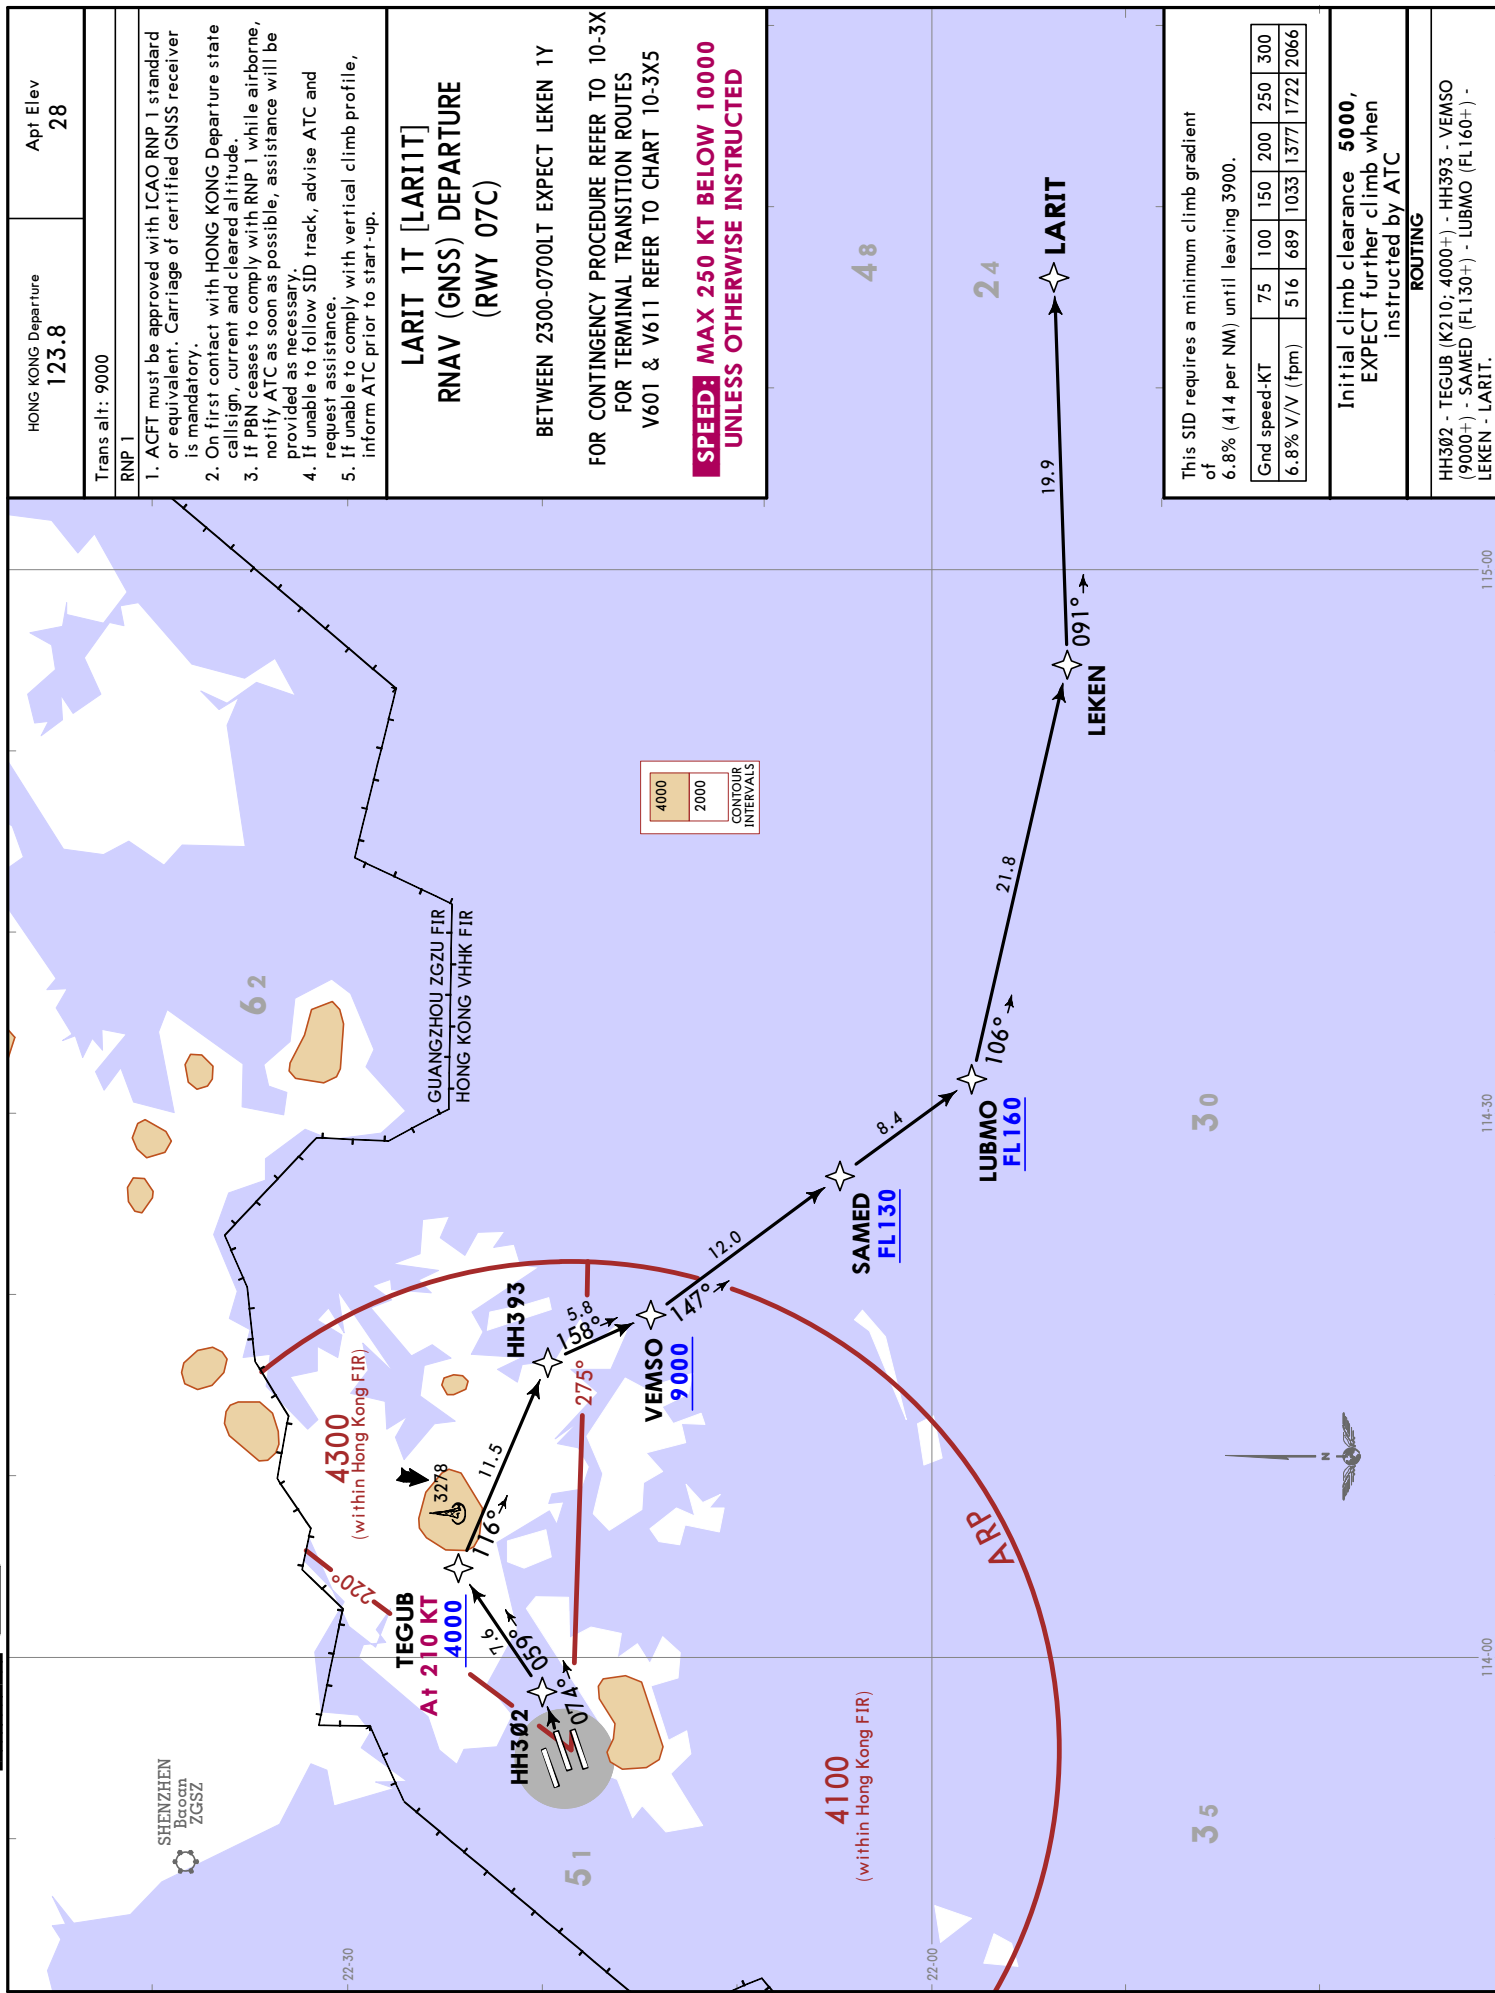





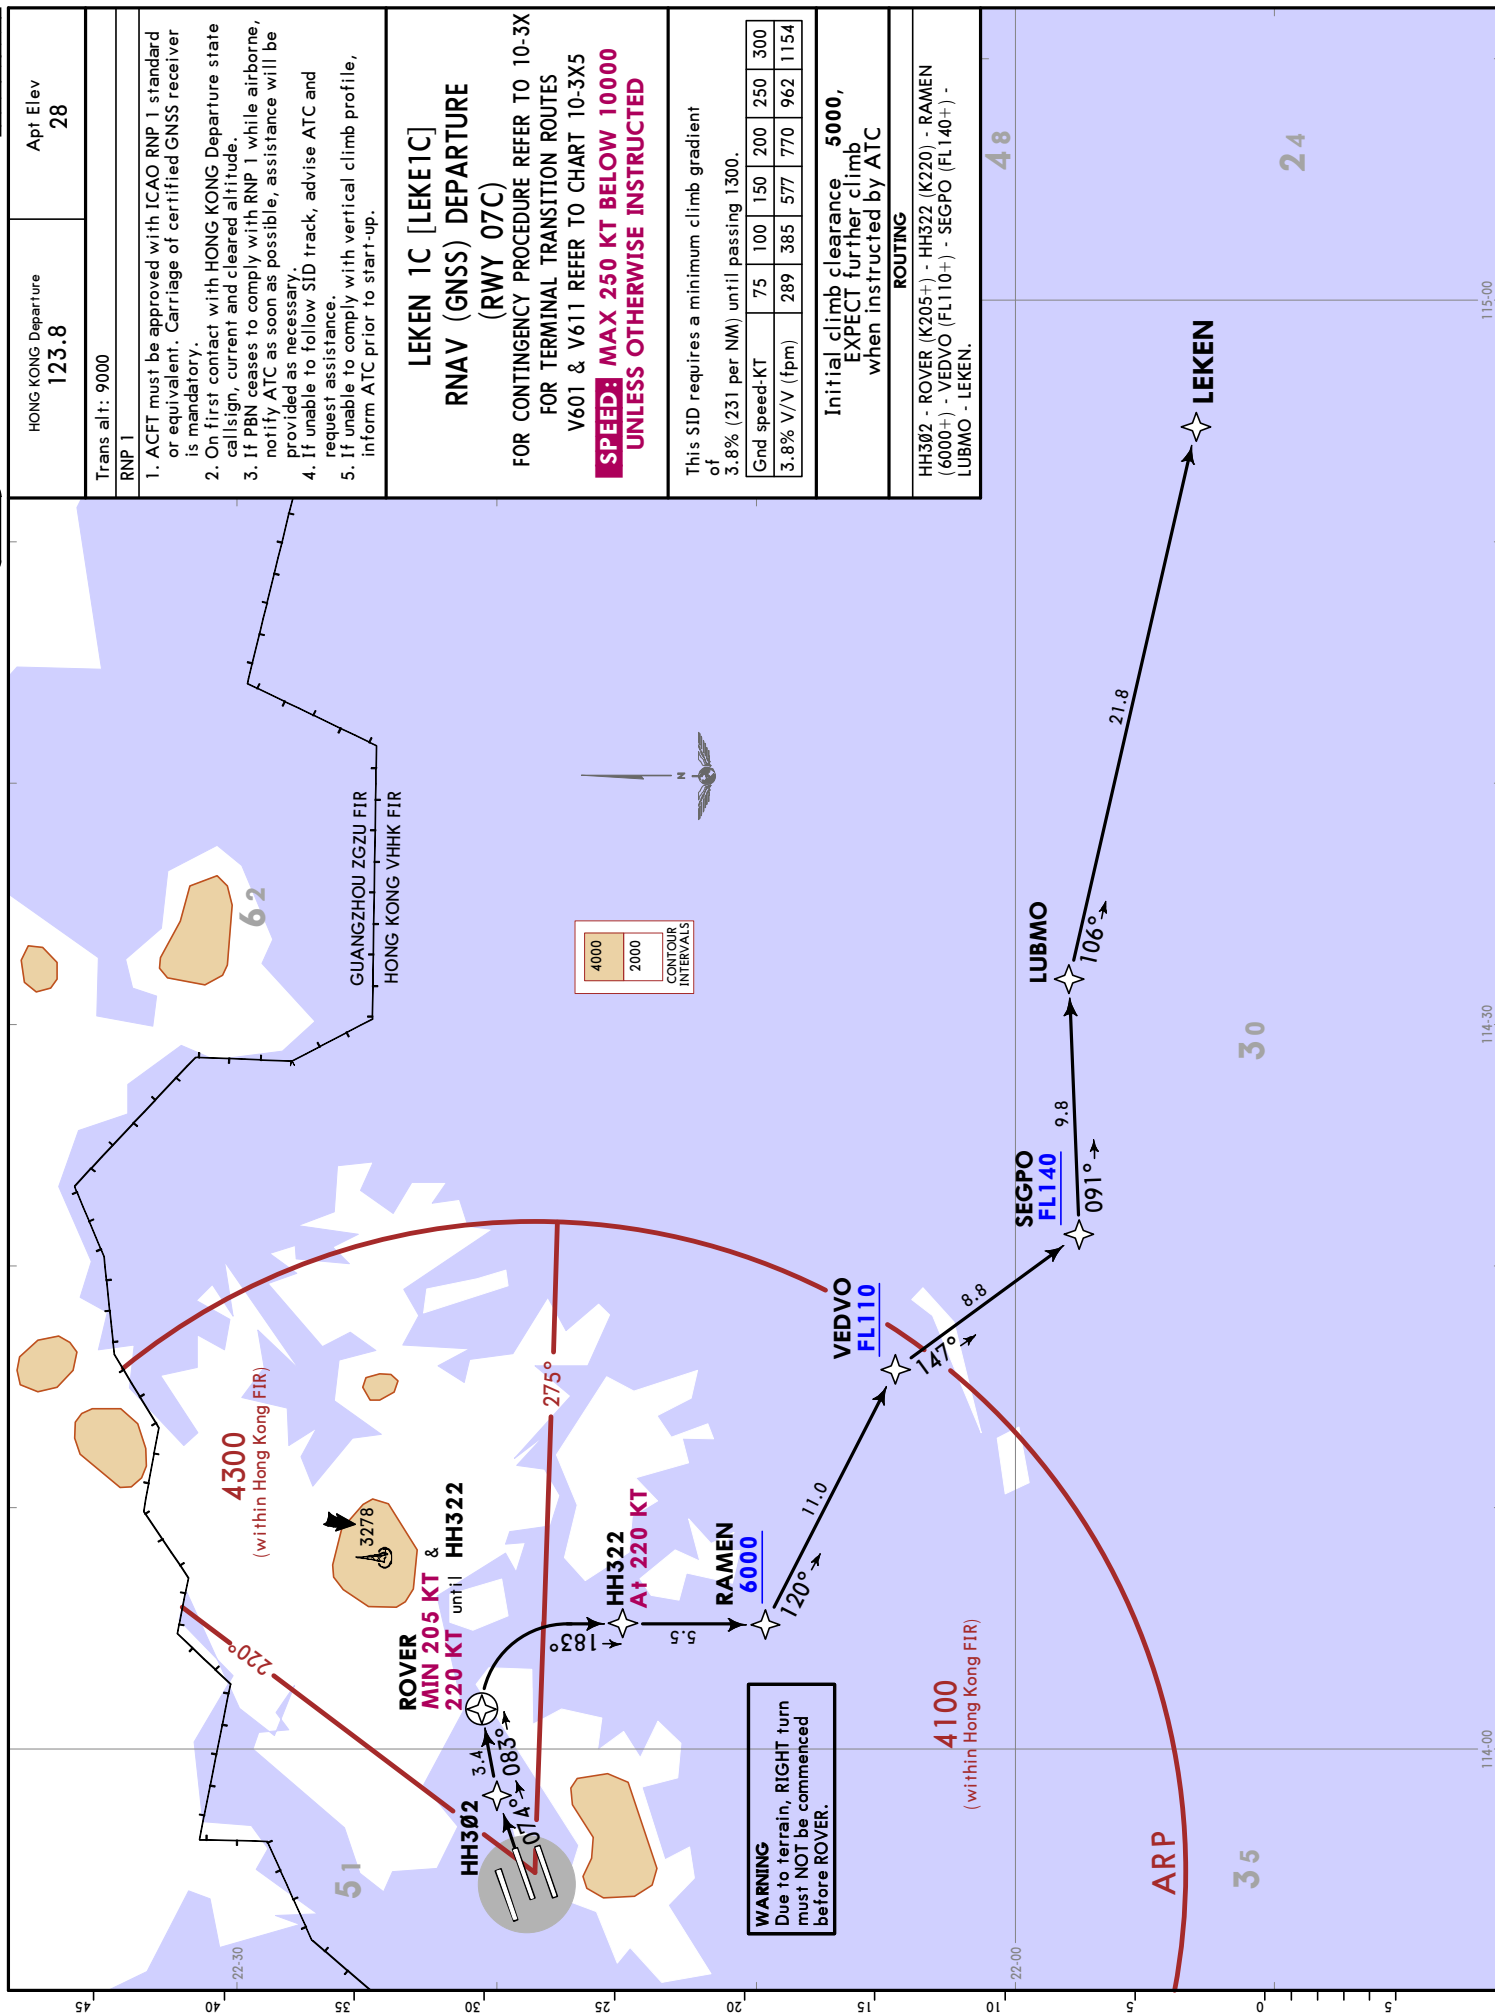

HONG KONG, PR OF CHINA

RNAV SID

VHHH/HKG
HONG KONG INTL
22 NOV 24
Eff 28 Nov
10-3Q1

JEPPESSEN

HONG KONG Departure
123.8

Apt Elev
28

Trans alt: 9000

RNP 1

1. ACFT must be approved with ICAO RNP 1 standard or equivalent. Carriage of certified GNSS receiver is mandatory.

2. On first contact with HONG KONG Departure state call sign, current and cleared altitude.

3. If PBN ceases to comply with RNP 1 while airborne, notify ATC as soon as possible, assistance will be provided as necessary.

4. If unable to follow SID track, advise ATC and request assistance.

5. If unable to comply with vertical climb profile, inform ATC prior to start-up.

LEKEN 1D [LEKE1D]
RNAV (GNSS) DEPARTURE
(RWY 25C)

FOR CONTINGENCY PROCEDURE REFER TO 10-3X3 FOR TERMINAL TRANSITION ROUTES
V601 & V611 REFER TO CHART 10-3X5

**SPEED: MAX 250 KT BELOW 10000
UNLESS OTHERWISE INSTRUCTED**


This SID requires a minimum climb gradient of 3.3% (201 per NM).


Grnd speed-KT	75	100	150	200	250	300
3.3% V/V (fpm)	251	334	501	668	835	1003

Initial climb clearance **5000**,
EXPECT further climb
when instructed by ATC

ROUTING


HH421 (K205+) - HH422 - HH423 (K230) - VANPU (9000+) - HH484 - SUPAD (FL150+) - HH477 (FL160+) - DAKIG - LEKEN.

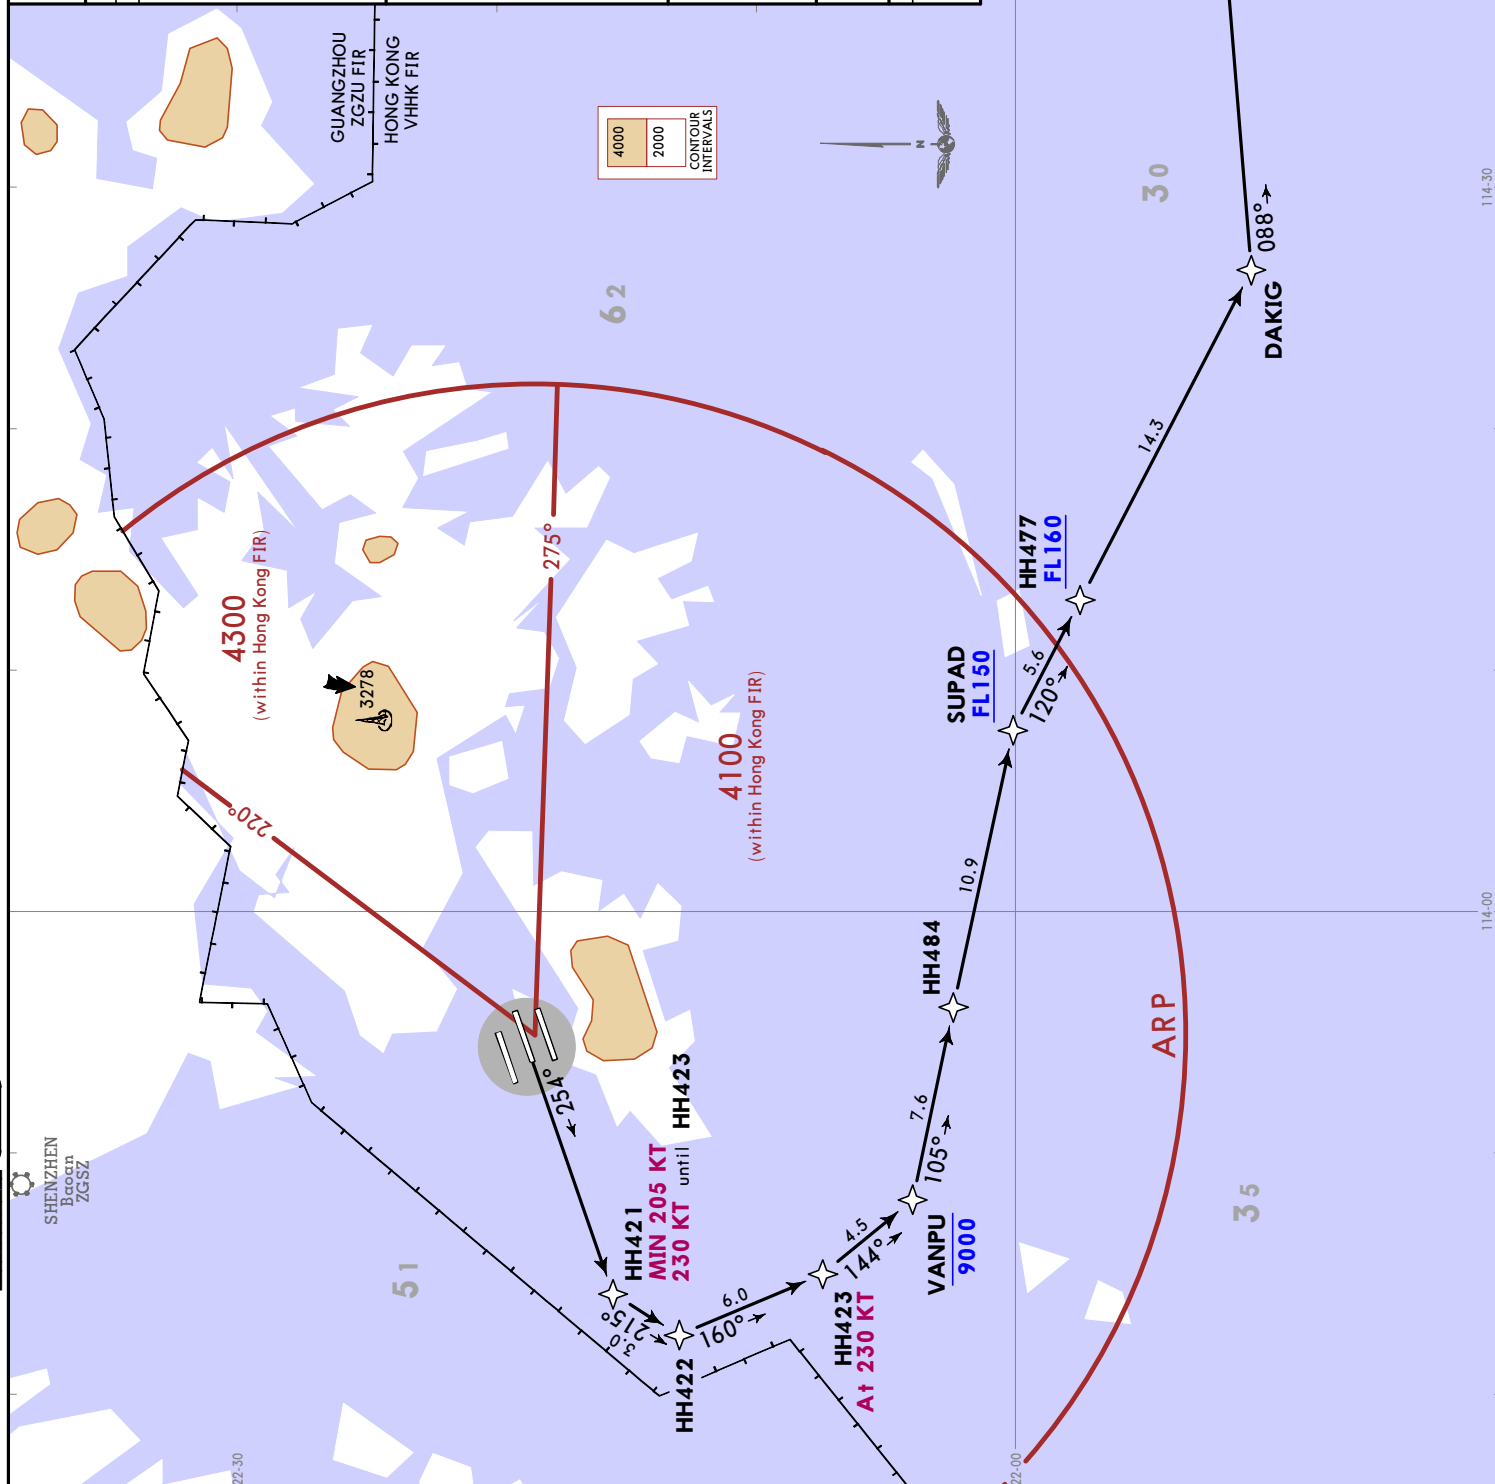

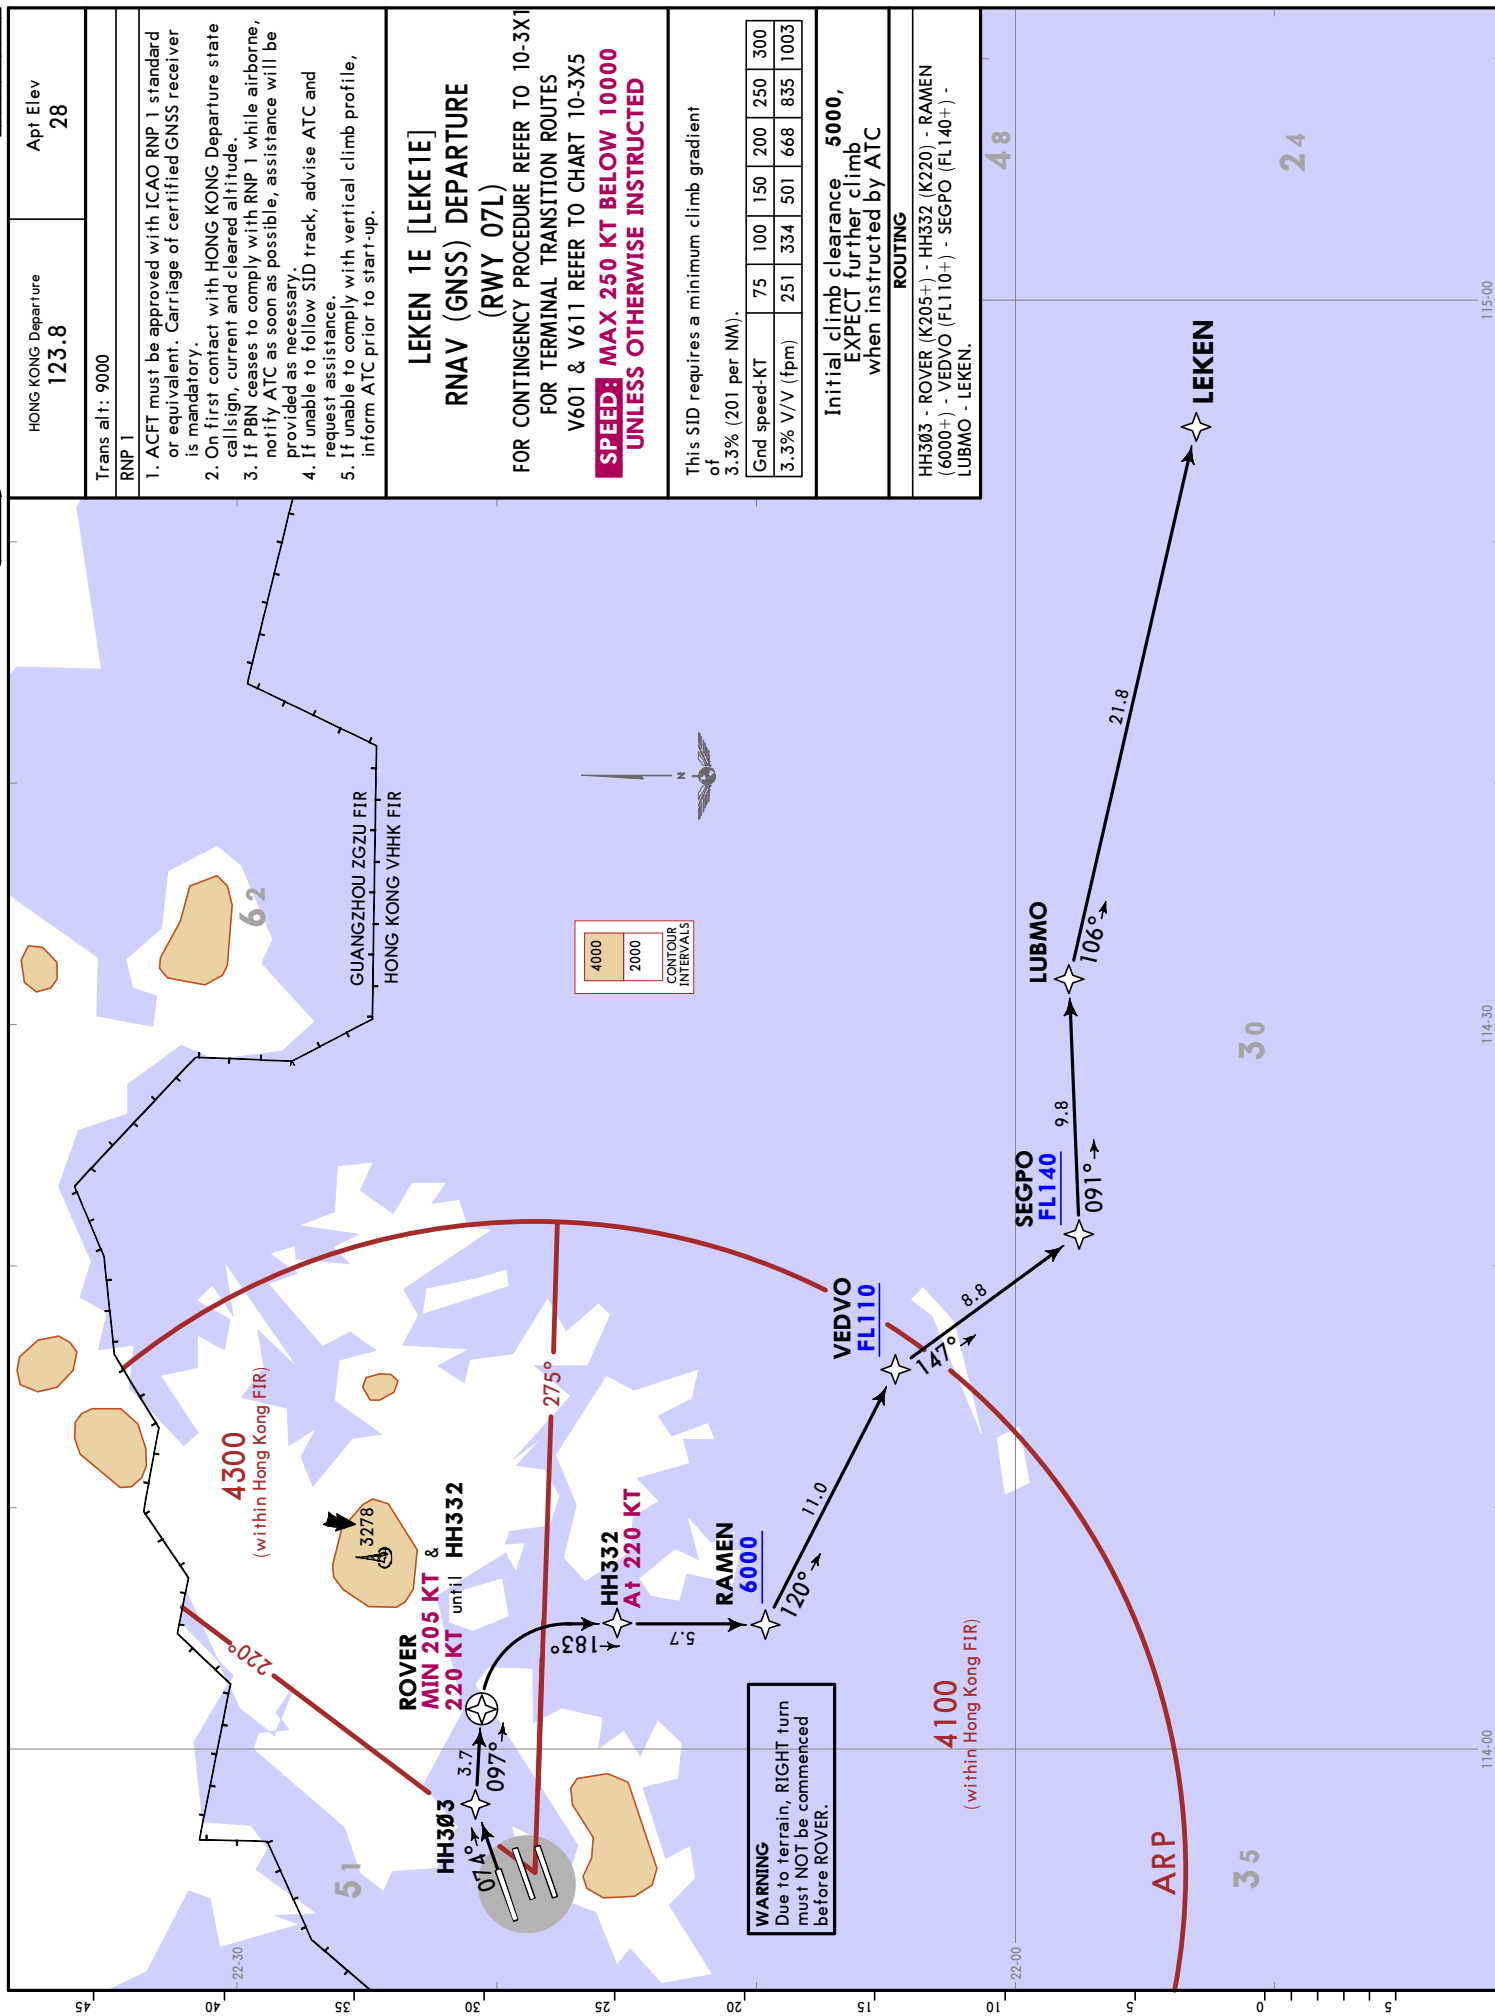






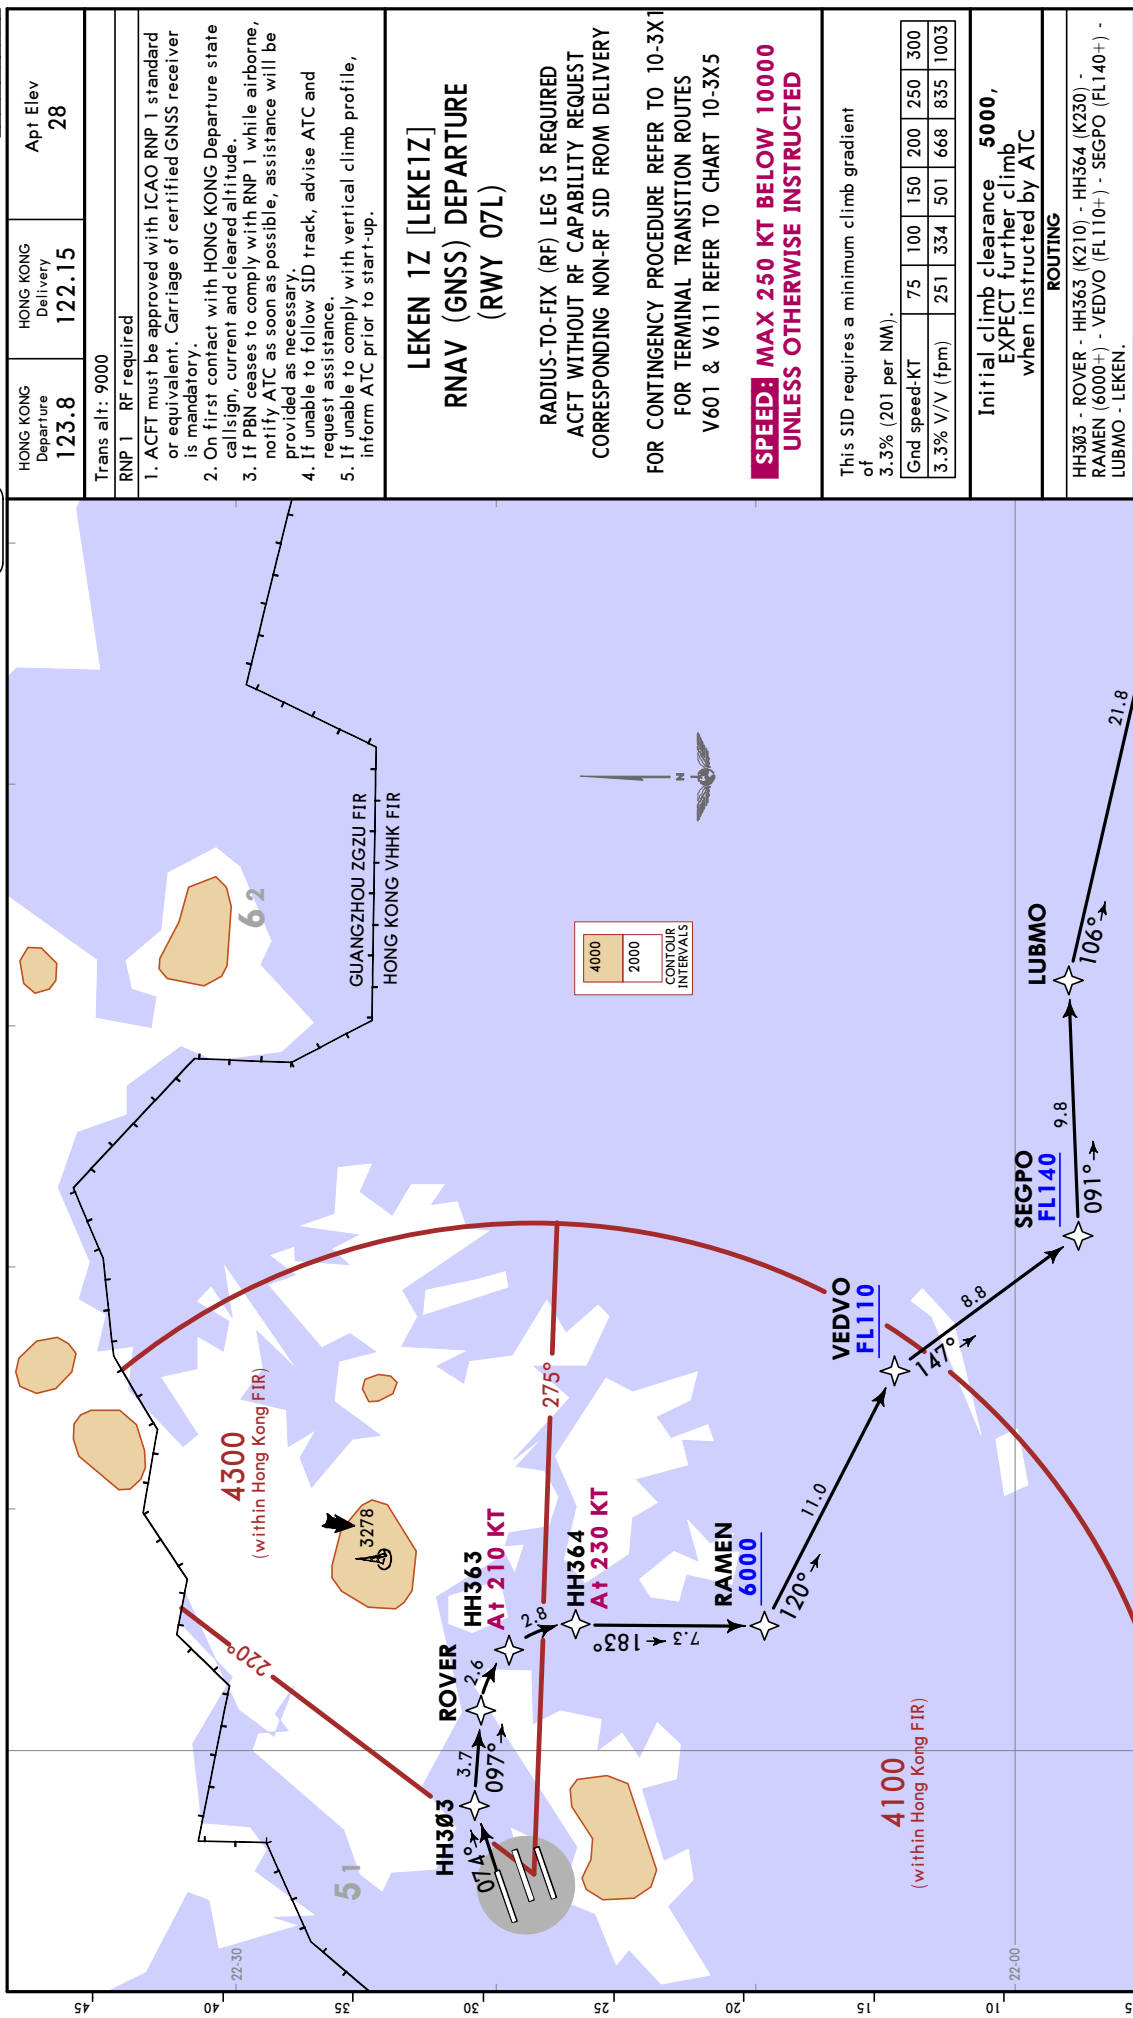

CHANGES: SID renumbered & completely revised, chart reindexed.

VHHH/HKG
HONG KONG INTL
22 NOV 24
JEPPesen
10-35
EFF 28 NOV

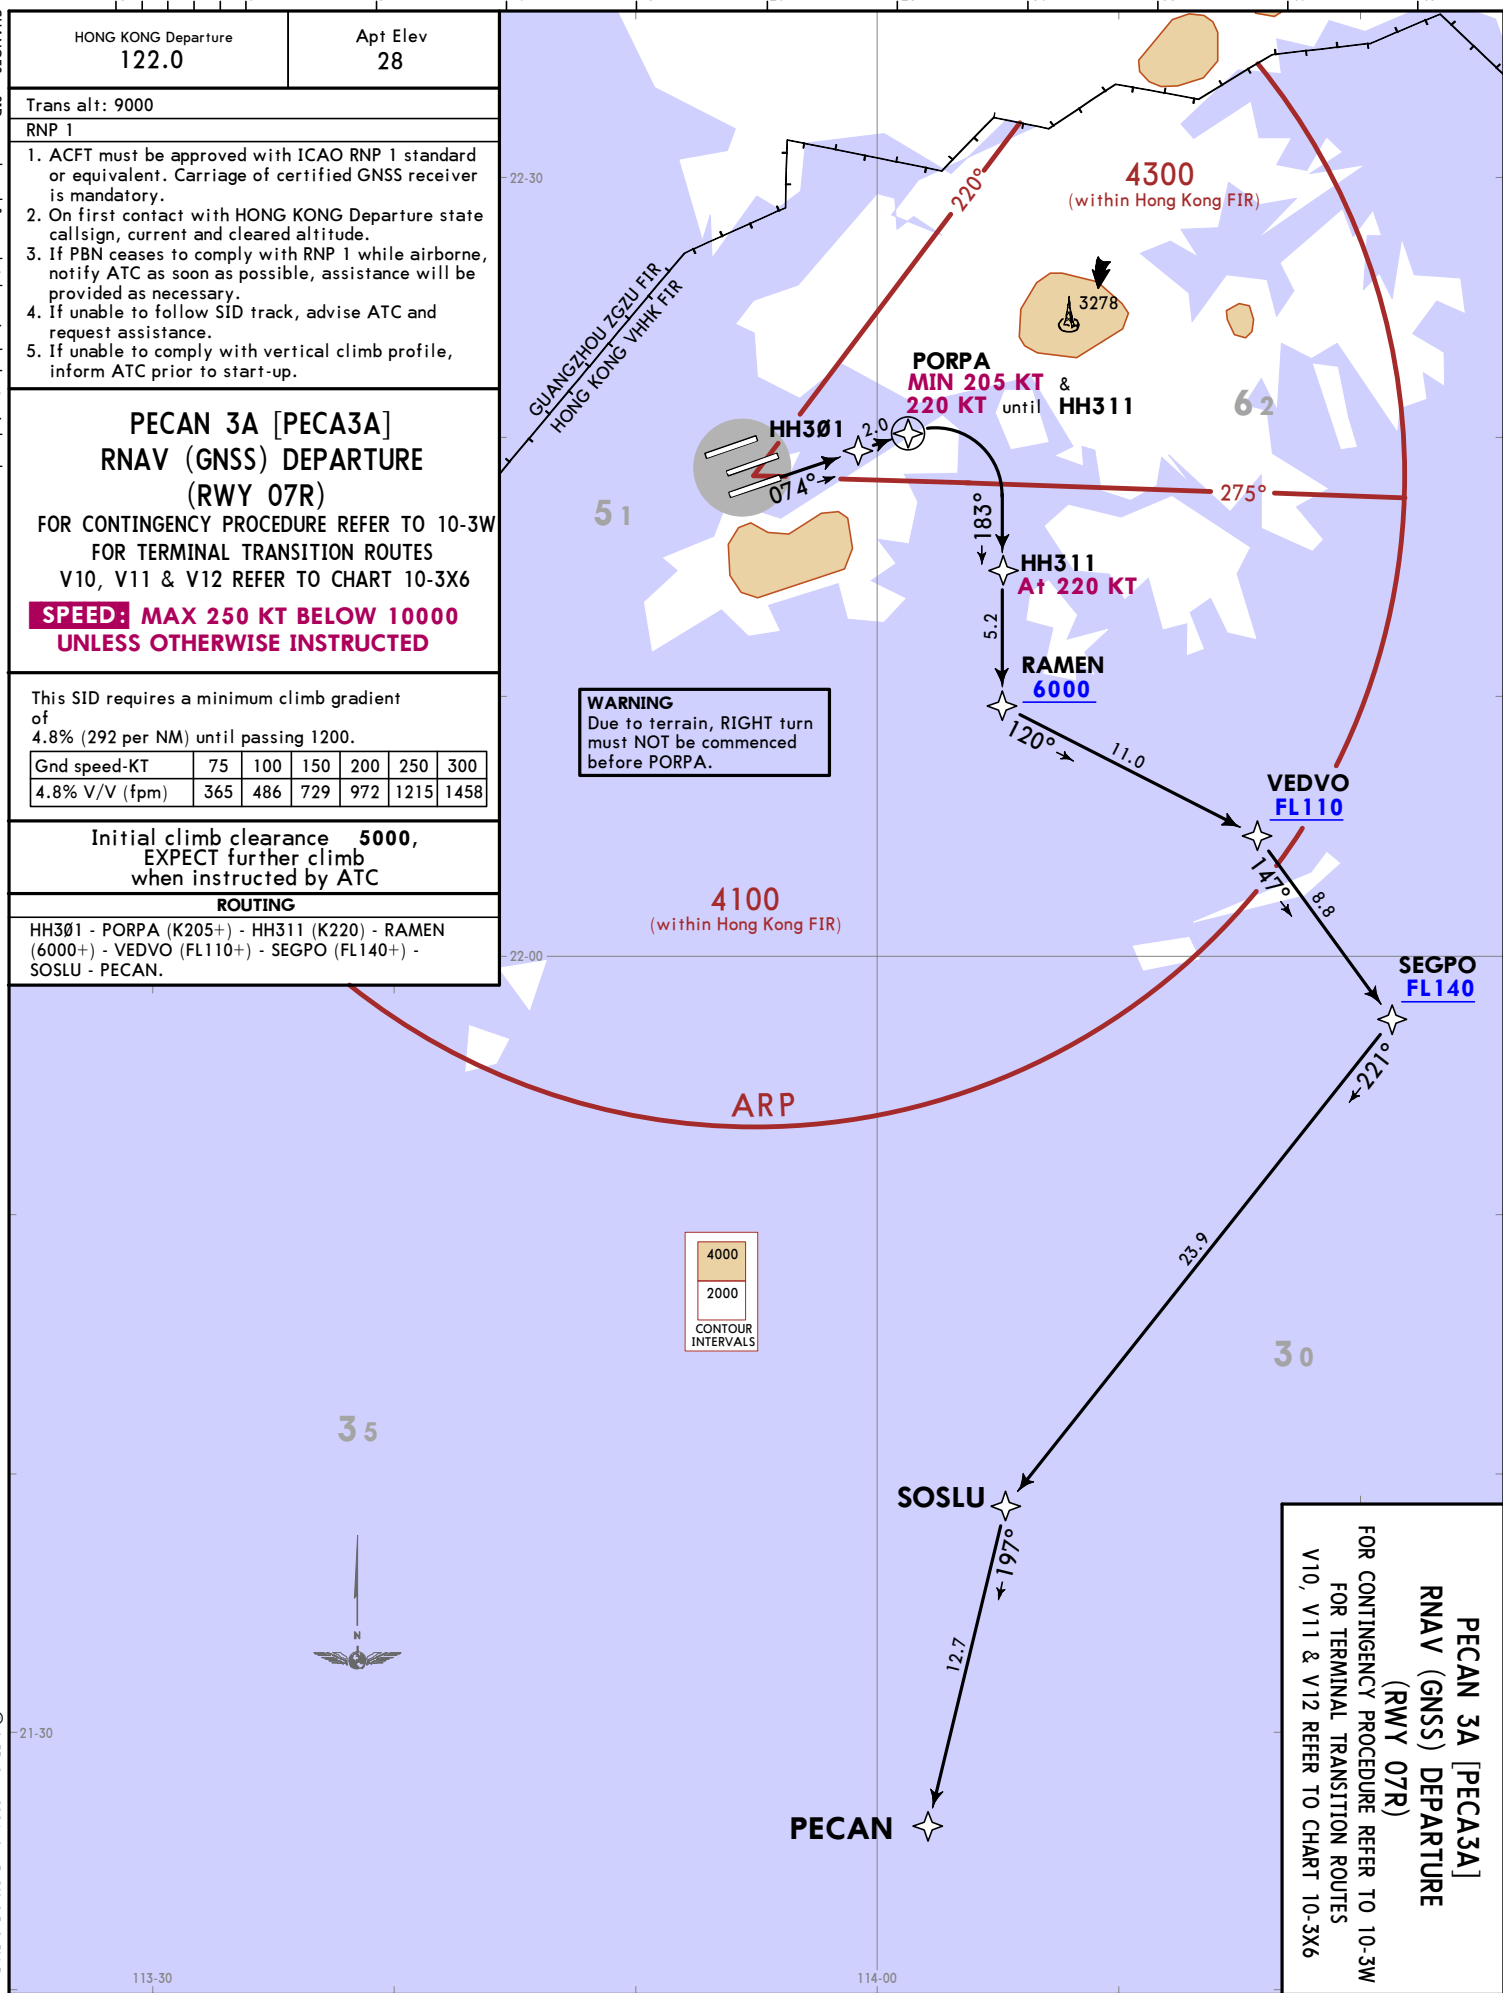

© JEPesen, 2024. ALL RIGHTS RESERVED.

HONG KONG, PR OF CHINA
RNAV SID

CHANGES: SID renumbered & completely revised; chart reindexed.

HONG KONG Departure
122.0

Apt Elev
28

Trans alt: 9000

RNP 1

1. ACFT must be approved with ICAO RNP 1 standard or equivalent. Carriage of certified GNSS receiver is mandatory.

2. On first contact with HONG KONG Departure state callsign, current and cleared altitude.

3. If PBN ceases to comply with RNP 1 while airborne, notify ATC as soon as possible, assistance will be provided as necessary.

4. If unable to follow SID track, advise ATC and request assistance.

5. If unable to comply with vertical climb profile, inform ATC prior to start-up.

PECAN 2B [PECA2B]

RNAV (GNSS) DEPARTURE

(RWY 25L)

FOR CONTINGENCY PROCEDURE REFER TO 10-3X2

FOR TERMINAL TRANSITION ROUTES

V10, V11 & V12 REFER TO CHART 10-3X6

SPEED: MAX 250 KT BELOW 10000

UNLESS OTHERWISE INSTRUCTED

This SID requires a minimum climb gradient of

4.7% (286 per NM) until passing 1600.

Gnd speed-KT	75	100	150	200	250	300
4.7% V/V (fpm)	357	476	714	952	1190	1428


Initial climb clearance **5000**,

EXPECT further climb

when instructed by ATC

ROUTING

HH411 - HH412 (K205+) - HH413 - HH414 - VEDMU (K230; 9000-; 4000+) - HH471 (9000+) - HH472 (FL120-) - HH477 (FL140) - HH478 (FL140) - SOSLU - PECAN.

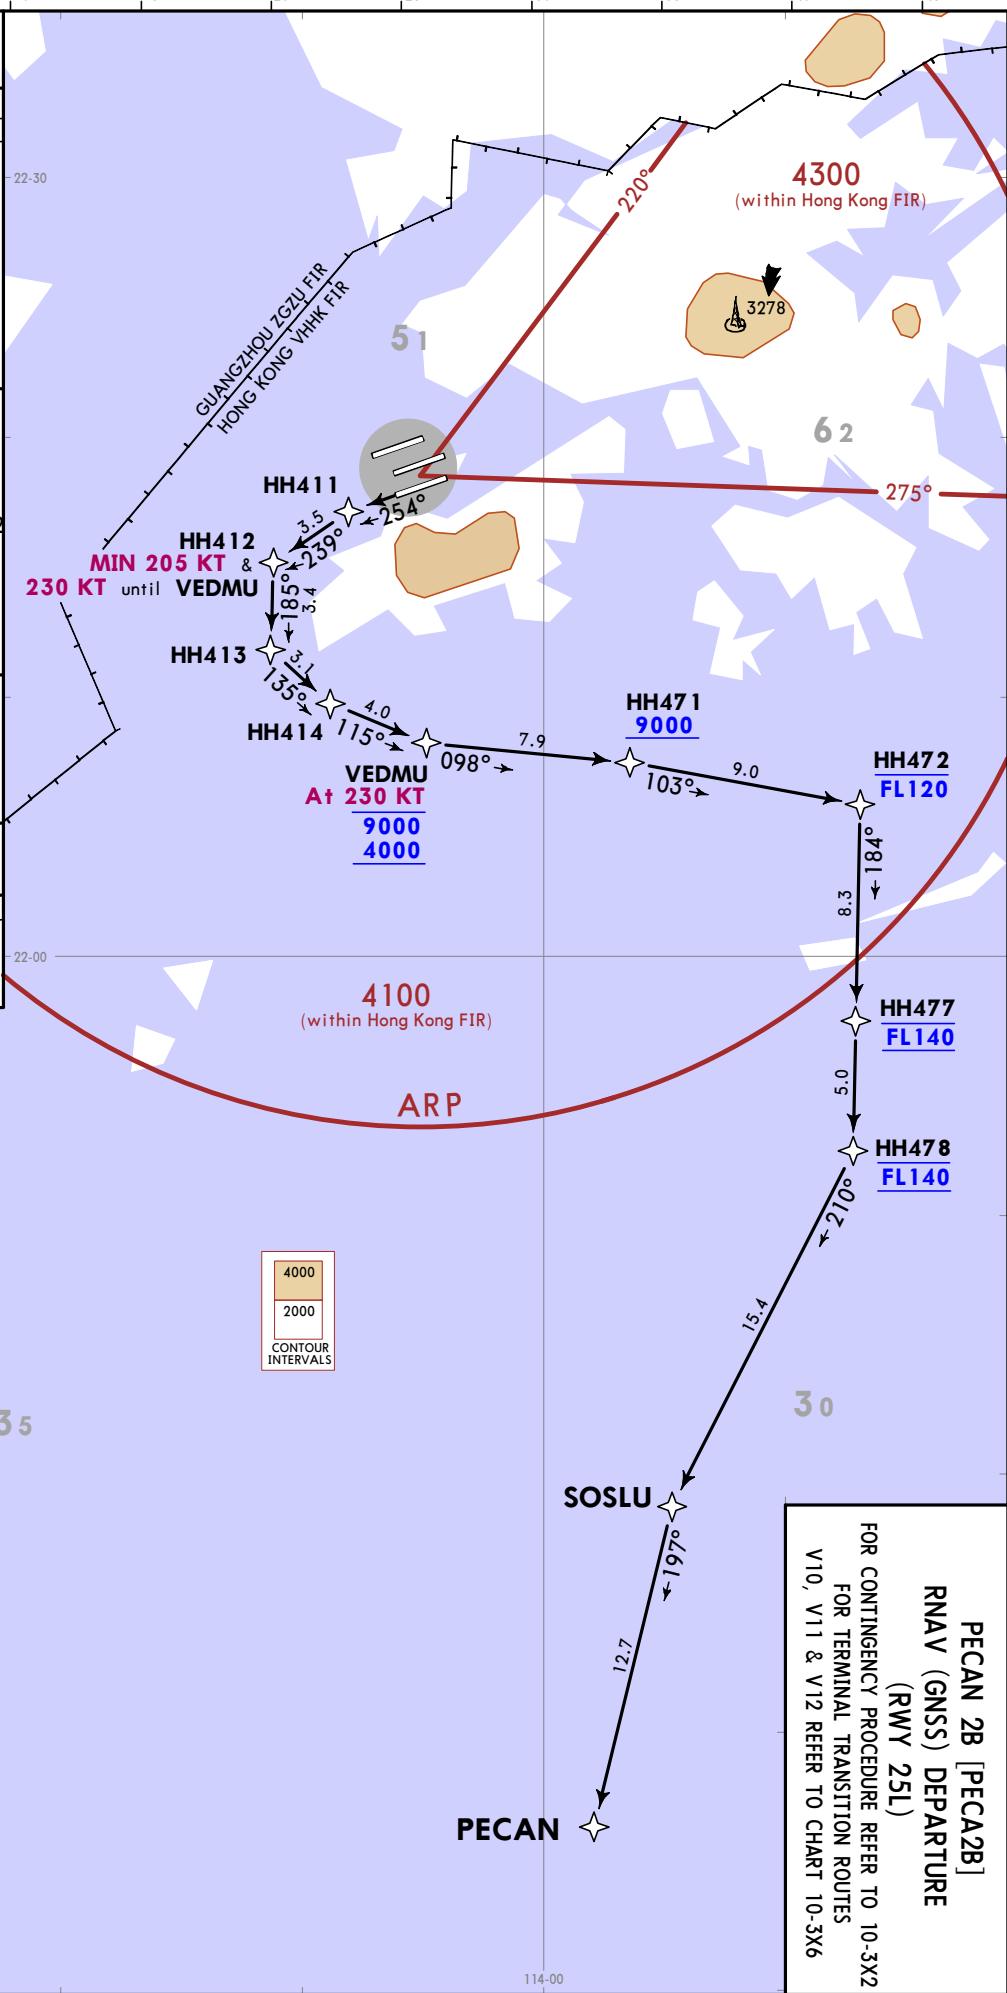

PECAN 2B [PECA2B]

RNAV (GNSS) DEPARTURE

(RWY 25L)

FOR CONTINGENCY PROCEDURE REFER TO 10-3X2


FOR TERMINAL TRANSITION ROUTES

V10, V11 & V12 REFER TO CHART 10-3X6

CHANGES: New procedure at this airport.

VHHH/HKG
HONG KONG INTL
22 NOV 24
JEPPESSEN
EFF 28 NOV
(10-3T1)

HONG KONG, PR OF CHINA
RNAV SID

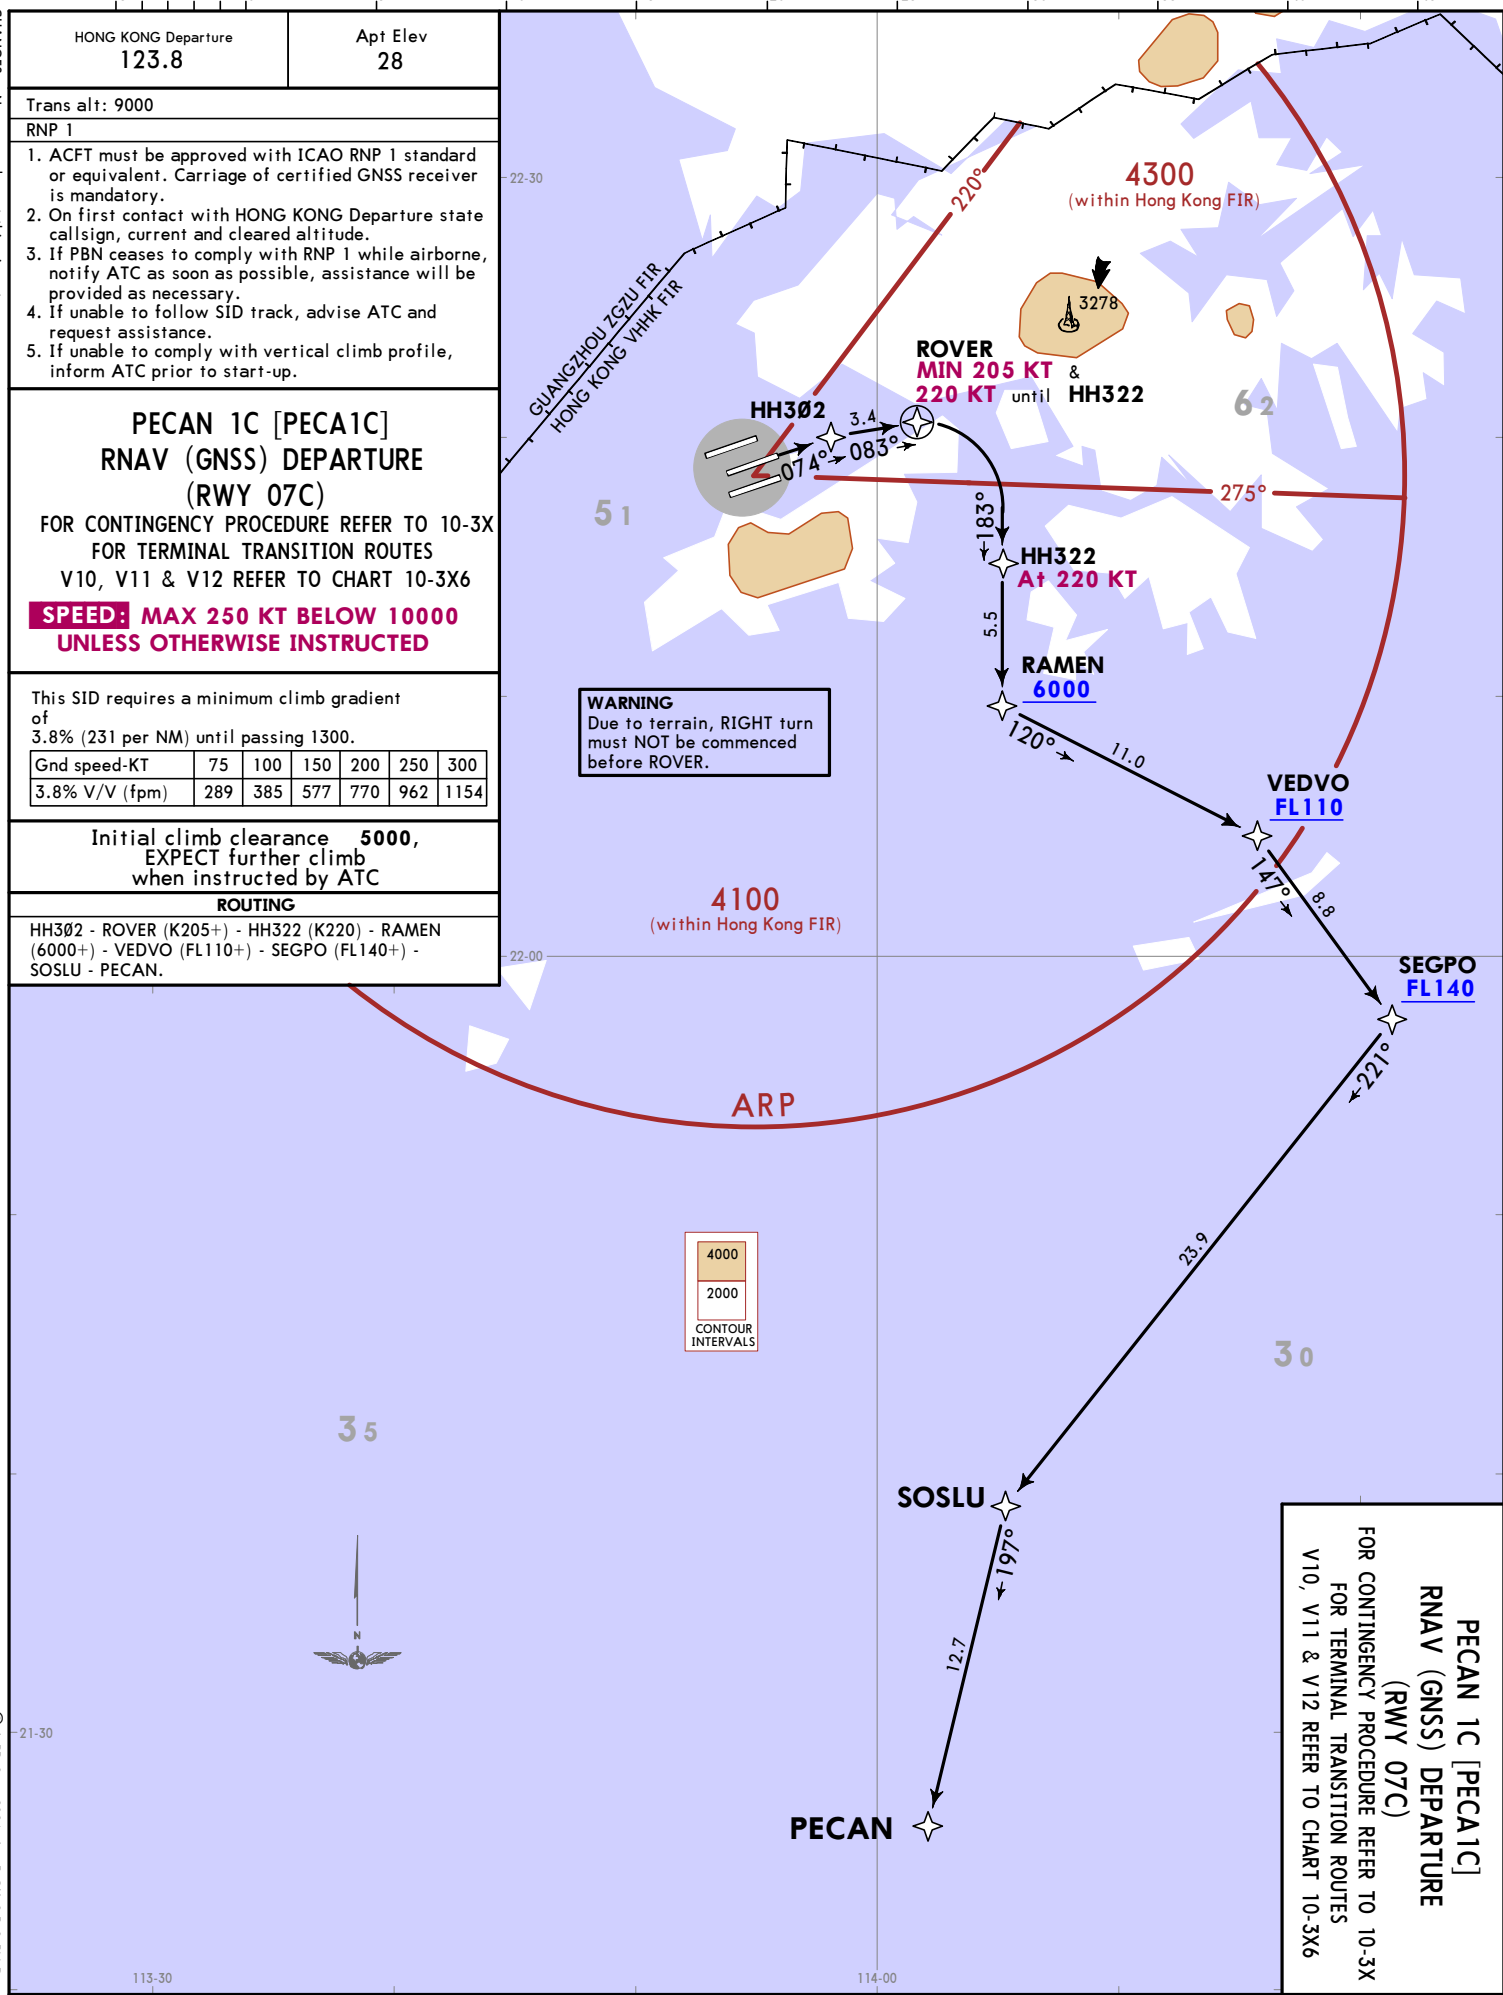

CHANGES: New procedure at this airport.

HONG KONG Departure
123.8

Apt Elev
28

Trans alt: 9000

RNP 1

1. ACFT must be approved with ICAO RNP 1 standard or equivalent. Carriage of certified GNSS receiver is mandatory.

2. On first contact with HONG KONG Departure state callsign, current and cleared altitude.

3. If PBN ceases to comply with RNP 1 while airborne, notify ATC as soon as possible, assistance will be provided as necessary.

4. If unable to follow SID track, advise ATC and request assistance.

5. If unable to comply with vertical climb profile, inform ATC prior to start-up.

PECAN 1D [PECA1D]

RNAV (GNSS) DEPARTURE

(RWY 25C)

FOR CONTINGENCY PROCEDURE REFER TO 10-3X3

FOR TERMINAL TRANSITION ROUTES

V10, V11 & V12 REFER TO CHART 10-3X6

SPEED: MAX 250 KT BELOW 10000

UNLESS OTHERWISE INSTRUCTED

This SID requires a minimum climb gradient of 3.3% (201 per NM).

Gnd speed-KT	75	100	150	200	250	300
3.3% V/V (fpm)	251	334	501	668	835	1003


Initial climb clearance **5000**,

EXPECT further climb

when instructed by ATC

ROUTING

HH421 (K205+) - HH422 - HH423 (K230) - VANPU (9000-) - HH484 - SUGAP (FL140+) - SOSLU - PECAN.

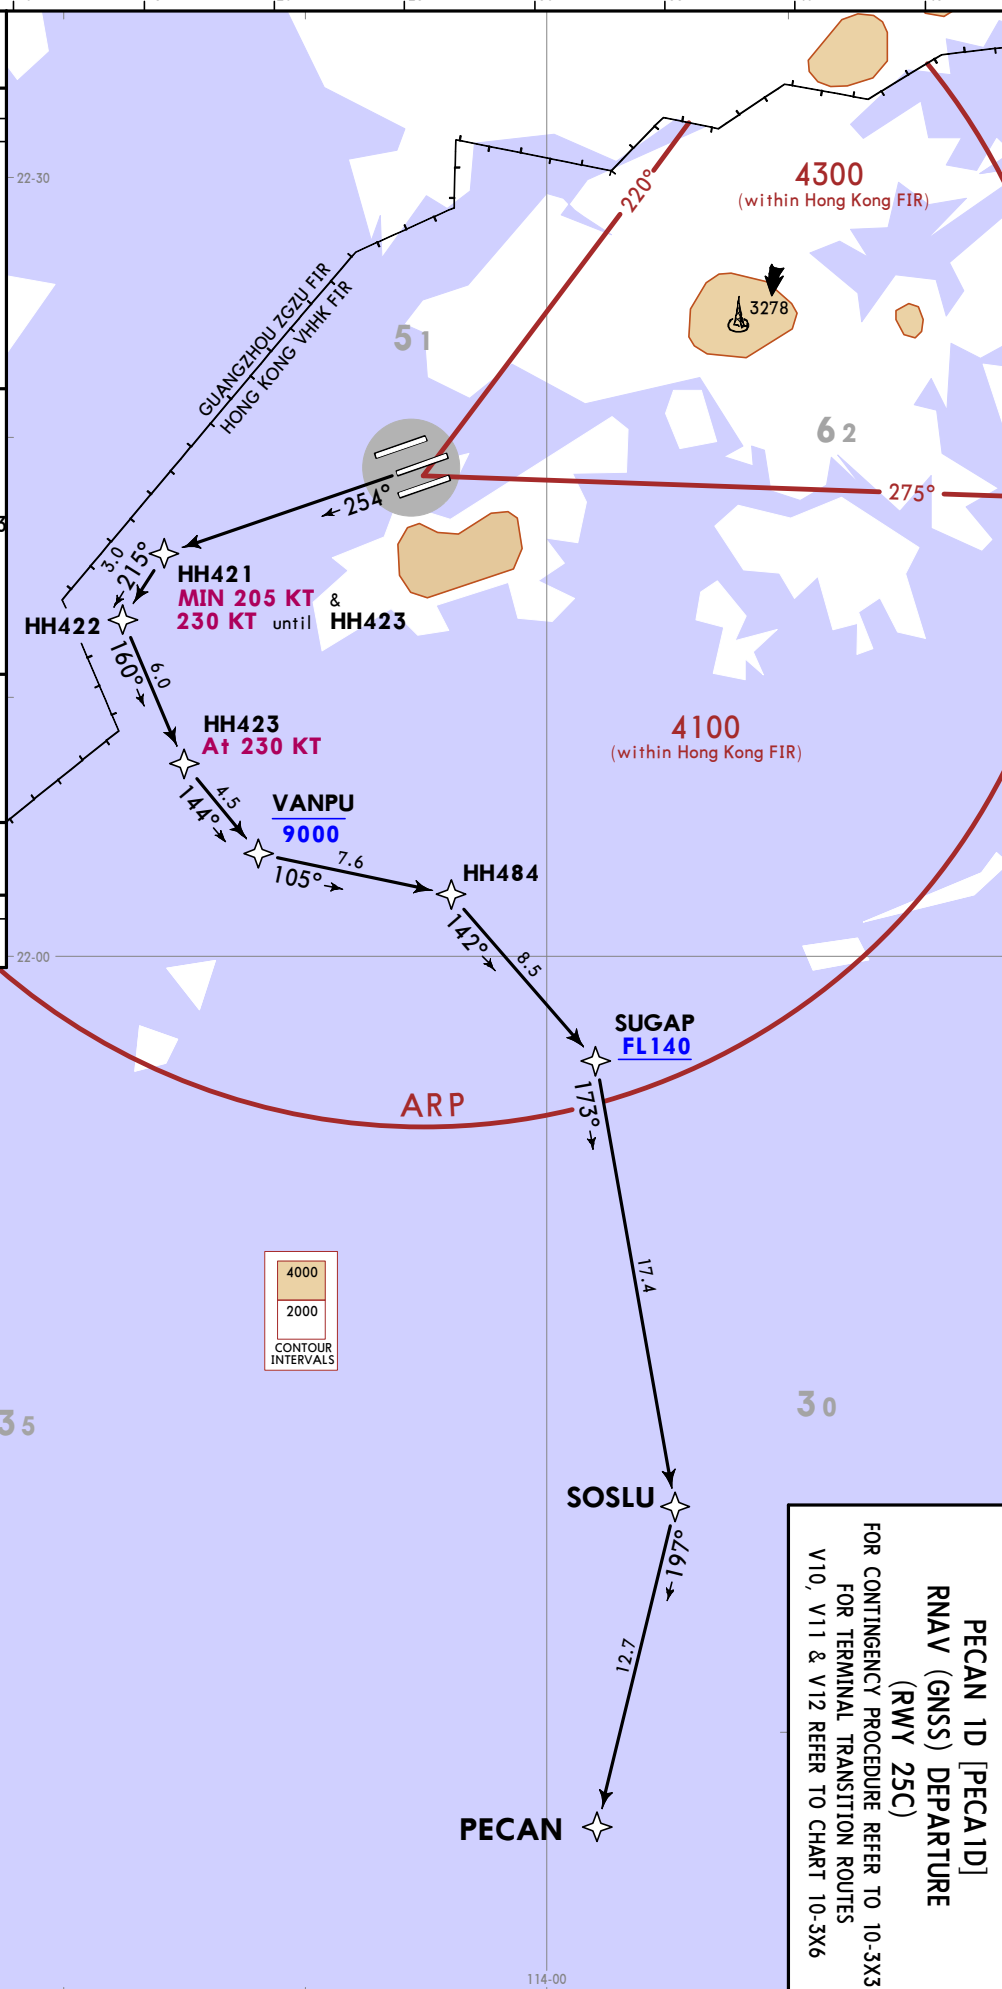

PECAN 1D [PECA1D]


RNAV (GNSS) DEPARTURE

(RWY 25C)

FOR CONTINGENCY PROCEDURE REFER TO 10-3X3

FOR TERMINAL TRANSITION ROUTES

V10, V11 & V12 REFER TO CHART 10-3X6



CHANGES: SID renumbered & completely revised, chart reindexed.

HONG KONG Departure
123.8

Apt Elev
28

Trans alt: 9000

RNP 1

1. ACFT must be approved with ICAO RNP 1 standard or equivalent. Carriage of certified GNSS receiver is mandatory.

2. On first contact with HONG KONG Departure state callsign, current and cleared altitude.

3. If PBN ceases to comply with RNP 1 while airborne, notify ATC as soon as possible, assistance will be provided as necessary.

4. If unable to follow SID track, advise ATC and request assistance.

5. If unable to comply with vertical climb profile, inform ATC prior to start-up.

PECAN 2F [PECA2F]

RNAV (GNSS) DEPARTURE

(RWY 25R)

FOR CONTINGENCY PROCEDURE REFER TO 10-3X4

FOR TERMINAL TRANSITION ROUTES

V10, V11 & V12 REFER TO CHART 10-3X6

SPEED: MAX 250 KT BELOW 10000

UNLESS OTHERWISE INSTRUCTED

This SID requires a minimum climb gradient of 3.3% (201 per NM).

Gnd speed-KT	75	100	150	200	250	300
3.3% V/V (fpm)	251	334	501	668	835	1003


Initial climb clearance **5000**,

EXPECT further climb

when instructed by ATC

ROUTING

HH421 (K205+) - HH422 - HH423 (K230) - VANPU (9000-) - HH484 - SUGAP (FL140+) - SOSLU - PECAN.

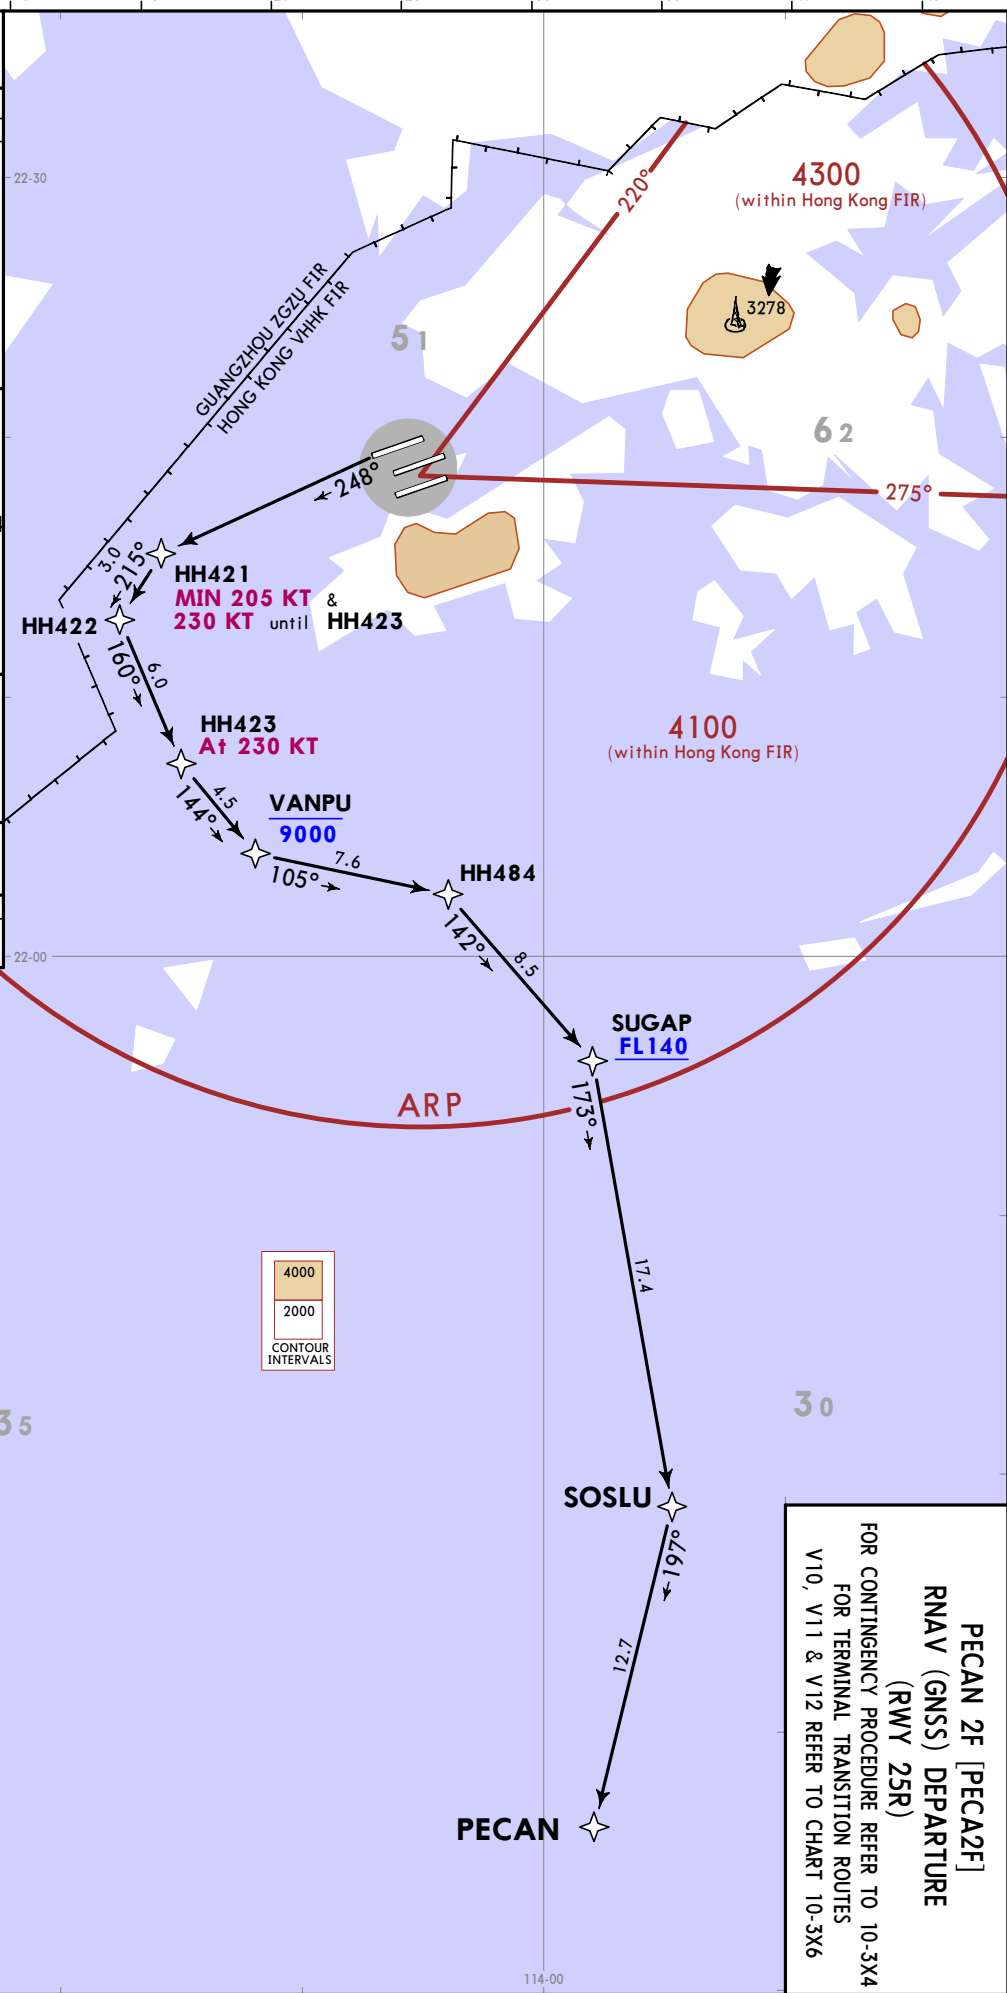

CHANGES: SID renumbered & completely revised, chart reindexed.

HONG KONG
Departure
122.0

HONG KONG
Delivery
122.15

Apt Elev
28

Trans alt: 9000

RNP 1 RF required

1. ACFT must be approved with ICAO RNP 1 standard or equivalent. Carriage of certified GNSS receiver is mandatory.

2. On first contact with HONG KONG Departure state callsign, current and cleared altitude.

3. If PBN ceases to comply with RNP 1 while airborne, notify ATC as soon as possible, assistance will be provided as necessary.

4. If unable to follow SID track, advise ATC and request assistance.

5. If unable to comply with vertical climb profile, inform ATC prior to start-up.

PECAN 3X [PECA3X]
RNAV (GNSS) DEPARTURE
(RWY 07R)

RADIUS-TO-FIX (RF) LEG IS REQUIRED
ACFT WITHOUT RF CAPABILITY REQUEST
CORRESPONDING NON-RF SID FROM DELIVERY

FOR CONTINGENCY PROCEDURE REFER TO 10-3W
FOR TERMINAL TRANSITION ROUTES
V10, V11 & V12 REFER TO CHART 10-3X6

SPEED: MAX 250 KT BELOW 10000
UNLESS OTHERWISE INSTRUCTED

This SID requires a minimum climb gradient of 4.8% (292 per NM) until passing 1200.

Gnd speed-KT	75	100	150	200	250	300
4.8% V/V (fpm)	365	486	729	972	1215	1458

Initial climb clearance 5000,
EXPECT further climb
when instructed by ATC

ROUTING

HH301 - PORPA - HH341 (K210) - HH342 (K230) -
RAMEN (6000+) - VEDVO (FL110+) - SEGPO (FL140+) -
SOSLU - PECAN.

GUANGZHOU ZGZU FIR
HONG KONG VHHK FIR

4300 (within Hong Kong FIR)

3278

62

51

HH301 074° 2.0

PORPA 3.1

HH341 A+ 210 KT

HH342 A+ 230 KT

275°

RAMEN 6000

120° 11.0

VEDVO FL110

147° 8.8

SEGPO FL140

221°

23.9

SOSLU 197° 12.7

PECAN

4100 (within Hong Kong FIR)

ARP

30

35

CONTOUR INTERVALS

4000

2000

113-30

114-00

22-30

22-00

21-30

VHHK/HKG
HONG KONG INTL
22 NOV 24
JEPPesen
EFF 28 NOV
10-315

HONG KONG, PR OF CHINA
RNAV SID

PECAN 3X [PECA3X]
RNAV (GNSS) DEPARTURE
(RWY 07R)

RADIUS-TO-FIX (RF) LEG IS REQUIRED
ACFT WITHOUT RF CAPABILITY REQUEST
CORRESPONDING NON-RF SID FROM DELIVERY

FOR CONTINGENCY PROCEDURE REFER TO 10-3W
FOR TERMINAL TRANSITION ROUTES
V10, V11 & V12 REFER TO CHART 10-3X6

© JEPPesen, 2024. ALL RIGHTS RESERVED.

CHANGES: New procedure at this airport.

HONG KONG
Departure
123.8

HONG KONG
Delivery
122.15

Apt Elev
28

Trans alt: 9000

RNP 1 RF required

1. ACFT must be approved with ICAO RNP 1 standard or equivalent. Carriage of certified GNSS receiver is mandatory.

2. On first contact with HONG KONG Departure state callsign, current and cleared altitude.

3. If PBN ceases to comply with RNP 1 while airborne, notify ATC as soon as possible, assistance will be provided as necessary.

4. If unable to follow SID track, advise ATC and request assistance.

5. If unable to comply with vertical climb profile, inform ATC prior to start-up.

PECAN 1Y [PECA1Y]
RNAV (GNSS) DEPARTURE
(RWY 07C)

RADIUS-TO-FIX (RF) LEG IS REQUIRED
ACFT WITHOUT RF CAPABILITY REQUEST
CORRESPONDING NON-RF SID FROM DELIVERY

FOR CONTINGENCY PROCEDURE REFER TO 10-3X
FOR TERMINAL TRANSITION ROUTES
V10, V11 & V12 REFER TO CHART 10-3X6

SPEED: MAX 250 KT BELOW 10000
UNLESS OTHERWISE INSTRUCTED


This SID requires a minimum climb gradient of 3.4% (207 per NM) until passing 1200.

Gnd speed-KT	75	100	150	200	250	300
3.4% V/V (fpm)	258	344	516	689	861	1033

Initial climb clearance 5000,
EXPECT further climb
when instructed by ATC

ROUTING

HH302 - ROVER - HH355 (K210) - HH356 (K230) -
RAMEN (6000+) - VEDVO (FL110+) - SEGPO (FL140+) -
SOSLU - PECAN.

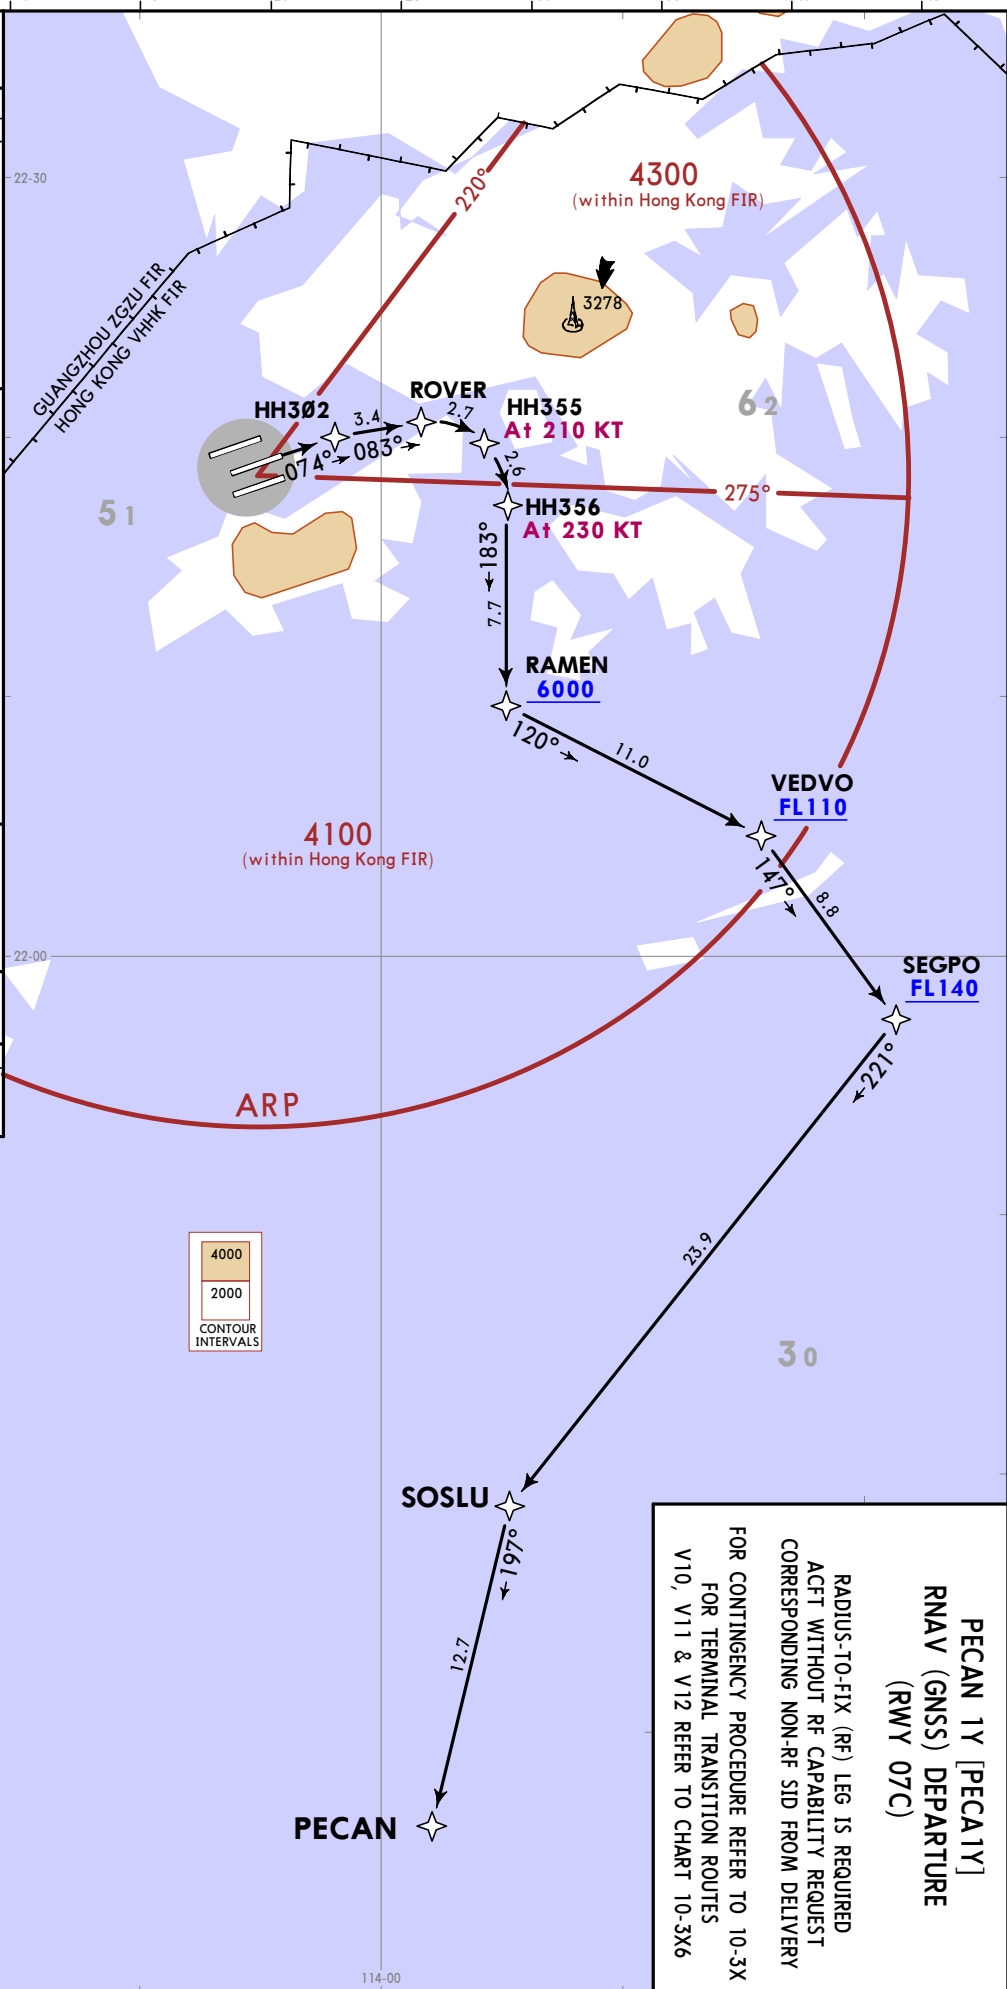

VHHH/HKG
HONG KONG INTL

22 NOV 24
JEPPESSEN
HONG KONG, PR OF CHINA
RNAV SID

EFF 28 Nov

© JEPPESSEN, 2024. ALL RIGHTS RESERVED.

CHANGES: SID renumbered & completely revised, chart reindexed.

HONG KONG Departure 123.8	HONG KONG Delivery 122.15	Apt Elev 28
---------------------------------	---------------------------------	----------------

Trans alt: 9000

RNP 1 RF required

1. ACFT must be approved with ICAO RNP 1 standard or equivalent. Carriage of certified GNSS receiver is mandatory.
2. On first contact with HONG KONG Departure state callsign, current and cleared altitude.
3. If PBN ceases to comply with RNP 1 while airborne, notify ATC as soon as possible, assistance will be provided as necessary.
4. If unable to follow SID track, advise ATC and request assistance.
5. If unable to comply with vertical climb profile, inform ATC prior to start-up.

**PECAN 2Z [PECA2Z]
RNAV (GNSS) DEPARTURE
(RWY 07L)**

RADIUS-TO-FIX (RF) LEG IS REQUIRED
ACFT WITHOUT RF CAPABILITY REQUEST
CORRESPONDING NON-RF SID FROM DELIVERY

FOR CONTINGENCY PROCEDURE REFER TO 10-3X1
FOR TERMINAL TRANSITION ROUTES
V10, V11 & V12 REFER TO CHART 10-3X6

**SPEED: MAX 250 KT BELOW 10000
UNLESS OTHERWISE INSTRUCTED**


This SID requires a minimum climb gradient
of
3.3% (201 per NM).

Gnd speed-KT	75	100	150	200	250	300
3.3% V/V (fpm)	251	334	501	668	835	1003

Initial climb clearance **5000**,
EXPECT further climb
when instructed by ATC

ROUTING

HH303 - ROVER - HH363 (K210) - HH364 (K230) -
RAMEN (6000+) - VEDVO (FL110+) - SEGPO (FL140+) -
SOSLU - PECAN.

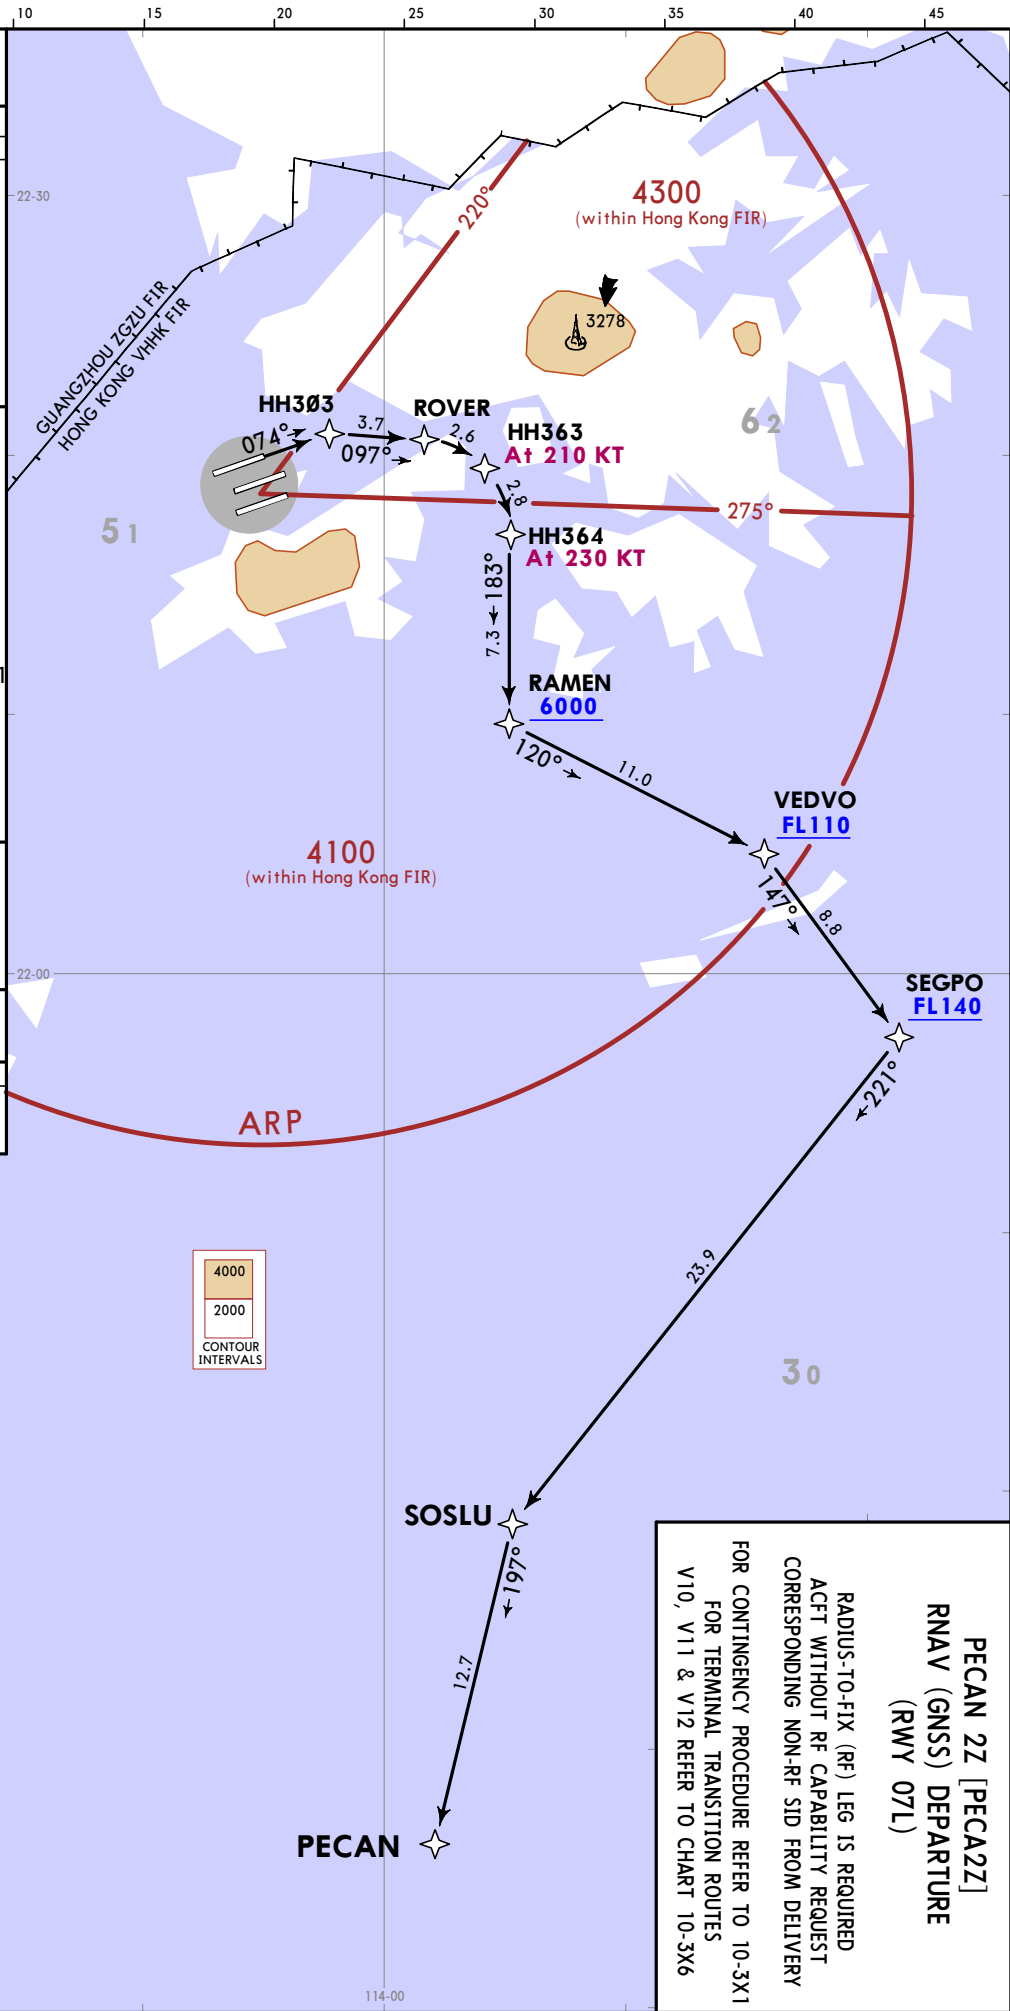

VHHK/HKG
HONG KONG INTL
22 NOV 24
JEPPESSEN
EFF 28 NOV
10-3U

HONG KONG, PR OF CHINA
RNAV SID

**PECAN 2Z [PECA2Z]
RNAV (GNSS) DEPARTURE
(RWY 07L)**

RADIUS-TO-FIX (RF) LEG IS REQUIRED
ACFT WITHOUT RF CAPABILITY REQUEST
CORRESPONDING NON-RF SID FROM DELIVERY

FOR CONTINGENCY PROCEDURE REFER TO 10-3X1
FOR TERMINAL TRANSITION ROUTES
V10, V11 & V12 REFER TO CHART 10-3X6

CHANGES: New procedure at this airport.

HONG KONG Departure
123.8

Apt Elev
28

Trans alt: 9000

RNP 1

1. ACFT must be approved with ICAO RNP 1 standard or equivalent. Carriage of certified GNSS receiver is mandatory.

2. On first contact with HONG KONG Departure state callsign, current and cleared altitude.

3. If PBN ceases to comply with RNP 1 while airborne, notify ATC as soon as possible, assistance will be provided as necessary.

4. If unable to follow SID track, advise ATC and request assistance.

5. If unable to comply with vertical climb profile, inform ATC prior to start-up.

SOSLU 1T [SOSL1T]
RNAV (GNSS) DEPARTURE
(RWY 07C)

BETWEEN 2300-0700LT EXPECT PECAN 1Y

FOR CONTINGENCY PROCEDURE REFER TO 10-3X
FOR TERMINAL TRANSITION ROUTES
V10, V11 & V12 REFER TO CHART 10-3X6

SPEED: MAX 250 KT BELOW 10000
UNLESS OTHERWISE INSTRUCTED

This SID requires a minimum climb gradient of 6.8% (414 per NM) until leaving 3900.

Gnd speed-KT	75	100	150	200	250	300
6.8% V/V (fpm)	516	689	1033	1377	1722	2066

Initial climb clearance **5000**,
EXPECT further climb when
instructed by ATC

ROUTING

HH302 - TEGUB (K210; 4000+) - HH393 - VEMSO (9000+) - SAMED (FL130+) - SEGPO (FL140+) - SOSLU - PECAN.

The chart illustrates the RNAV (GNSS) DEPARTURE (RWY 07C) procedure. The flight path starts at HH302 (074°) and proceeds to TEGUB (K210; 4000+) at 210 KT. From TEGUB, the path continues to HH393 (116°), VEMSO (9000+) at 147°, SAMED (FL130) at 217°, SEGPO (FL140) at 221°, SOSLU at 197°, and finally PECAN at 12.7. The chart also shows the ARP (Airport Reference Point) and the HONG KONG VHHK FIR. Contour intervals are marked at 4000 and 2000 feet. The chart includes a legend for speed and altitude, and a note about the minimum climb gradient of 6.8% (414 per NM) until leaving 3900 feet.

Legend:

4000
2000

CONTOUR INTERVALS

Speed and Altitude Legend:

Gnd speed-KT	75	100	150	200	250	300
6.8% V/V (fpm)	516	689	1033	1377	1722	2066

VHHK/HKG
HONG KONG INTL

JEPPESSEN
22 NOV 24
(10-3V)
EFF 28 NOV

HONG KONG, PR OF CHINA
RNAV SID

© JEPPESSEN, 2024. ALL RIGHTS RESERVED.




Trans alt: 9000

DME required

1. On first contact with HONG KONG Departure state callsign, current and cleared altitude.
2. If unable to follow SID track, advise ATC and request assistance.
3. EXPECT vectors to join flight plan route.

THIS CONTINGENCY PROCEDURE IS EXCLUSIVE FOR FLIGHTS EXEMPT FROM
RNP 1 REQUIREMENT (REFER TO 10-1P PAGES)

SPEED: MAX 250 KT BELOW 10000 UNLESS OTHERWISE INSTRUCTED

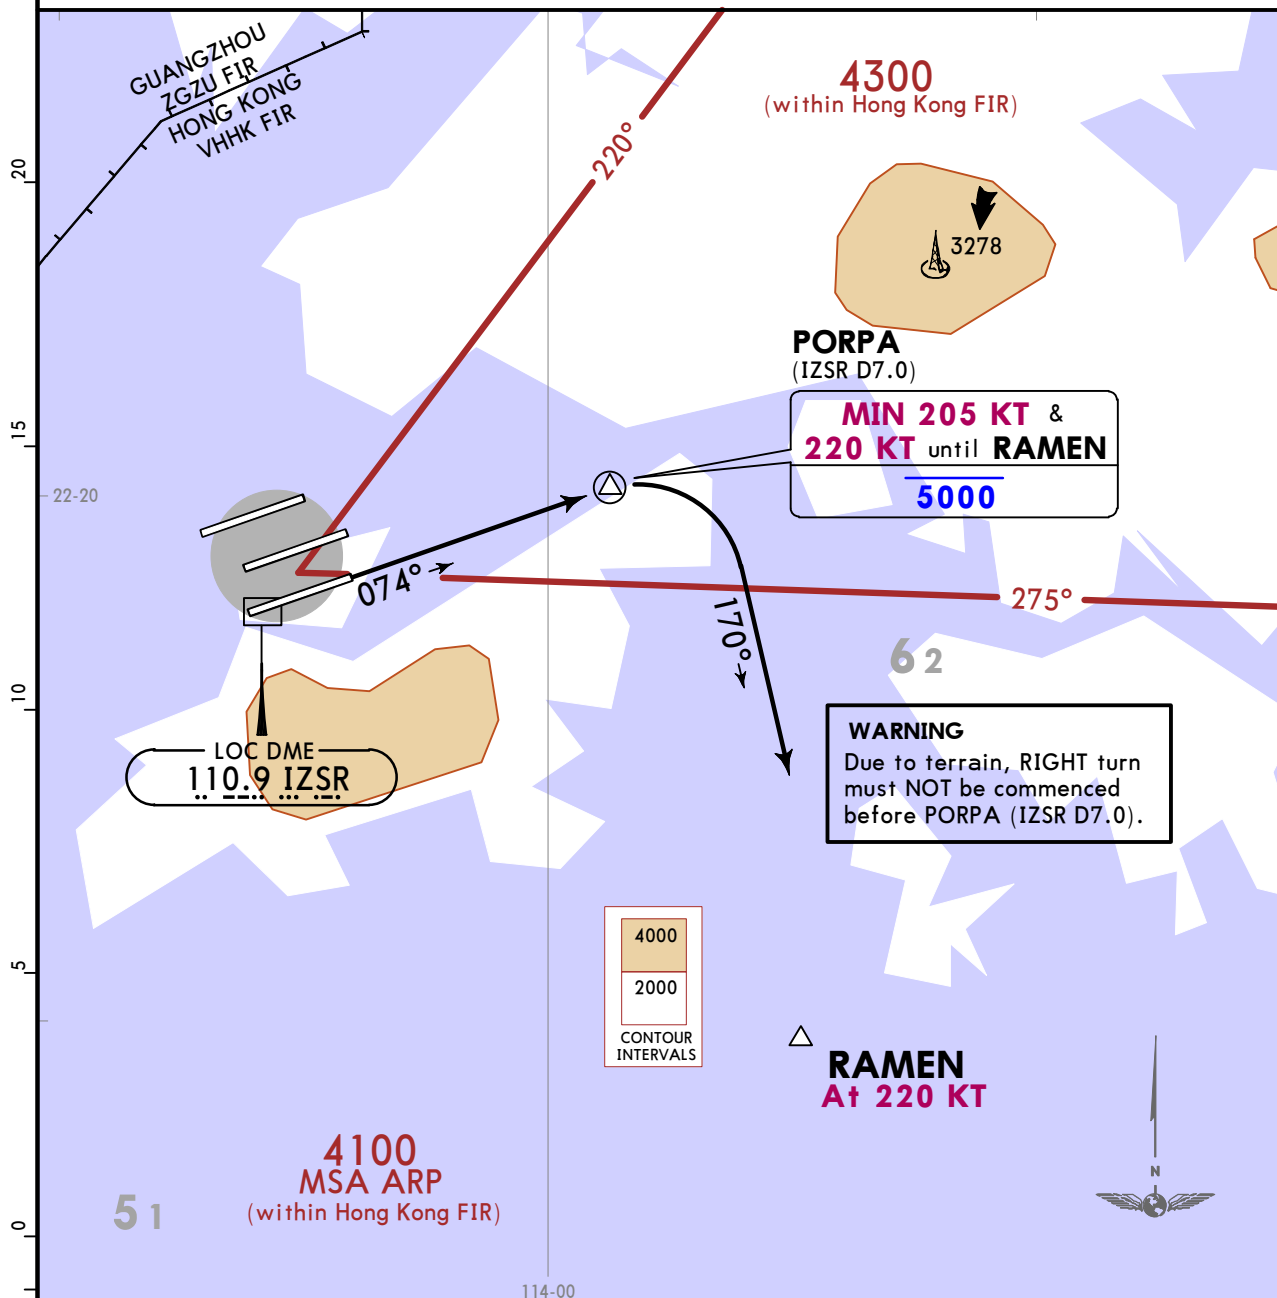

This SID requires a minimum climb gradient of 4.9% (298 per NM) until leaving 1400.

Gnd speed-KT	75	100	150	200	250	300
4.9% V/V (fpm)	372	496	744	992	1241	1489

Initial climb clearance **5000**,
EXPECT further climb when instructed by ATC

ROUTING

074° track to PORPA (IZSR D7.0), turn RIGHT, 170° track, request RADAR vectors to RAMEN.

HONG KONG, PR OF CHINA
28 Nov SID

VHHH/HKG
HONG KONG INTL

JEPPESSEN HON
22 NOV 24 **(10-3X)** **Eff 28 Nov**

HONG KONG, PR OF CHINA
28 Nov SID

HONG KONG Departure
123.8

Apt Elev
28

Trans alt: 9000


DME required

1. On first contact with HONG KONG Departure state callsign, current and cleared altitude.
2. If unable to follow SID track, advise ATC and request assistance.
3. EXPECT vectors to join flight plan route.

**RAMEN 1C DEPARTURE [RAME1C]
(RWY 07C)**

THIS CONTINGENCY PROCEDURE IS EXCLUSIVE FOR FLIGHTS EXEMPT FROM
RNP 1 REQUIREMENT (REFER TO 10-1P PAGES)

SPEED: MAX 250 KT BELOW 10000 UNLESS OTHERWISE INSTRUCTED

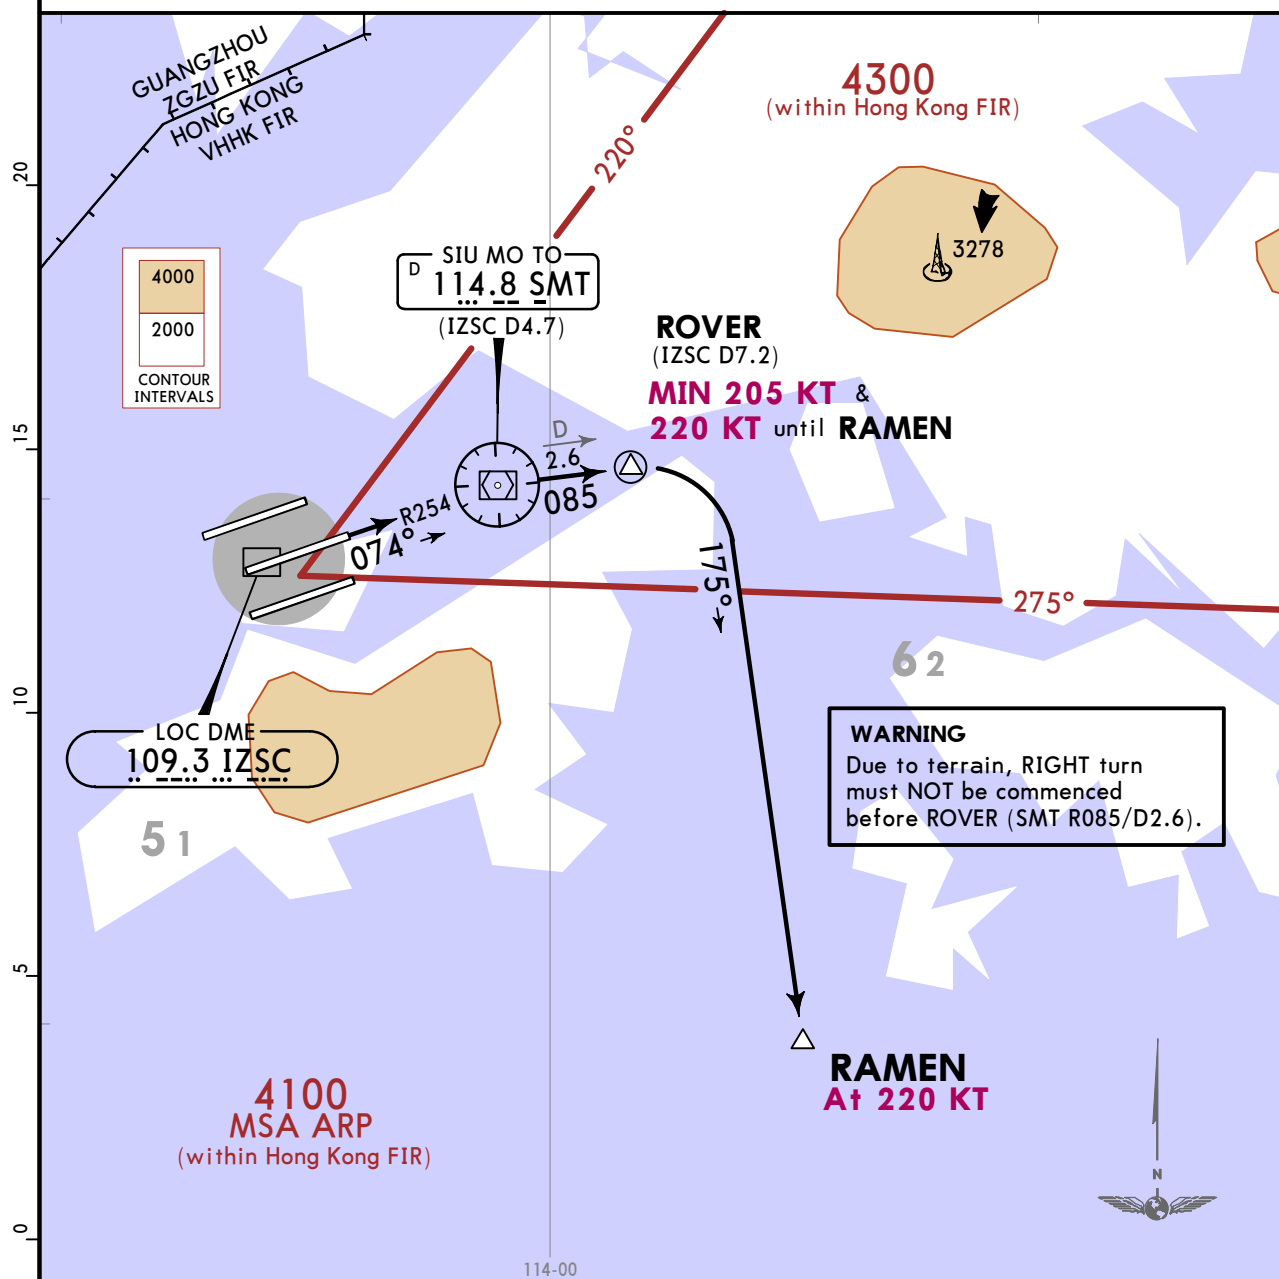

This SID requires a minimum climb gradient of 3.8% (231 per NM) until leaving 1300.

Gnd speed-KT	75	100	150	200	250	300
3.8% V/V (fpm)	289	385	577	770	962	1154

Initial climb clearance **5000**,
EXPECT further climb when instructed by ATC

ROUTING

On 074° track to SMT, SMT R085 to ROVER, turn RIGHT, 175° track, request RADAR vectors to RAMEN.

HONG KONG, PR OF CHINA
28 Nov SID

VHHH/HKG
HONG KONG INTL

JEPPESSEN HON
22 NOV 24 (10-3X1) Eff 28 Nov

HONG KONG, PR OF CHINA
28 Nov SID

HONG KONG Departure
123.8

Apt Elev
28

Trans alt: 9000


DME required

1. On first contact with HONG KONG Departure state callsign, current and cleared altitude.
2. If unable to follow SID track, advise ATC and request assistance.
3. EXPECT vectors to join flight plan route.

**RAMEN 1E DEPARTURE [RAME1E]
(RWY 07L)**

THIS CONTINGENCY PROCEDURE IS EXCLUSIVE FOR FLIGHTS EXEMPT FROM
RNP 1 REQUIREMENT (REFER TO 10-1P PAGES)

SPEED: MAX 250 KT BELOW 10000 UNLESS OTHERWISE INSTRUCTED

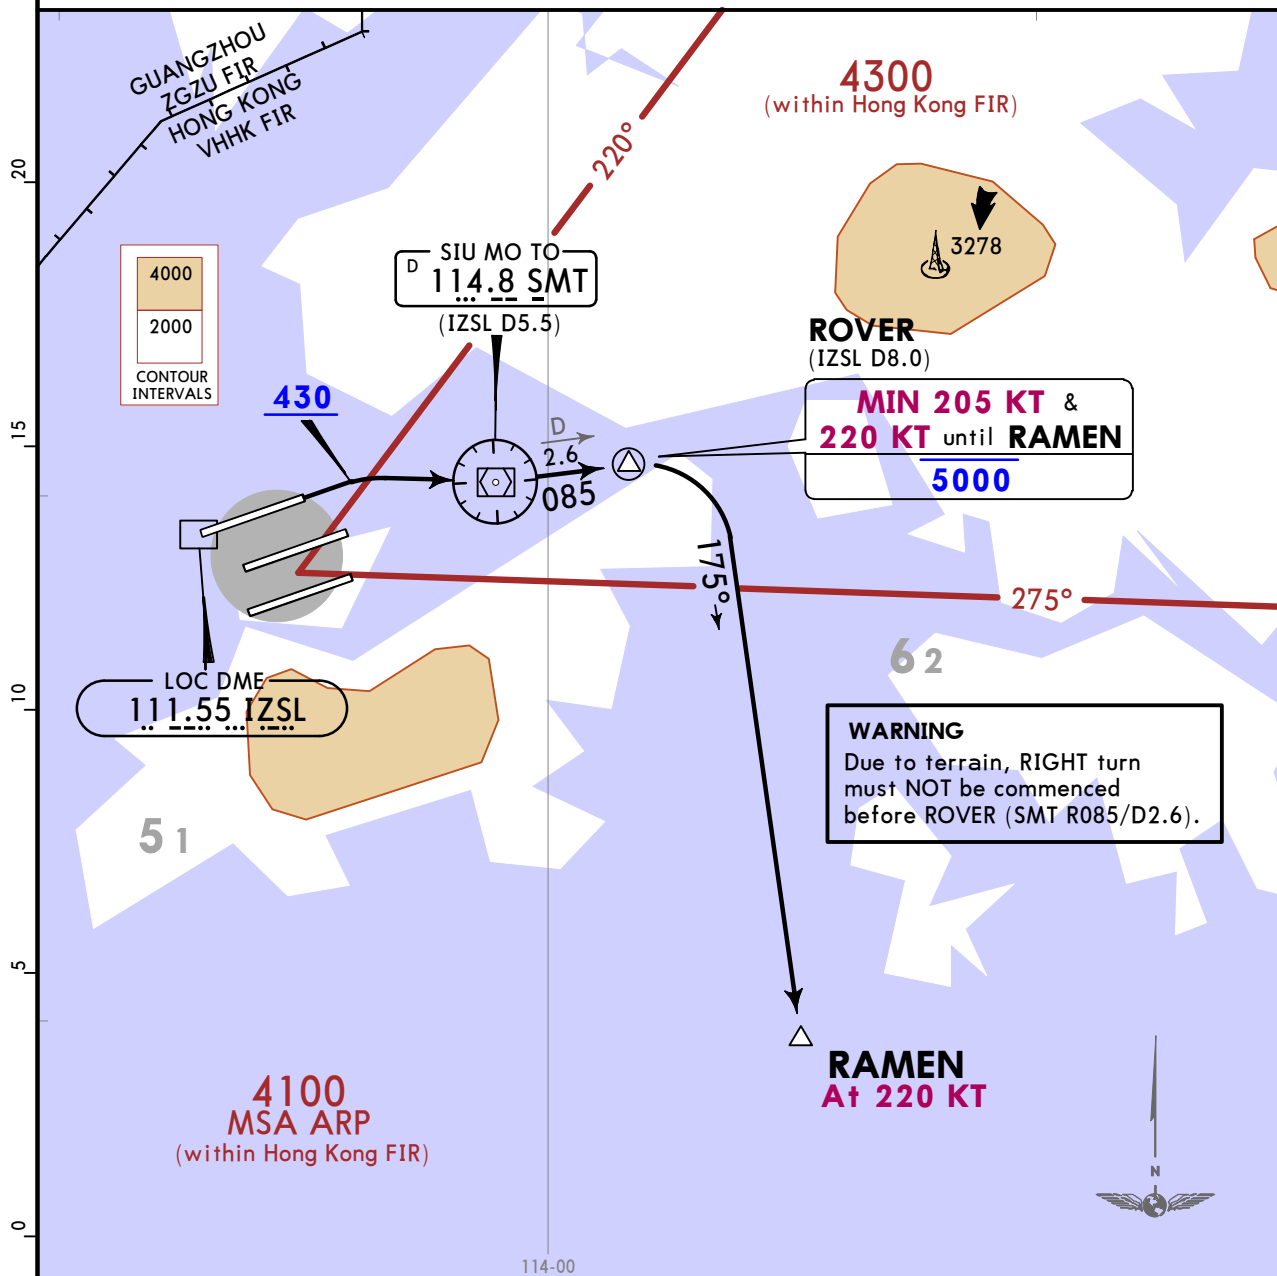

This SID requires a minimum climb gradient of 3.4% (207 per NM) until leaving 1400.

Gnd speed-KT	75	100	150	200	250	300
3.4% V/V (fpm)	258	344	516	689	861	1033

Initial climb clearance **5000**,
EXPECT further climb when instructed by ATC

ROUTING

Climb straight ahead to 430, turn RIGHT direct to SMT, turn LEFT, 085° track to ROVER, turn RIGHT, 175° track, request RADAR vectors to RAMEN.

VHHH/HKG
HONG KONG INTL

22 NOV 24 10-3X2 Eff 28 Nov


HONG KONG, PR OF CHINA
SID

HONG KONG Departure 122.0	Apt Elev 28	Trans alt: 9000
		DME required
		1. On first contact with HONG KONG Departure state callsign, current and cleared altitude. 2. If unable to follow SID track, advise ATC and request assistance. 3. EXPECT vectors to join flight plan route.

RUMSY 2B DEPARTURE [RUMS2B]
(RWY 25L)

THIS CONTINGENCY PROCEDURE IS EXCLUSIVE FOR FLIGHTS EXEMPT FROM
RNP 1 REQUIREMENT (REFER TO 10-1P PAGES)

SPEED: MAX 250 KT BELOW 10000 UNLESS OTHERWISE INSTRUCTED

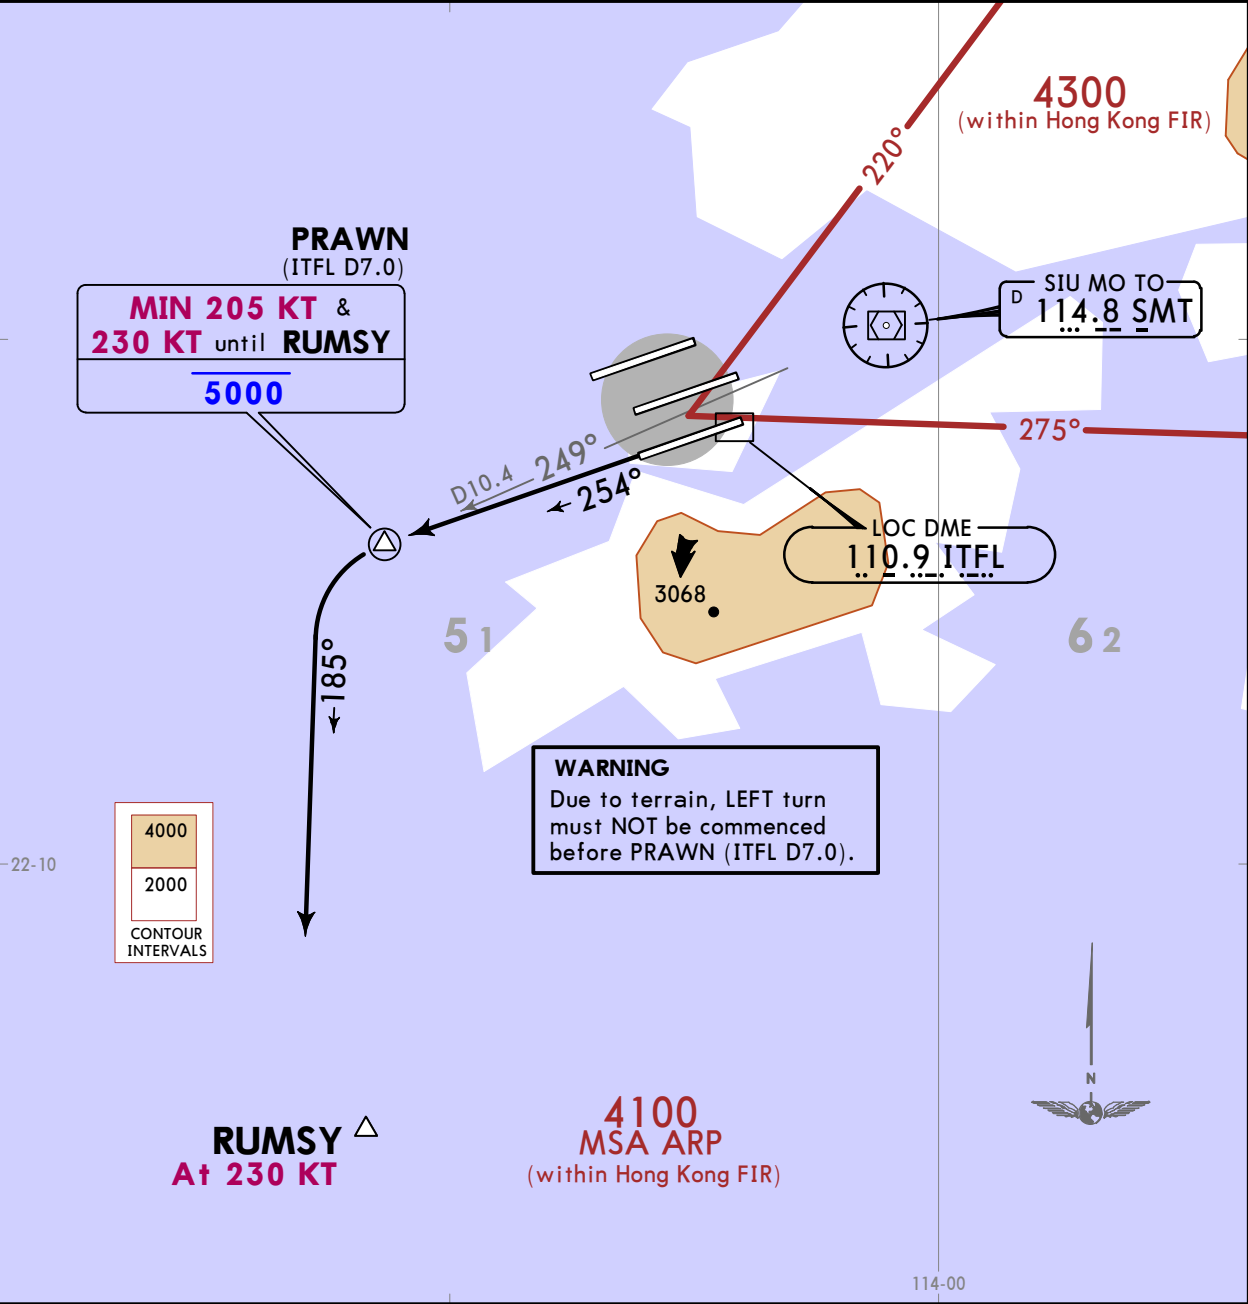

This SID requires a minimum climb gradient
of
3.3% (201 per NM).

Gnd speed-KT	75	100	150	200	250	300
3.3% V/V (fpm)	251	334	501	668	835	1003

Initial climb clearance **5000**,
EXPECT further climb when instructed by ATC

ROUTING

254° track to PRAWN (ITFL D7.0), turn LEFT, 185° track, request RADAR vectors to RUMSY.

VHHH/HKG
HONG KONG INTL


JEPPESEN HONG KONG, PR OF CHINA
22 NOV 24 10-3X3 Eff 28 Nov SID

HONG KONG Departure 123.8	Apt Elev 28	Trans alt: 9000
		DME required
		1. Do not turn LEFT before DER. 2. On first contact with HONG KONG Departure state callsign, current and cleared altitude. 3. If unable to follow SID track, advise ATC and request assistance. 4. EXPECT vectors to join flight plan route.

RUMSY 1D DEPARTURE [RUMS1D]
(RWY 25C)

THIS CONTINGENCY PROCEDURE IS EXCLUSIVE FOR FLIGHTS EXEMPT FROM
RNP 1 REQUIREMENT (REFER TO 10-1P PAGES)

SPEED: MAX 250 KT BELOW 10000 UNLESS OTHERWISE INSTRUCTED

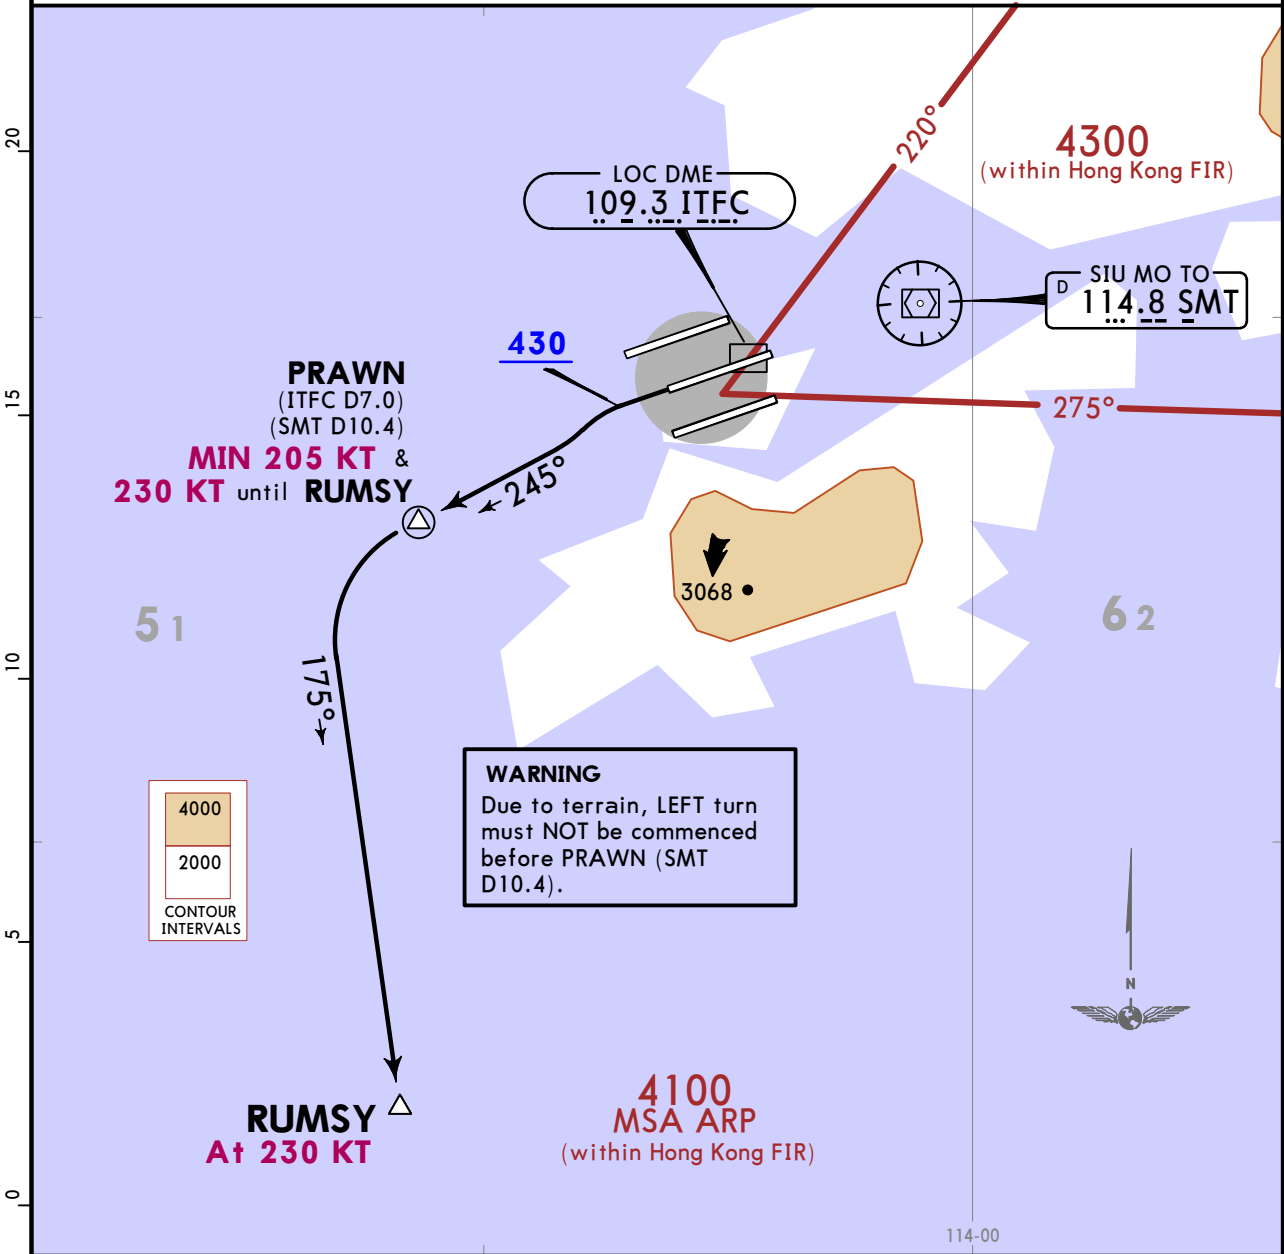

This SID requires a minimum climb gradient
of
3.3% (201 per NM).

Gnd speed-KT	75	100	150	200	250	300
3.3% V/V (fpm)	251	334	501	668	835	1003

Initial climb clearance **5000**,
EXPECT further climb when instructed by ATC


ROUTING

Climb straight ahead to 430, 245° track to PRAWN (SMT D10.4), turn LEFT, 175° track, request RADAR
vectors to RUMSY.

CHANGES: New chart (TFRs transferred, renamed & revised).
© JEPPESEN, 2024. ALL RIGHTS RESERVED.

VHHH/HKG
HONG KONG INTL
22 NOV 24
10-3X5
JEPPESEN

HONG KONG, PR OF CHINA
TERMINAL TRANSITION ROUTE

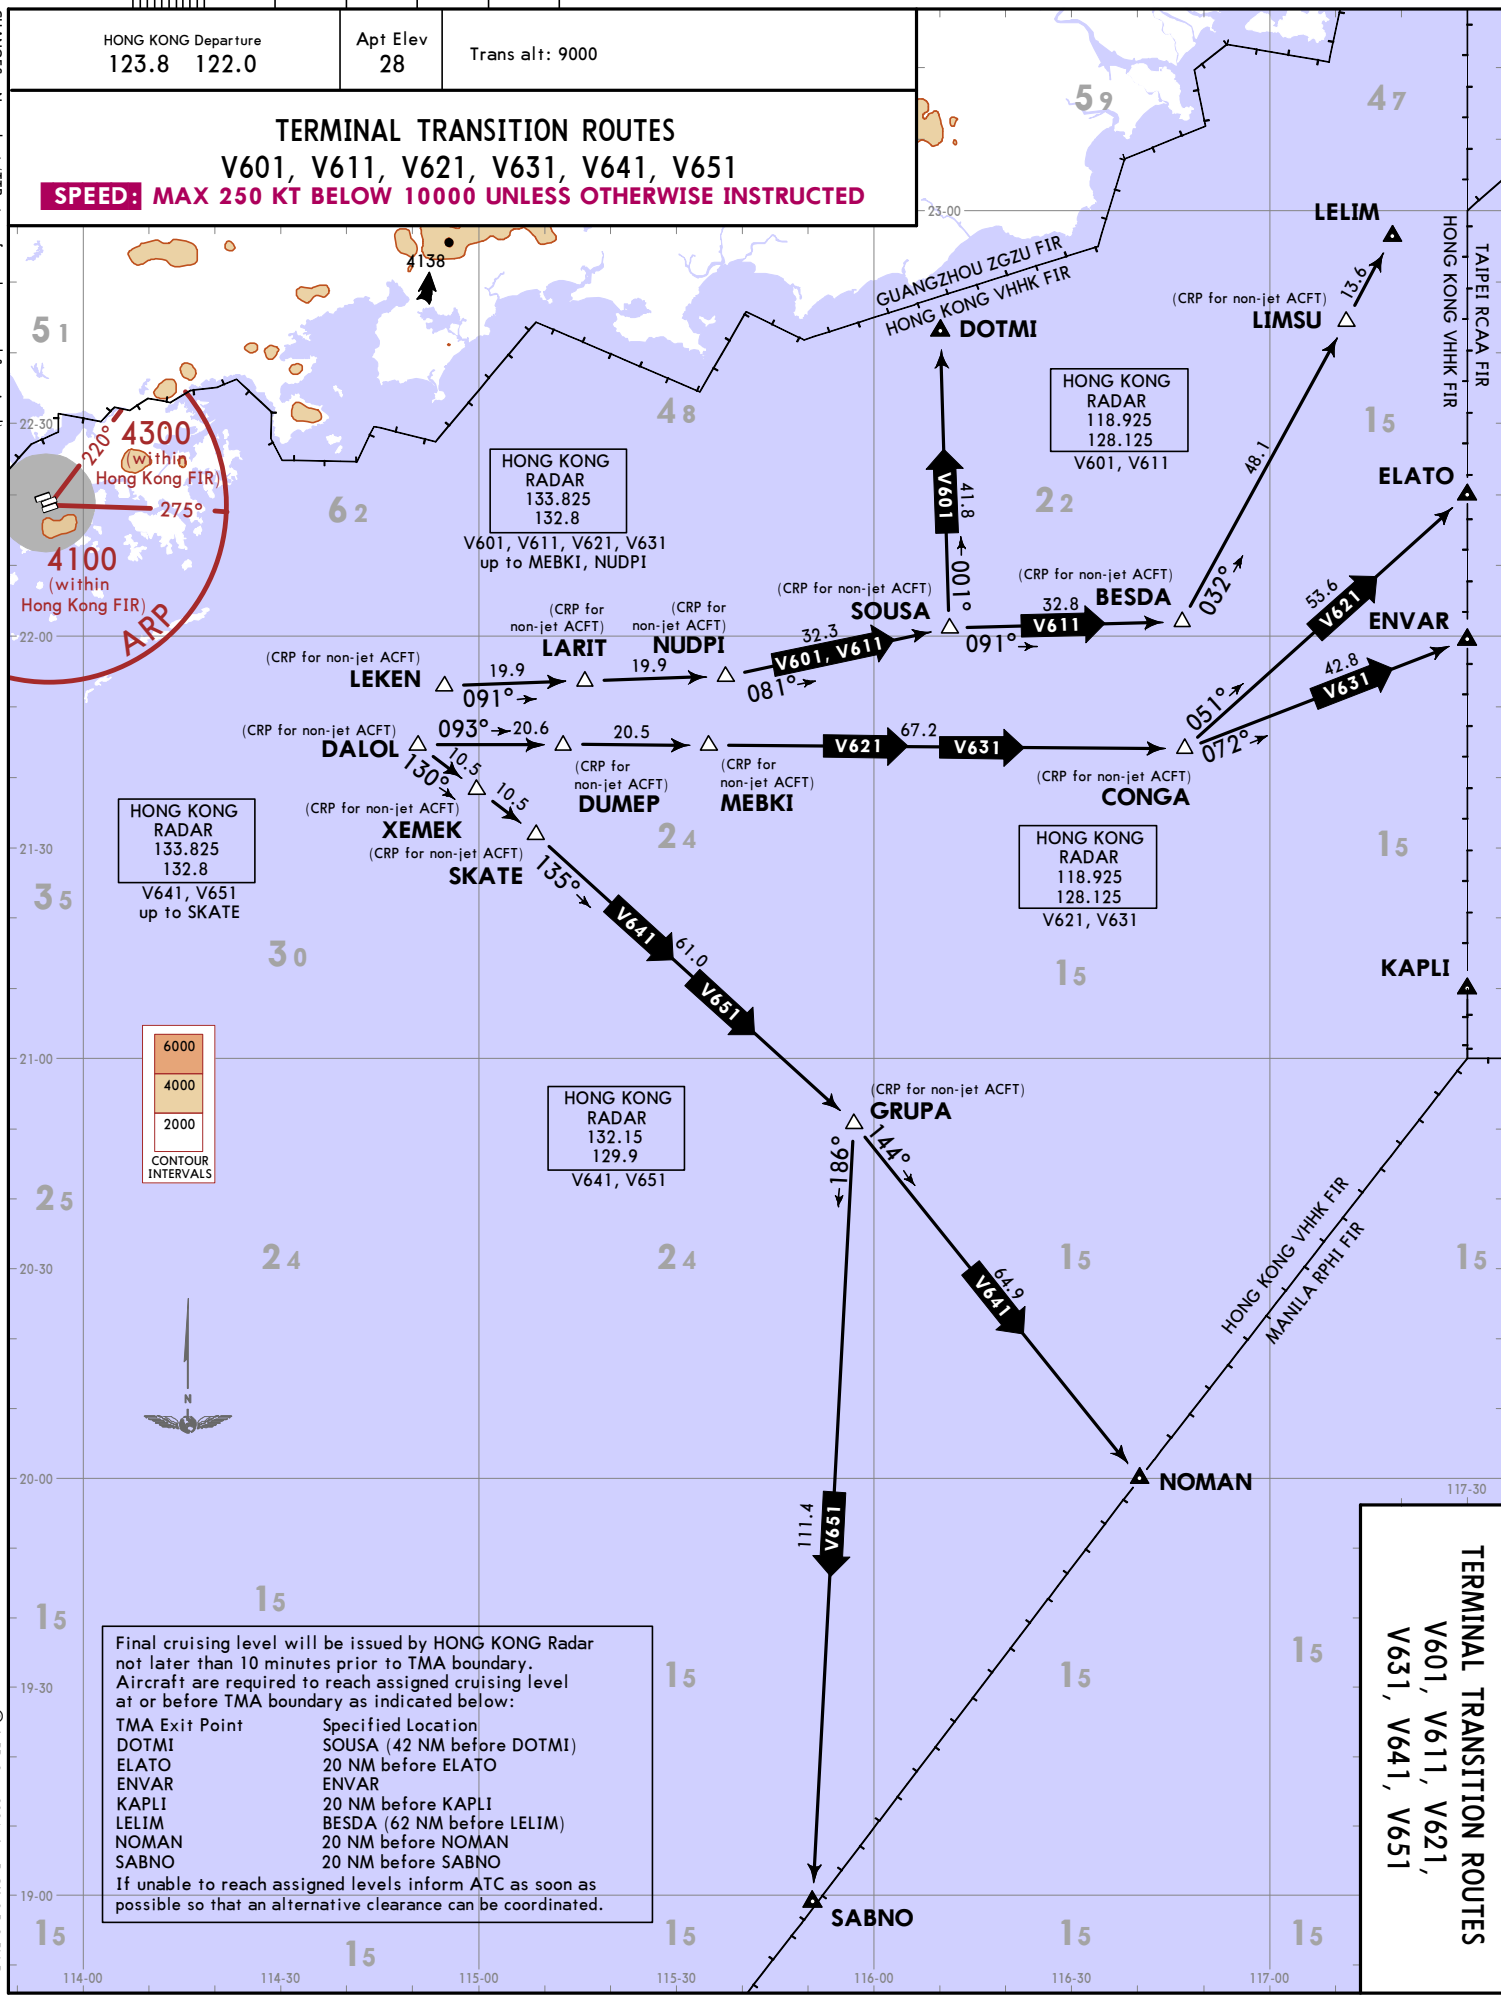

VHHH/HKG
HONG KONG INTL

JEPPESSEN
10-3X6
22 NOV 24

HONG KONG, PR OF CHINA
TERMINAL TRANSITION ROUTE