

VHHH/HKG
HONG KONG INTL

 **JEPPESSEN HONG KONG, PR OF CHINA**
22 NOV 24 **10-4** **Eff 28 Nov**

NOISE

NOISE ABATEMENT

LT minus 8 HOURS = UTC(Z)

GENERAL
NOISE MITIGATING MEASURES

The following measures are implemented daily between 2300-0700 LT (the "Noise Mitigation period") to manage ACFT noise exposure levels when operating conditions permit.

These measures include:

- South RWY (07R/25L) on Standby Mode;
- Preferential use of RWY 07L/07C;
- Usage of southbound SID route via RAMEN for RWY 07C;
- Preferential use of RNP Y (AR) APCH procedures for RWY 25C/25R;
- Continuous Descent Approach (CDA) procedure for RWY 25C/25R;
- Special ATC handling procedures for RWY 25C/25R departures.

Noise mitigating measures are not applicable to special authorised flights, flights with medical or SAR priority, and flights necessary for the calibration of procedures, navigation aids and landing aids.

SOUTH RWY (07R/25L) ON STANDBY MODE

South Runway (07R/25L) will be placed on Standby Mode during Noise Mitigation Period. Normal operations will not be permitted to use the South RWY during the noise mitigating period.

Under emergency or declared contingency circumstances, the South Runway (07R/25L) may be returned to Operational Mode but will be limited to the minimum extent necessary for permitted operations. (Note: The scheduled RWY maintenance periods will override Standby Mode on selected nights).

PREFERENTIAL USE OF RWY 07L/07C

RWY 07L/07C will be selected as the runway-in-use whenever the tailwind component is not greater than 5 knots.

RWY 25C/25R may be used if operationally required, e.g. unserviceability of navigation aids, adverse weather conditions, ACFT performance, traffic situations, etc.

ARRIVALS
NOISE MITIGATING MEASURES

PREFERENTIAL USE OF RNP Y (AR) APCH PROCEDURES FOR RWY 25C/25R

When meteorological conditions are suitable and RWY 25C/25R is nominated as the arrival runway, Hong Kong ATC will endeavor to preferentially sequence arrival flights having authorization to conduct RNP Y (AR) APCH to Hong Kong International Airport.

Flights with authorization will be facilitated and assigned the appropriate STAR or RADAR vectors to LUDLA for the RNP Y RWY 25 (AR) procedure to the appropriate RWY.

Flights without RNP AR authorization will be processed via the ILS/LOC or RNP (LNAV/VNAV) approach procedures and may be accorded lower priority when sequencing is required.

CONTINUOUS DESCENT APPROACH (CDA) PROCEDURE FOR RWY 25C/25R

Arrivals to RWY 25C/25R via straight-in ILS/LOC or RNP (LNAV/VNAV) instrument approach procedures may expect continuous descent approach (CDA) subject to the prevailing traffic situation.

VHHH/HKG
HONG KONG INTL

 **JEPPESEN** HONG KONG, PR OF CHINA
22 NOV 24 **10-4A** **Eff 28 Nov**

NOISE

NOISE ABATEMENT (CONTD)

ARRIVALS

NOISE MITIGATING MEASURES (CONTD)

CDA PROCEDURE

- Pilots may expect to commence a continuous descent profile from altitude of 8000 or higher. Subject to ATC clearance, low thrust settings and a relatively clean configuration should be maintained to minimise noise nuisance.
- If RADAR vectors are given, the estimated track miles to touchdown will be passed with descent clearance and further distance information may be given as required.
- Pilots should maintain ACFT's minimum clean configuration speed as far as practicable and are expected to descend in a manner that complies with the published or assigned speed restrictions.
- If ACFT cannot comply with the CDA procedures or speed restrictions, the pilot should advise ATC in good time so that alternative arrangements can be made.

DEPARTURES

ICAO NOISE ABATEMENT DEPARTURE PROCEDURE RWY 07

All operators are to adopt either NADP 1 or NADP 2 (ICAO Doc 8168 Volume 1) procedures for all take-offs on RWY 07.

Operators are not required to inform CAD of the adopted procedure.

NOISE MITIGATING MEASURES


USAGE OF SOUTHBOUND SID ROUTE VIA RAMEN FOR RWY 07C

All departures from RWY 07C may expect the appropriate BEKOL, DALOL, LEKEN or PECAN SID via RAMEN. These SIDs route predominantly overwater via the West Lamma Channel and avoid overflight of densely populated areas at low altitude.

Pilots shall comply with the SID procedures and requirements (i.e. level and speed restrictions, terrain clearance, etc.) as specified in 10-1P pages and procedure charts.

SPECIAL ATC HANDLING PROCEDURES FOR RWY 25C/25R DEPARTURES

Departures from RWY 25C/25R may expect to remain on the appropriate SID track until passing 9000 or until they are SOUTH of Lantau Island, before being provided with RADAR vectors, as appropriate.

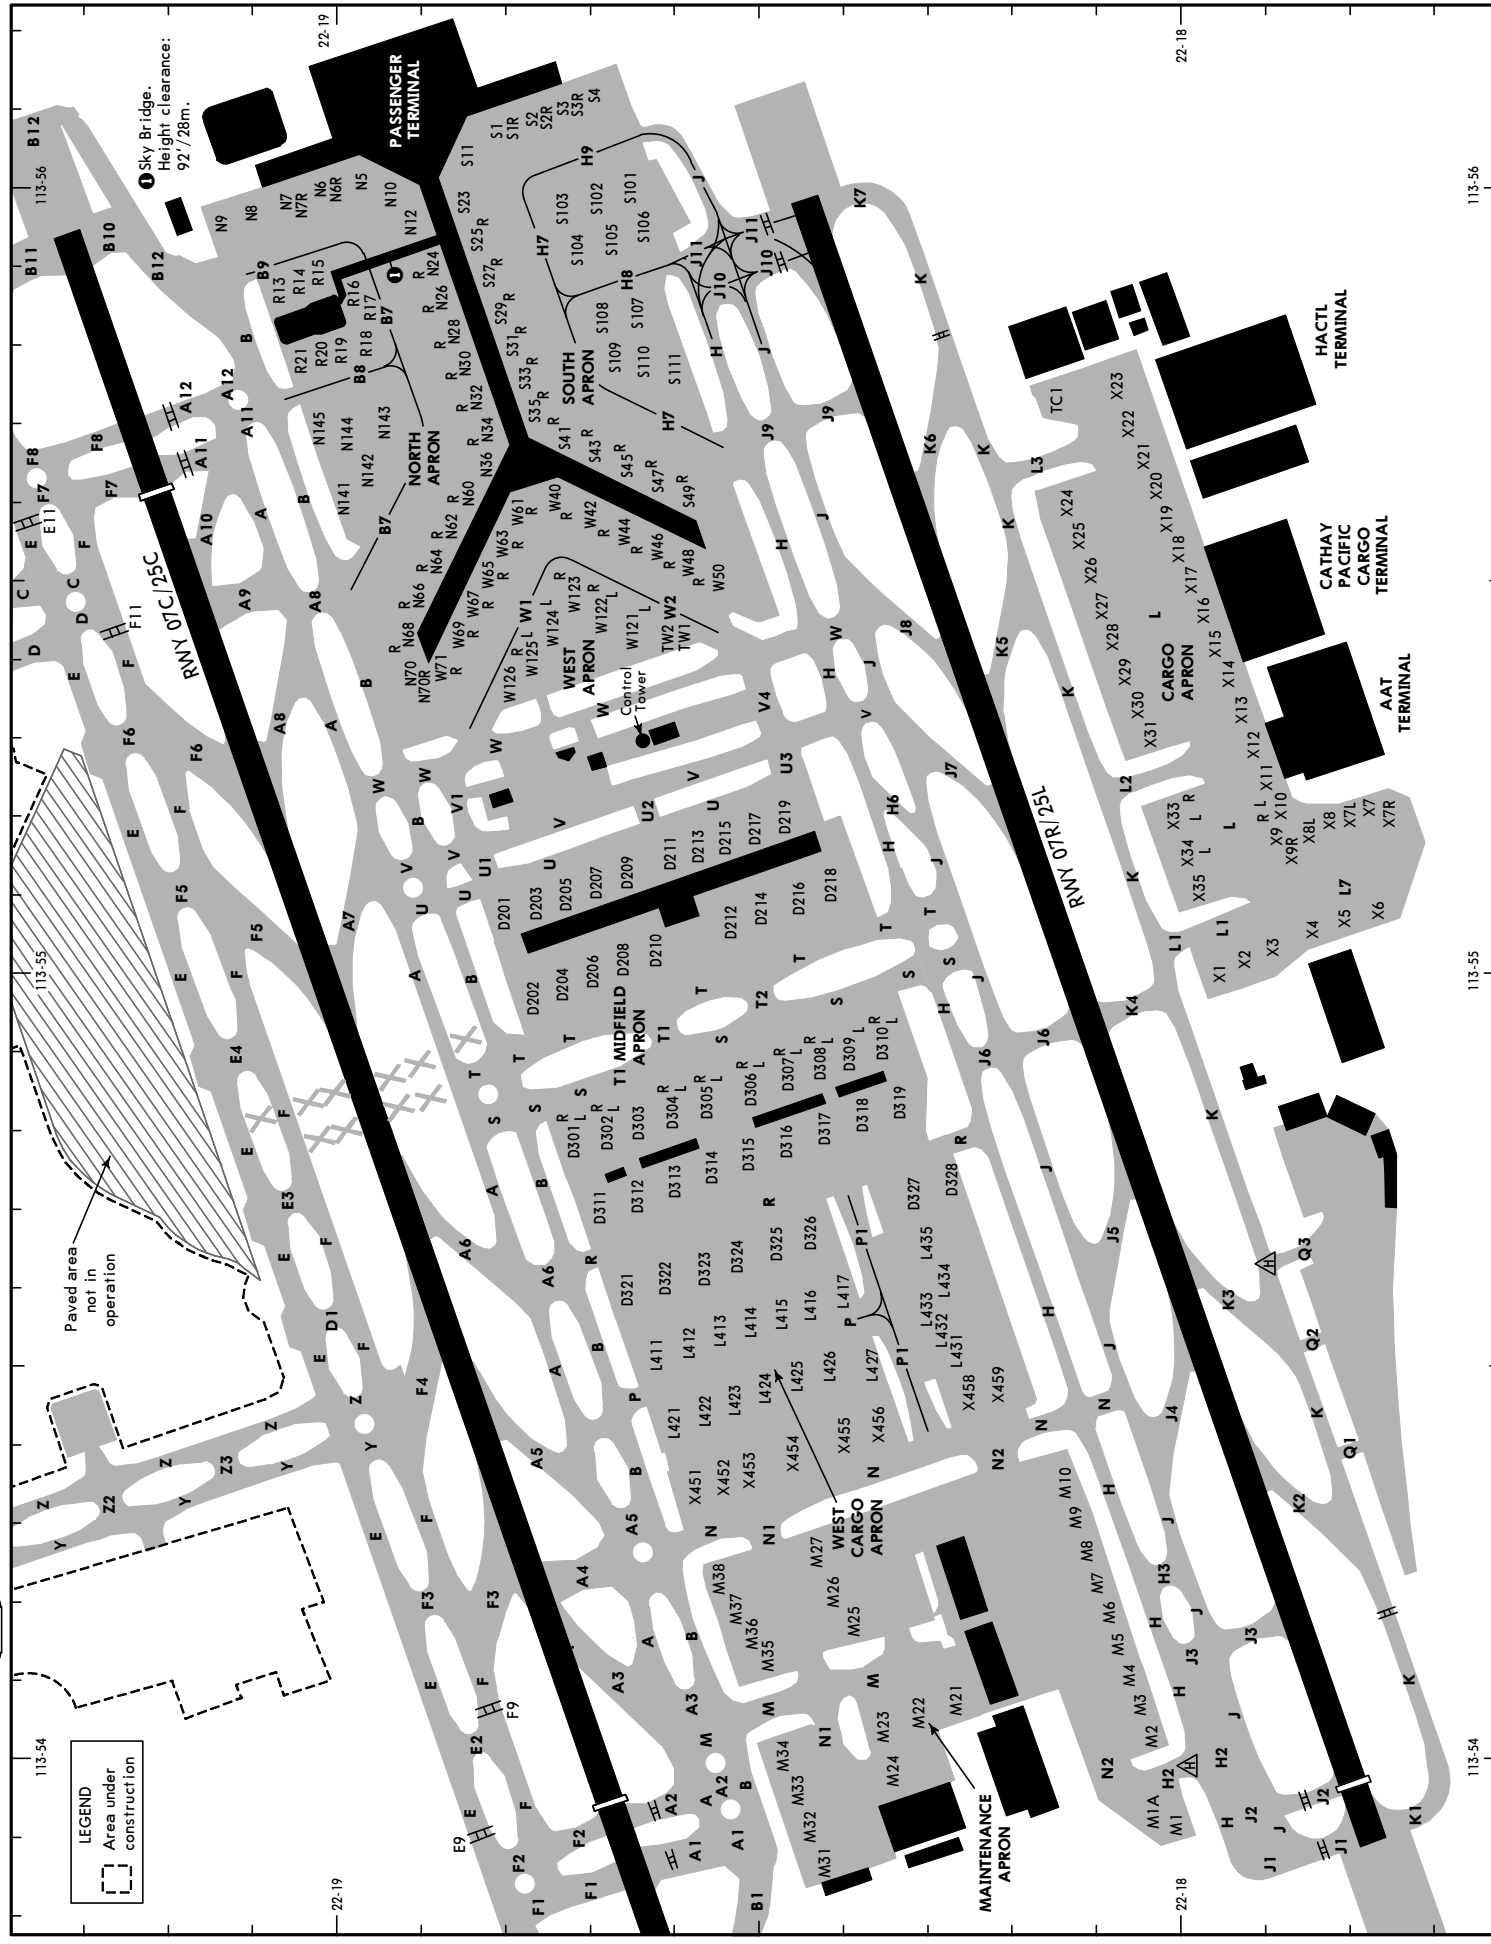

21 MAR 25

10-9C

JEPPESEN HONG KONG, PR OF CHINA

HONG KONG INTL

VHHH/HKG

Printed from JeppView for Windows 5.3.0.0 on 04 Oct 2025; Terminal chart data cycle 12-2025 (Expired); Notice: After 19 Jun 2025, 0000Z, this chart may no longer be valid


INS COORDINATES				INS COORDINATES			
STAND No.	COORDINATES	STAND No.	COORDINATES	STAND No.	COORDINATES	STAND No.	COORDINATES
D201 thru D203 D204 D205 D206 D207	N22 18.8 E113 55.0 N22 18.7 E113 55.0 N22 18.7 E113 55.1 N22 18.7 E113 55.0 N22 18.7 E113 55.1	M8, M9 M10 M21, M22 M23 M24	N22 18.1 E113 54.3 N22 18.1 E113 54.4 N22 18.3 E113 54.0 N22 18.4 E113 54.0 N22 18.3 E113 54.0	W40, W42 W44 thru W48 W50 W61 W63 thru W67	N22 18.7 E113 55.6 N22 18.6 E113 55.5 N22 18.5 E113 55.5 N22 18.8 E113 55.6 N22 18.8 E113 55.5		
D208 D209 D210 D211 D212	N22 18.7 E113 55.0 N22 18.6 E113 55.1 N22 18.6 E113 55.0 N22 18.6 E113 55.1 N22 18.5 E113 55.1	M25 thru M27 M31, M32 M33 M34 M35, M36	N22 18.4 E113 54.2 N22 18.4 E113 53.9 N22 18.5 E113 53.9 N22 18.5 E113 54.0 N22 18.5 E113 54.1	W69, W71 W121L W121 thru W123 W123R W124, W125	N22 18.9 E113 55.4 N22 18.6 E113 55.4 N22 18.7 E113 55.4 N22 18.7 E113 55.5 N22 18.7 E113 55.4		
D213 D214, D215 D216 D217 D218	N22 18.6 E113 55.1 N22 18.5 E113 55.1 N22 18.4 E113 55.1 N22 18.5 E113 55.1 N22 18.4 E113 55.1	M37, M38 N5 thru N6R, N7R N7 thru N9 N10 N12, N24	N22 18.5 E113 54.2 N22 19.0 E113 56.0 N22 19.1 E113 56.0 N22 18.9 E113 56.0 N22 18.9 E113 55.9	W125R W126 X1 X2, X3 X4	N22 18.8 E113 55.4 N22 18.8 E113 55.3 N22 18.0 E113 55.0 N22 17.9 E113 55.0 N22 17.8 E113 55.0		
D219 D301 thru D302 D303 thru D305 D306 D307L	N22 18.5 E113 55.2 N22 18.7 E113 54.8 N22 18.6 E113 54.8 N22 18.5 E113 54.8 N22 18.5 E113 54.9	N26, N28 N30 N32, N34 N36, N60 N60R	N22 18.9 E113 55.8 N22 18.8 E113 55.8 N22 18.8 E113 55.7 N22 18.8 E113 55.6 N22 18.9 E113 55.6	X5, X6 X7 thru X8L X9, X9R X10 thru X11 X12, X13	N22 17.8 E113 55.1 N22 17.8 E113 55.2 N22 17.9 E113 55.1 N22 17.9 E113 55.2 N22 17.9 E113 55.3		
D307 D307R D308 thru D309 D310L, D310 D310R	N22 18.5 E113 54.8 N22 18.5 E113 54.9 N22 18.4 E113 54.9 N22 18.3 E113 54.9 N22 18.4 E113 54.9	N62, N64 N66, N68 N70 N141, N142 N143	N22 18.9 E113 55.5 N22 18.9 E113 55.4 N22 18.9 E113 55.3 N22 19.0 E113 55.6 N22 18.9 E113 55.7	X14 X15 X16 thru X18 X19, X20 X21, X22	N22 17.9 E113 55.4 N22 18.0 E113 55.4 N22 18.0 E113 55.5 N22 18.0 E113 55.6 N22 18.0 E113 55.7		
D311 D312 thru D313 D314 D315 thru D316 D317 thru D318	N22 18.7 E113 54.7 N22 18.6 E113 54.7 N22 18.6 E113 54.8 N22 18.5 E113 54.8 N22 18.4 E113 54.8	N144, N145 R13 R14 R15 R16 thru R21	N22 19.0 E113 55.7 N22 19.1 E113 55.8 N22 19.0 E113 55.8 N22 19.0 E113 55.9 N22 19.0 E113 55.8	X23 X24 X25 thru X27 X28, X29 X30, X31	N22 18.1 E113 55.7 N22 18.2 E113 55.6 N22 18.1 E113 55.5 N22 18.1 E113 55.4 N22 18.1 E113 55.3		
D319 D321 thru D323 D324, D325 D326 D327, D328	N22 18.3 E113 54.8 N22 18.6 E113 54.6 N22 18.5 E113 54.6 N22 18.4 E113 54.6 N22 18.3 E113 54.7	S1, S2 S3, S4 S11 S23 S25, S27	N22 18.8 E113 56.1 N22 18.7 E113 56.1 N22 18.8 E113 56.0 N22 18.9 E113 56.0 N22 18.8 E113 55.9	X33 thru X33R X34 thru X35 X451 X452, X453 X454 thru X456	N22 18.0 E113 55.2 N22 18.0 E113 55.1 N22 18.6 E113 54.3 N22 18.5 E113 54.4 N22 18.4 E113 54.4		
L411, L412 L413 L414, L415 L416, L417 L421, L422	N22 18.6 E113 54.5 N22 18.6 E113 54.6 N22 18.5 E113 54.6 N22 18.4 E113 54.6 N22 18.6 E113 54.4	S29, S31 S33, S35 S41 S41R S43	N22 18.8 E113 55.8 N22 18.8 E113 55.7 N22 18.7 E113 55.6 N22 18.7 E113 55.7 N22 18.7 E113 55.6	X458 X459	N22 18.3 E113 54.5 N22 18.2 E113 54.5		
L423, L424 L425 L426, L427 L431 thru L433 L434 thru L435	N22 18.5 E113 54.4 N22 18.4 E113 54.4 N22 18.4 E113 54.5 N22 18.3 E113 54.5 N22 18.3 E113 54.6	S45 thru S49 S101 S102 S103 thru S105 S106	N22 18.6 E113 55.6 N22 18.6 E113 56.0 N22 18.7 E113 56.0 N22 18.7 E113 55.9 N22 18.6 E113 56.0				
M1, M1A M2 M3 M4, M5 M6, M7	N22 18.0 E113 53.9 N22 18.0 E113 54.0 N22 18.0 E113 54.1 N22 18.1 E113 54.1 N22 18.1 E113 54.2	S107 S108, S109 S110, S111 TC1 TW1, TW2	N22 18.6 E113 55.8 N22 18.7 E113 55.8 N22 18.6 E113 55.8 N22 18.2 E113 55.7 N22 18.6 E113 55.4				


CHANGES: Parking stands.

© JEPPESEN, 2018, 2025. ALL RIGHTS RESERVED.

CHANGES: Parking stands.



© JEPPESEN, 2018, 2025. ALL RIGHTS RESERVED.

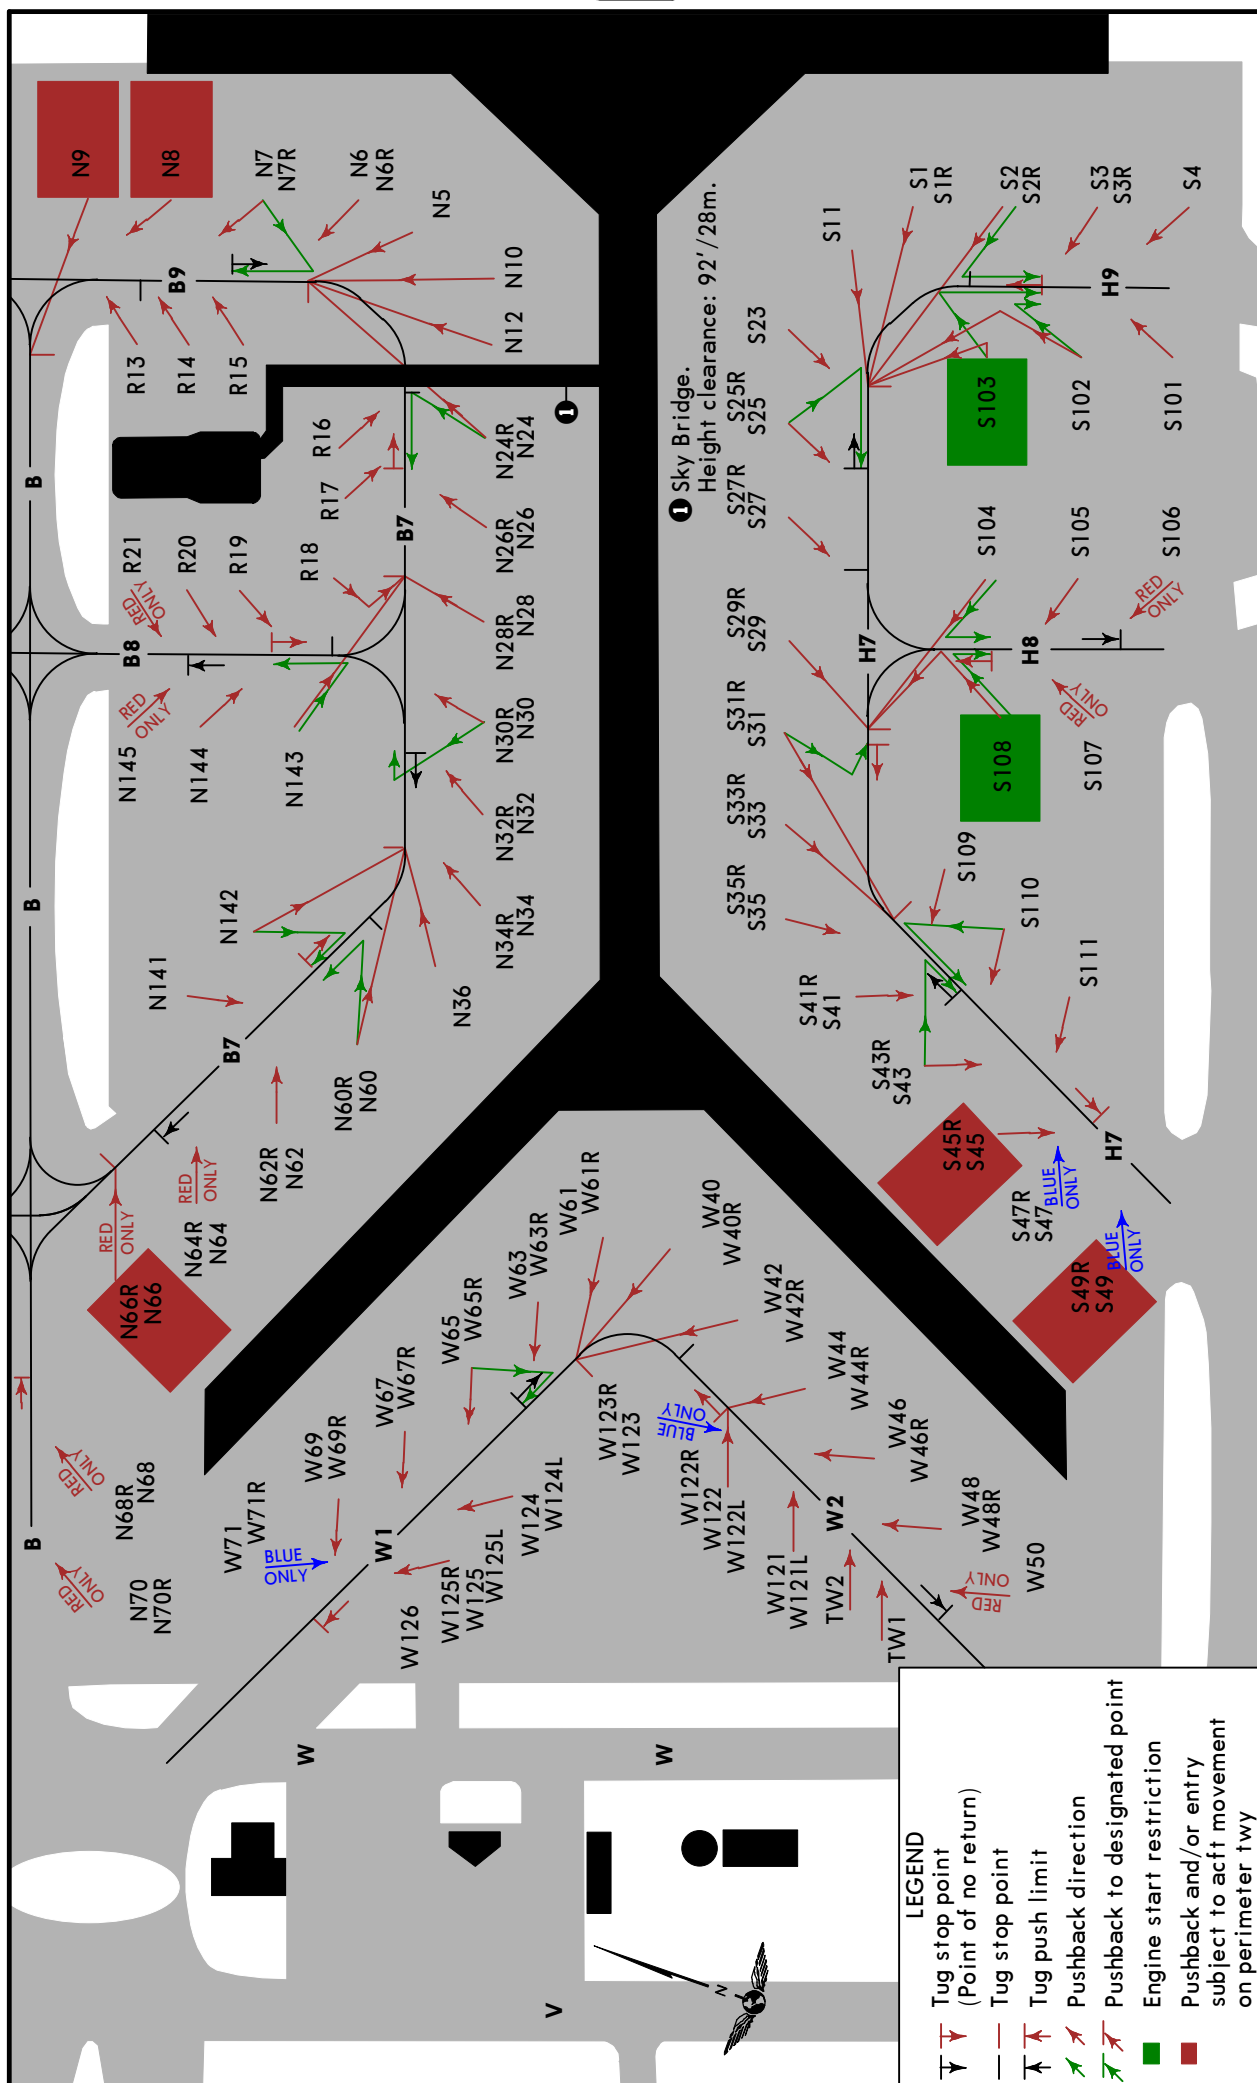

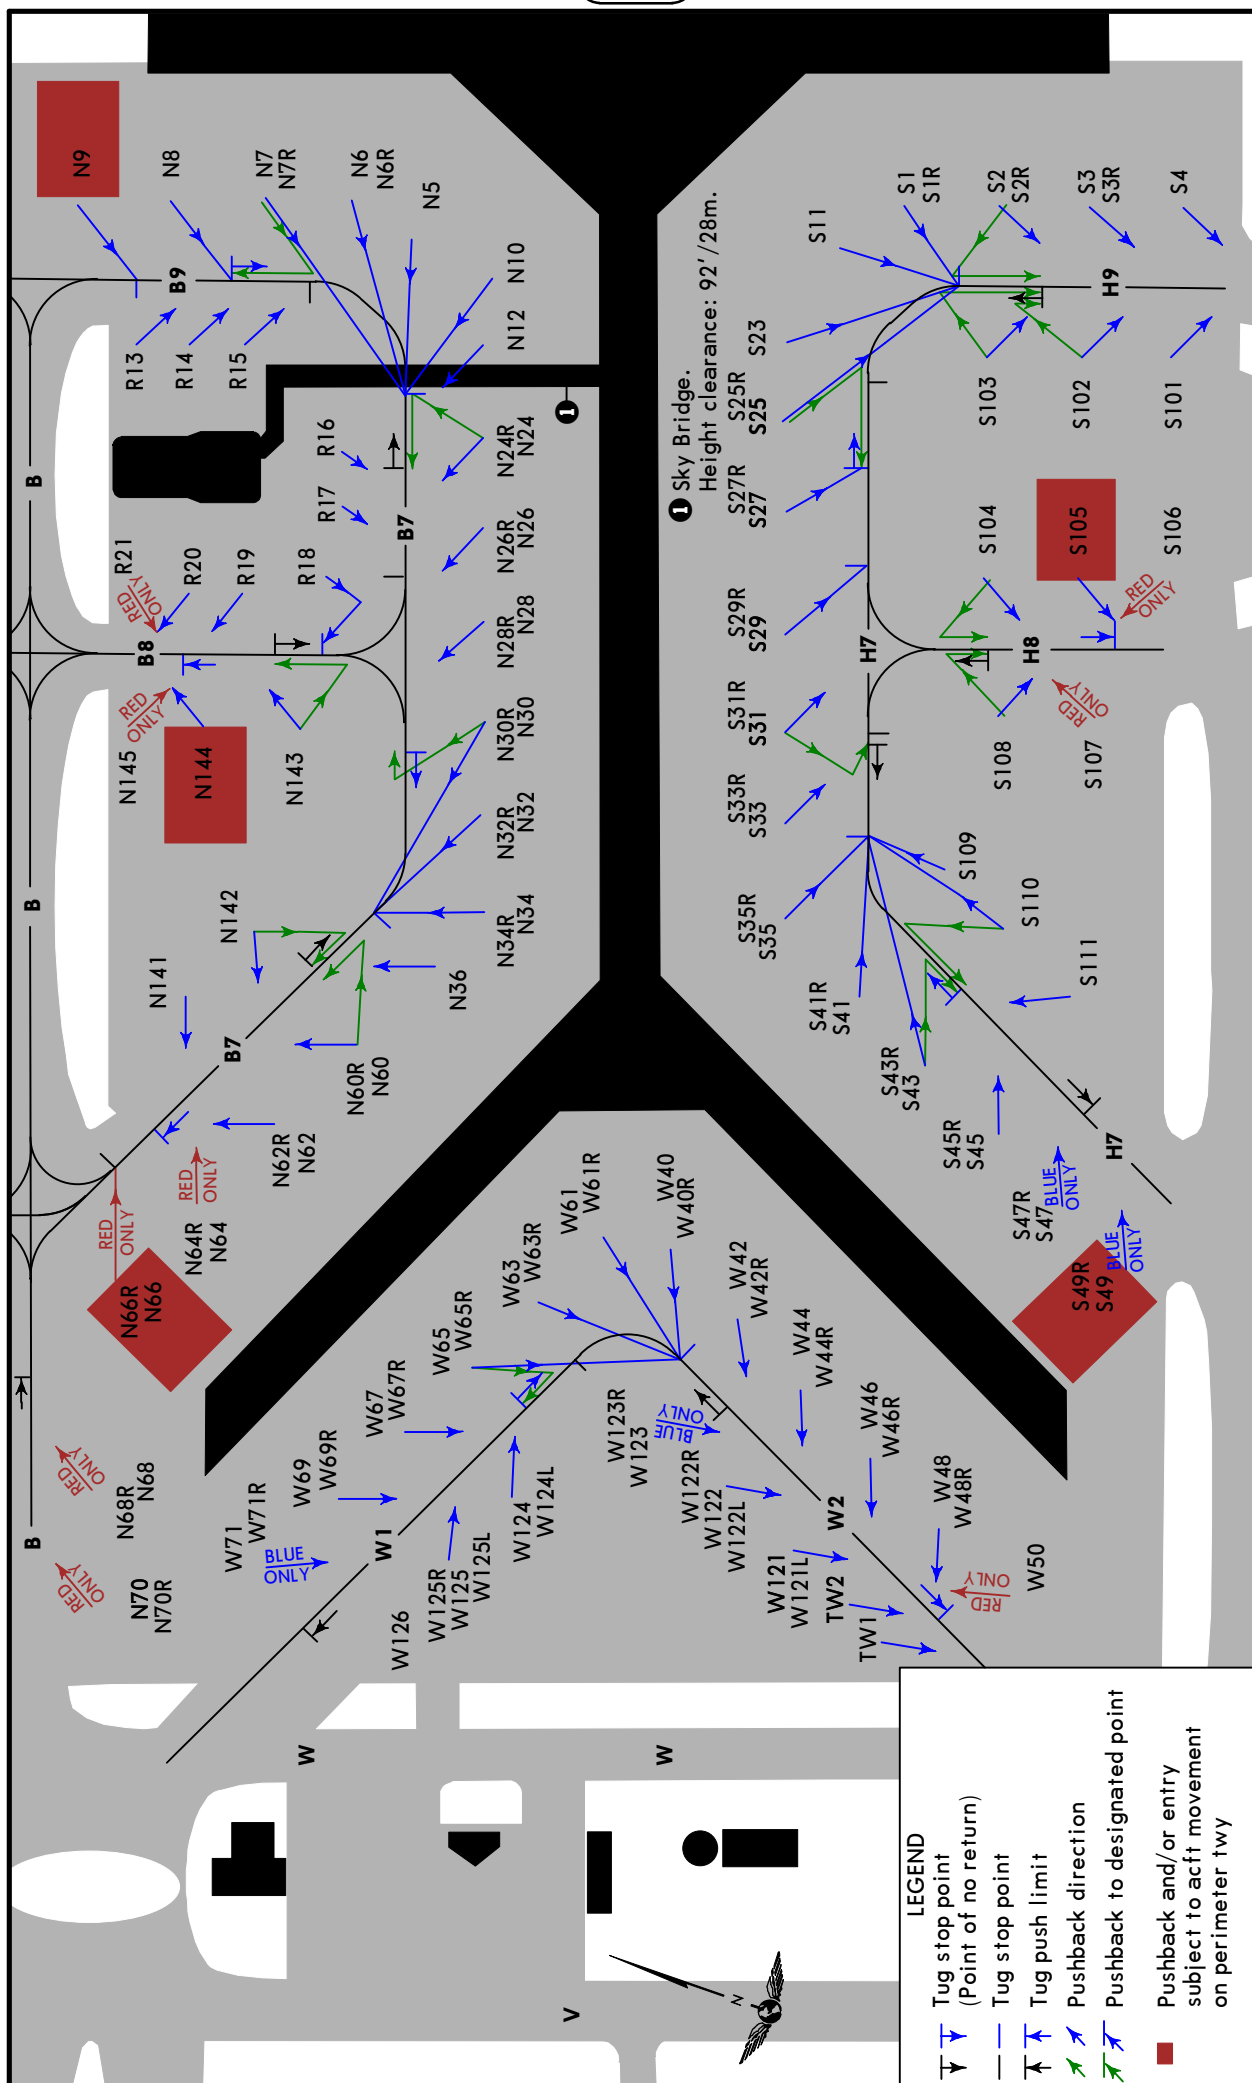

VHHH/HKG

JEPPESEN HONG KONG, PR OF CHINA
21 MAR 25 **10-9F**
HONG KONG INTL

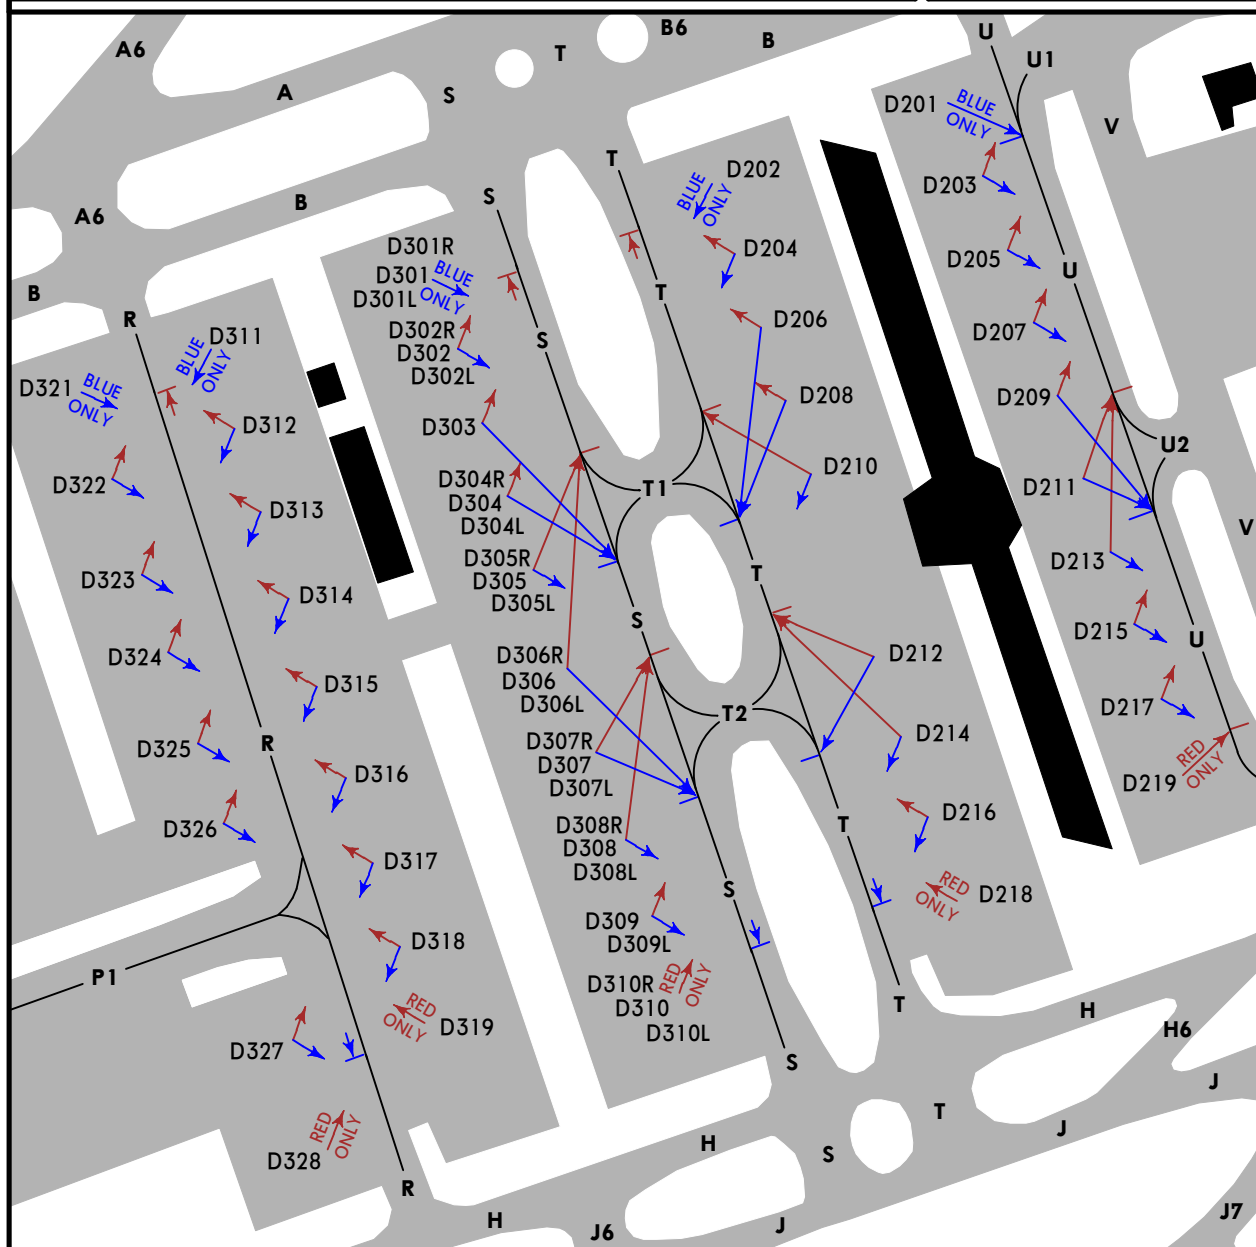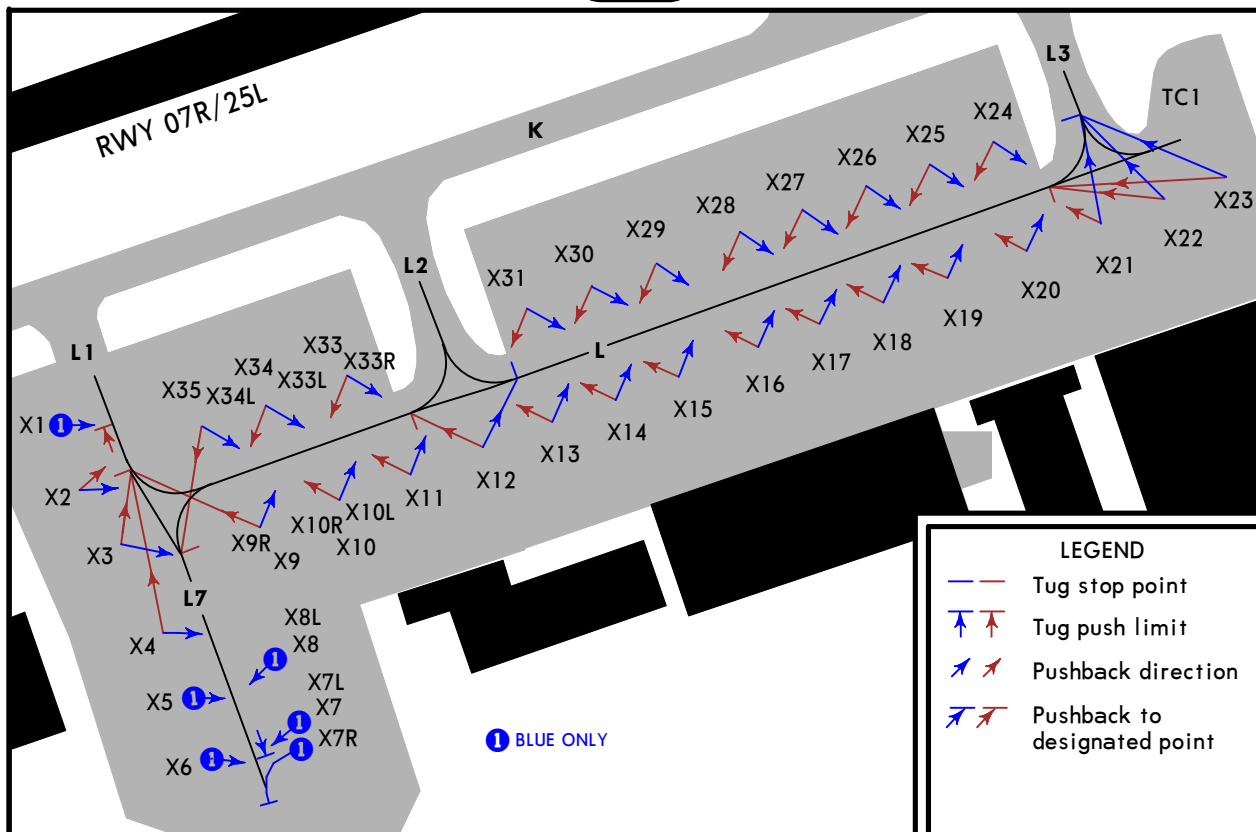


CHANGES: Parking stands.

© JEPPESEN, 2019, 2025. ALL RIGHTS RESERVED.

VHHH/HKG

21 MAR 25 10-9G JEPPESEN HONG KONG, PR OF CHINA
HONG KONG INTL

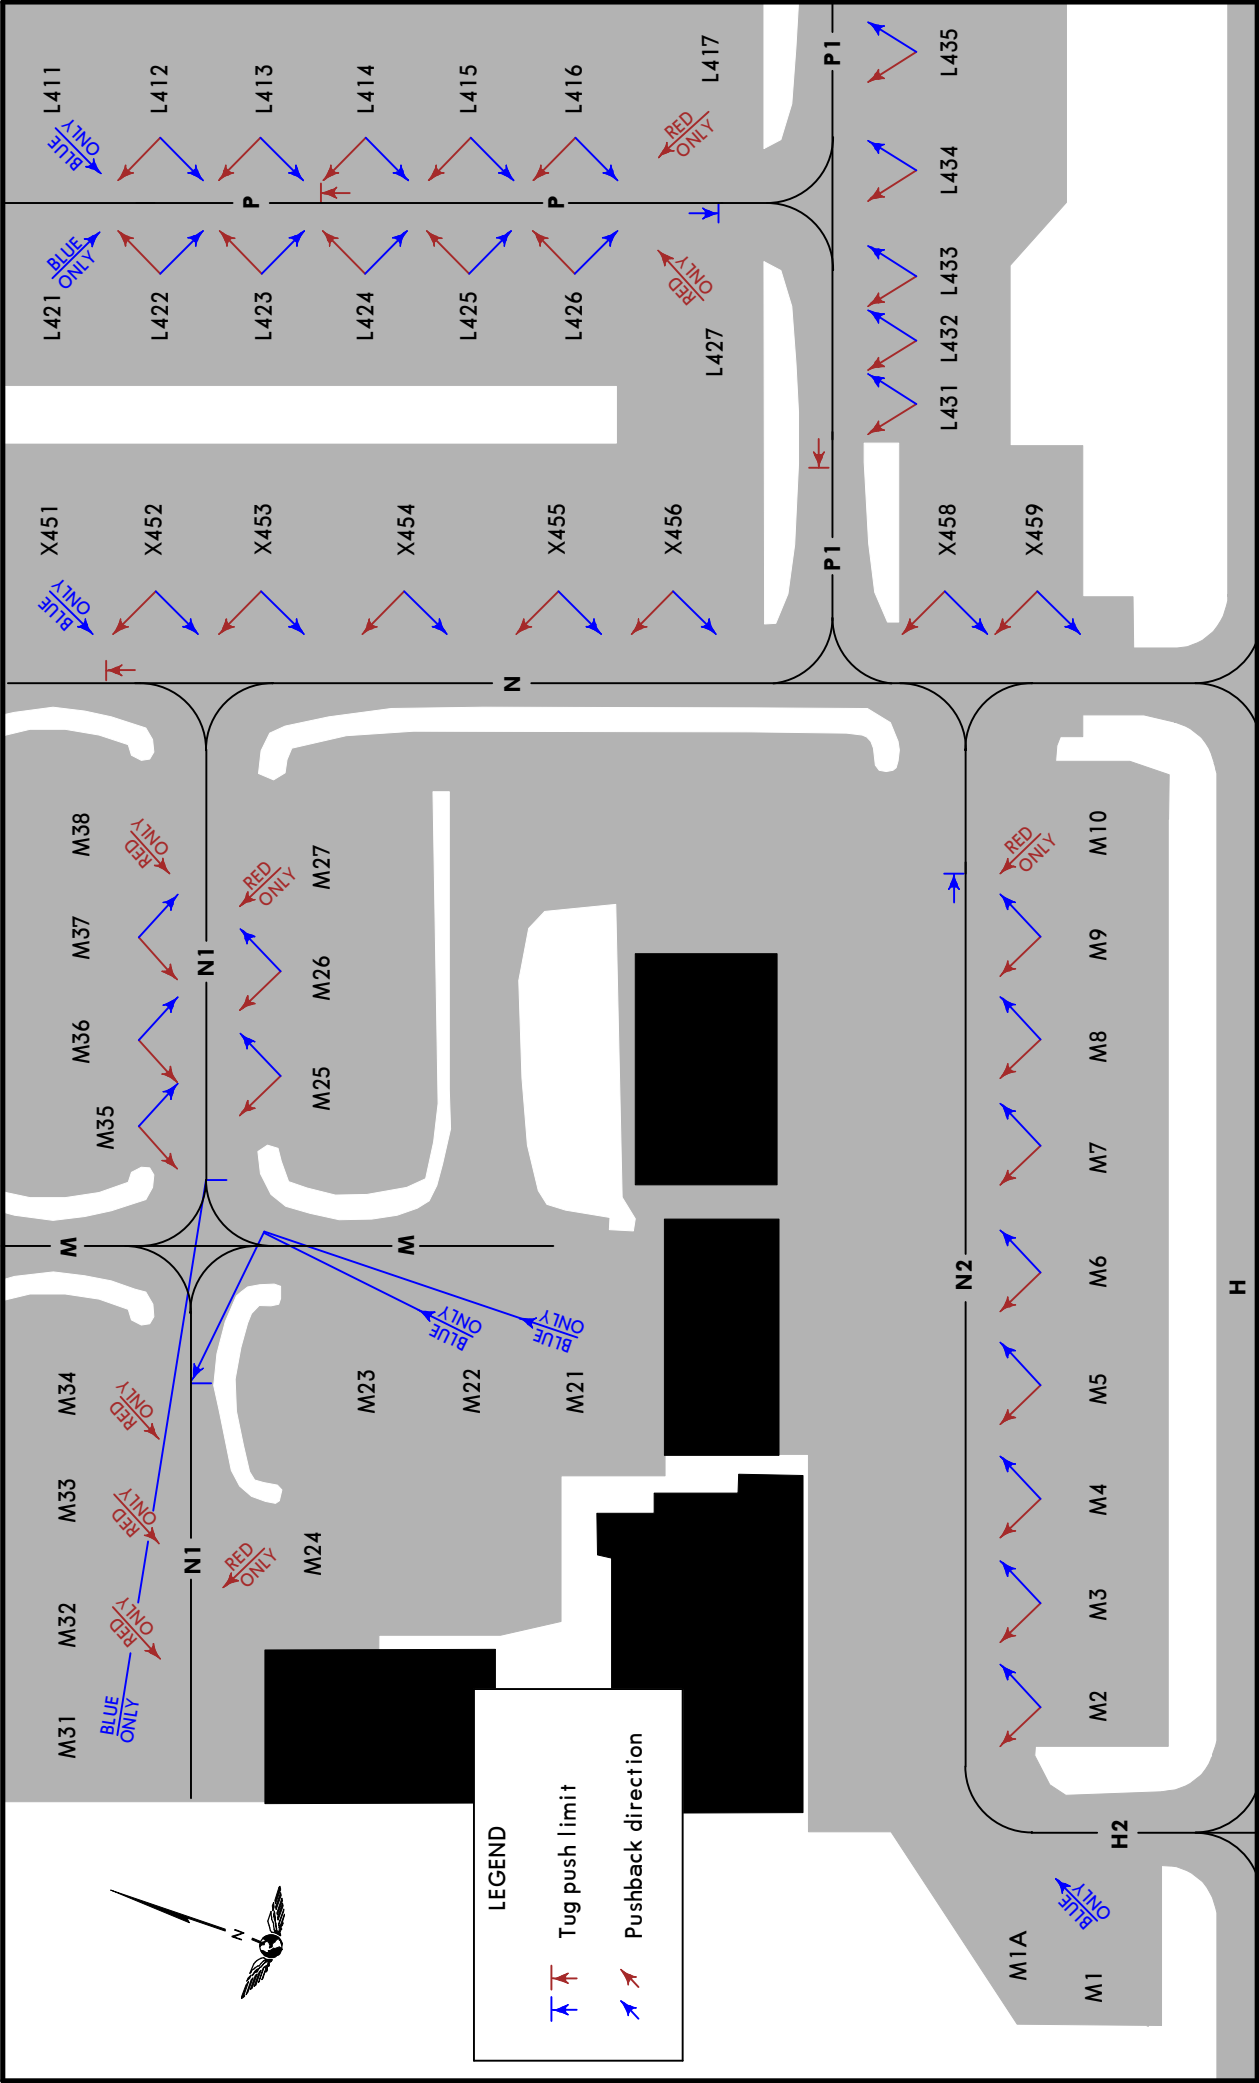

VHHH/HKG

AIRCRAFT DOCKING GUIDANCE SYSTEM

GENERAL

Several stands (named on 10-1P pages) are equipped with a docking guidance system, to enable aircraft to park at the correct main centerline position on the parking bays without the assistance of a marshaller.


The aircraft docking guidance system consists of a LED screen and a laser scanner located at the head of the parking bay to ensure the aircraft stops in the correct location.

When the system is activated the following information will be displayed on the LED screen :


- a. Type of arriving aircraft;
- b. Floating arrows to indicate the system is active to search for an approaching aircraft;
- c. Lateral guidance with an illuminated "T" when the aircraft is within 262'/80m of the correct parking position;
- d. Display of the distance to go when the aircraft is within 66'/20m of the correct parking position;
- e. STOP indication when the aircraft is at the correct parking position;
- f. OK indication when the aircraft is parked.

TYPE OF AIRCRAFT

The type of aircraft and floating arrows will be displayed on the LED screen which indicates the activation of the system, searching for an approaching aircraft. When the aircraft turns into the parking bay the system starts tracking the aircraft, and the laser scanner identifies the type of aircraft.



If the laser unit detects that the type of aircraft corresponds to the type entered into the system, the docking system will continue to function normally.




If the laser unit detects a discrepancy in the type of aircraft or cannot identify the aircraft, the message "STOP ID FAIL" will be displayed on the LED screen.




TRACKING MODE

When the system is activated by the marshaller locally or remotely, the laser scanner automatically scans the pre-defined docking area in the parking bay to detect the arriving aircraft.


When the aircraft is approximately 262'/80m from the correct parking position, the aircraft will be tracked and information on its lateral position relative to the parking centerline will be displayed, by a "T" symbol representing the centerline, and an arrow representing the location of the aircraft.



LEFT
of
centerline



ON
centerline




RIGHT
of
centerline

VHHH/HKG

 **JEPPESSEN HONG KONG, PR OF CHINA**
23 AUG 24 **10-9J** **HONG KONG INTL**


DISTANCE TO GO INDICATOR

Distance to go information is displayed on the LED screen when the aircraft is within 66'/20m of the correct parking position whilst the enlarged indicator is only applicable to T1M parking bays. The distance is displayed at 3'/1m intervals between 66'/20m and 16'/5m, then at 1.6'/0.5m intervals between 16'/5m and 10'/3m, further at 0.7'/0.2m intervals between 10'/3m and 7'/2m, finally at 0.3'/0.1m intervals up to the STOP position.

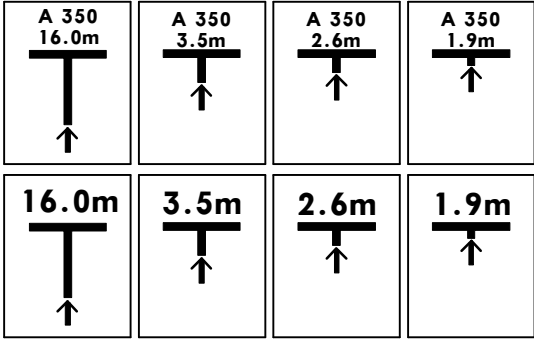

STOP POSITION INDICATOR

The correct parking position is displayed on the LED screen by a "STOP" message replacing the azimuth guidance and distance to go information. The "STOP" message indicates the exact location of the aircraft nose wheel at the correct parking position. When the system detects the aircraft has stopped, an "OK" message indicates the aircraft is correctly parked. A "TOO FAR" message indicates the aircraft has overshoot the correct parking position by at least 3'/1m.

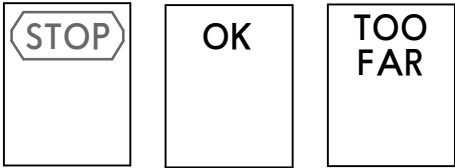

PILOT PROCEDURES

Pilots must follow the parking bay lead-in ground marking as they approach the parking bay to ensure the docking guidance system laser unit starts tracking the aircraft. Pilots must check that the correct type of aircraft is displayed on the LED screen at the appointed parking bay. If any discrepancy on aircraft type is noticed, pilots shall stop the aircraft immediately. Pilots must follow the floating arrows displaying on the LED screen to enter the appointed parking bay. The aircraft taxiing speed shall be less than 3m/s (6 KT) as it starts docking and shall be gradually reduced. Pilots shall approach the stop position slowly and observe the closing rate information display throughout the entire aircraft docking and halt when the "STOP" message is displayed. In case the docking system is not available, or the display panel of the docking system does not show the aircraft type and the floating arrows, guidance from a local marshaller shall be mandatory. Pilots shall not enter the parking bay in the absence of marshalling service.

FURTHER INFORMATION

The aircraft docking guidance system is able to be activated and monitored by a remote marshaller without presence at the parking bay. Such remote marshalling will be implemented in phases and details will be disseminated via NOTAM.

VHHH/HKG



EASA AIR OPS

HONG KONG, PR OF CHINA
HONG KONG INTL

STRAIGHT-IN RWY		A	B	C	D
07L	CAT 3 ILS	R75m	R75m	R75m	R100m
	CAT 2 ILS	123'(100') RA100' R300m	123'(100') RA100' R300m	123'(100') RA100' R300m	123'(100') RA100' ① R300m
	② ILS	223'(200') R550m V800m	223'(200') R550m V800m	223'(200') R550m V800m	223'(200') R550m V800m
	TDZ or CL out	③ R550mV800m	③ R550mV800m	③ R550mV800m	③ R550mV800m
	ALS out	R1200m	R1200m	R1200m	R1200m
	④ ILS	1359'(1336') R1500m	1369'(1346') R1500m	1379'(1356') R2400m	1388'(1365') R2400m
	LOC ⑤ with SDF	500'(477') R1500m	500'(477') R1500m	500'(477') R1500m	500'(477') R1500m
	TDZ or CL out	R1500m	R1500m	R1500m	R1500m
	ALS out	R1500m	R1500m	R2200m	R2200m
	LOC ⑤ without SDF	820'(797') R1500m	820'(797') R1500m	820'(797') R2400m	820'(797') R2400m
07C	RNP LNAV/VNAV	302'(279') R600m	312'(289') R650m	322'(299') R650m	332'(309') R700m
	TDZ or CL out	③ R600m	③ R650m	③ R650m	③ R700m
	ALS out	R1300m	R1400m	R1400m	R1400m
	CAT 2 ILS	122'(100') RA100' R300m	122'(100') RA100' R300m	122'(100') RA100' R300m	122'(100') RA100' ① R300m
	⑥ ILS	222'(200') R550m V800m	222'(200') R550m V800m	222'(200') R550m V800m	222'(200') R550m V800m
	TDZ or CL out	③ R550mV800m	③ R550mV800m	③ R550mV800m	③ R550mV800m
	ALS out	R1200m	R1200m	R1200m	R1200m
	④ ILS	781'(759') R1500m	781'(759') R1500m	781'(759') R2400m	781'(759') R2400m
	⑤⑦ LOC	420'(392') R1100m	420'(392') R1100m	420'(392') R1100m	420'(392') R1100m
	TDZ or CL out	R1100m	R1100m	R1100m	R1100m
	ALS out	R1500m	R1500m	R1800m	R1800m
	④⑤ LOC	930'(902') R1500m	930'(902') R1500m	930'(902') R2400m	930'(902') R2400m
	RNP ⑧ LNAV/VNAV	302'(280') R600m	312'(290') R650m	322'(300') R650m	331'(309') R700m
	TDZ or CL out	③ R600m	③ R650m	③ R650m	③ R700m
	ALS out	R1300m	R1400m	R1400m	R1400m
	RNP ④ LNAV/VNAV	808'(786') R1500m	808'(786') R1500m	808'(786') R2400m	808'(786') R2400m

- ① Requires autoland or HUDLS, otherwise: R350m.
- ② Missed apch climb gradient MIN 6.9% (420'/NM).
- ③ R750m when a Flight Director or Autopilot or HUDLS to DA is not used.
- ④ Missed apch climb gradient MIN 2.5% (152'/NM).
- ⑤ Continuous Descent Final Approach.
- ⑥ Missed apch climb gradient MIN 4.6% (280'/NM).
- ⑦ Missed apch climb gradient MIN 3.9% (237'/NM).
- ⑧ Missed apch climb gradient MIN 4.4% (268'/NM).

VHHH/HKG


JEPPESSEN
22 NOV 24
Eff 28 Nov (10-9S1)

EASA AIR OPS
HONG KONG, PR OF CHINA
HONG KONG INTL

STRAIGHT-IN RWY		A	B	C	D
07R	CAT 2 ILS	127'(100') RA98' R350m	127'(100') RA98' R350m	127'(100') RA98' R350m	127'(100') RA98' R350m
	① ILS	227'(200') R550m V800m	227'(200') R550m V800m	227'(200') R550m V800m	227'(200') R550m V800m
	TDZ or CL out	② R550mV800m	② R550mV800m	② R550mV800m	② R550mV800m
	ALS out	R1200m	R1200m	R1200m	R1200m
	③ ILS	594'(567') R1500m	606'(579') R1500m	615'(588') R2000m	625'(598') R2000m
	TDZ or CL out	R1500m	R1500m	R2000m	R2000m
	ALS out	R1500m	R1500m	R2400m	R2400m
	④⑤ LOC	460'(432') R1300m	460'(432') R1300m	460'(432') R1300m	460'(432') R1300m
	TDZ or CL out	R1300m	R1300m	R1300m	R1300m
	ALS out	R1500m	R1500m	R2000m	R2000m
25L	③④ LOC	880'(852') R1500m	880'(852') R1500m	880'(852') R2400m	880'(852') R2400m
	RNP Z or Y (AR)	437'(410') R1200m	437'(410') R1200m	437'(410') R1200m	437'(410') R1200m
	TDZ or CL out	R1200m	R1200m	R1200m	R1200m
	ALS out	R1500m	R1500m	R1900m	R1900m
	CAT 2 ILS	127'(100') RA100' R350m	127'(100') RA100' R350m	127'(100') RA100' R350m	127'(100') RA100' R350m
	⑥ ILS	227'(200') R550m V800m	227'(200') R550m V800m	227'(200') R550m V800m	227'(200') R550m V800m
	TDZ or CL out	② R550mV800m	② R550mV800m	② R550mV800m	② R550mV800m
	ALS out	R1200m	R1200m	R1200m	R1200m
	③ ILS	607'(580') R1500m	619'(592') R1500m	627'(600') R2000m	638'(611') R2100m
	TDZ or CL out	R1500m	R1500m	R2000m	R2100m
	ALS out	R1500m	R1500m	R2400m	R2400m
	④⑥ LOC	420'(392') R1100m	420'(392') R1100m	420'(392') R1100m	420'(392') R1100m
	TDZ or CL out	R1100m	R1100m	R1100m	R1100m
	ALS out	R1500m	R1500m	R1800m	R1800m
	③④ LOC	690'(662') R1500m	690'(662') R1500m	690'(662') R2400m	690'(662') R2400m
	RNP Z or Y (AR)	467'(440') R1300m	486'(459') R1400m	506'(479') R1500m	518'(491') R1500m
	TDZ or CL out	R1300m	R1400m	R1500m	R1500m
	ALS out	R1500m	R1500m	R2200m	R2300m

- ① Missed apch climb gradient MIN 3.6% (219'/NM) up to 1400'.
② R750m when a Flight Director or Autopilot or HUDLS to DA is not used.
③ Missed apch climb gradient MIN 2.5% (152'/NM).
④ Continuous Descent Final Approach.
⑤ Missed apch climb gradient MIN 4.1% (250'/NM).
⑥ Missed apch climb gradient MIN 4.0% (244'/NM).

VHHH/HKG


JEPPESSEN
 22 NOV 24
 Eff 28 Nov 10-9S2
EASA AIR OPS**HONG KONG, PR OF CHINA**
HONG KONG INTL

STRAIGHT-IN RWY		A	B	C	D
25C	CAT 3 ILS	R75m	R75m	R75m	R100m
	CAT 2 ILS	122' (100') RA100' R300m	122' (100') RA100' R300m	122' (100') RA100' R300m	122' (100') RA100' ① R300m
	② ILS	222' (200') R550m V800m	222' (200') R550m V800m	222' (200') R550m V800m	222' (200') R550m V800m
	TDZ or CL out	③ R550mV800m	③ R550mV800m	③ R550mV800m	③ R550mV800m
	ALS out	R1200m	R1200m	R1200m	R1200m
	④ ILS	500' (478') R1500m	500' (478') R1500m	500' (478') R1500m	500' (478') R1500m
	TDZ or CL out	R1500m	R1500m	R1500m	R1500m
	ALS out	R1500m	R1500m	R2200m	R2200m
	②③ LOC	420' (392') R1100m	420' (392') R1100m	420' (392') R1100m	420' (392') R1100m
	TDZ or CL out	R1100m	R1100m	R1100m	R1100m
	ALS out	R1500m	R1500m	R1800m	R1800m
	④⑤ LOC	710' (682') R1500m	710' (682') R1500m	710' (682') R2400m	710' (682') R2400m
	RNP Y (AR)	470' (448') R1400m	480' (458') R1400m	490' (468') R1500m	500' (478') R1500m
	TDZ or CL out	R1400m	R1400m	R1500m	R1500m
	ALS out	R1500m	R1500m	R2200m	R2200m
25R	RNP Z LNAV/VNAV	500' (478') R1500m	500' (478') R1500m	500' (478') R1500m	500' (478') R1500m
	TDZ or CL out	R1500m	R1500m	R1500m	R1500m
	ALS out	R1500m	R1500m	R2200m	R2200m
	⑥ ILS	223' (200') R550m V800m	223' (200') R550m V800m	223' (200') R550m V800m	223' (200') R550m V800m
	TDZ or CL out	③ R550mV800m	③ R550mV800m	③ R550mV800m	③ R550mV800m
	ALS out	R1200m	R1200m	R1200m	R1200m
	④ ILS	1425' (1402') R1500m	1435' (1412') R1500m	1445' (1422') R2400m	1455' (1432') R2400m
	⑤ LOC	430' (402') R1200m	430' (402') R1200m	430' (402') R1200m	430' (402') R1200m
	TDZ or CL out	R1200m	R1200m	R1200m	R1200m
	ALS out	R1500m	R1500m	R1900m	R1900m
	RNP Y (AR)	485' (462') R1500m	495' (472') R1500m	505' (482') R1500m	515' (492') R1500m
	TDZ or CL out	R1500m	R1500m	R1500m	R1500m
	ALS out	R1500m	R1500m	R2300m	R2300m
	RNP Z ⑦ LNAV/VNAV	485' (462') R1500m	495' (472') R1500m	505' (482') R1500m	515' (492') R1500m
	TDZ or CL out	R1500m	R1500m	R1500m	R1500m
	ALS out	R1500m	R1500m	R2300m	R2300m
	RNP Z ④ LNAV/VNAV	1425' (1402') R1500m	1435' (1412') R1500m	1445' (1422') R2400m	1455' (1432') R2400m

① Requires autoland or HUDLS, otherwise: R350m.**②** Missed apch climb gradient MIN 4.0% (244'/NM).**③** R750m when a Flight Director or Autopilot or HUDLS to DA is not used.**④** Missed apch climb gradient MIN 2.5% (152'/NM).**⑤** Continuous Descent Final Approach.**⑥** Missed apch climb gradient MIN 6.5% (395'/NM).**⑦** Missed apch climb gradient MIN 5.6% (341'/NM).

VHHH/HKG

**JEPPesen**

22 NOV 24
Eff 28 Nov

10-9S3

EASA AIR OPS

HONG KONG, PR OF CHINA

HONG KONG INTL

CIRCLE-TO-LAND	A	B	C	D
	PROHIBITED			

TAKE-OFF							
Low Visibility Procedures required				RCLM or HIRL or CL	HIRL or CL	Adequate Vis Ref	
Approval for Low Visibility Take-off required							
RCLM & HIRL & CL (spacing 15m or less) & RVR	RCLM & HIRL & CL & RVR	RCLM & HIRL & RVR	RCLM& RVR & HIRL or CL				
		DAY	NIGHT	DAY	NIGHT	DAY	NIGHT
R125m	R150m	R400m		R400m		R/V500m	NA