

ZGSZ/SZX



EASA AIR OPS
SHENZHEN, PR OF CHINA
BAOAN

STRAIGHT-IN RWY		A	B	C	D
15	SA CAT I RNP ILS DME Z or SA CAT I ILS DME Y	162'(150') RA 158' ② R450m	162'(150') RA 158' ② R450m	162'(150') RA 158' ② R450m	162'(150') RA 158' ② R450m
	① RNP ILS DME Z or ① ILS DME Y TDZ or CL out ALS out	212'(200') R550m V800m ③ R550m V800m R/V1200m	212'(200') R550m V800m ③ R550m V800m R/V1200m	212'(200') R550m V800m ③ R550m V800m R/V1200m	212'(200') R550m V800m ③ R550m V800m R/V1200m
	④ RNP ILS DME Z or ④ ILS DME Y TDZ or CL out ALS out	718'(706') R/V3300m R/V3300m R/V4200m	734'(722') R/V3300m R/V3300m R/V4200m	734'(722') R/V3300m R/V3300m R/V4200m	751'(739') R/V3400m R/V3400m R/V4300m
	⑤ LOC	460'(448') R/V1700m R/V1700m R/V2600m	460'(448') R/V1700m R/V1700m R/V2600m	460'(448') R/V1700m R/V1700m R/V2600m	460'(448') R/V1700m R/V1700m R/V2600m
	TDZ or CL out ALS out				
16	SA CAT I RNP ILS DME Z	163'(150') RA 155' ② R450m	163'(150') RA 155' ② R450m	163'(150') RA 155' ② R450m	163'(150') RA 155' ② R450m
	SA CAT I ILS DME Y	163'(150') RA 158' ② R450m	163'(150') RA 158' ② R450m	163'(150') RA 158' ② R450m	163'(150') RA 158' ② R450m
	RNP ILS DME Z or ILS DME Y	213'(200') ⑥ R550m V800m R/V1200m	213'(200') ⑥ R550m V800m R/V1200m	213'(200') ⑥ R550m V800m R/V1200m	213'(200') ⑥ R550m V800m R/V1200m
	ALS out				
	⑤ LOC	420'(407') R/V1500m R/V2400m	420'(407') R/V1500m R/V2400m	420'(407') R/V1500m R/V2400m	420'(407') R/V1500m R/V2400m
33	SA CAT I RNP ILS DME Z or SA CAT I ILS DME Y	162'(150') RA 158' ② R450m	162'(150') RA 158' ② R450m	162'(150') RA 158' ② R450m	162'(150') RA 158' ② R450m
	① RNP ILS DME Z or ① ILS DME Y TDZ or CL out ALS out	212'(200') R550m V800m ③ R550m V800m R/V1200m	212'(200') R550m V800m ③ R550m V800m R/V1200m	212'(200') R550m V800m ③ R550m V800m R/V1200m	212'(200') R550m V800m ③ R550m V800m R/V1200m
	④ RNP ILS DME Z or ④ ILS DME Y TDZ or CL out ALS out	472'(460') R/V1800m R/V1800m R/V2700m	488'(476') R/V1900m R/V1900m R/V2800m	488'(476') R/V1900m R/V1900m R/V2800m	505'(493') R/V2000m R/V2000m R/V2900m
	⑤ LOC	630'(618') R/V2700m R/V2700m R/V3600m	630'(618') R/V2700m R/V2700m R/V3600m	630'(618') R/V2700m R/V2700m R/V3600m	630'(618') R/V2700m R/V2700m R/V3600m
	TDZ or CL out ALS out				

- ① Missed approach climb gradient MIN 4.0%.
- ② HUD required.
- ③ R750m when a Flight Director or Autopilot or HUDLS to DA is not used.
- ④ Missed approach climb gradient MIN 2.5%.
- ⑤ Continuous Descent Final Approach.
- ⑥ R800m when a Flight Director or Autopilot or HUDLS to DA is not used.

ZGSZ/SZX



EASA AIR OPS
SHENZHEN, PR OF CHINA
BAOAN

STRAIGHT-IN RWY		A	B	C	D
34	SA CAT I RNP ILS DME Z or SA CAT I ILS DME Y	163'(150') RA 158' ① R450m	163'(150') RA 158' ① R450m	163'(150') RA 158' ① R450m	163'(150') RA 158' ① R450m
	RNP ILS DME Z, ILS DME Y or RNP (AR) ILS DME W	213'(200') ② R550m V800m	213'(200') ② R550m V800m	213'(200') ② R550m V800m	213'(200') ② R550m V800m
	ALS out	R/V1200m	R/V1200m	R/V1200m	R/V1200m
	③ LOC	420'(407') R/V1500m	420'(407') R/V1500m	420'(407') R/V1500m	420'(407') R/V1500m
ALS out		R/V2400m	R/V2400m	R/V2400m	R/V2400m

- ① HUD required.
- ② R800m when a Flight Director or Autopilot or HUDLS to DA is not used.
- ③ Continuous Descent Final Approach.

CIRCLE-TO-LAND ④	100 Kts	135 Kts	180 Kts	205 Kts
	730'(717') V3300m	740'(727') V3300m	910'(897') V4000m	910'(897') V4600m


- ④ Not authorized East of runway.

TAKE-OFF		(with reliable alternate)	
		RL	NIL (DAY only)
2 TURB Eng or 3 & 4 Eng	A	R400m V800m	R500m V800m
	B		
	C		
	D		
Other 1 & 2 Eng		R/V1600m	

ZGSZ/SZX
BAOAN

JEPPESSEN
3 JAN 25 (11-1)

SHENZHEN, PR OF CHINA
RNP ILS DME Z Rwy 15

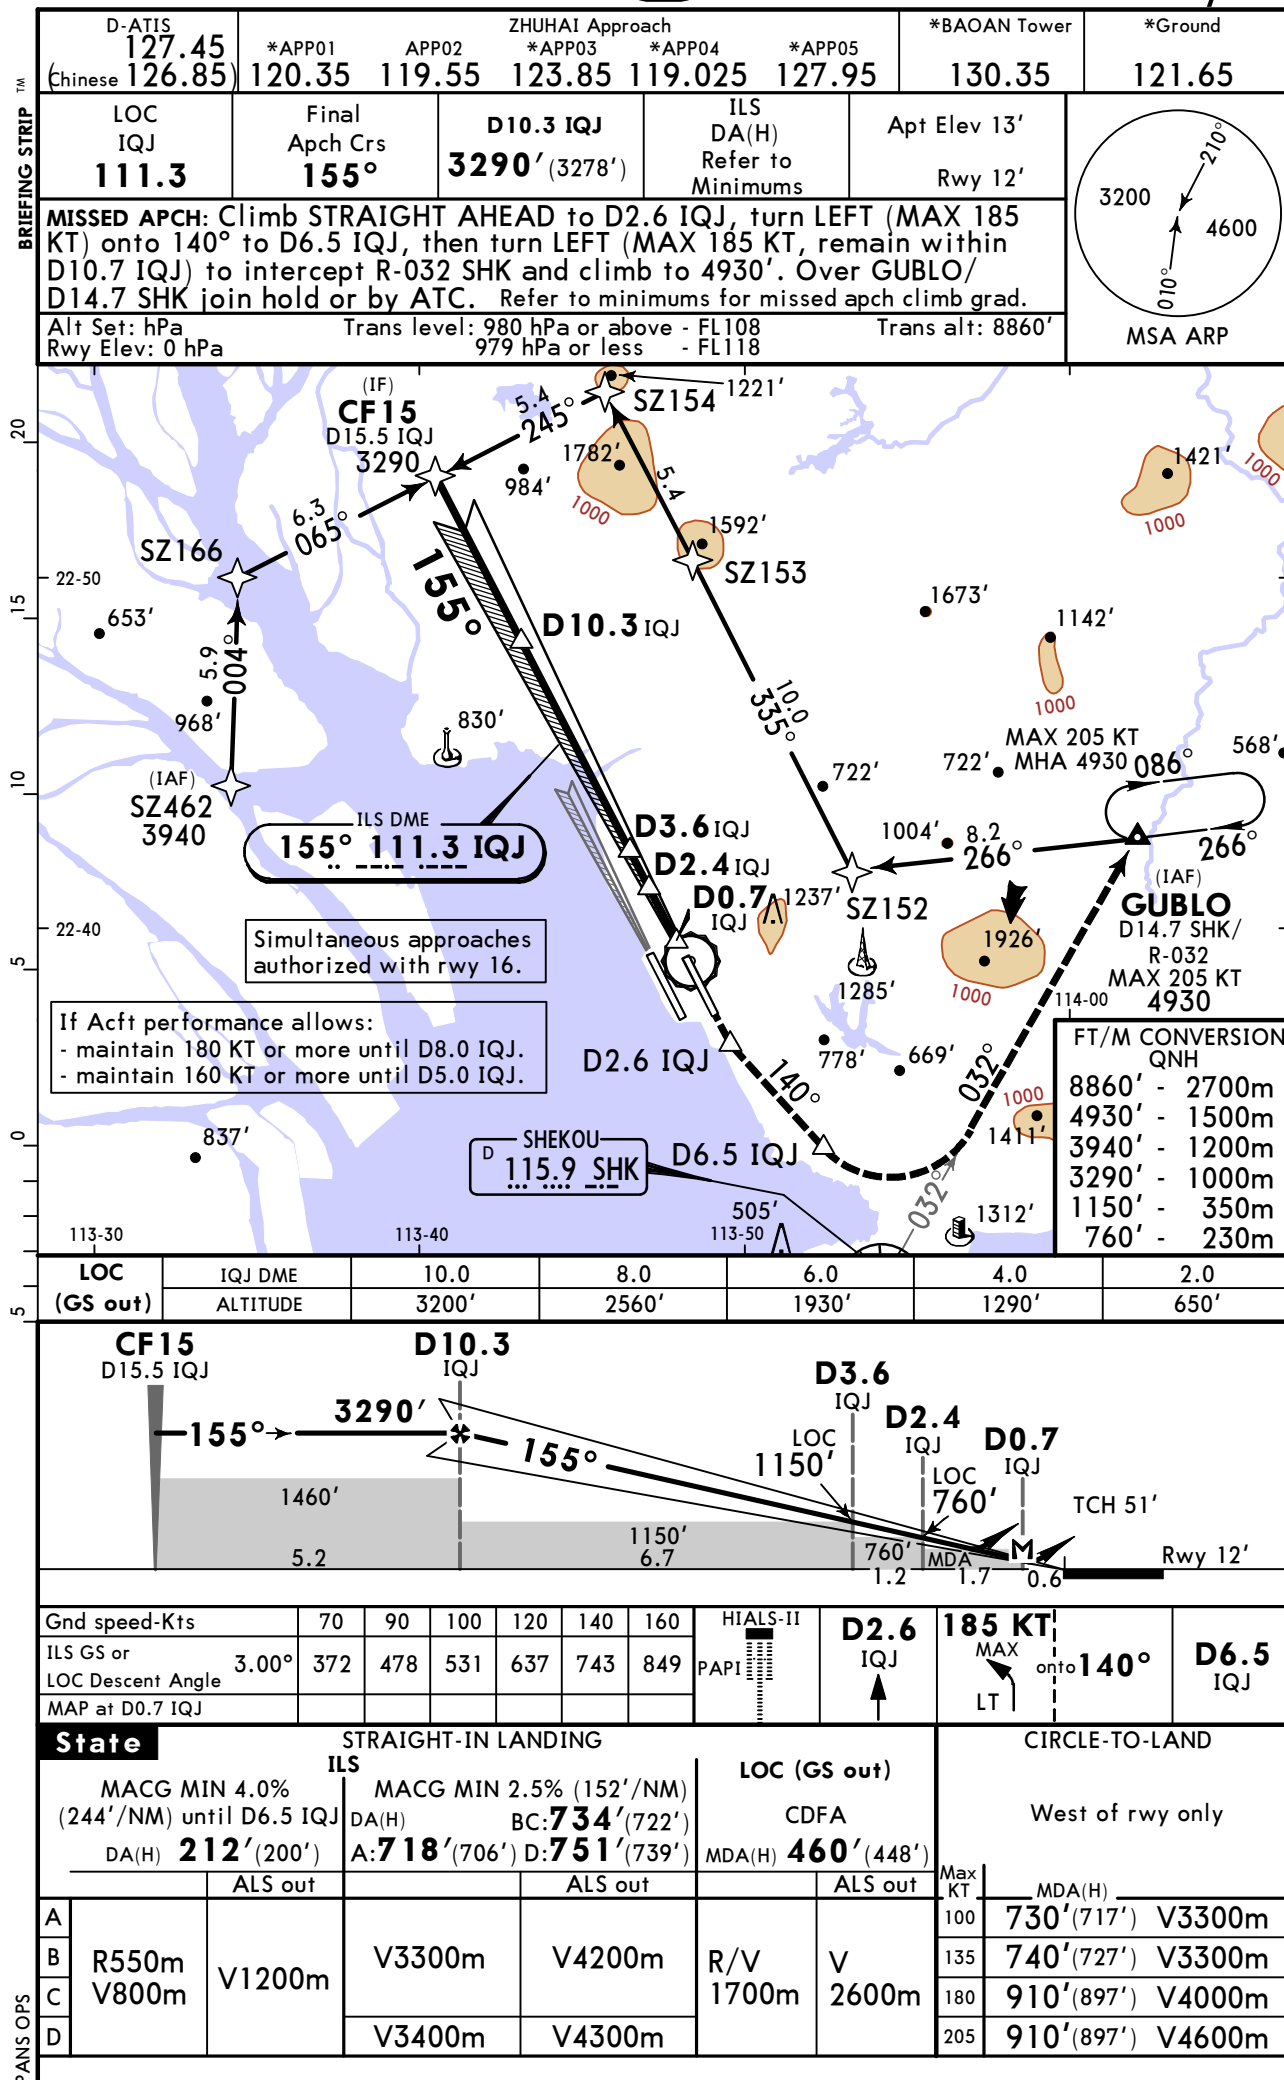


CHANGES: None.

© JEPPESSEN, 2012, 2024. ALL RIGHTS RESERVED.

ZGSZ/SZX
BAOAN

JEPPESSEN SHENZHEN, PR OF CHINA
3 JAN 25 (11-2)
ILS DME Y Rwy 15

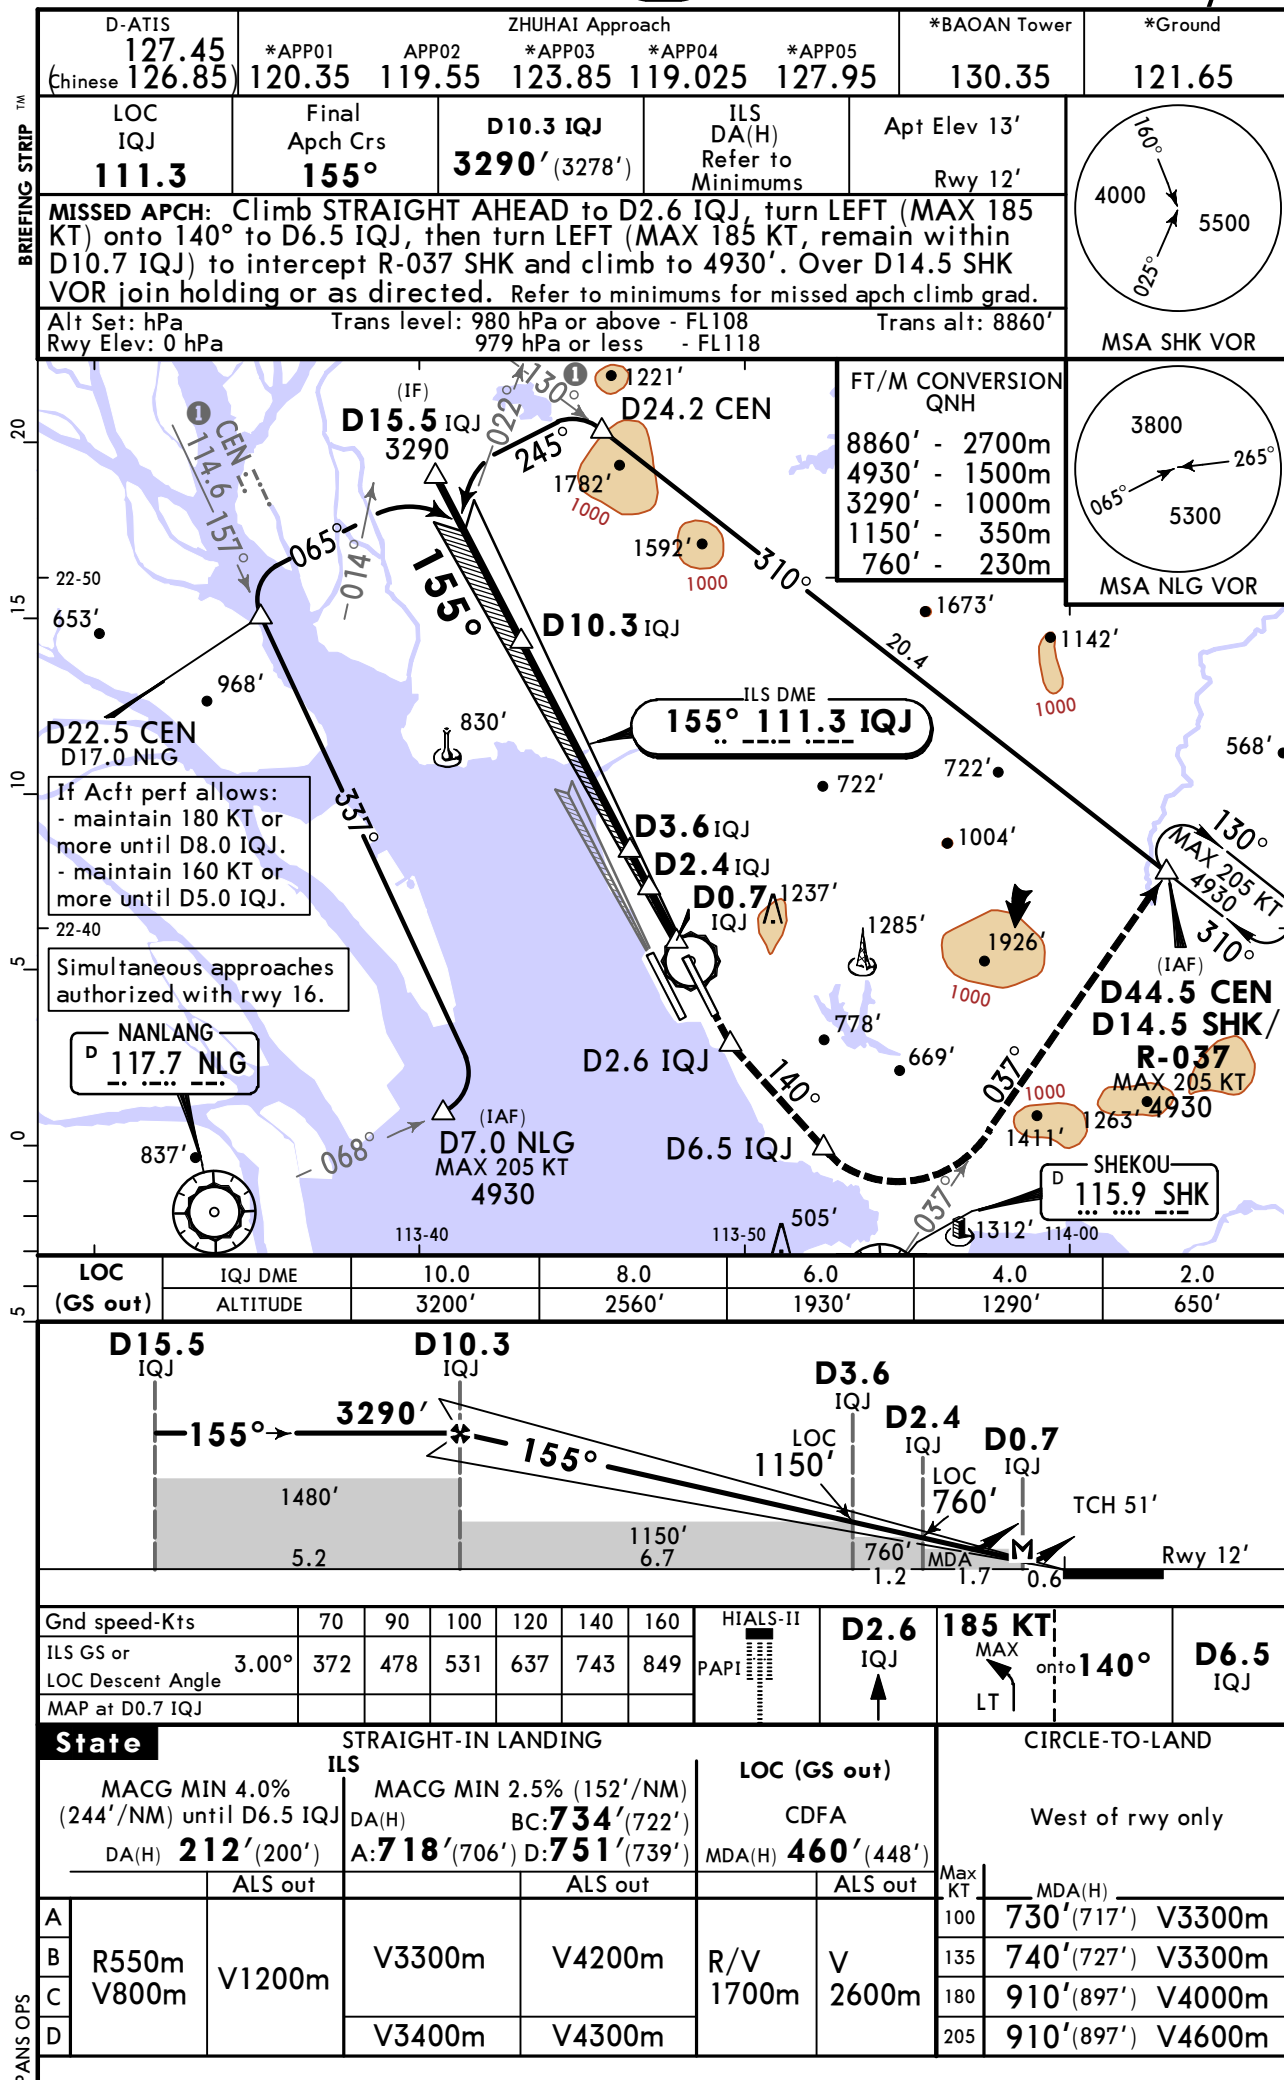

ZGSZ/SZX
BAOAN



3 JAN 25

11-2A

SA CAT I RNP ILS DME Z Rwy 15

JEPPESSEN SHENZHEN, PR OF CHINA

D-ATIS 127.45 (Chinese 126.85)		ZHUHAI Approach					*BAOAN Tower	*Ground
		*APP01	APP02	*APP03	*APP04	*APP05		
		120.35	119.55	123.85	119.025	127.95	130.35	121.65
LOC IQJ 111.3	Final Apch Crs 155°	D10.3 IQJ 3290' (3278')		SA CAT I ILS RA 158' DA(H) 162' (150')		Apt Elev 13' Rwy 12'		 MSA ARP
MISSED APCH: Climb STRAIGHT AHEAD to D2.6 IQJ, turn LEFT (MAX 185 KT) onto 140° to D6.5 IQJ, then turn LEFT (MAX 185 KT, remain within D10.7 IQJ) to intercept R-032 SHK and climb to 4930'. Over GUBLO/D14.7 SHK join hold or by ATC. MACG MIN 4.0% (244' /NM) until D6.5 IQJ.								
Alt Set: hPa		Trans level: 980 hPa or above - FL108				Trans alt: 8860'		
Rwy Elev: 0 hPa		979 hPa or less - FL118						

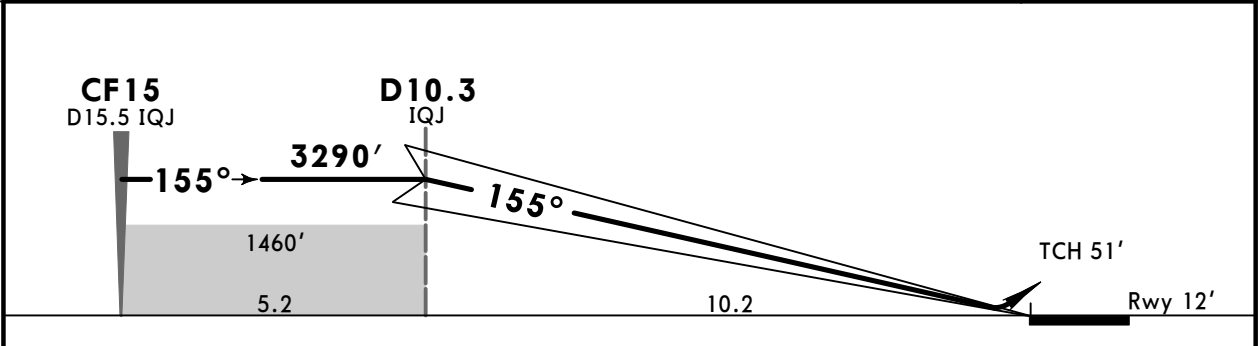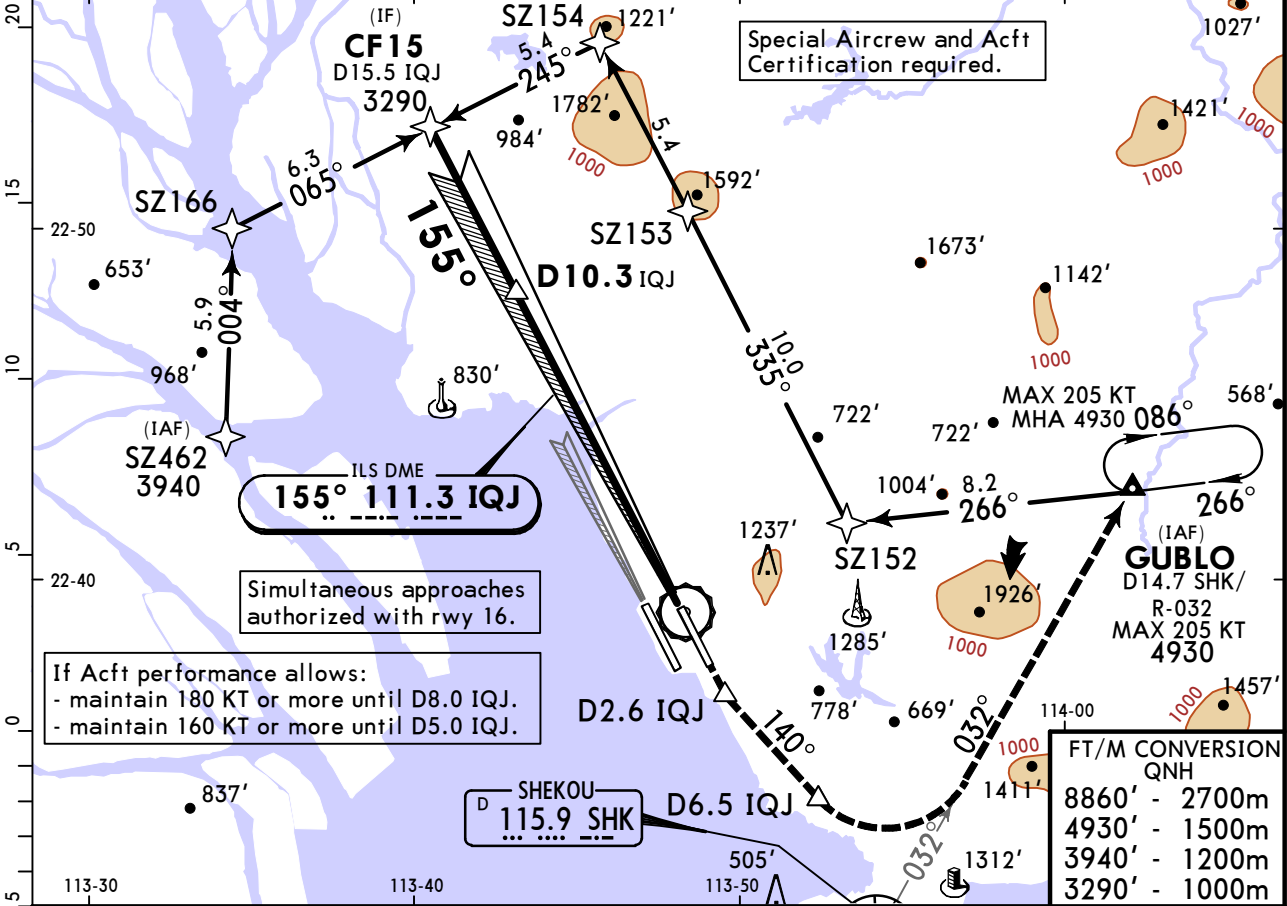

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II		D2.6 IQJ	185 KT	MAX	onto 140°	D6.5 IQJ
GS	3.00°	372	478	531	637	743	849	PAPI	↑	LT			

State	STRAIGHT-IN LANDING									
	1 SA CAT I ILS									
	RA 158'									
	DA(H) 162'(150')									
	R450m									
1 HUD required.										

CHANGES: None.



ZGSZ/SZ
BAOAN

JEPPESSEN SHENZHEN, PR OF CHINA
3 JAN 25 11-2B SA CAT I ILS DME Y Rwy 15

D-ATIS 127.45 (Chinese 126.85)	ZHUHAI Approach					*BAOAN Tower	*Ground
	*APP01 120.35	APP02 119.55	*APP03 123.85	*APP04 119.025	*APP05 127.95	130.35	121.65

LOC IQJ 111.3	Final Apch Crs 155°	D10.3 IQJ 3290' (3278')	SA CAT I ILS RA 158' DA(H) 162' (150')	Apt Elev 13' Rwy 12'	
----------------------------	----------------------------------	-----------------------------------	--	-------------------------	--

					MSA NLG VOR
					FT/M CONVERSION QNH 8860' - 2700m 4930' - 1500m 3290' - 1000m

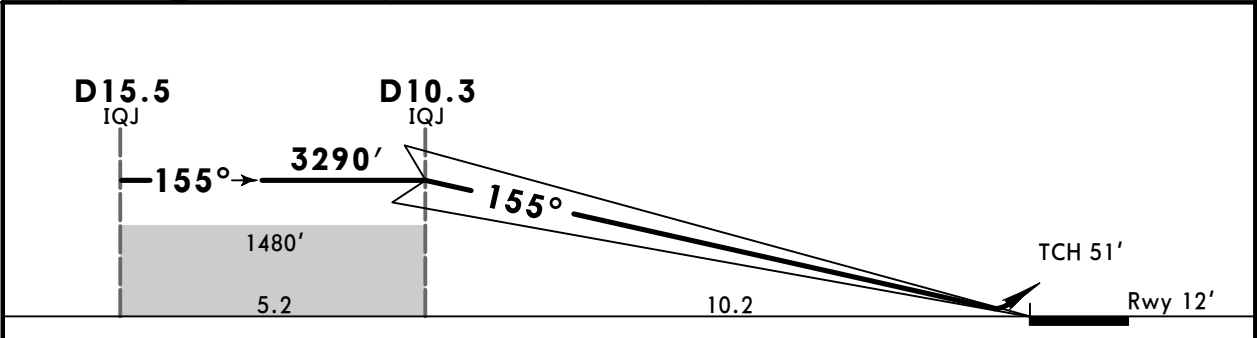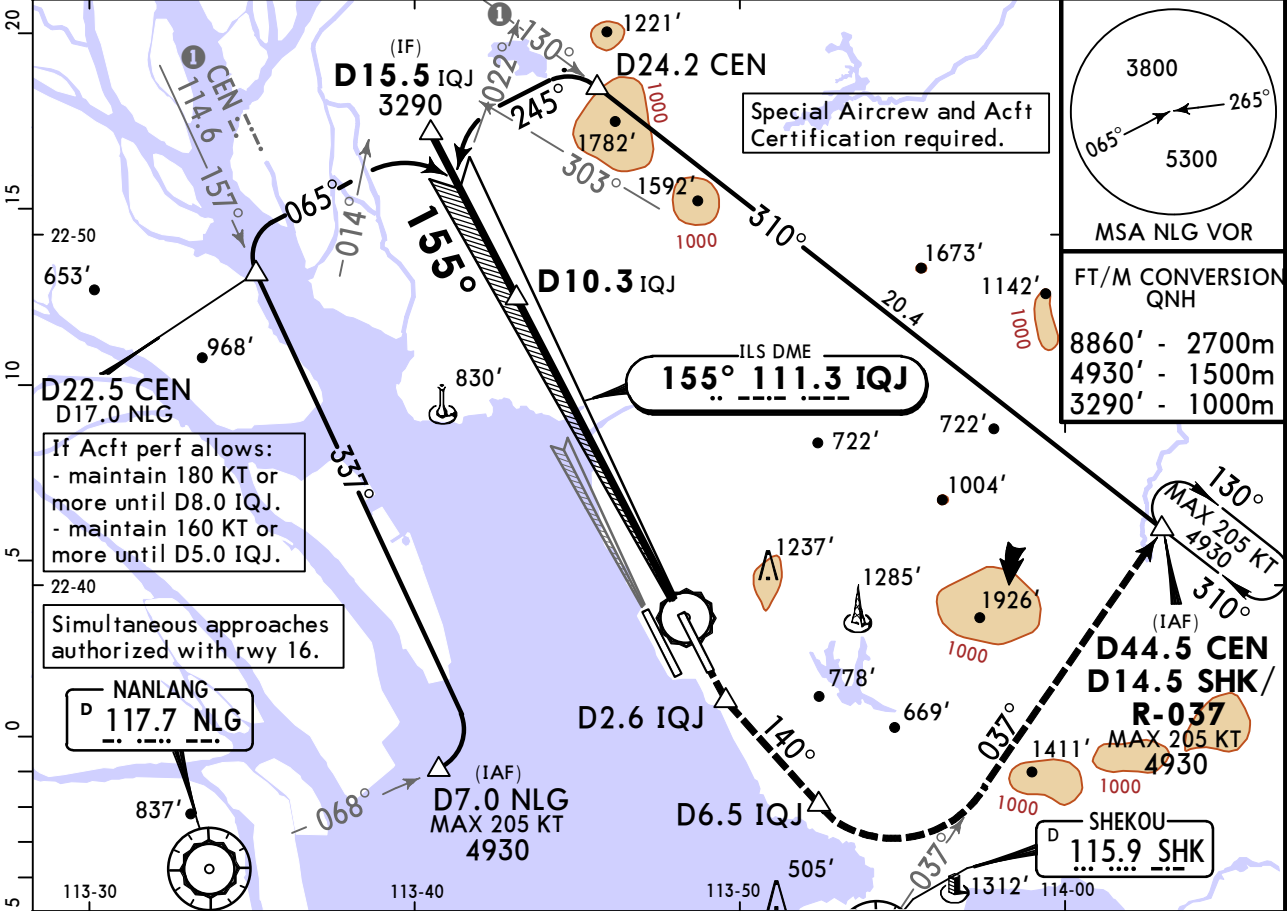


Gnd speed-Kts	70	90	100	120	140	160	HIALS-II PAPI	D2.6 IQJ	185 KT MAX LT	onto 140°	D6.5 IQJ
Gs	3.00°	372	478	531	637	743		↑			

State	STRAIGHT-IN LANDING										
	SA CAT I ILS										
	RA 158' DA(H) 162' (150')										
	R450m										
PANS OPS	HUD required.										

ZGSZ/SZX
BAOAN

JEPPESSEN SHENZHEN, PR OF CHINA
3 JAN 25 (11-4)
ILS DME Y Rwy 16

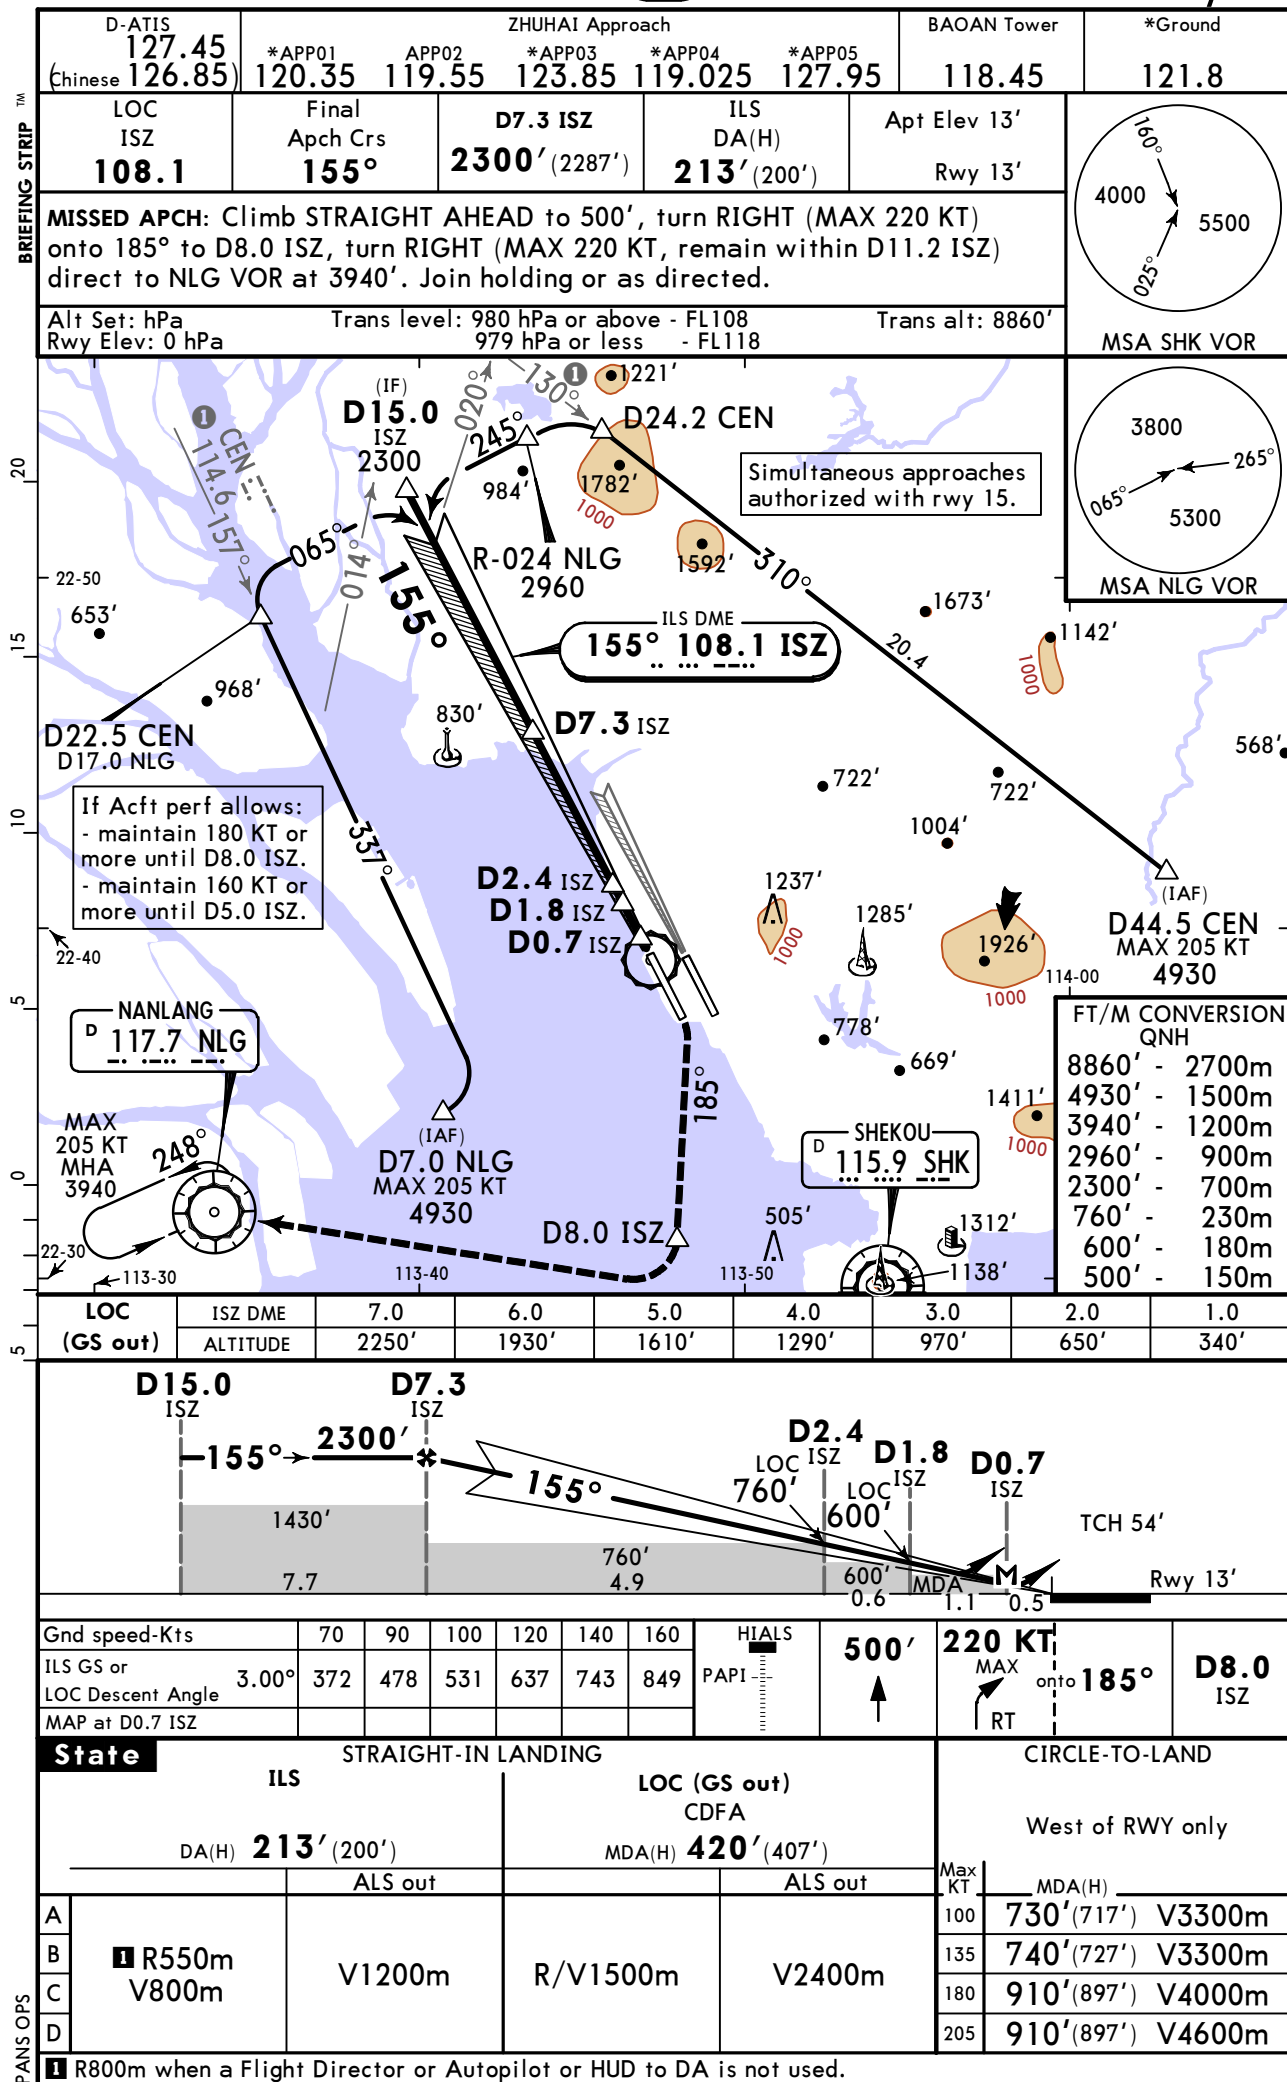




ZGSZ/SZ
BAOAN

3 JAN 25

11-4A

SA CAT I RNP ILS DME Z Rwy 16

D-ATIS 127.45 (Chinese 126.85)	*APP01 120.35	APP02 119.55	ZHUHAI Approach *APP03 123.85	*APP04 119.025	*APP05 127.95	BAOAN Tower 118.45	*Ground 121.8
LOC ISZ 108.1	Final Apch Crs 155°	D7.3 ISZ 2300' (2287')	SA CAT I ILS RA 155' DA(H) 163' (150')	Apt Elev 13' Rwy 13'			
MISSED APCH: Climb STRAIGHT AHEAD to 500', turn RIGHT (MAX 220 KT) onto 185° to D8.0 ISZ, turn RIGHT (MAX 220 KT, remain within D11.2 ISZ) direct to NLG VOR at 3940'. Join holding or as directed.							MSA ARP
Alt Set: hPa Rwy Elev: 0 hPa	Trans level: 980 hPa or above - FL108 979 hPa or less - FL118				Trans alt: 8860'		

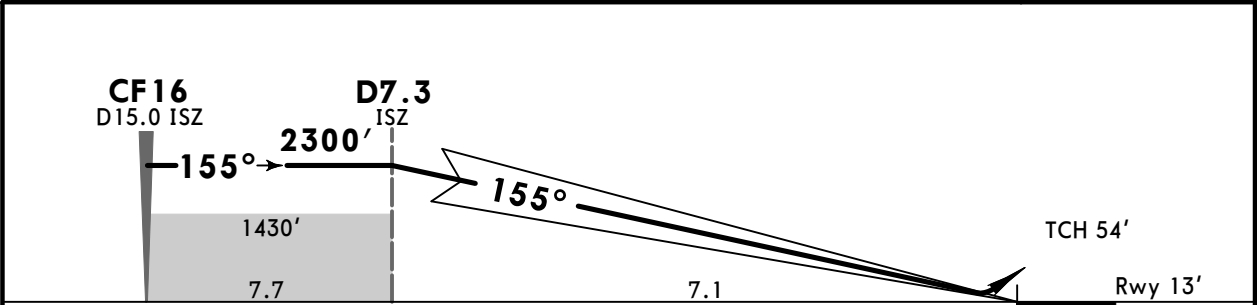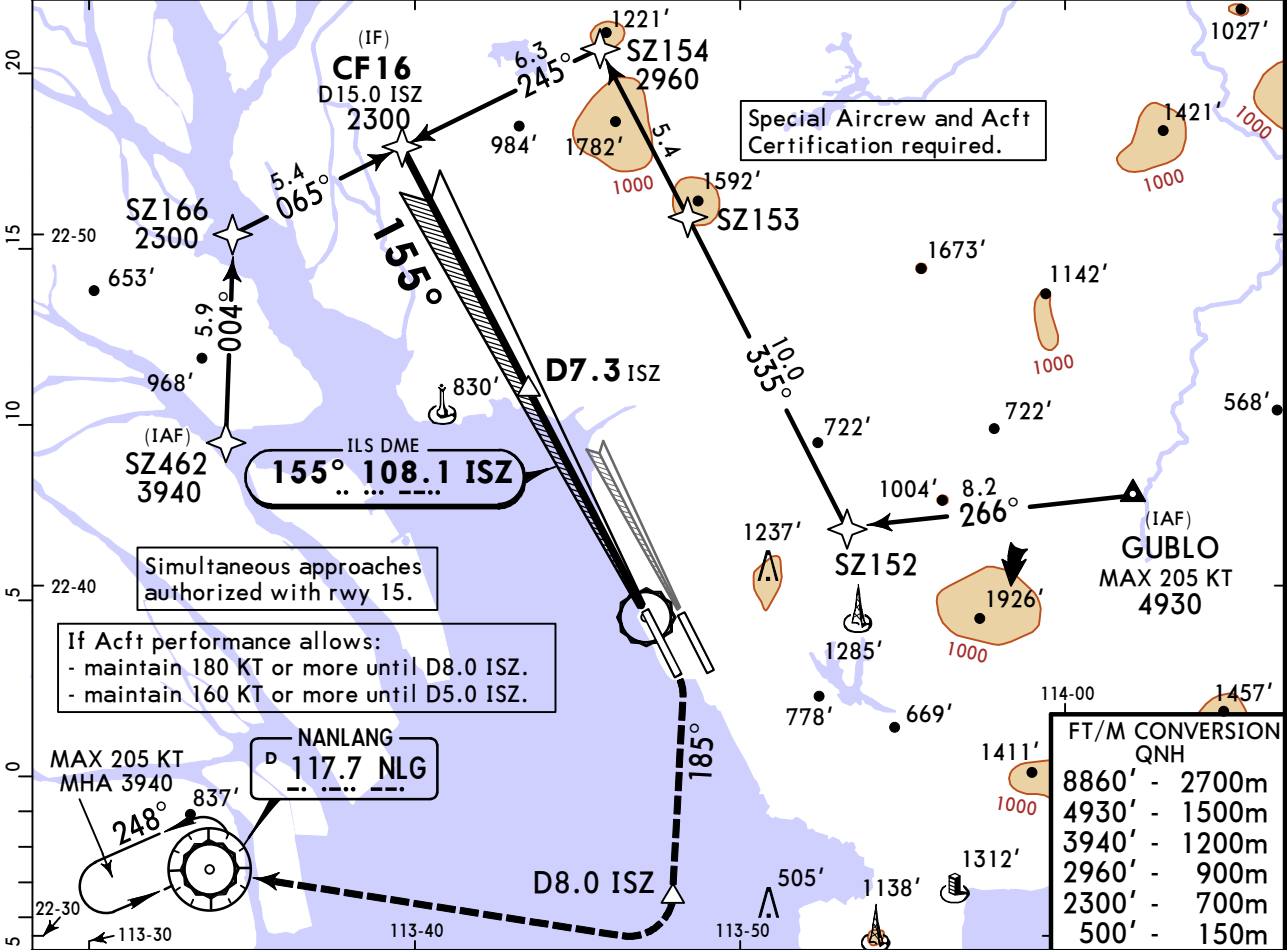

Gnd speed-Kts	70	90	100	120	140	160	HIALS	500'	220 KT	MAX	onto 185°	D8.0 ISZ
GS	3.00°	372	478	531	637	743	PAPI	↑	↑	RT		

State	STRAIGHT-IN LANDING											
	SA CAT I ILS											
	RA 155'											
	DA(H) 163' (150')											
	R450m											
PANS OPS	HUD required.											

CHANGES: None.

© JEPPESEN, 2018, 2024. ALL RIGHTS RESERVED.

ZGSZ/SZX
BAOAN


JEPPESSEN SHENZHEN, PR OF CHINA
3 JAN 25 **11-4B** SA CAT I ILS DME Y Rwy 16

D-ATIS 127.45 (Chinese 126.85)	ZHUHAI Approach					BAOAN Tower	*Ground
	*APP01 120.35	APP02 119.55	*APP03 123.85	*APP04 119.025	*APP05 127.95	118.45	121.8


LOC ISZ 108.1	Final Apch Crs 155°	D7.3 ISZ 2300' (2287')	SA CAT I ILS RA 158' DA(H) 163' (150')	Apt Elev 13' Rwy 13'
----------------------------	----------------------------------	---	--	-------------------------

MISSED APCH: Climb STRAIGHT AHEAD to 500', turn RIGHT (MAX 220 KT) onto 185° to D8.0 ISZ, turn RIGHT (MAX 220 KT, remain within D11.2 ISZ) direct to NLG VOR at 3940'. Join holding or as directed.


Alt Set: hPa Trans level: 980 hPa or above - FL108
Rwy Elev: 0 hPa 979 hPa or less - FL118 Trans alt: 8860'




MSA SHK VOR



MSA NLG VOR

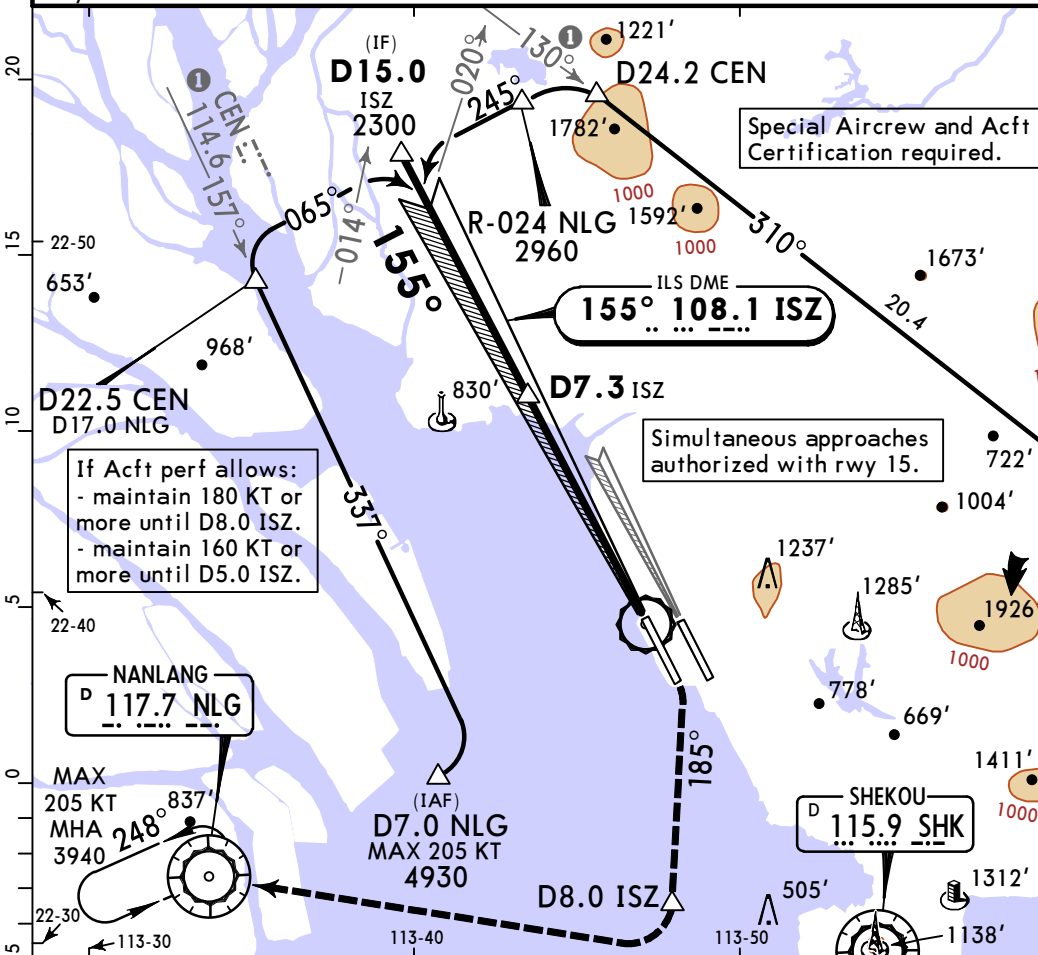

FT/M CONVERSION QNH	
8860'	2700m
4930'	1500m
3940'	1200m
2960'	900m
2300'	700m
500'	150m

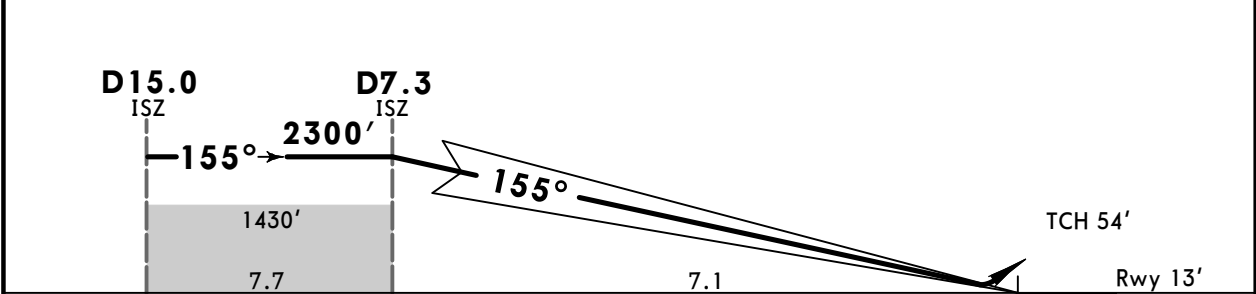

Gnd speed-Kts	70	90	100	120	140	160	HIALS PAPI	500'	220 KT MAX ↑ RT	onto 185°	D8.0 ISZ
Gs	3.00°	372	478	531	637	743					

State STRAIGHT-IN LANDING
SA CAT I ILS
RA 158'
DA(H) 163' (150')


R450m
HUD required.



ZGSZ/SZX
BAOAN

JEPPESSEN
28 MAR 25 **(11-5)**

SHENZHEN, PR OF CHINA
RNP ILS DME Z Rwy 33

BRIEFING STRIP™

D-ATIS 127.45 (Chinese 126.85)	*APP01 120.35	APP02 119.55	ZHUHAI Approach *APP03 123.85	*APP04 119.025	*APP05 127.95	*BAOAN Tower 130.35	*Ground 121.65
LOC IMH 110.7	Final Apch Crs 335°	D6.6 IMH 2100' (2088')	ILS DA(H) Refer to Minimums	Apt Elev 13' Rwy 12'		 MSA ARP	
MISSED APCH: Climb STRAIGHT AHEAD to SZ710, at 660' or above turn RIGHT (MAX 185 KT) along 350° to SZ711 at 1320' or above, then turn RIGHT (MAX 185 KT) to GUBLO at 4930'. Over GUBLO join holding or as directed. Refer to minimums for missed apch climb gradient.							
Alt Set: hPa		Trans level: 980 hPa or above - FL108			Trans alt: 8860'		
Rwy Elev: 0 hPa		979 hPa or less - FL118					

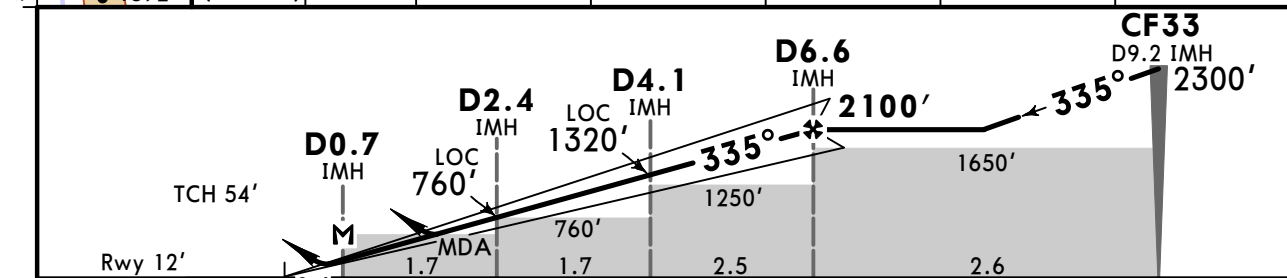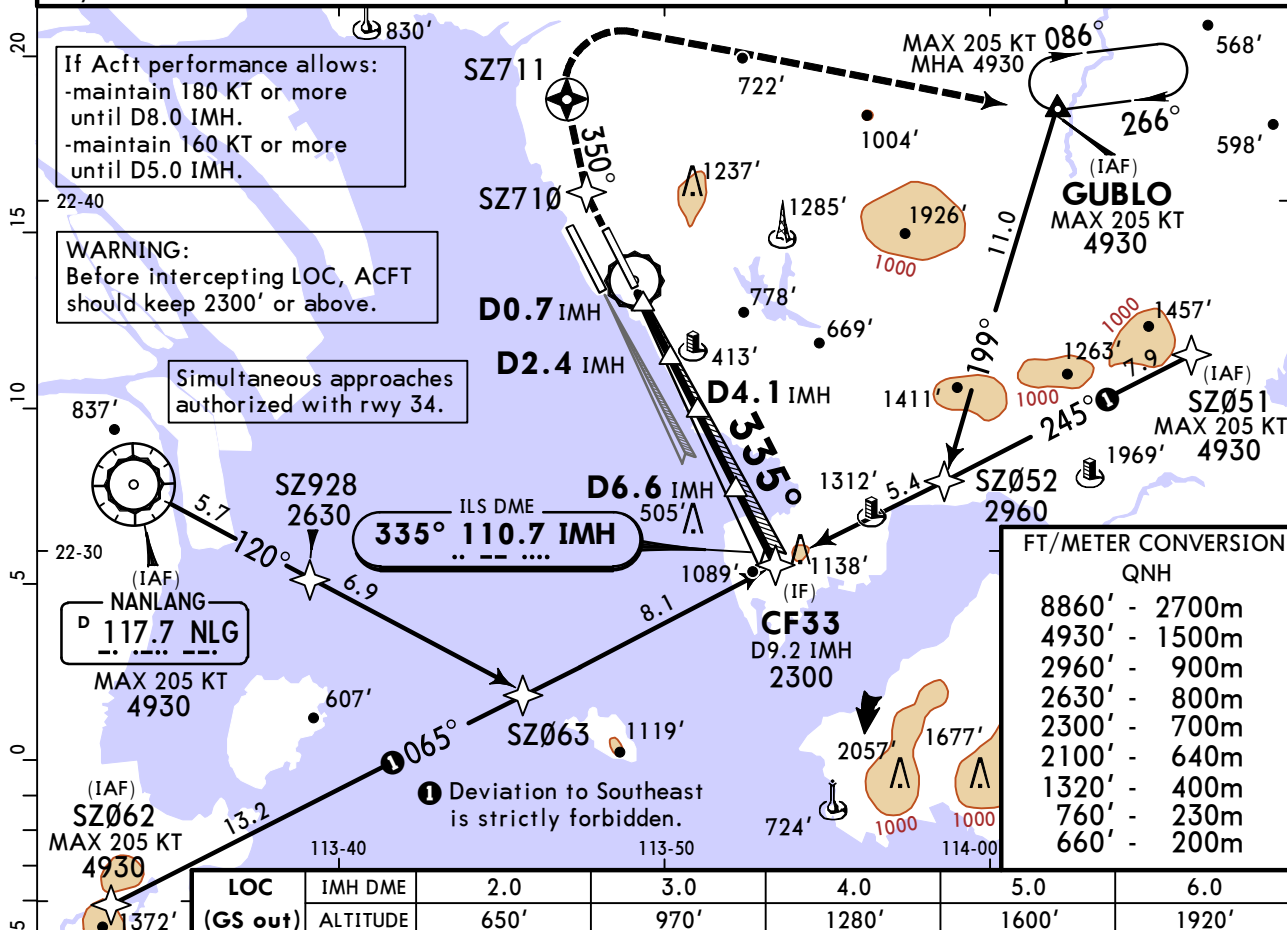

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II	SZ710	185 KT	MAX	onto 350°	SZ711
ILS GS or LOC Descent Angle	3.00°	372	478	531	637	743	849	PAPI				
MAP at D0.7 IMH												

State				STRAIGHT-IN LANDING				CIRCLE-TO-LAND			
ILS				LOC (GS out)				West of rwy only			
MACG MIN 4.0% (244'/NM) until SZ711				MACG MIN 2.5% (152'/NM)							
DA(H) 212' (200')				DA(H) 472' (460') BC: 488' (476') D: 505' (493')							
ALS out				ALS out				Max KT			
A				R/V1800m V2700m				100			
B				R/V1900m V2800m				135			
C				R/V2000m V2900m				180			
D								205			

CHANGES: Waypoint SZ053 withdrawn.


© JEPPESSEN, 2012, 2025. ALL RIGHTS RESERVED.



ZGSZ/SZX
BAOAN

28 MAR 25 (11-6)

JEPPESSEN SHENZHEN, PR OF CHINA
ILS DME Y Rwy 33

BRIEFING STRIP™

D-ATIS 127.45 (Chinese 126.85)	ZHUHAI Approach					*BAOAN Tower	*Ground
	*APP01 120.35	APP02 119.55	*APP03 123.85	*APP04 119.025	*APP05 127.95	130.35	121.65
LOC IMH 110.7	Final Apch Crs 335°	D5.6 IMH 1810' (1798')	ILS DA(H) Refer to Minimums	Apt Elev 13' Rwy 12'			
MISSED APCH: Climb STRAIGHT AHEAD to D2.5 IMH, turn RIGHT (MAX 185 KT) onto 350° to D5.5 IMH, then turn RIGHT (MAX 185 KT) along track 105° to intercept R-135 CEN climbing to 4930'. Join holding at D50.2 CEN/D11.5 SHK or as directed. Refer to minimums for missed apch climb gradient.							
Alt Set: hPa		Trans level: 980 hPa or above - FL108			Trans alt: 8860'		
Rwy Elev: 0 hPa		979 hPa or less - FL118					
MSA SHK VOR							

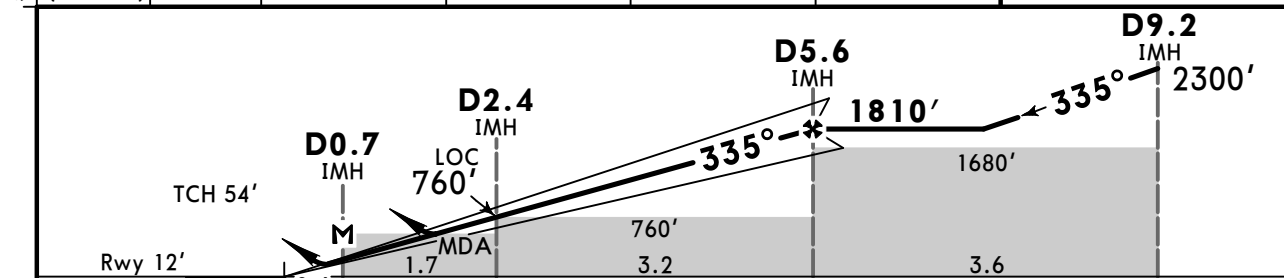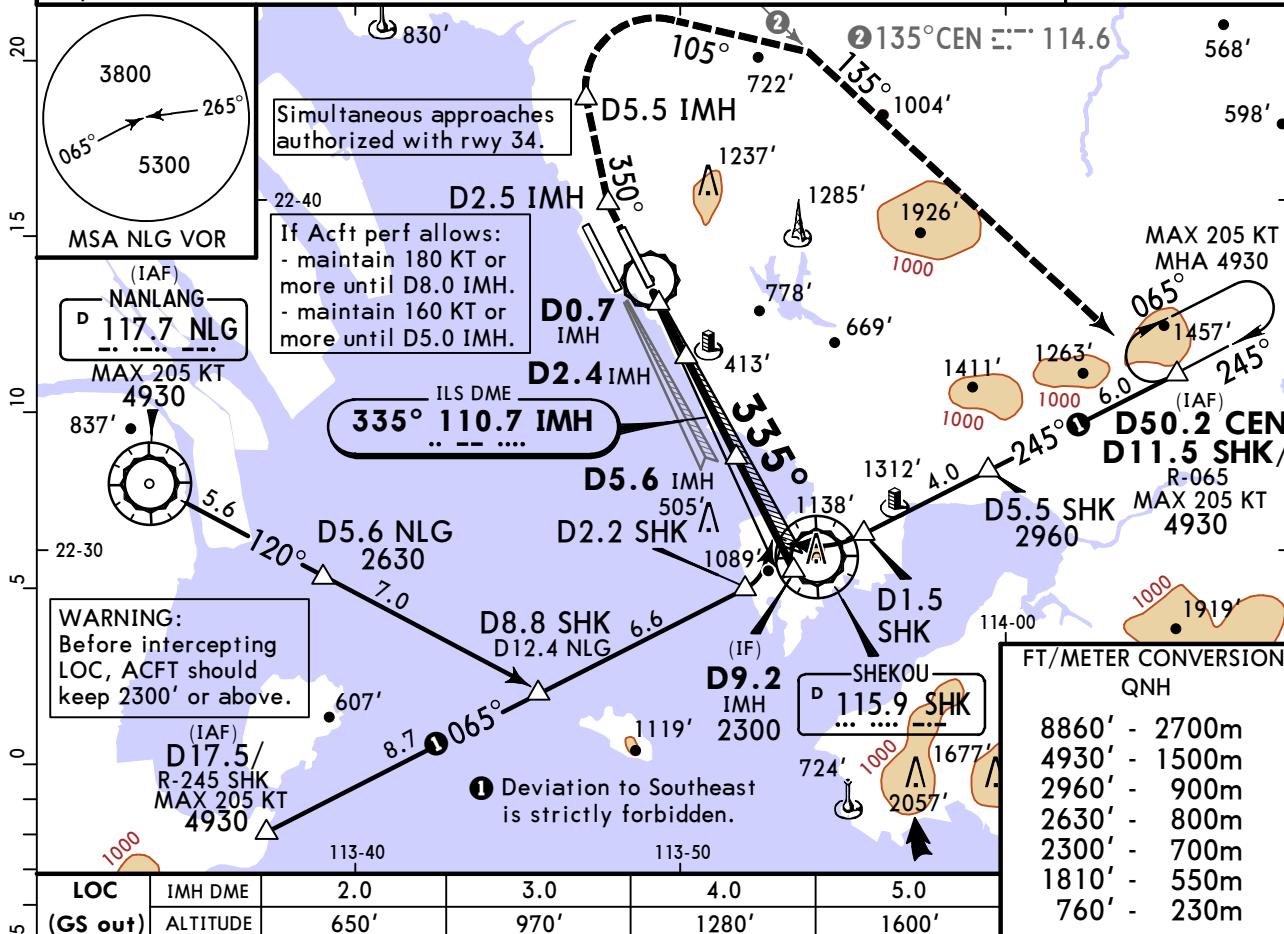

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II	D2.5 IMH	185 KT	D5.5 IMH
ILS GS or LOC Descent Angle	3.00°	372	478	531	637	743	849	PAPI	MAX	onto 350°
MAP D0.7 IMH									RT	

State				STRAIGHT-IN LANDING				CIRCLE-TO-LAND			
MACG MIN 4.0% (244'/NM) until D5.5 IMH				MACG MIN 2.5% (152'/NM)				West of rwy only			
DA(H) 212' (200')				DA(H) A: 472' (460') D: 505' (493')				CDFA MDA(H) 630' (618')			
ALS out				ALS out				ALS out			
A				R/V1800m V2700m				Max KT 100			
B				R/V1900m V2800m				135			
C				R/V2000m V2900m				180			
D								205			

ZGSZ/SZ
BAOAN

28 MAR 25



11-6A

SA CAT I RNP ILS DME Z Rwy 33

BRIEFING STRIP™

D-ATIS 127.45 (Chinese 126.85)	ZHUHAI Approach					*BAOAN Tower	*Ground
	*APP01 120.35	APP02 119.55	*APP03 123.85	*APP04 119.025	*APP05 127.95	130.35	121.65
LOC IMH 110.7	Final Apch Crs 335°	D6.6 IMH 2100' (2088')	SA CAT I ILS RA 158' DA(H) 162' (150')		Apt Elev 13' Rwy 12'		
MISSED APCH: Climb STRAIGHT AHEAD to SZ710, at 660' or above turn RIGHT (MAX 185 KT) along 350° to SZ711 at 1320' or above, then turn RIGHT (MAX 185 KT) to GUBLO at 4930'. Over GUBLO join holding or as directed. Missed apch climb grad MIN 4.0% (244'/NM) until SZ711.							
Alt Set: hPa Rwy Elev: 0 hPa		Trans level: 980 hPa or above - FL108 979 hPa or less - FL118			Trans alt: 8860'		

MSA ARP

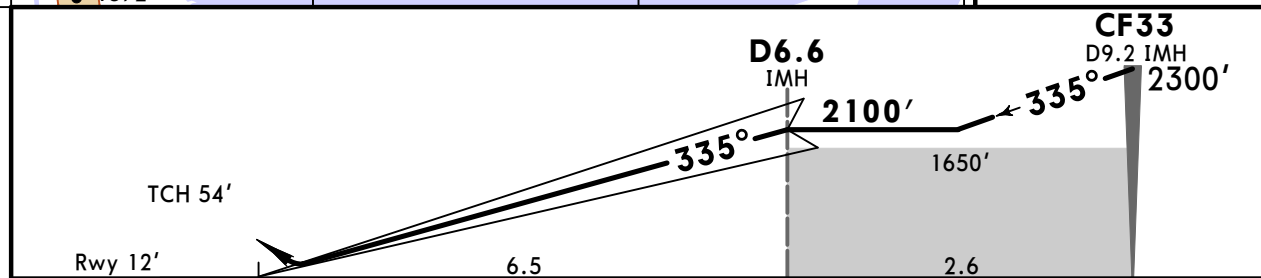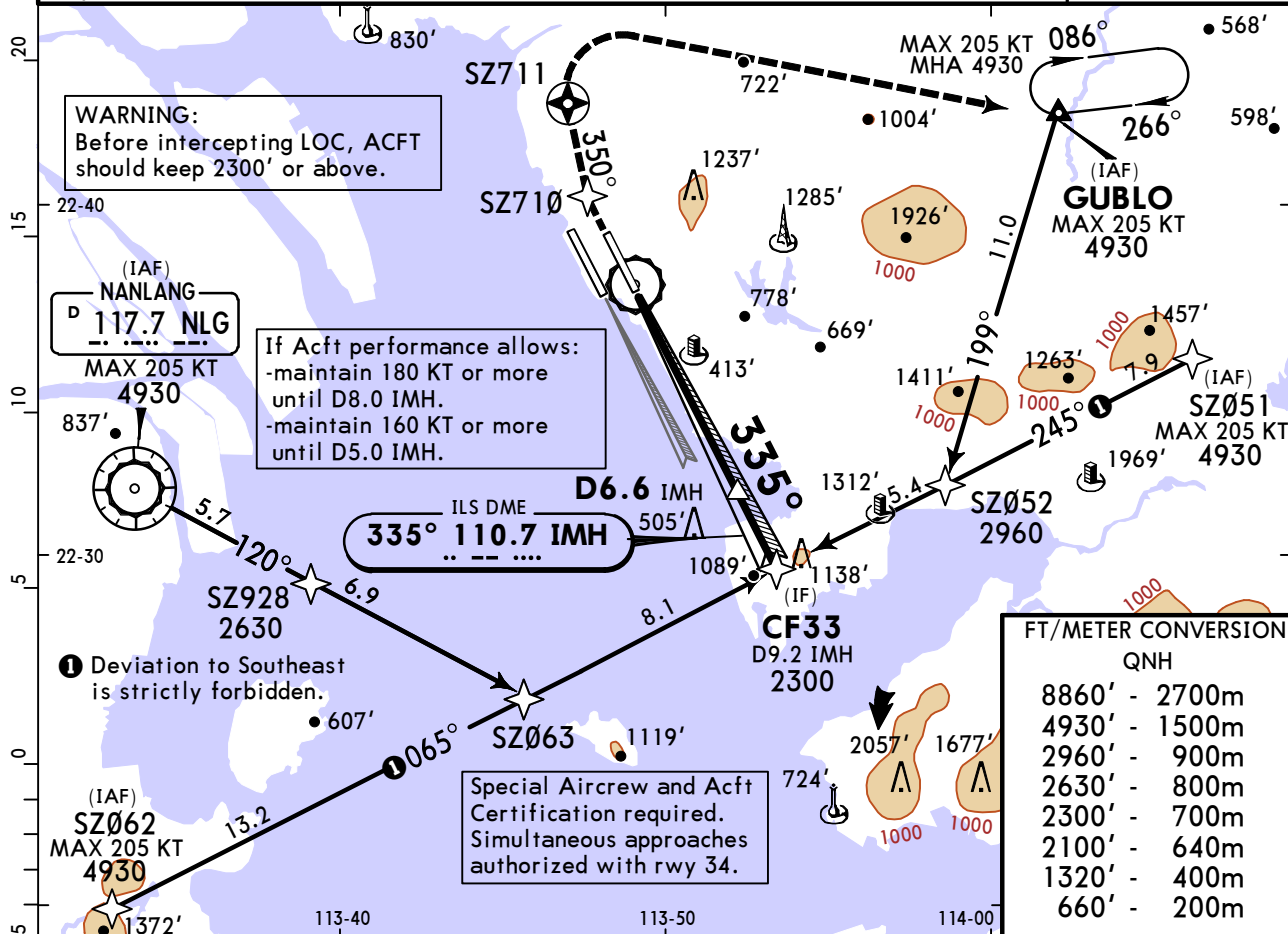

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II PAPI	SZ710 ↑	185 KT MAX ↑ RT	onto 350° SZ711
GS	3.00°	372	478	531	637	743				

State

STRAIGHT-IN LANDING

SA CAT I ILS

RA 158'

DA(H) 162' (150')

R450m

HUD required.

CHANGES: Waypoint SZ053 withdrawn.



© JEPPESEN, 2018, 2025. ALL RIGHTS RESERVED.

ZGSZ/SZX
BAOAN

JEPPESSEN SHENZHEN, PR OF CHINA
28 MAR 25 11-6B SA CAT I ILS DME Y Rwy 33

BRIEFING STRIP™

D-ATIS 127.45 (Chinese 126.85)	*APP01 120.35	APP02 119.55	ZHUHAI Approach *APP03 123.85	*APP04 119.025	*APP05 127.95	*BAOAN Tower 130.35	*Ground 121.65
LOC IMH 110.7	Final Apch Crs 335°	D5.6 IMH 1810' (1798')	SA CAT I ILS RA 158' DA(H) 162' (150')		Apt Elev 13' Rwy 12'		
MISSED APCH: Climb STRAIGHT AHEAD to D2.5 IMH, turn RIGHT (MAX 185 KT) onto 350° to D5.5 IMH, then turn RIGHT (MAX 185 KT) along track 105° to intercept R-135 CEN climbing to 4930'. Join hold at D50.2 CEN/D11.5 SHK or as directed. Missed apch climb grad MIN 4.0% (244'/NM) until D5.5 IMH.							
Alt Set: hPa		Trans level: 980 hPa or above - FL108			Trans alt: 8860'		
Rwy Elev: 0 hPa		979 hPa or less - FL118					MSA SHK VOR

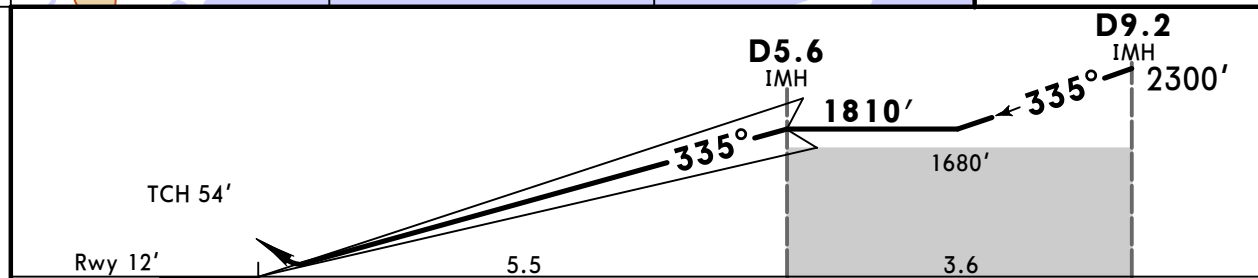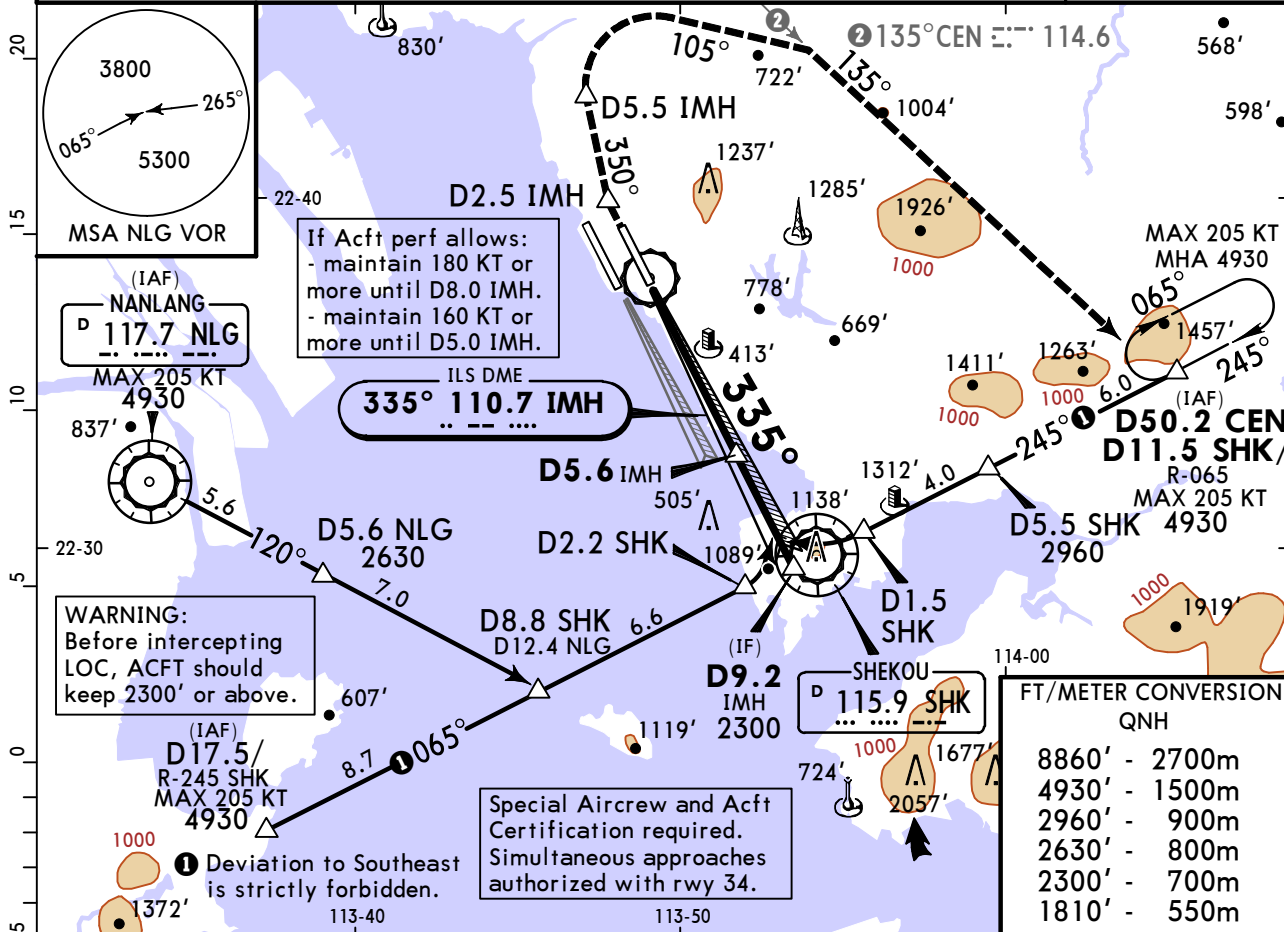


Gnd speed-Kts	70	90	100	120	140	160	HIALS-II PAPI	D2.5 IMH	185 KT MAX onto 350° RT	D5.5 IMH
GS	3.00°	372	478	531	637	743	849			

State	STRAIGHT-IN LANDING									
	SA CAT I ILS									
	RA 158' DA(H) 162' (150')									
PANS OPS	R450m									
	HUD required.									

ZGSZ/SZX
BAOAN

JEPPESSEN SHENZHEN, PR OF CHINA
28 MAR 25 (11-8)
ILS DME Y Rwy 34

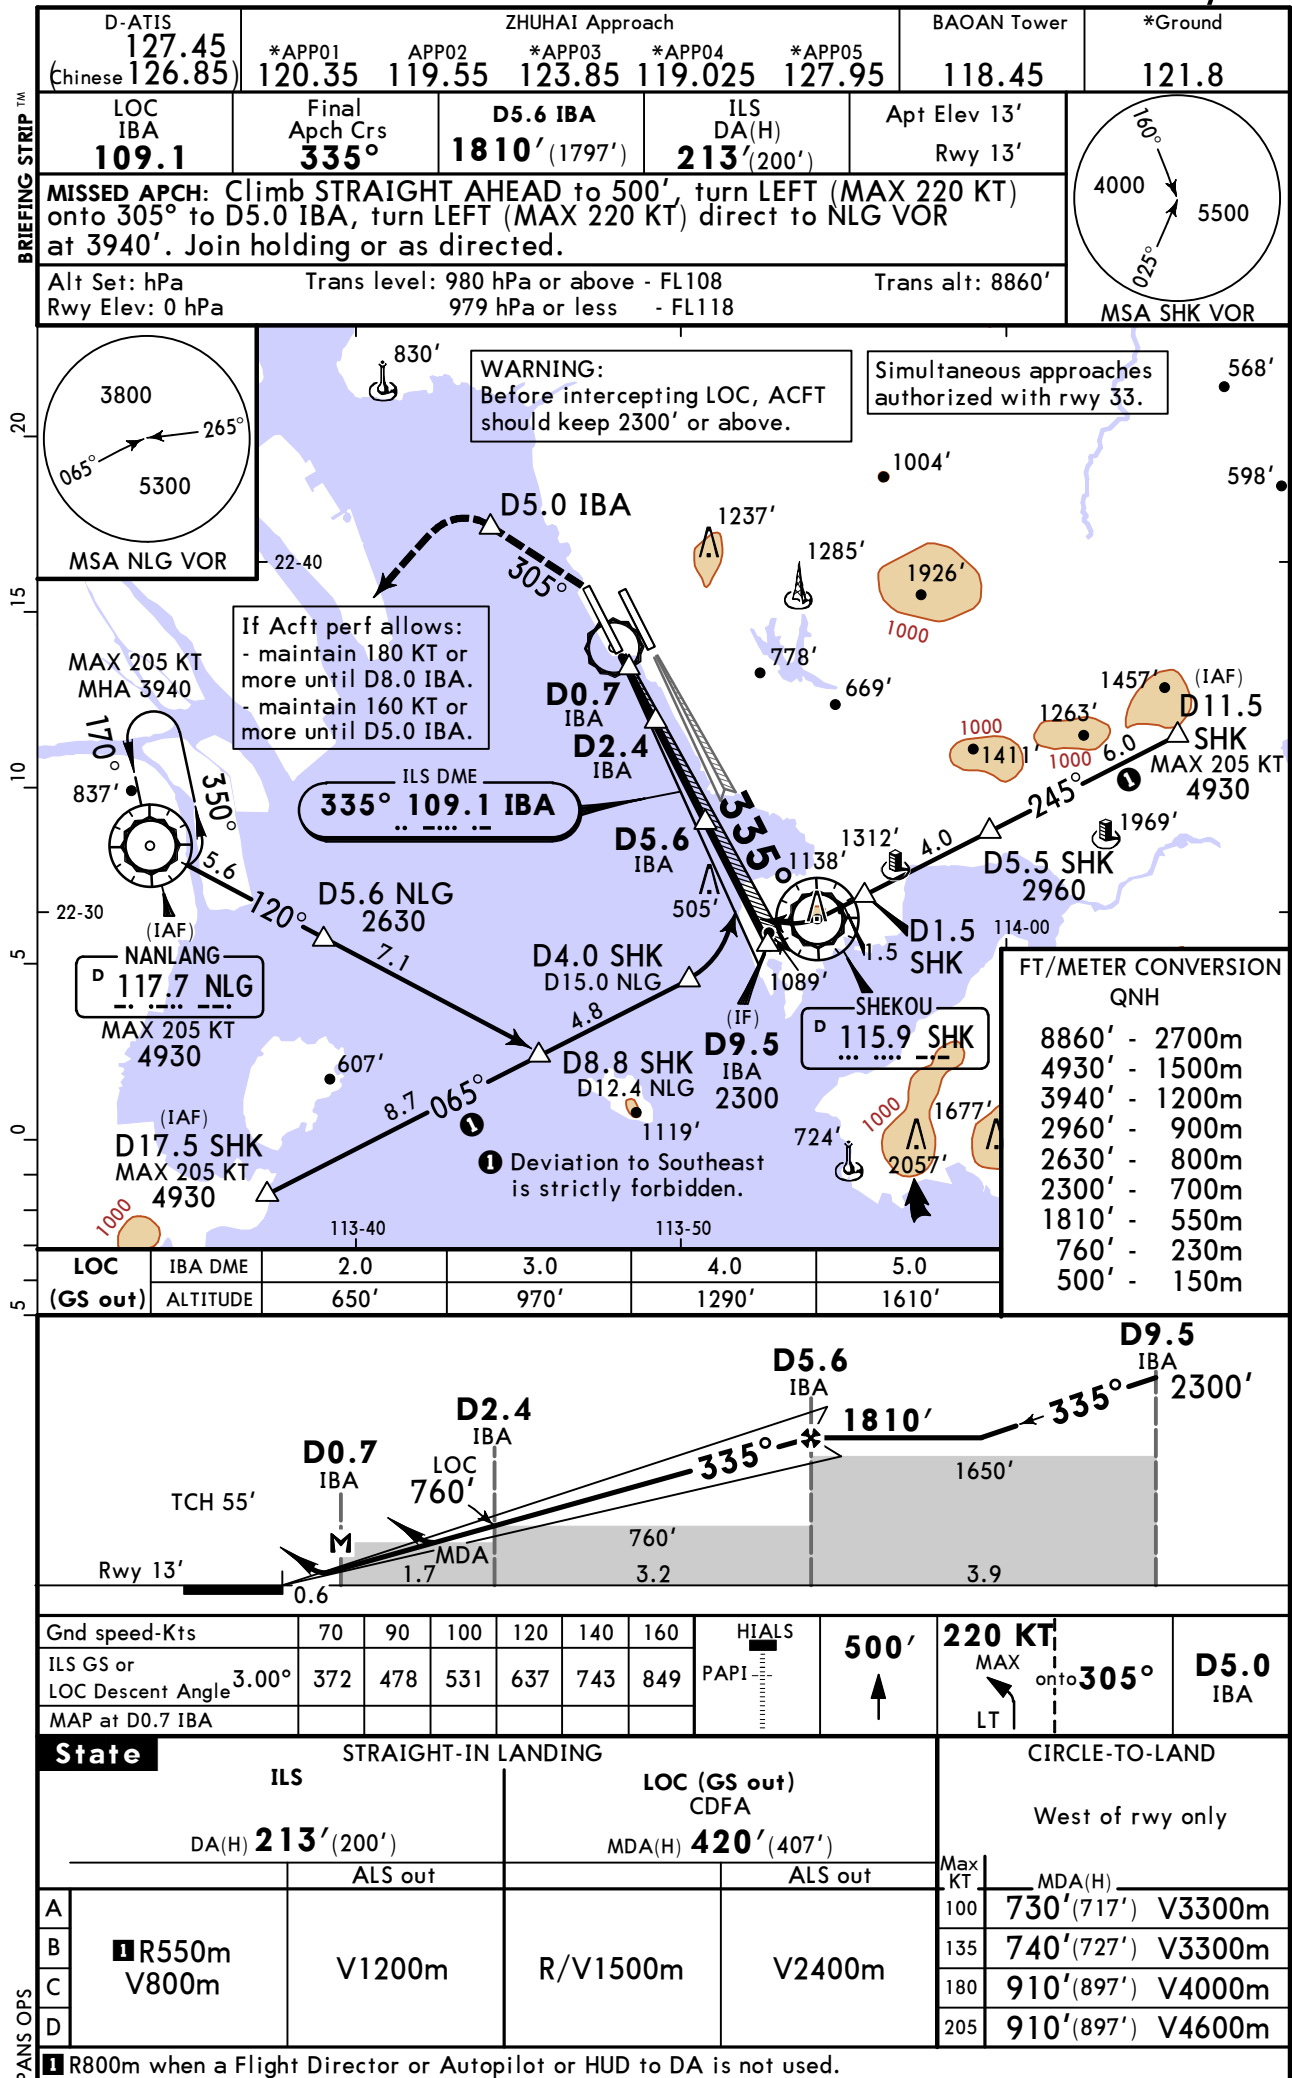




ZGSZ/SZX
BAOAN

28 MAR 25

11-8A

SA CAT I RNP ILS DME Z Rwy 34

D-ATIS 127.45 (Chinese 126.85)	*APP01 120.35	APP02 119.55	ZHUHAI Approach *APP03 123.85	*APP04 119.025	*APP05 127.95	BAOAN Tower 118.45	*Ground 121.8
LOC IBA 109.1	Final Apch Crs 335°	D5.6 IBA 1810' (1797')	SA CAT I ILS RA 158' DA(H) 163' (150')	Apt Elev 13' Rwy 13'			
MISSED APCH: Climb STRAIGHT AHEAD to 500', turn LEFT (MAX 220 KT) onto 305° to D5.0 IBA, turn LEFT (MAX 220 KT) direct to NLG VOR at 3940'. Join holding or as directed.							
Alt Set: hPa		Trans level: 980 hPa or above - FL108		Trans alt: 8860'		MSA ARP	
Rwy Elev: 0 hPa		979 hPa or less - FL118					

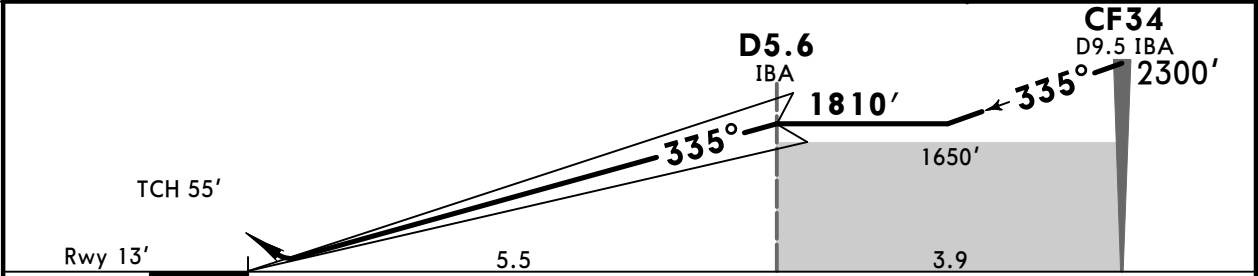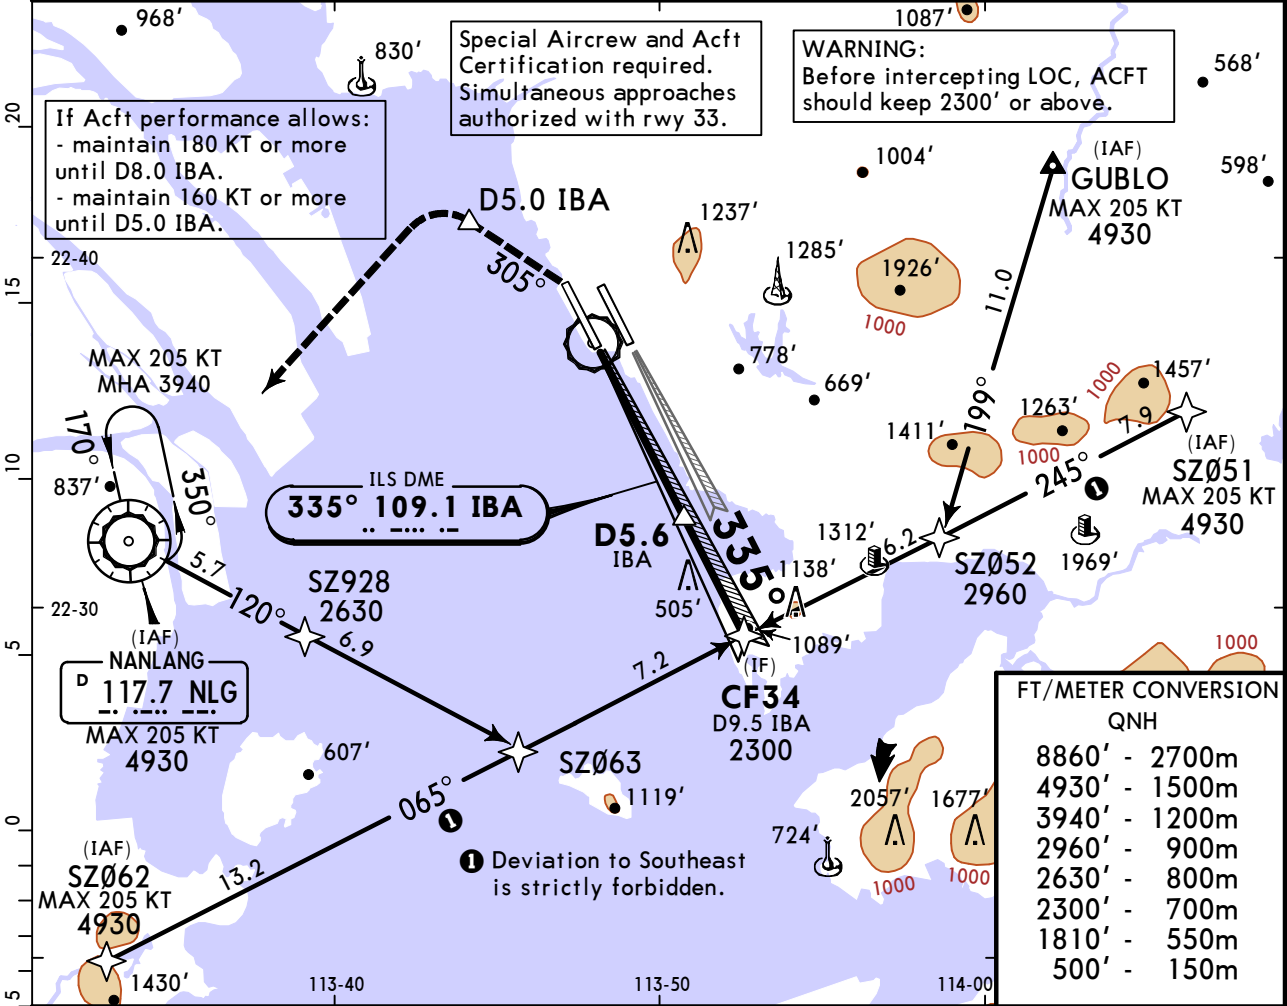

Gnd speed-Kts	70	90	100	120	140	160	HIALS	500'	220 KT	MAX	onto 305°	D5.0 IBA
GS	3.00°	372	478	531	637	743	PAPI	↑	LT			

State

STRAIGHT-IN LANDING

SA CAT I ILS

RA 158'

DA(H) 163' (150')


R450m



HUD required.

CHANGES: Waypoint SZ053 withdrawn.

ZGSZ/SZ
BAOAN

JEPPESSEN SHENZHEN, PR OF CHINA
28 MAR 25 11-8B SA CAT I ILS DME Y Rwy 34

D-ATIS 127.45 (Chinese 126.85)		ZHUHAI Approach					BAOAN Tower	*Ground
		*APP01	APP02	*APP03	*APP04	*APP05	118.45	121.8
LOC IBA 109.1		Final Apch Crs 335°	D5.6 IBA 1810' (1797')		SA CAT I ILS RA 158' DA(H) 163' (150')		Apt Elev 13' Rwy 13'	
MISSED APCH: Climb STRAIGHT AHEAD to 500', turn LEFT (MAX 220 KT) onto 305° to D5.0 IBA, turn LEFT (MAX 220 KT) direct to NLG VOR at 3940'. Join holding or as directed.								
Alt Set: hPa		Trans level: 980 hPa or above - FL108				Trans alt: 8860'		
Rwy Elev: 0 hPa		979 hPa or less - FL118						

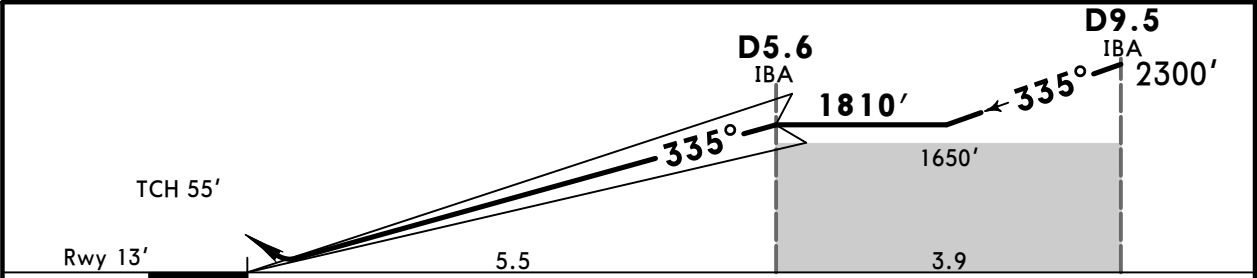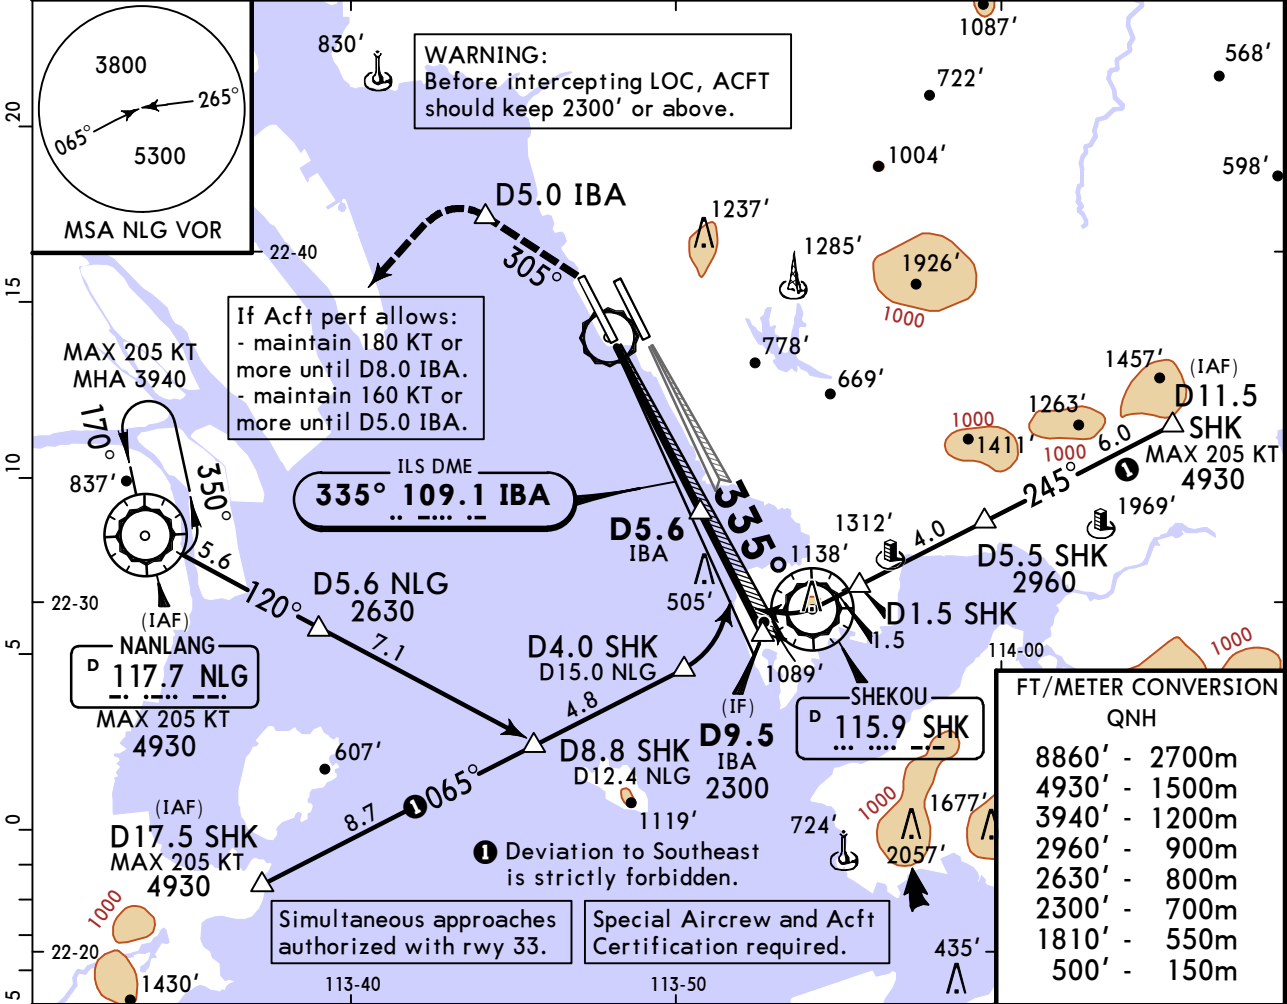

Gnd speed-Kts	70	90	100	120	140	160	HIALS PAPI	500'	220 KT MAX LT	onto 305°	D5.0 IBA
GS	3.00°	372	478	531	637	743		↑			


State STRAIGHT-IN LANDING
SA CAT I ILS
RA 158'
DA(H) 163' (150')



R450m
HUD required.

ZGSZ/SZ
BAOAN

JEPPESSEN SHENZHEN, PR OF CHINA
6 DEC 24 11-9 RNP (AR) ILS DME W Rwy 34

BRIEFING STRIP™

D-ATIS 127.45 (Chinese 126.85)	ZHUHAI Approach					BAOAN Tower	*Ground
	*APP01 120.35	APP02 119.55	*APP03 123.85	*APP04 119.025	*APP05 127.95	118.45	121.8
LOC IBA 109.1	Final Apch Crs 335°	[FI34W] MANDATORY 1100' (1087')	ILS DA(H) 213' (200')	Apt Elev 13' Rwy 13'			
MISSED APCH: Climb STRAIGHT AHEAD to 500', turn LEFT (MAX 220 KT) onto 305° to D5.0 IBA, turn LEFT (MAX 220 KT) direct to NLG VOR at 3900'. Join holding or as directed.							
Alt Set: hPa		Trans level: 980 hPa or above - FL108		Trans alt: 8860'			
Rwy Elev: 0 hPa		979 hPa or less - FL118					
1. Authorization required. 2. Dual GNSS and IRU required. 3. RF required.							

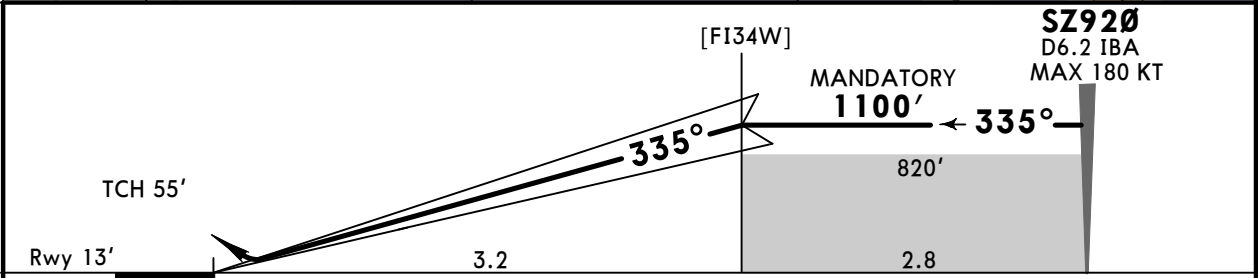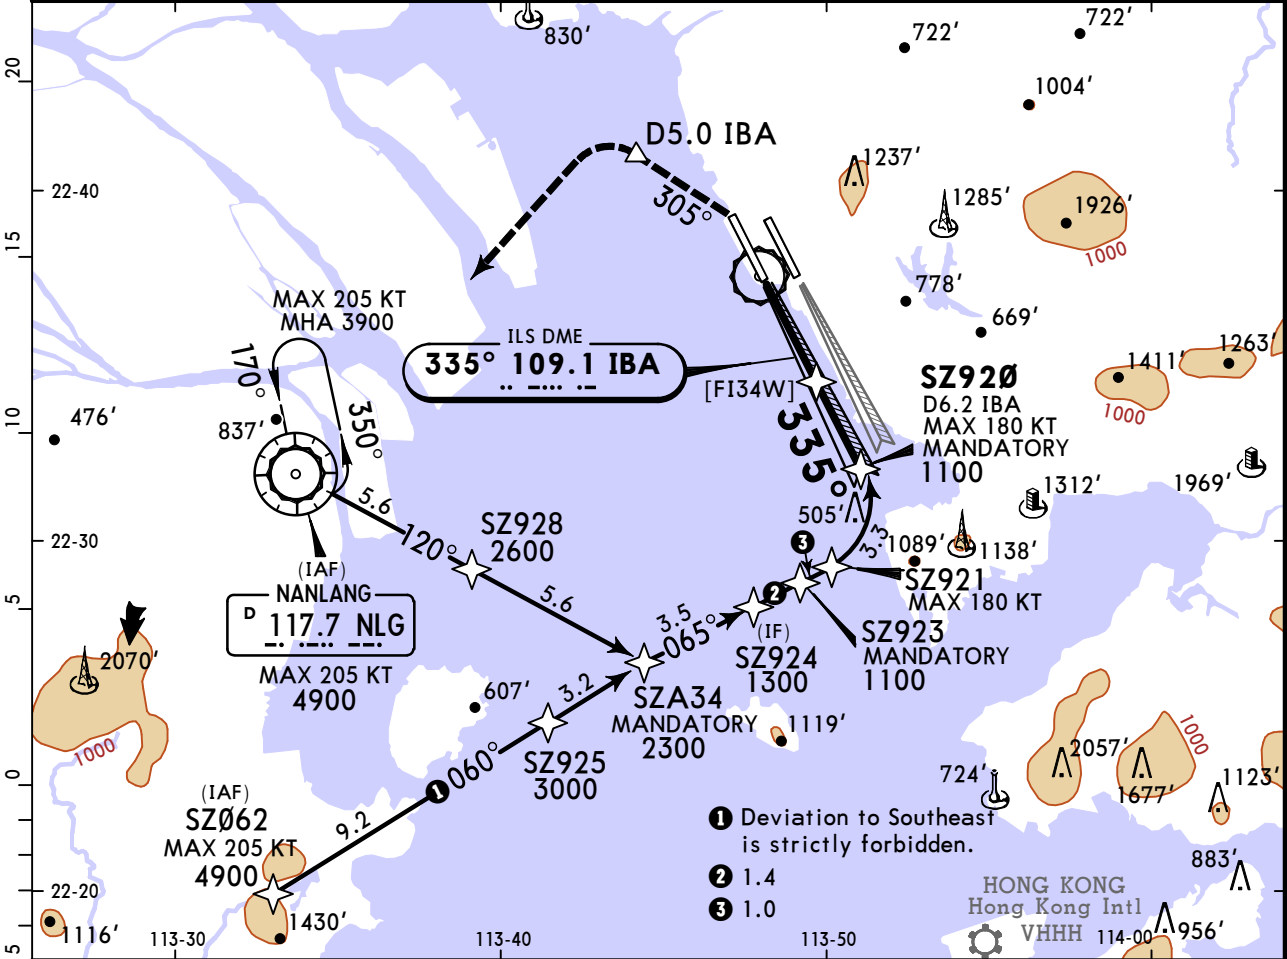

Gnd speed-Kts	70	90	100	120	140	160	HIALS PAPI	500'	220 KT MAX LT	onto 305°	D5.0 IBA
GS	3.00°	372	478	531	637	743					

State		STRAIGHT-IN LANDING	
		ILS	
		DA(H) 213' (200')	
		ALS out	
A	R550m V800m		V1200m
B			
C			
D			
R800m when a Flight Director or Autopilot or HUD to DA is not used.			