

RNAV SID DESIGNATION	REFER TO CHART
ANEKI 1X	10-3A3
ANEKI 1Y	10-3A4
CINDY 1X	10-3A5
CINDY 1Y	10-3A6
SOBRA 2U	10-3A7
SOBRA 1X	10-3A8
SOBRA 1Y	10-3A9
MARUN 3K	10-3B
MARUN 3W	10-3C
OBOKA 3K	10-3C1
OBOKA 3W	10-3C2
TOBAK 3K	10-3C3
TOBAK 3W	10-3C4
ANEKI 3D	10-3C5
ANEKI 6E	10-3C6
ANEKI 3F, 2L	10-3C7
CINDY 2D	10-3D
CINDY 5F	10-3E
CINDY 5L	10-3E1
CINDY 7S	10-3E2
MARUN 7F, 2G	10-3E3
MARUN 2N	10-3E4
MARUN 4R	10-3E5
MARUN 8S	10-3E6
MARUN 6T	10-3E7
OBOKA 4G	10-3E8
OBOKA 6N	10-3E9
OBOKA 2L, 4S	10-3E10
OBOKA 2R	10-3F
OBOKA 3T	10-3G

FOR FURTHER RNAV SID DESIGNATION REFER TO PAGE 10-3A

RNAV SID DESIGNATION	REFER TO CHART
SOBRA 7D	10-3G1
SOBRA 8E	10-3G2
SOBRA 1F, 9P	10-3G3
SOBRA 9N	10-3G4
SOBRA 2L	10-3G5
SULUS 5F	10-3G6
SULUS 4L	10-3G7
SULUS 6S	10-3G8
TOBAK 8F, 3G	10-3G9
TOBAK 4N	10-3H
TOBAK 4R	10-3J
TOBAK 1S	10-3J1
TOBAK 8T	10-3K
ULKIG 4L, 3S	10-3L

SID DESIGNATION	REFER TO CHART
FRANKENSTEIN 1B	10-3L1
FRANKENSTEIN 1C, 1Q	10-3L2
KOMIB 5D	10-3L3
MARUN 1D, 5E	10-3L4
MARUN 5H	10-3L5
MARUN 7M	10-3M
METRO 6C	10-3N
OBOKA 2D, 1E	10-3N1
OBOKA 2H	10-3N2
OBOKA 2M	10-3N3
SULUS 3D	10-3N4
TAUNUS 3Q	10-3N5
TOBAK 1D	10-3N6
TOBAK 5H	10-3N7
TOBAK 7M	10-3N8

--

RNAV SID DESIGNATION	REFER TO CHART
KOMIB 5D	10-3P
MARUN 1D, 5E	10-3Q
MARUN 5H	10-3Q1
MARUN 7M	10-3Q2
OBOKA 2D, 1E	10-3Q3
OBOKA 2H	10-3S
OBOKA 2M	10-3T
SULUS 3D	10-3U
TOBAK 1D	10-3V
TOBAK 5H	10-3W
TOBAK 7M	10-3X

EDDF/FRA
FRANKFURT/MAIN


JEPPesen
27 OCT 23 10-3A3 Eff 2 Nov

FRANKFURT/MAIN, GERMANY
RNAV SID

*LANGEN Radar (APP) 136.130	Apt Elev 363	Trans alt: 5000
		RNP-1/A-RNP, RF leg required GPS required
		1. Contact LANGEN Radar when advised by Tower. 2. WARNING: Close-in obstacles 3. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY. 4. For operational RWY use concept refer to 10-1P pages.

ANEKI 1X [ANEK1X]
RNP DEPARTURE
(RWY 07C)

SPEED: MAX 250 KT BELOW FL100 OR AS BY ATC
NOT APPLICABLE WITHIN AIRSPACE C

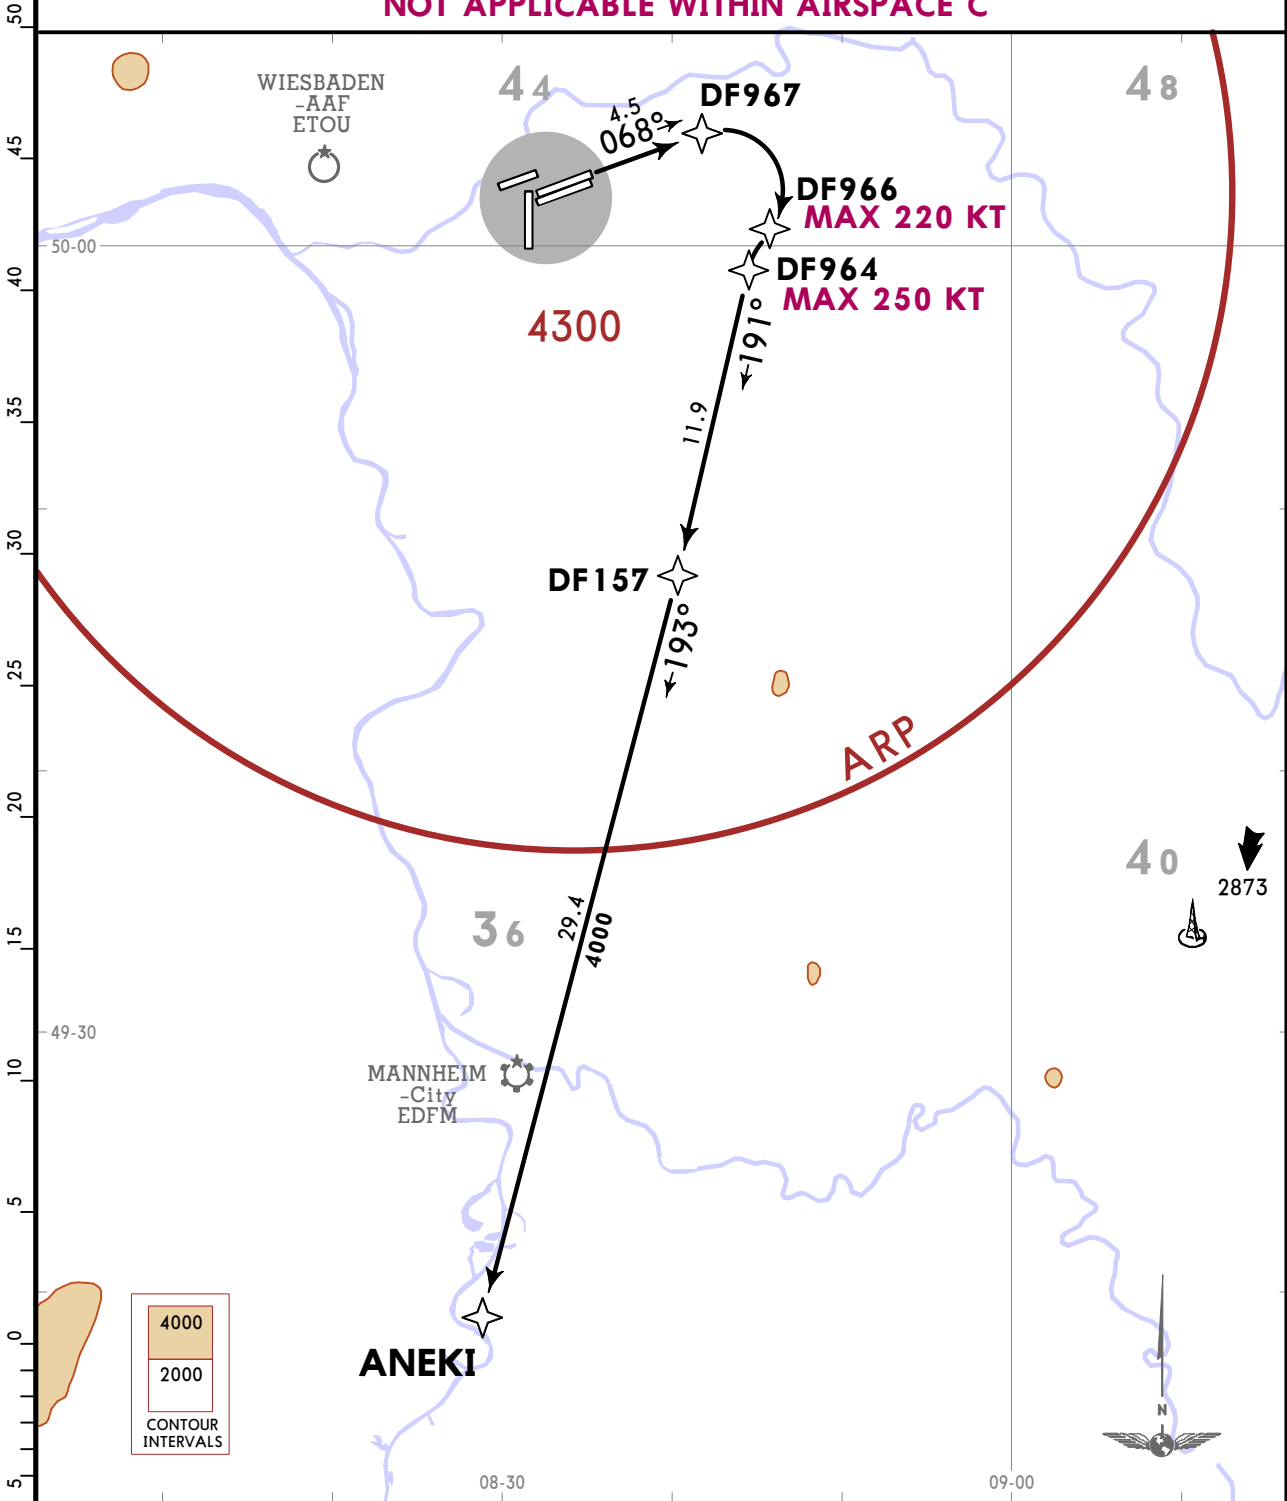

Initial climb clearance 4000

ROUTING

On 068° track to DF967, turn RIGHT to DF966, turn LEFT to DF964, to DF157, to ANEKI.


EDDF/FRA
FRANKFURT/MAIN

JEPPesen FRANKFURT/MAIN, GERMANY
27 OCT 23 10-3A4 Eff 2 Nov RNAV SID

*LANGEN Radar (APP) 136.130	Apt Elev 363	Trans alt: 5000
		RNP-1/A-RNP, RF leg required GPS required
		1. Contact LANGEN Radar when advised by Tower. 2. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY. 3. For operational RWY use concept refer to 10-1P pages.

ANEKI 1Y [ANEK1Y]
RNP DEPARTURE
(RWY 07R)

SPEED: MAX 250 KT BELOW FL100 OR AS BY ATC
NOT APPLICABLE WITHIN AIRSPACE C

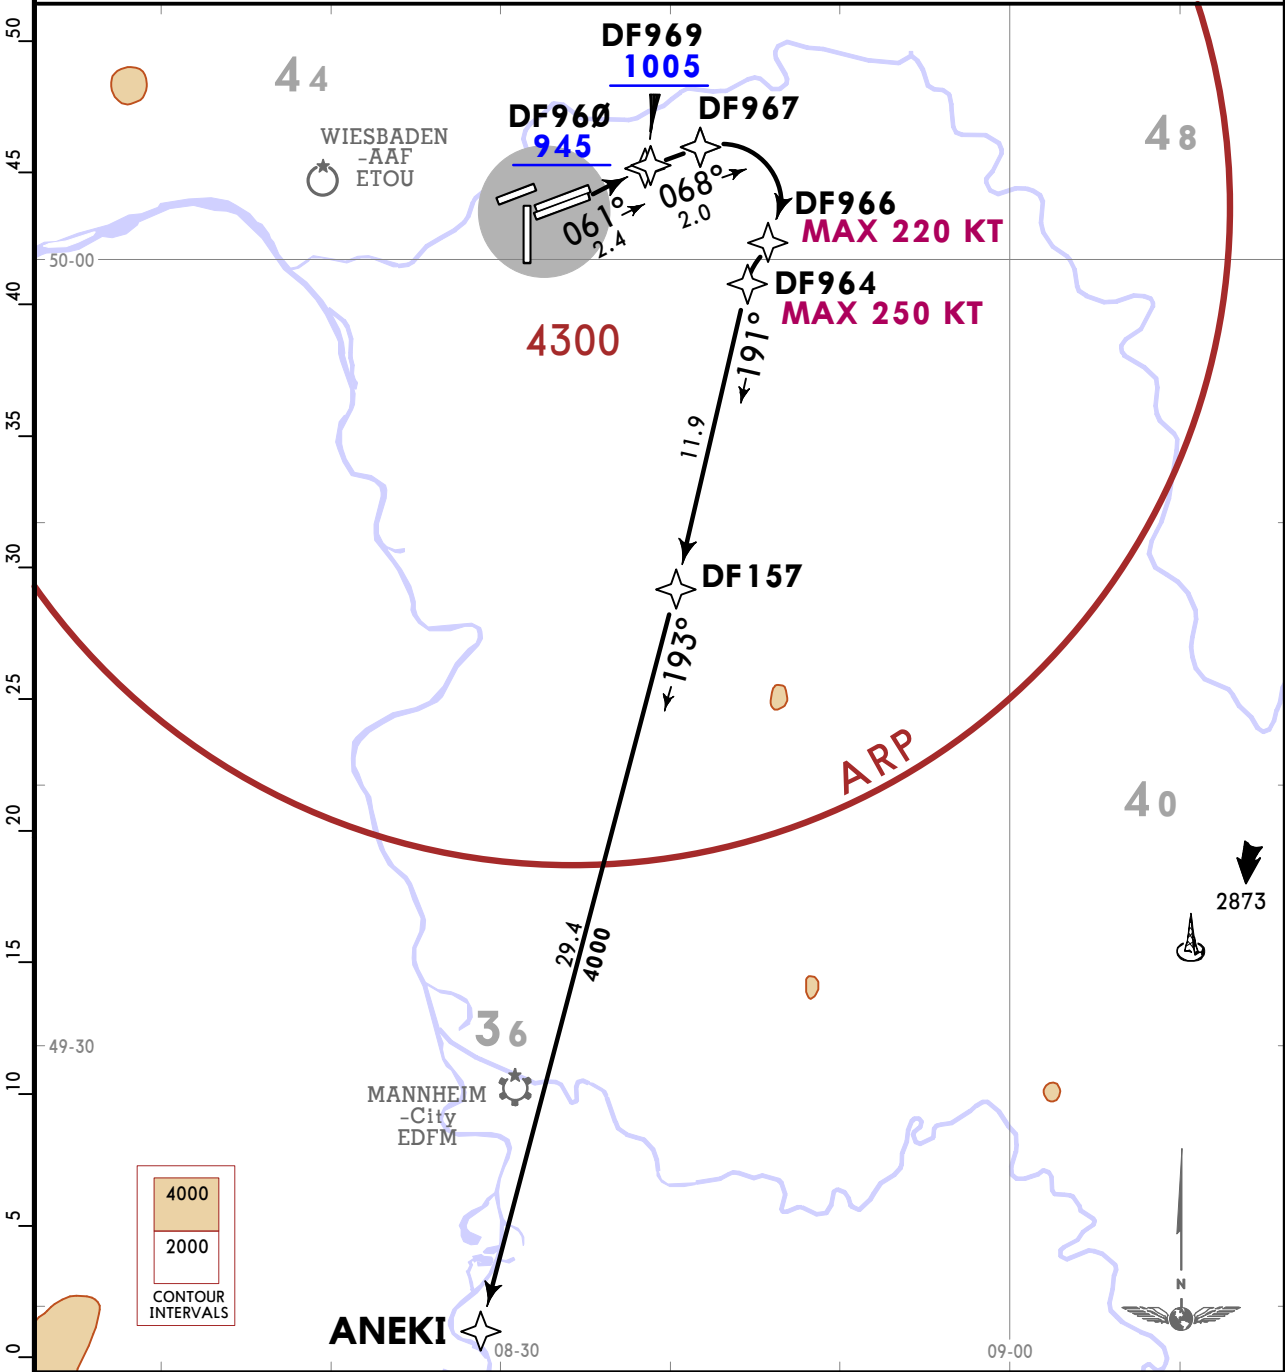

This SID requires a minimum climb gradient of 3.9% (240 FT/NM) until passing 1005 due to operational reasons.

Gnd speed-KT	75	100	150	200	250	300
3.9% V/V (fpm)	296	395	592	790	987	1185

Initial climb clearance 4000

ROUTING

On 061° track to DF960, turn RIGHT to DF969, to DF967, turn RIGHT to DF966, turn LEFT to DF964, to DF157, to ANEKI.

EDDF/FRA
FRANKFURT/MAIN

 JEPPESSEN **FRANKFURT/MAIN, GERMANY**

27 OCT 23 **10-3A5** **Eff 2 Nov**

RNAV SID

*LANGEN Radar (APP) 136.130	Apt Elev 363	Trans alt: 5000
		RNP-1/A-RNP, RF leg required GPS required
		1. Contact LANGEN Radar when advised by Tower.
		2. WARNING: Close-in obstacles. 3. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY. 4. For operational RWY use concept refer to 10-1P pages.


CINDY 1X [CIND1X]

RNP DEPARTURE

(RWY 07C)

SPEED: MAX 250 KT BELOW FL100 OR AS BY ATC

NOT APPLICABLE WITHIN AIRSPACE C

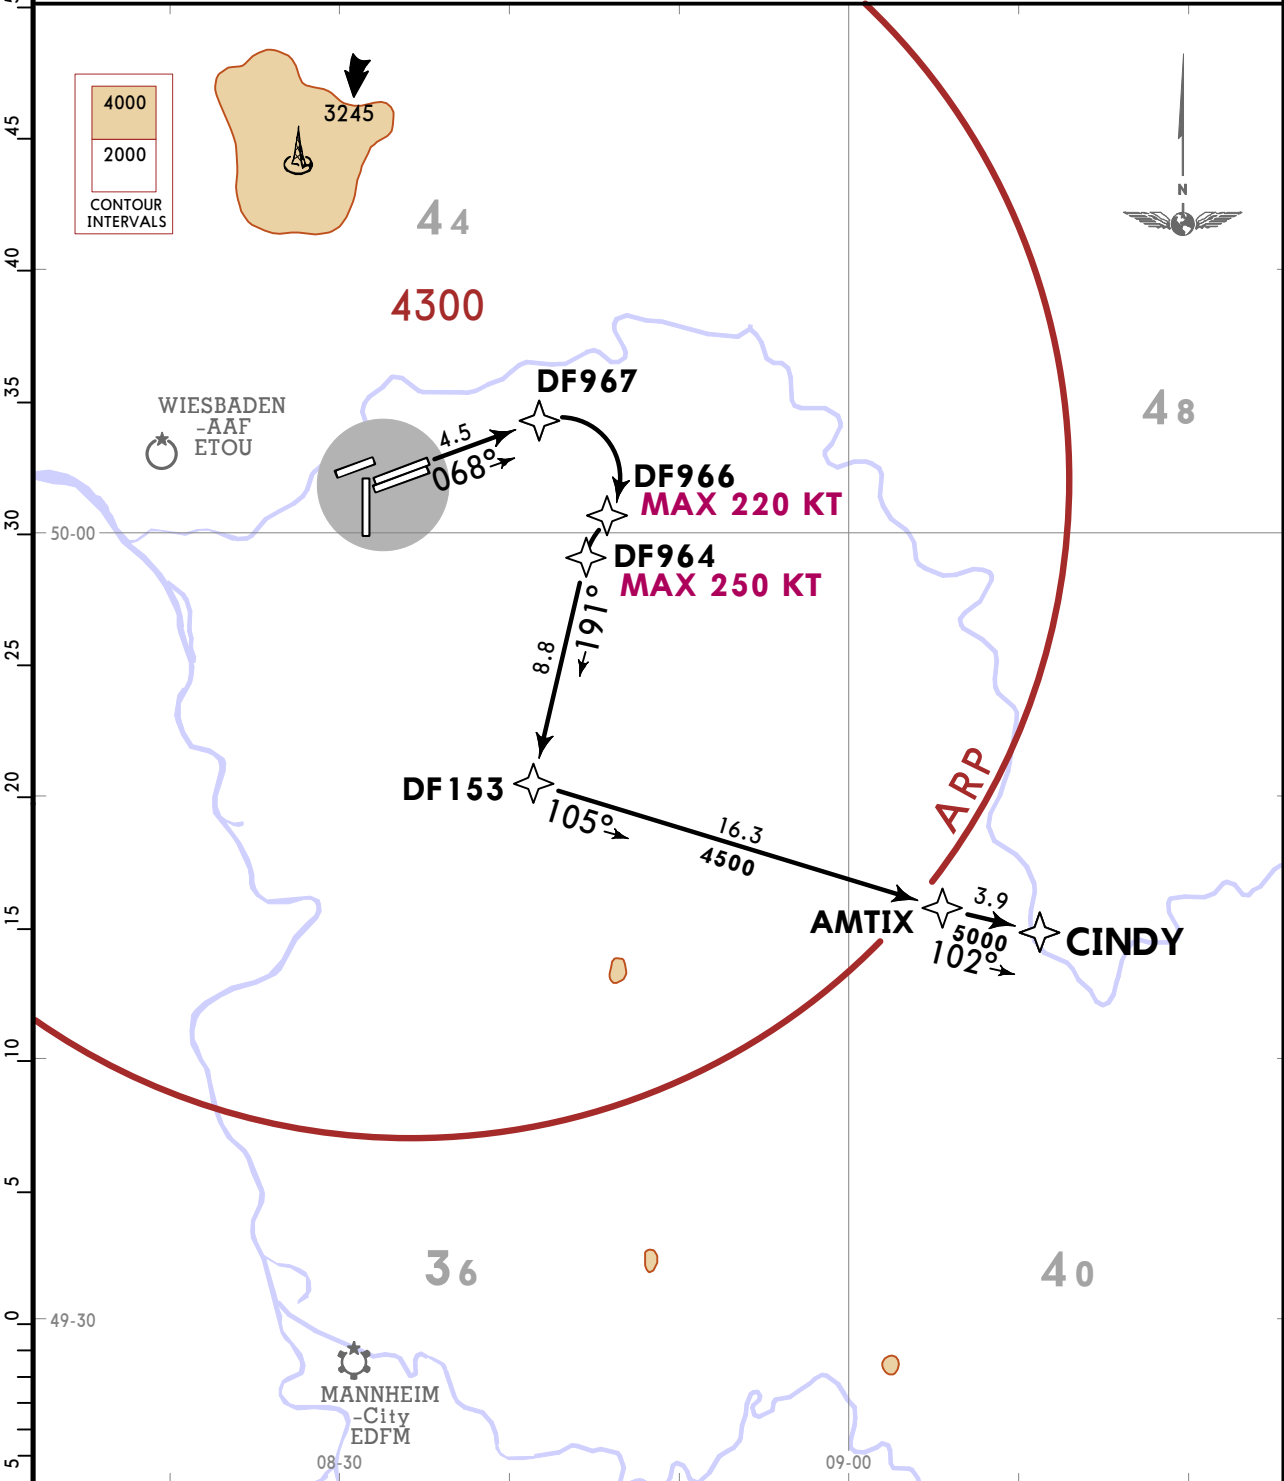

Initial climb clearance 4000

ROUTEING

On 068° track to DF967, turn RIGHT to DF966, turn LEFT to DF964, to DF153, to AMTIX, to CINDY.

CHANGES: General notes.

© JEPPESSEN, 2019, 2023. ALL RIGHTS RESERVED.


EDDF/FRA
FRANKFURT/MAIN

JEPPESSEN FRANKFURT/MAIN, GERMANY
27 OCT 23 10-3A6 Eff 2 Nov RNAV SID

*LANGEN Radar (APP) 136.130	Apt Elev 363	Trans alt: 5000
		RNP-1/A-RNP, RF leg required GPS required
		1. Contact LANGEN Radar when advised by Tower. 2. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY. 3. For operational RWY use concept refer to 10-1P pages.

CINDY 1Y [CIND1Y]
RNP DEPARTURE
(RWY 07R)

SPEED: MAX 250 KT BELOW FL100 OR AS BY ATC
NOT APPLICABLE WITHIN AIRSPACE C

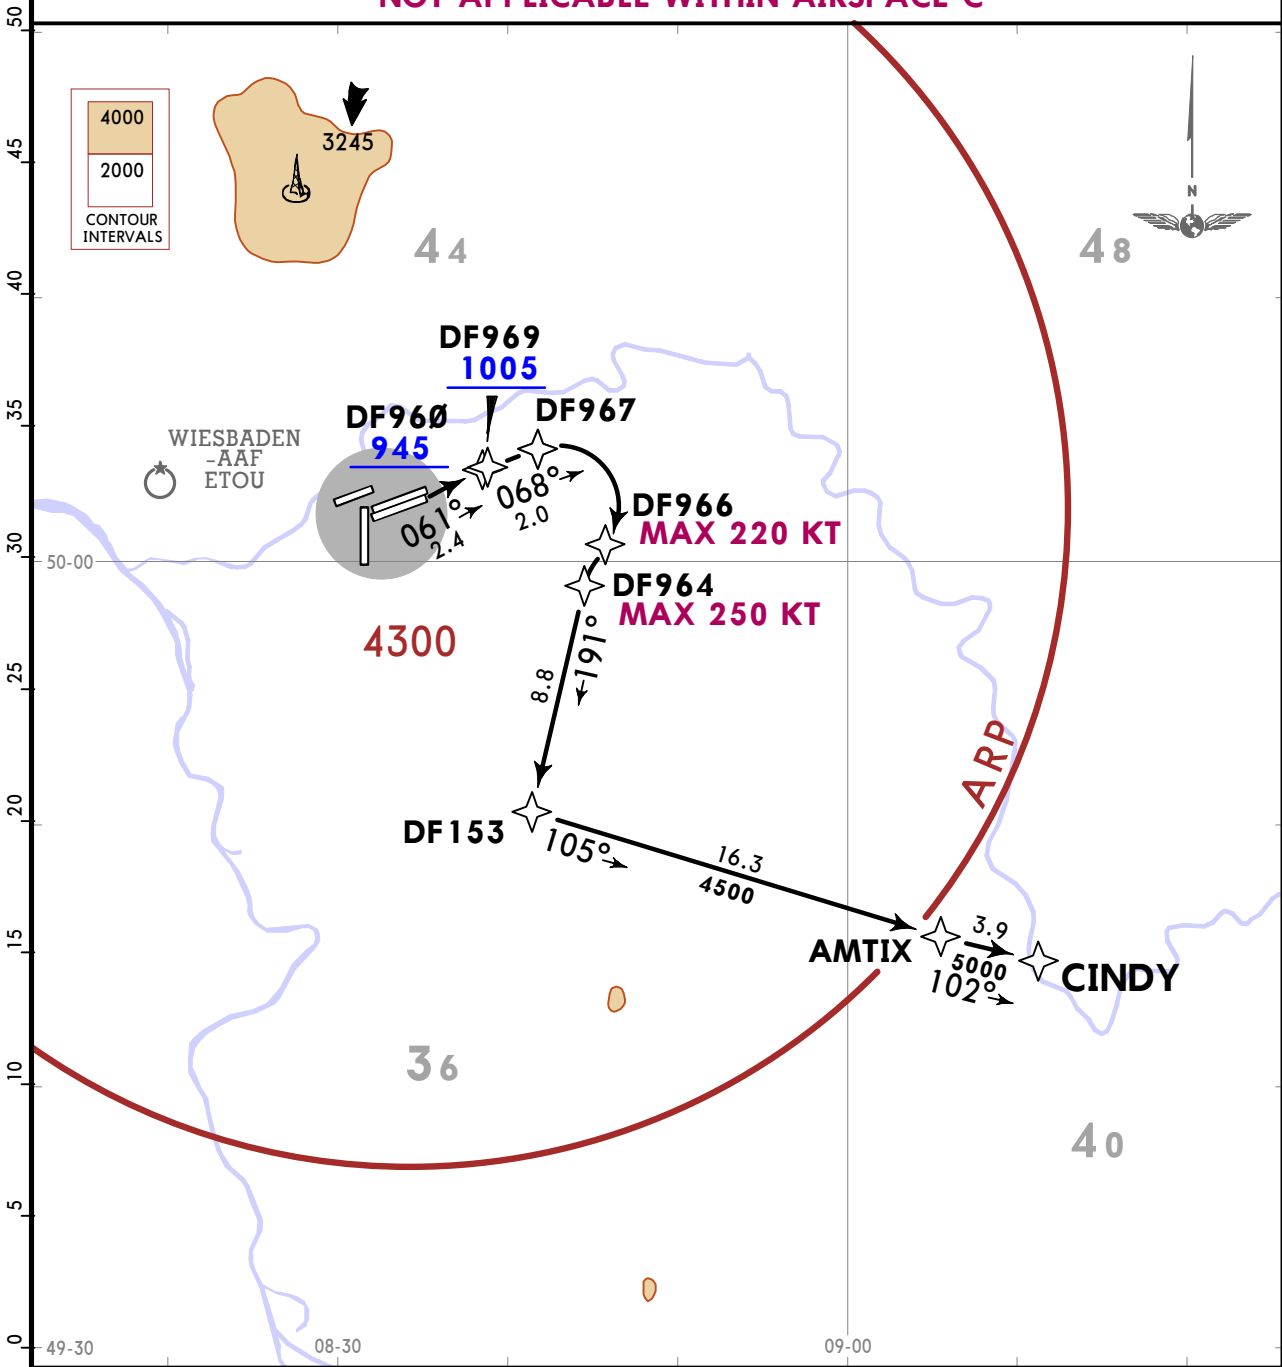

This SID requires a minimum climb gradient of 3.9% (240 FT/NM) until passing 1005 due to operational reasons.	Gnd speed-KT	75	100	150	200	250	300
	3.9% V/V (fpm)	296	395	592	790	987	1185
Initial climb clearance 4000							
ROUTING							
On 061° track to DF960, turn RIGHT to DF969, to DF967, turn RIGHT to DF966, turn LEFT to DF964, to DF153, to AMTIX, to CINDY.							

EDDF/FRA
FRANKFURT/MAIN


JEPPESSEN FRANKFURT/MAIN, GERMANY
5 JUL 24 (10-3A7) Eff 11 Jul RNAV SID

*LANGEN Radar (APP) 136.130	Apt Elev 363	Trans alt: 5000
		RNP-1, RF required GPS
		1. Contact LANGEN Radar when advised by Tower. 2. WARNING: Close-in obstacles. 3. WARNING: Wind shears and increased turbulences must be EXPECTED when strong winds. 4. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY. 5. For operational RWY use concept refer to 10-1P pages. 6. Do not turn before DER. 7. If unable to cross DF201 at or above FL090 advise EDDF DELIVERY prior to start-up and EXPECT routing via SID ULKIG 3L.

SOBRA 2U [SOBR2U]
RNP DEPARTURE
(RWY 18)

FOR FLIGHTS INTENDING TO PROCEED
AT OR ABOVE FL250 VIA AIRWAYS Y-180/Y-181
FLIGHTS HAVE TO BE ABLE TO CROSS RUDOT AT OR ABOVE FL240
IF UNABLE TO COMPLY FPL SHALL READ
RUDOT FL220 - Y-180 - DIK RFL

SPEED: MAX 250 KT BELOW FL100 OR AS BY ATC
NOT APPLICABLE WITHIN AIRSPACE C

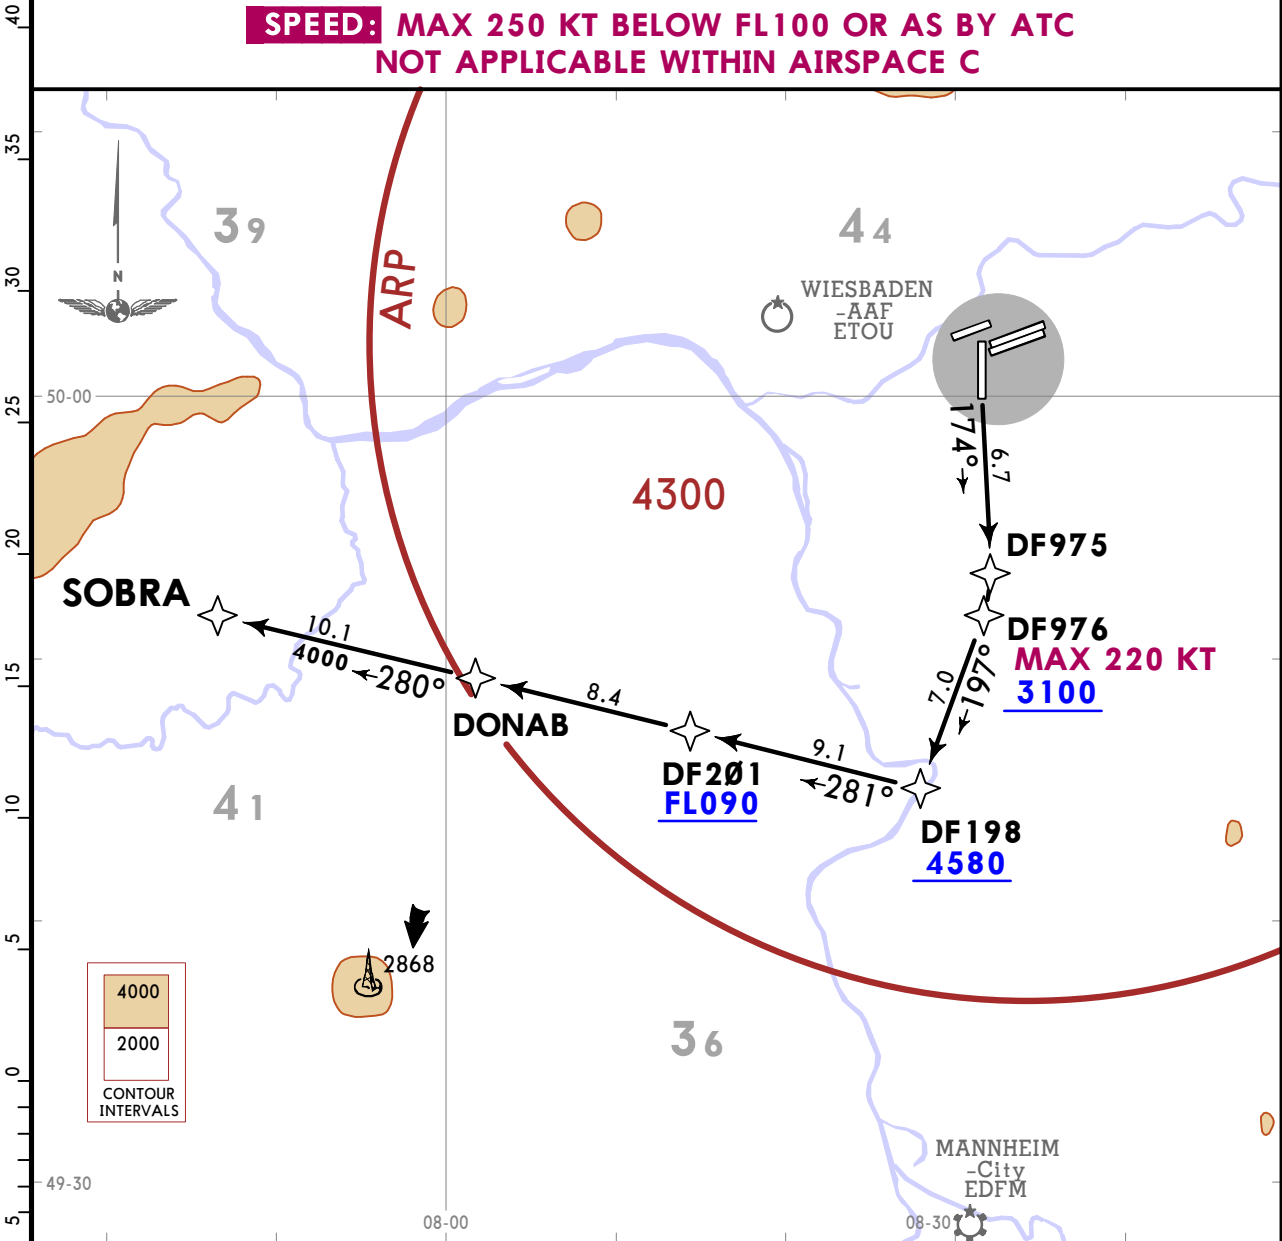

Initial climb clearance 4000

ROUTING

On 174° track to DF975, turn RIGHT to DF976, to DF198, to DF201, to DONAB, to SOBRA.


EDDF/FRA
FRANKFURT/MAIN

JEPPesen FRANKFURT/MAIN, GERMANY
5 JUL 24 10-3A8 Eff 11 Jul RNAV SID

*LANGEN Radar (APP) 136.130	Apt Elev 363	Trans alt: 5000
		RNP-1/A-RNP, RF leg required.
		GPS required.
		1. Contact LANGEN Radar when advised by Tower. 2. WARNING: Close-in obstacles. 3. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY. 4. For operational RWY use concept refer to 10-1P pages.

SOBRA 1X [SOBR1X]
RNP DEPARTURE
(RWY 07C)

FOR FLIGHTS INTENDING TO PROCEED
AT OR ABOVE FL250 VIA AIRWAYS Y-180/Y-181
FLIGHTS HAVE TO BE ABLE TO CROSS RUDOT AT OR ABOVE FL240
IF UNABLE TO COMPLY FPL SHALL READ
RUDOT FL220 - Y-180 - DIK RFL
**SPEED: MAX 250 KT BELOW FL100
OR AS BY ATC
NOT APPLICABLE WITHIN AIRSPACE C**

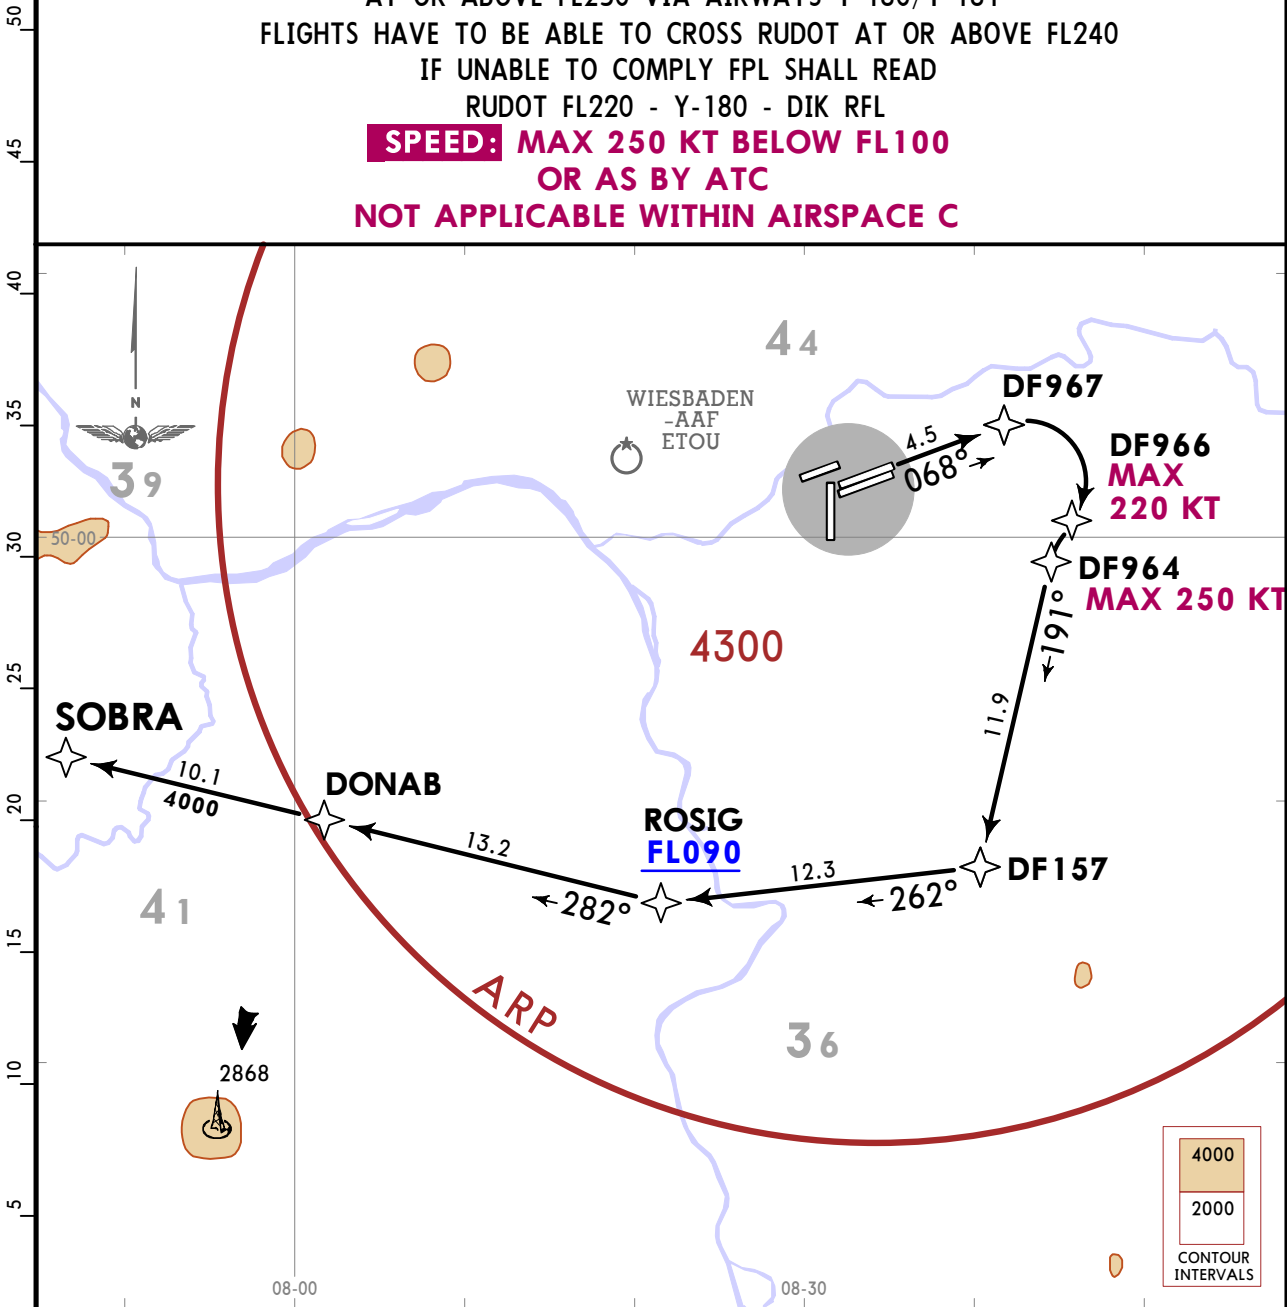

This SID requires a minimum climb gradient of 3.9% (240 FT/NM) until passing FL090, due to airspace structure.

Gnd speed-KT	75	100	150	200	250	300
3.9% V/V (fpm)	296	395	592	790	987	1185

If unable to comply advise EDDF DELIVERY prior to start-up.

Initial climb clearance 4000

ROUTING


On 068° track to DF967, turn RIGHT to DF966, turn LEFT to DF964, to DF157, to ROSIG, to DONAB, to SOBRA.

EDDF/FRA
FRANKFURT/MAIN

JEPPesen FRANKFURT/MAIN, GERMANY
5 JUL 24 10-3A9 Eff 11 Jul RNAV SID

*LANGEN Radar (APP) 136.130	Apt Elev 363	Trans alt: 5000
		RNP-1/A-RNP, RF leg required. GPS required.
		1. Contact LANGEN Radar when advised by Tower. 2. WARNING: Close-in obstacles. 3. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY. 4. For operational RWY use concept refer to 10-1P pages.

SOBRA 1Y [SOBR1Y]
RNP DEPARTURE (RWY 07R)
FOR FLIGHTS INTENDING TO PROCEED
AT OR ABOVE FL250 VIA AIRWAYS Y-180/Y-181
FLIGHTS HAVE TO BE ABLE TO CROSS RUDOT AT OR ABOVE FL240
IF UNABLE TO COMPLY FPL SHALL READ
RUDOT FL220 - Y-180 - DIK RFL
SPEED: MAX 250 KT BELOW FL100
OR AS BY ATC
NOT APPLICABLE WITHIN AIRSPACE C

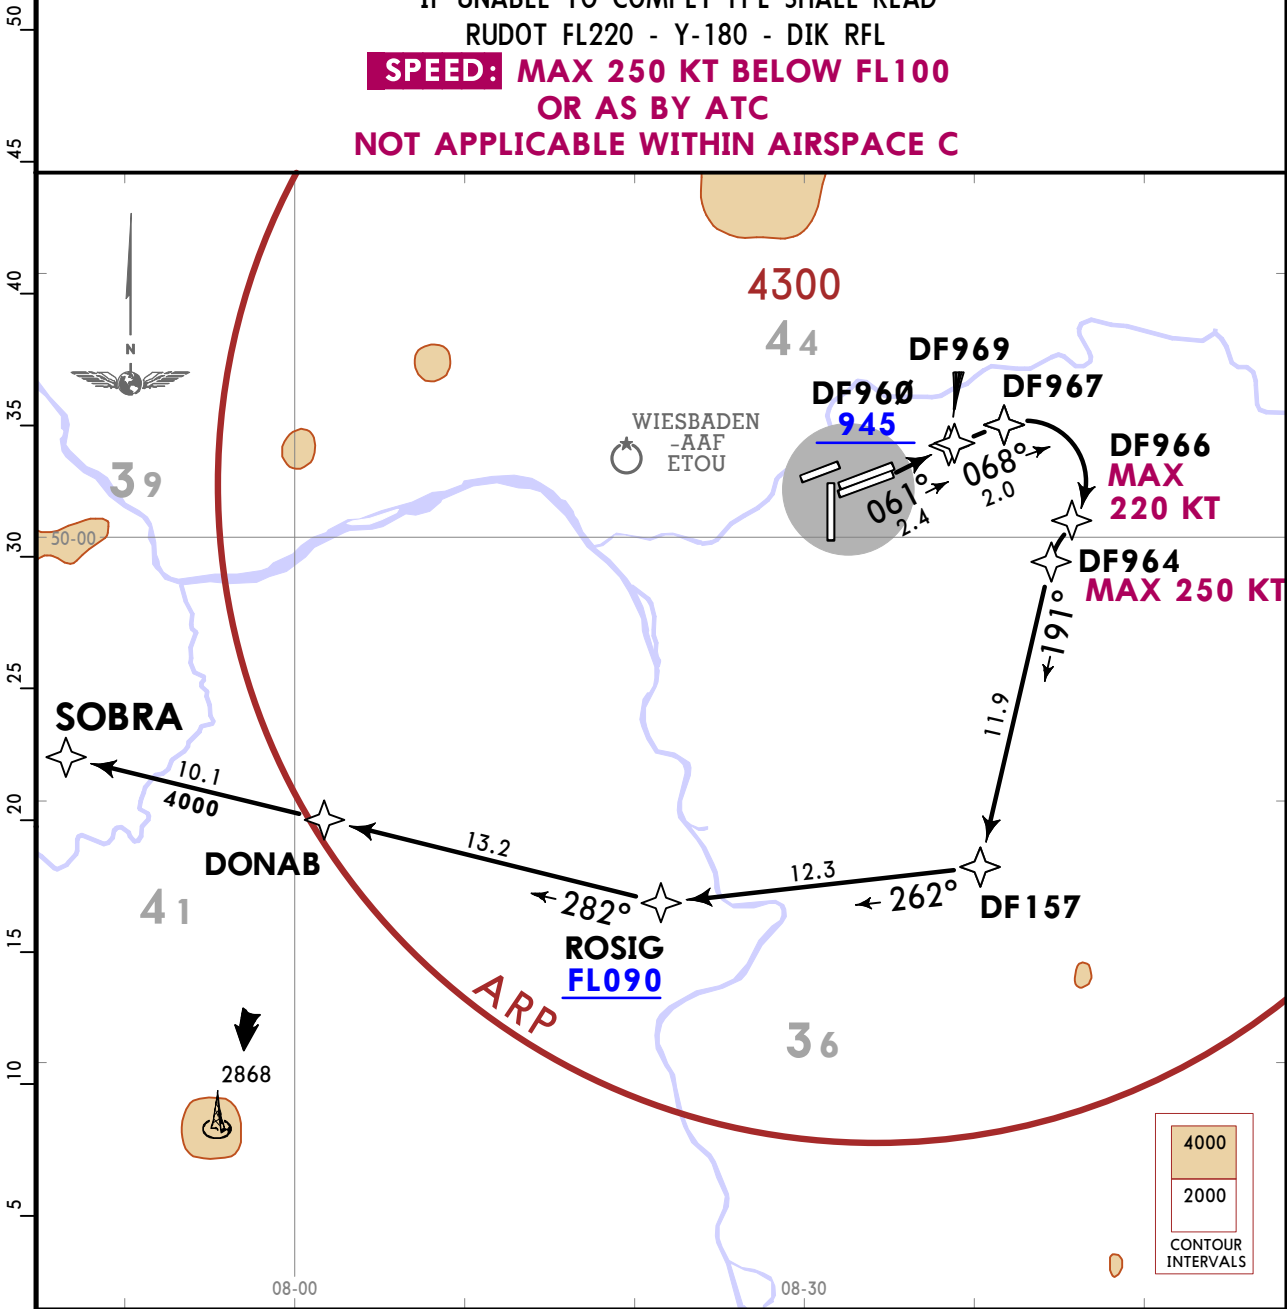


This SID requires a minimum climb gradient of 240 per NM (3.9%) until passing FL90, due to airspace structure.	Gnd speed-KT	75	100	150	200	250	300
	240 per NM	300	400	600	800	1000	1200
If unable to comply advise EDDF DELIVERY prior to start-up.							
Initial climb clearance 4000							
ROUTING							
On 061° track to DF960, turn RIGHT to DF969, to DF967, turn RIGHT to DF966, turn LEFT to DF964, to DF157, to ROSIG, to DONAB, to SOBRA.							

RNAV SID

1. Contact LANGEN Radar when advised by Tower.
2. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY.
3. For operational RWY use concept refer to 10-1P pages.

**SPEED: MAX 250 KT BELOW FL100
OR AS BY ATC
NOT APPLICABLE WITHIN AIRSPACE C**

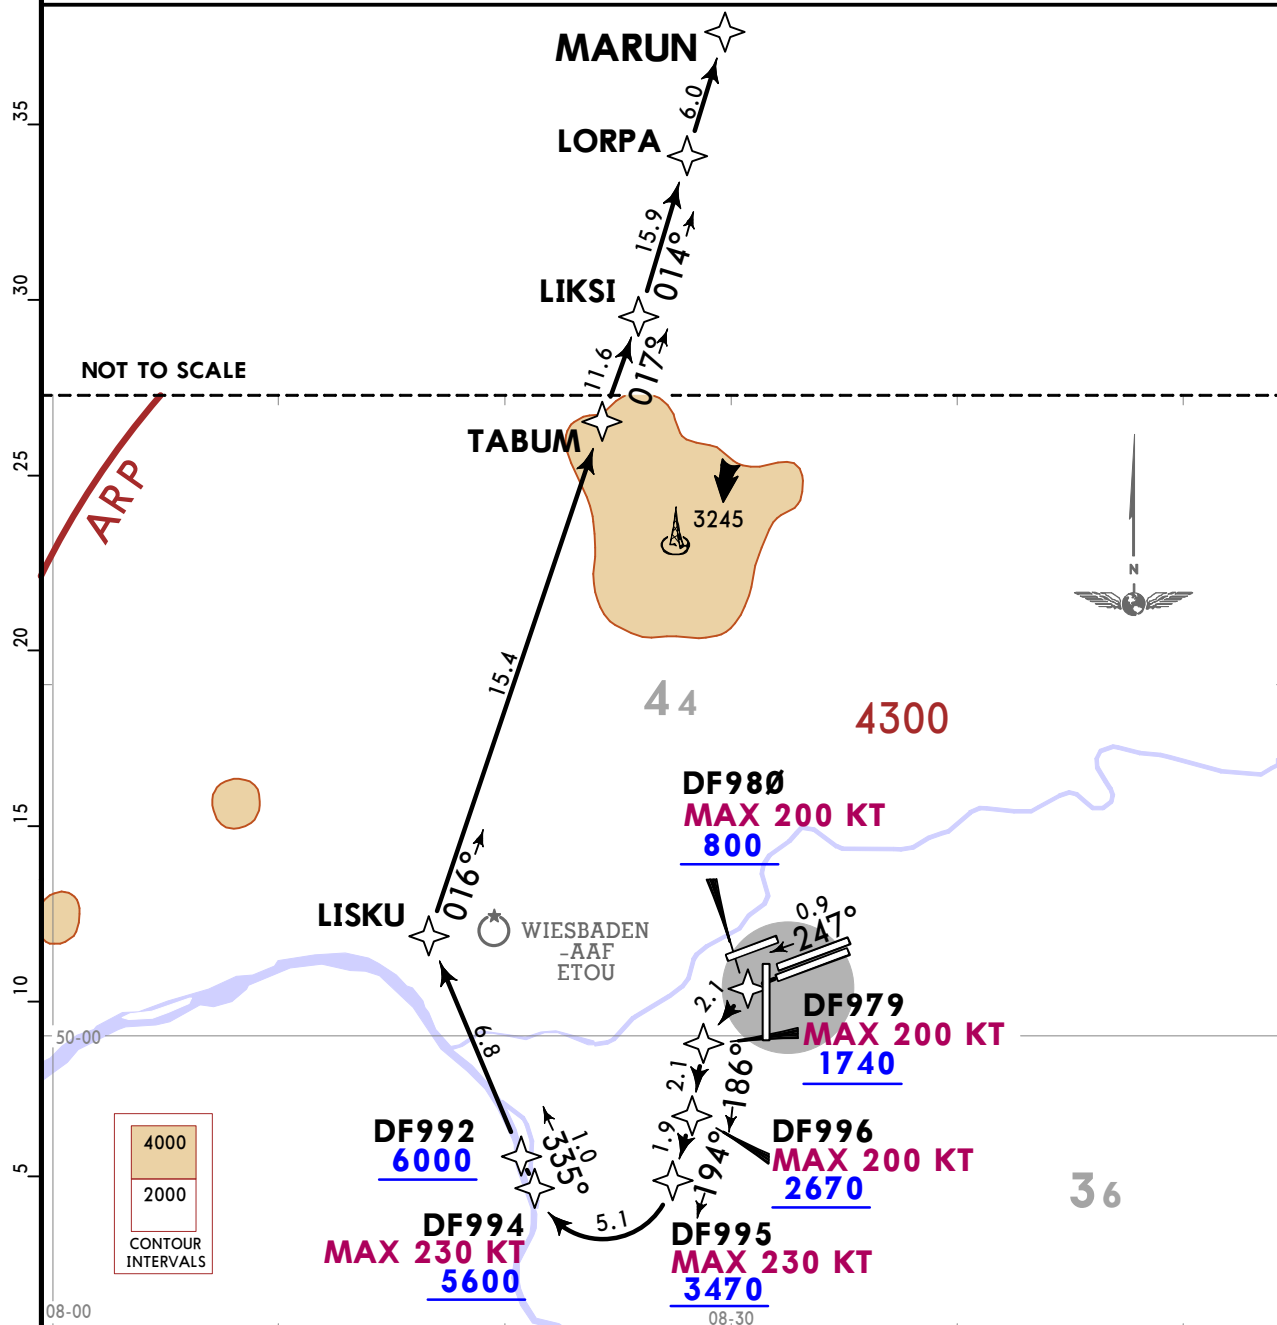

This SID requires minimum climb gradients of 8.5% (520 FT/NM) up to 800, due to operational requirements, then 7.3% (445 FT/NM) up to 2670, due to operational requirements, then 6.8% (415 FT/NM) up to 6000, due to operational requirements.

Gnd speed-KT	75	100	150	200	250	300
6.8% V/V (fpm)	516	689	1033	1377	1722	2066
7.3% V/V (fpm)	554	739	1109	1479	1848	2218
8.5% V/V (fpm)	646	861	1291	1722	2152	2582

DF980 (K200-; 800+) - DF979 (K200-; 1740+) - DF996 (K200-; 2670+) - DF995 (K230-; 3470+) -
DF994 (K230-; 5600+) - DF992 (6000+) - LISKU - TABUM - LIKSI - LORPA - MARUN.

EDDF/FRA
FRANKFURT/MAIN

26 JUL 24
10-3C

JEPPESEN
FRANKFURT/MAIN, GERMANY


RNAV SID

*LANGEN
Radar (APP)
120.155

Apt Elev
363

Trans alt: 5000
RNP 1/A-RNP required RF required GPS required
1. Contact LANGEN Radar when advised by Tower.
2. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY.
3. For operational RWY use concept refer to 10-1P pages.

MARUN 3W [MARU3W]
RNP DEPARTURE (RWY 25C)
SPEED: MAX 250 KT BELOW FL100
OR AS BY ATC
NOT APPLICABLE WITHIN AIRSPACE C

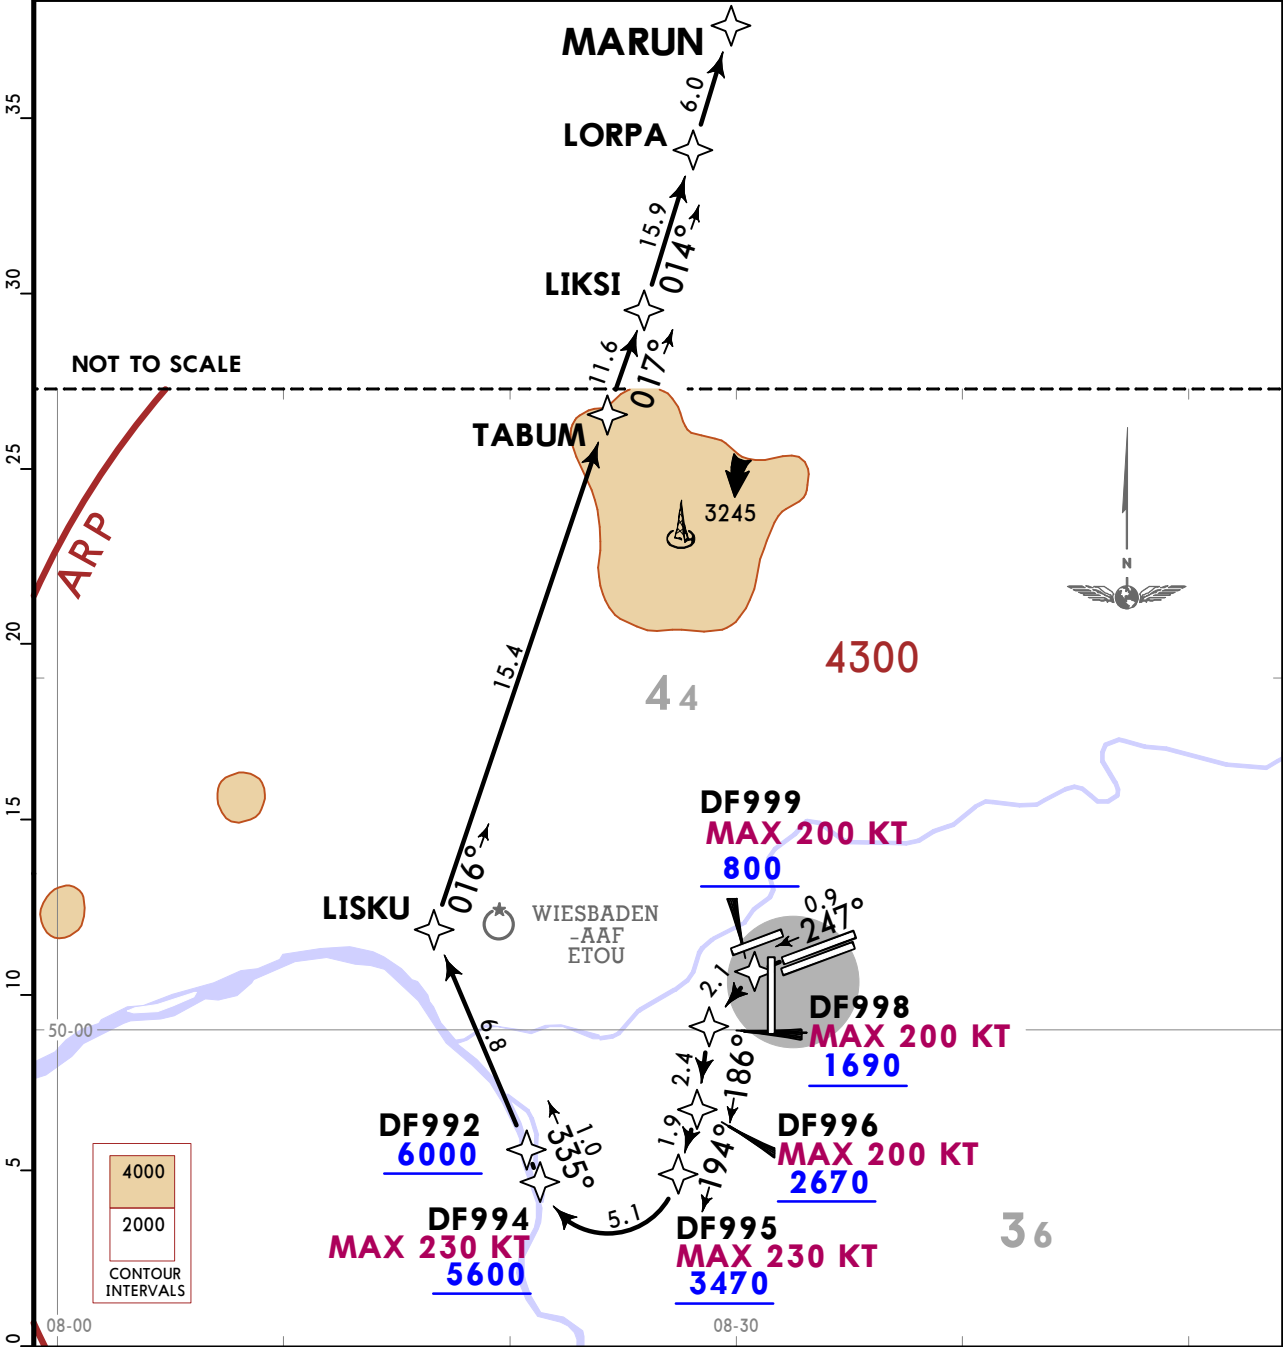

This SID requires minimum climb gradients of
8.5% (520 FT/NM) up to 800, due to operational requirements, then
6.8% (415 FT/NM) up to 6000, due to operational requirements.

Gnd speed-KT	75	100	150	200	250	300
6.8% V/V (fpm)	516	689	1033	1377	1722	2066
8.5% V/V (fpm)	646	861	1291	1722	2152	2582

Initial climb clearance **FL070**

ROUTING

DF999 (K200-; 800+) - DF998 (K200-; 1690+) - DF996 (K200-; 2670+) - DF995 (K230-; 3470+) - DF994 (K230-; 5600+) - DF992 (6000+) - LISKU - TABUM - LIKSI - LORPA - MARUN.



EDDF/FRA
FRANKFURT/MAIN

26 JUL 24 (10-3C2)

JEPPESSEN
FRANKFURT/MAIN, GERMANY

RNAV SID

Trans alt: 5000

RNP 1/A-RNP required RF required GPS required

*LANGEN
Radar (APP)
120.155

Apt Elev
363

1. Contact LANGEN Radar when advised by Tower.
2. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY.
3. For operational RWY use concept refer to 10-1P pages.

OBOKA 3W [OBOK3W]

RNP DEPARTURE (RWY 25C)

FLIGHTS HAVE TO BE ABLE TO CROSS OBOKA AT OR ABOVE FL170 EXCEPT FLIGHTS TO EDDM
IF UNABLE TO COMPLY ADVISE EDDF DELIVERY PRIOR TO START-UP

SPEED: MAX 250 KT BELOW FL100

OR AS BY ATC

NOT APPLICABLE WITHIN AIRSPACE C

This SID requires minimum climb gradients of
8.5% (520 FT/NM) up to 800, due to
operational requirements, then
4.1% (250 FT/NM) up to 2500, due to
airspace structure.

Gnd speed-KT	75	100	150	200	250	300
4.1% V/V (fpm)	311	415	623	830	1038	1246
8.5% V/V (fpm)	646	861	1291	1722	2152	2582

Initial climb clearance FL070

ROUTING

DF999 (K200-; 800+)- DF998 (K200-; 1340+)- DF996 (K200-; 1930+)- DF172 (K230-; 2670+)-
PABV1 (K230-)- SIVDO - KUPIP - MASIR - RAVKI - DITAM - OBOKA.

OBOKA 3W [OBOK3W]
RNP DEPARTURE (RWY 25C)
FLIGHTS HAVE TO BE ABLE TO CROSS OBOKA AT OR ABOVE FL170 EXCEPT FLIGHTS TO EDDM
IF UNABLE TO COMPLY ADVISE EDDF DELIVERY PRIOR TO START-UP
SPEED: MAX 250 KT BELOW FL100
OR AS BY ATC
NOT APPLICABLE WITHIN AIRSPACE C

This SID requires minimum climb gradients of
8.5% (520 FT/NM) up to 800, due to
operational requirements, then
4.1% (250 FT/NM) up to 2500, due to
airspace structure.

Gnd speed-KT	75	100	150	200	250	300
4.1% V/V (fpm)	311	415	623	830	1038	1246
8.5% V/V (fpm)	646	861	1291	1722	2152	2582

Initial climb clearance FL070
ROUTING
DF999 (K200-; 800+)- DF998 (K200-; 1340+)- DF996 (K200-; 1930+)- DF172 (K230-; 2670+)-
PABV1 (K230-)- SIVDO - KUPIP - MASIR - RAVKI - DITAM - OBOKA.

OBOKA
DITAM
RAVKI
MASIR
KUPIP
PABV1
SIVDO
DF999
DF998
DF996
DF172
WIESBADEN
BUCHHEL
FRANKFURT-HAHN

4000
2000
CONTOUR
INTERVALS

4300
4400
4500
4600
4700
4800
4900
5000
5100
5200
5300
5400
5500
5600
5700
5800
5900
6000
6100
6200
6300
6400
6500
6600
6700
6800
6900
7000
7100
7200
7300
7400
7500
7600
7700
7800
7900
8000
8100
8200
8300
8400
8500
8600
8700
8800
8900
9000
9100
9200
9300
9400
9500
9600
9700
9800
9900
10000

CHANGES: MEAs withdrawn, chart reindexed. © JEPPESSEN, 2024. ALL RIGHTS RESERVED.

EDDF/FRA
FRANKFURT/MAIN

26 JUL 24

10-3C3

JEPPesenFRANKFURT/MAIN, GERMANY

RNAV SID

*LANGEN
Radar (APP)
120.155

Apt Elev
363

Trans alt: 5000


RNP 1/A-RNP required RF required GPS required

1. Contact LANGEN Radar when advised by Tower.
2. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY.
3. For operational RWY use concept refer to 10-1P pages.

TOBAK 3K [TOBA3K]

RNP DEPARTURE (RWY 25L)

**SPEED: MAX 250 KT BELOW FL100
OR AS BY ATC
NOT APPLICABLE WITHIN AIRSPACE C**

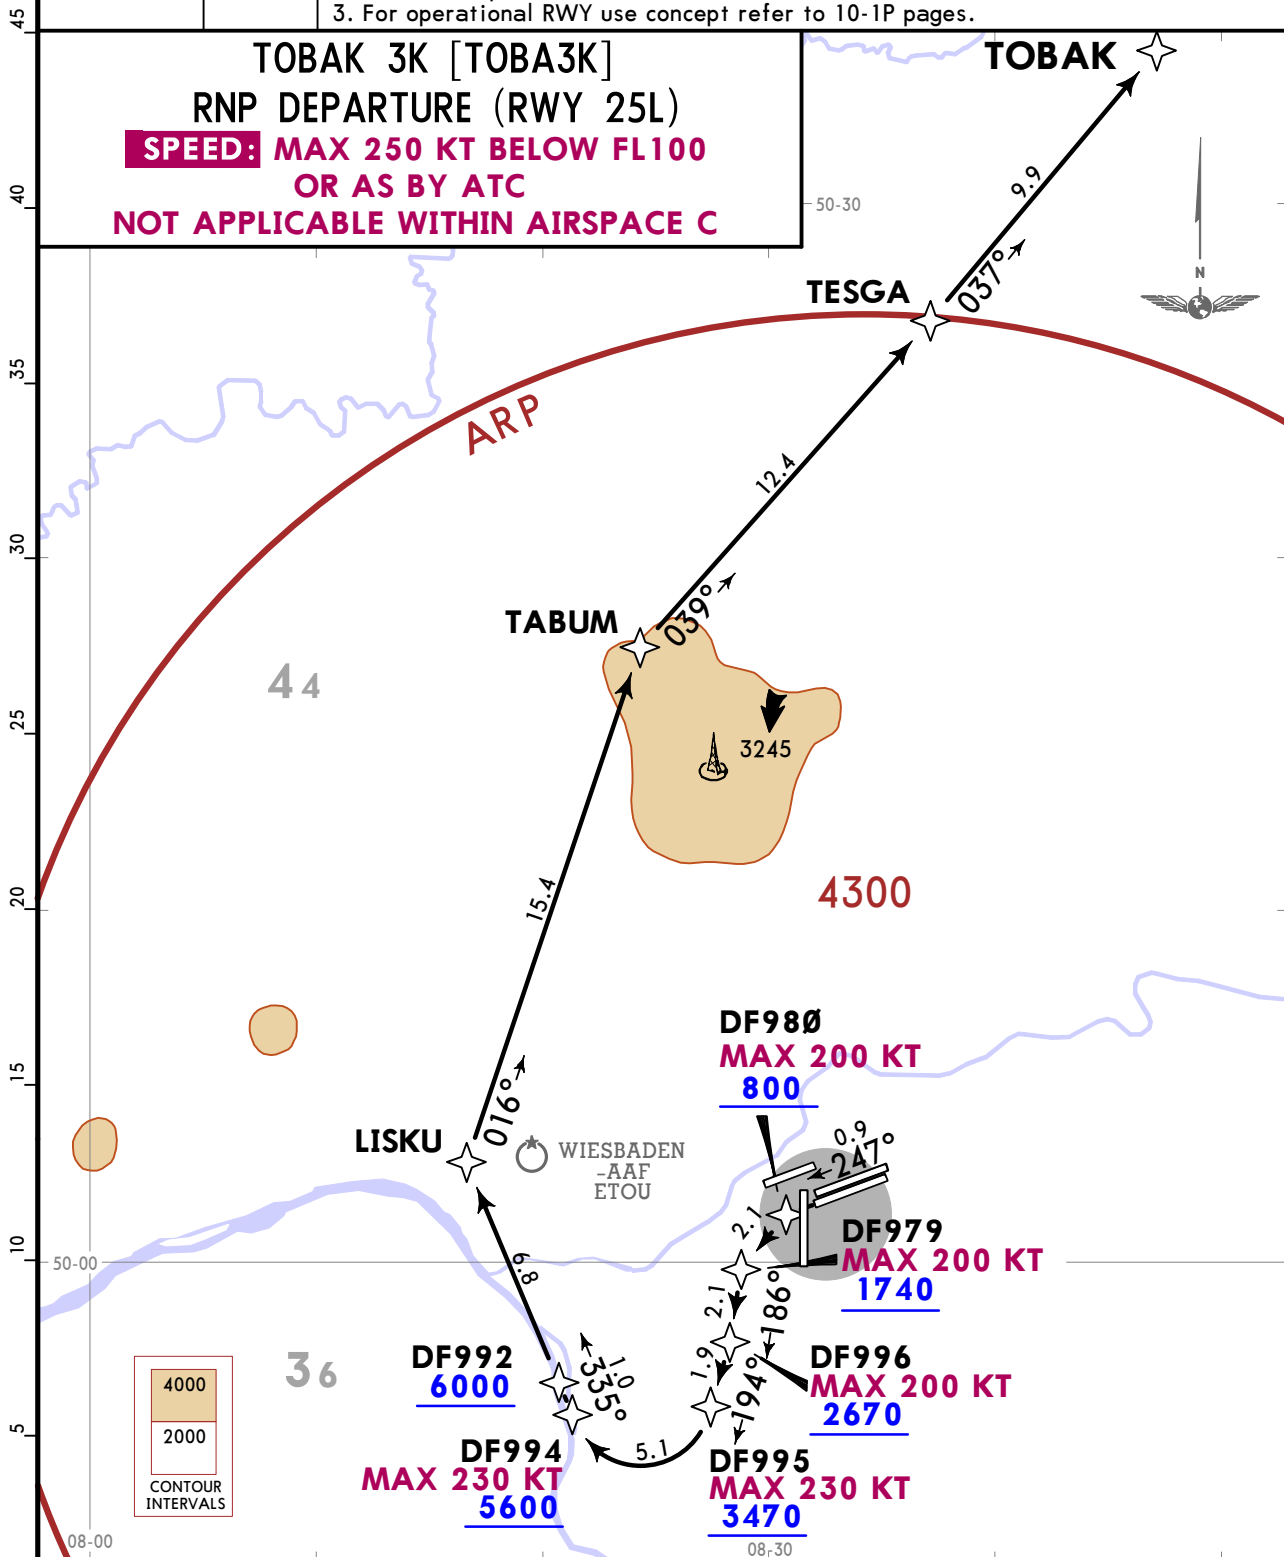

This SID requires minimum climb gradients of
8.5% (520 FT/NM) up to 800, due to operational requirements, then
7.3% (445 FT/NM) up to 2670, due to operational requirements, then
6.8% (415 FT/NM) up to 6000, due to operational requirements.

Gnd speed-KT	75	100	150	200	250	300
6.8% V/V (fpm)	516	689	1033	1377	1722	2066
7.3% V/V (fpm)	554	739	1109	1479	1848	2218
8.5% V/V (fpm)	646	861	1291	1722	2152	2582

Initial climb clearance **FL070**

ROUTING


DF980 (K200-; 800+) - DF979 (K200-; 1740+) - DF996 (K200-; 2670+) - DF995 (K230-; 3470+) -
DF994 (K230-; 5600+) - DF992 (6000+) - LISKU - TABUM - TESGA - TOBAK.

CHANGES: MEA withdrawn, chart reindexed.

© JEPPesen, 2024. ALL RIGHTS RESERVED.

EDDF/FRA
FRANKFURT/MAIN

JEPPesenFRANKFURT/MAIN, GERMANY
26 JUL 24 (10-3C5) RNAV SID

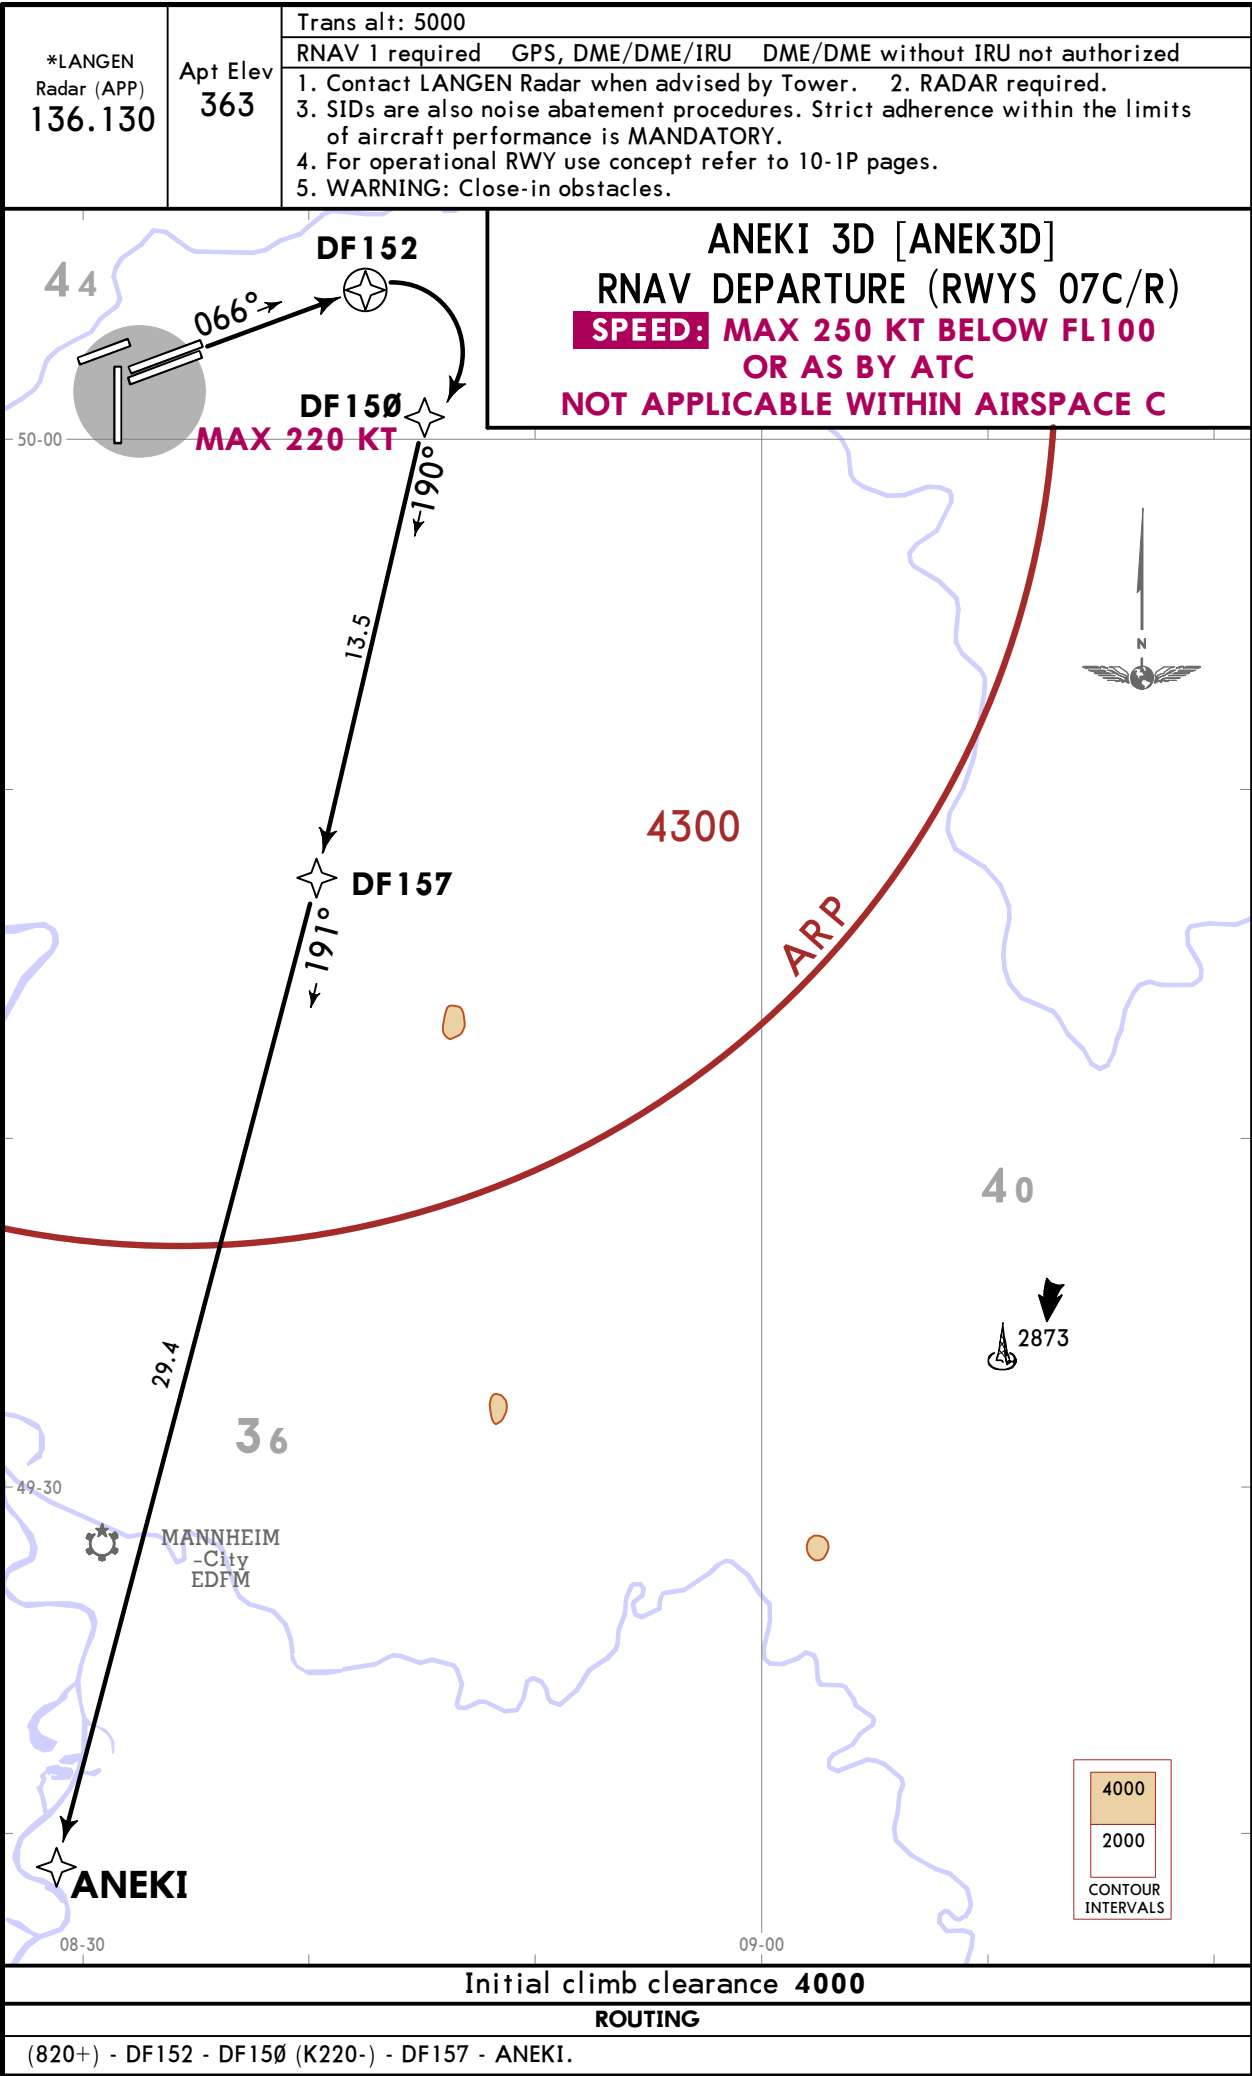

EDDF/FRA
FRANKFURT/MAIN

26 JUL 24

10-3C6



JEPPESSEN

FRANKFURT/MAIN, GERMANY

RNAV SID

*LANGEN
Radar (APP)
136.130

Apt Elev
363

Trans alt: 5000

RNAV 1 required GPS, DME/DME/IRU DME/DME without IRU not authorized


1. Contact LANGEN Radar when advised by Tower.
2. RADAR required.
3. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY.
4. For operational RWY use concept refer to 10-1P pages.
5. Altitude constraints due to operational requirements.

ANEKI 6E [ANEK6E]

RNAV DEPARTURE

(RWYS 07C/R)

**SPEED: MAX 250 KT BELOW FL100
OR AS BY ATC
NOT APPLICABLE WITHIN AIRSPACE C**

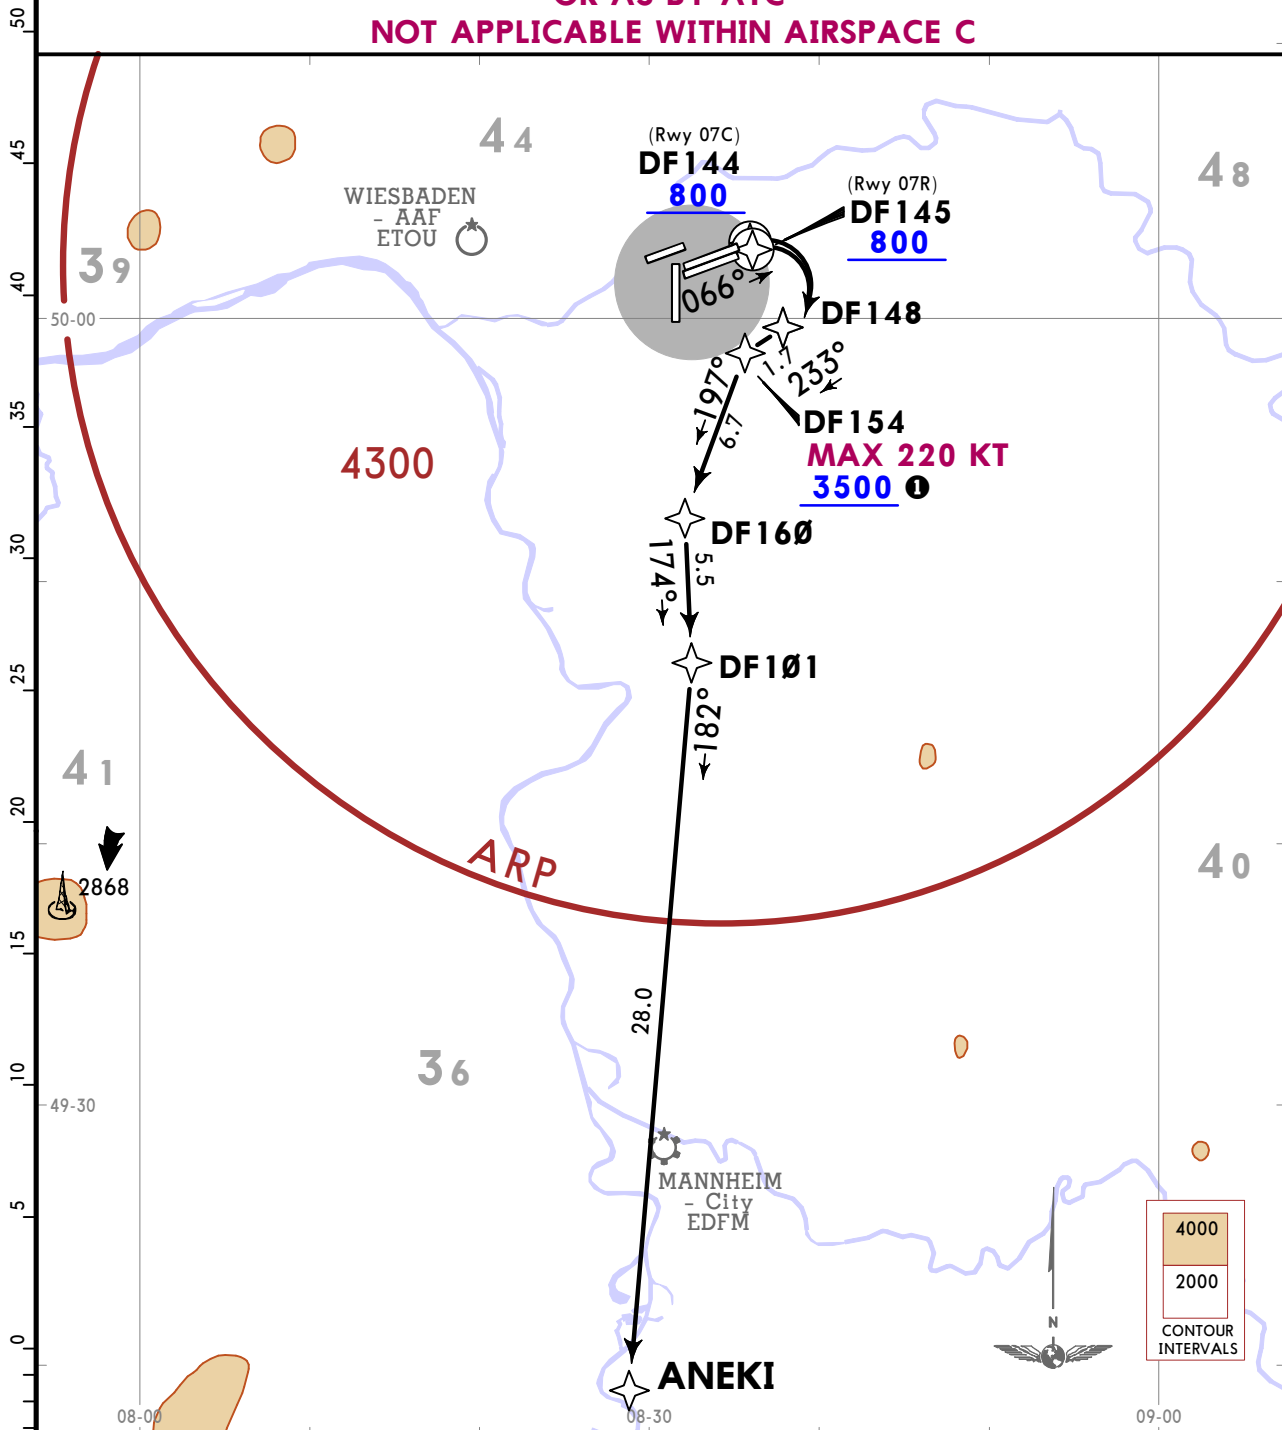

Initial climb clearance 4000

RWY

ROUTING


07C

DF144 (800+) - DF148 - DF154 (K220-; 3500+ ①) - DF160 - DF101 - ANEKI.

07R

DF145 (800+) - DF148 - DF154 (K220-; 3500+ ①) - DF160 - DF101 - ANEKI.

① If unable to comply, advise EDDF DELIVERY prior to start-up.

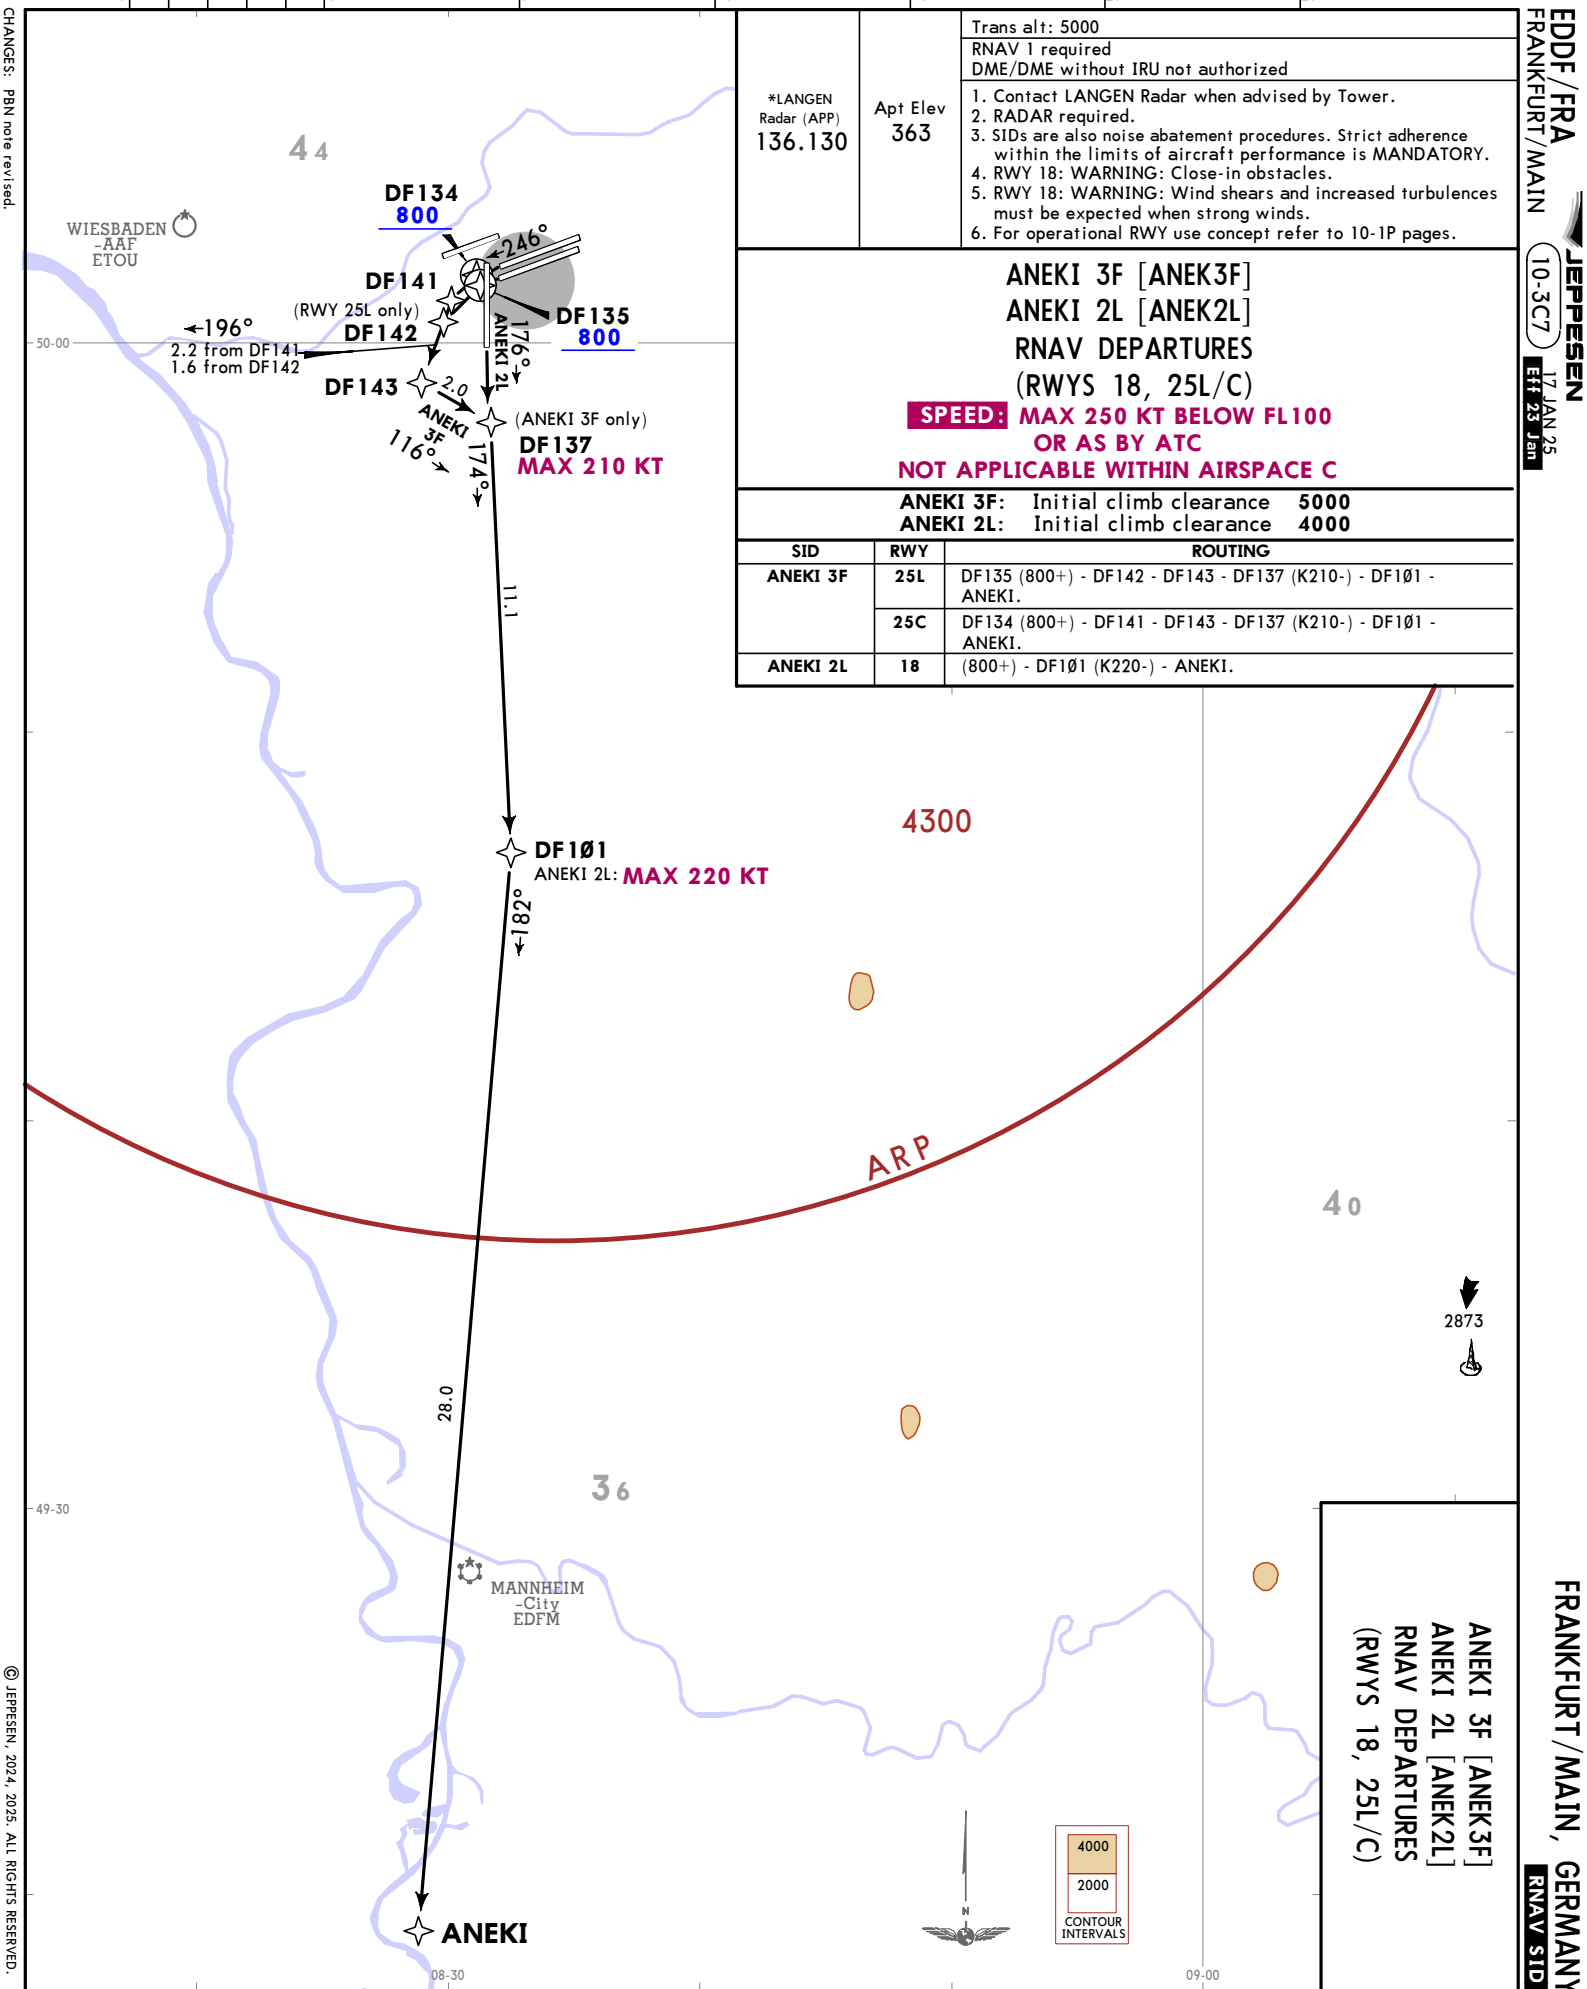

EDDF/FRA
FRANKFURT/MAIN


JEPPesenFRANKFURT/MAIN, GERMANY


17 JAN 25

10-3D

Eff 23 Jan

RNAV SID

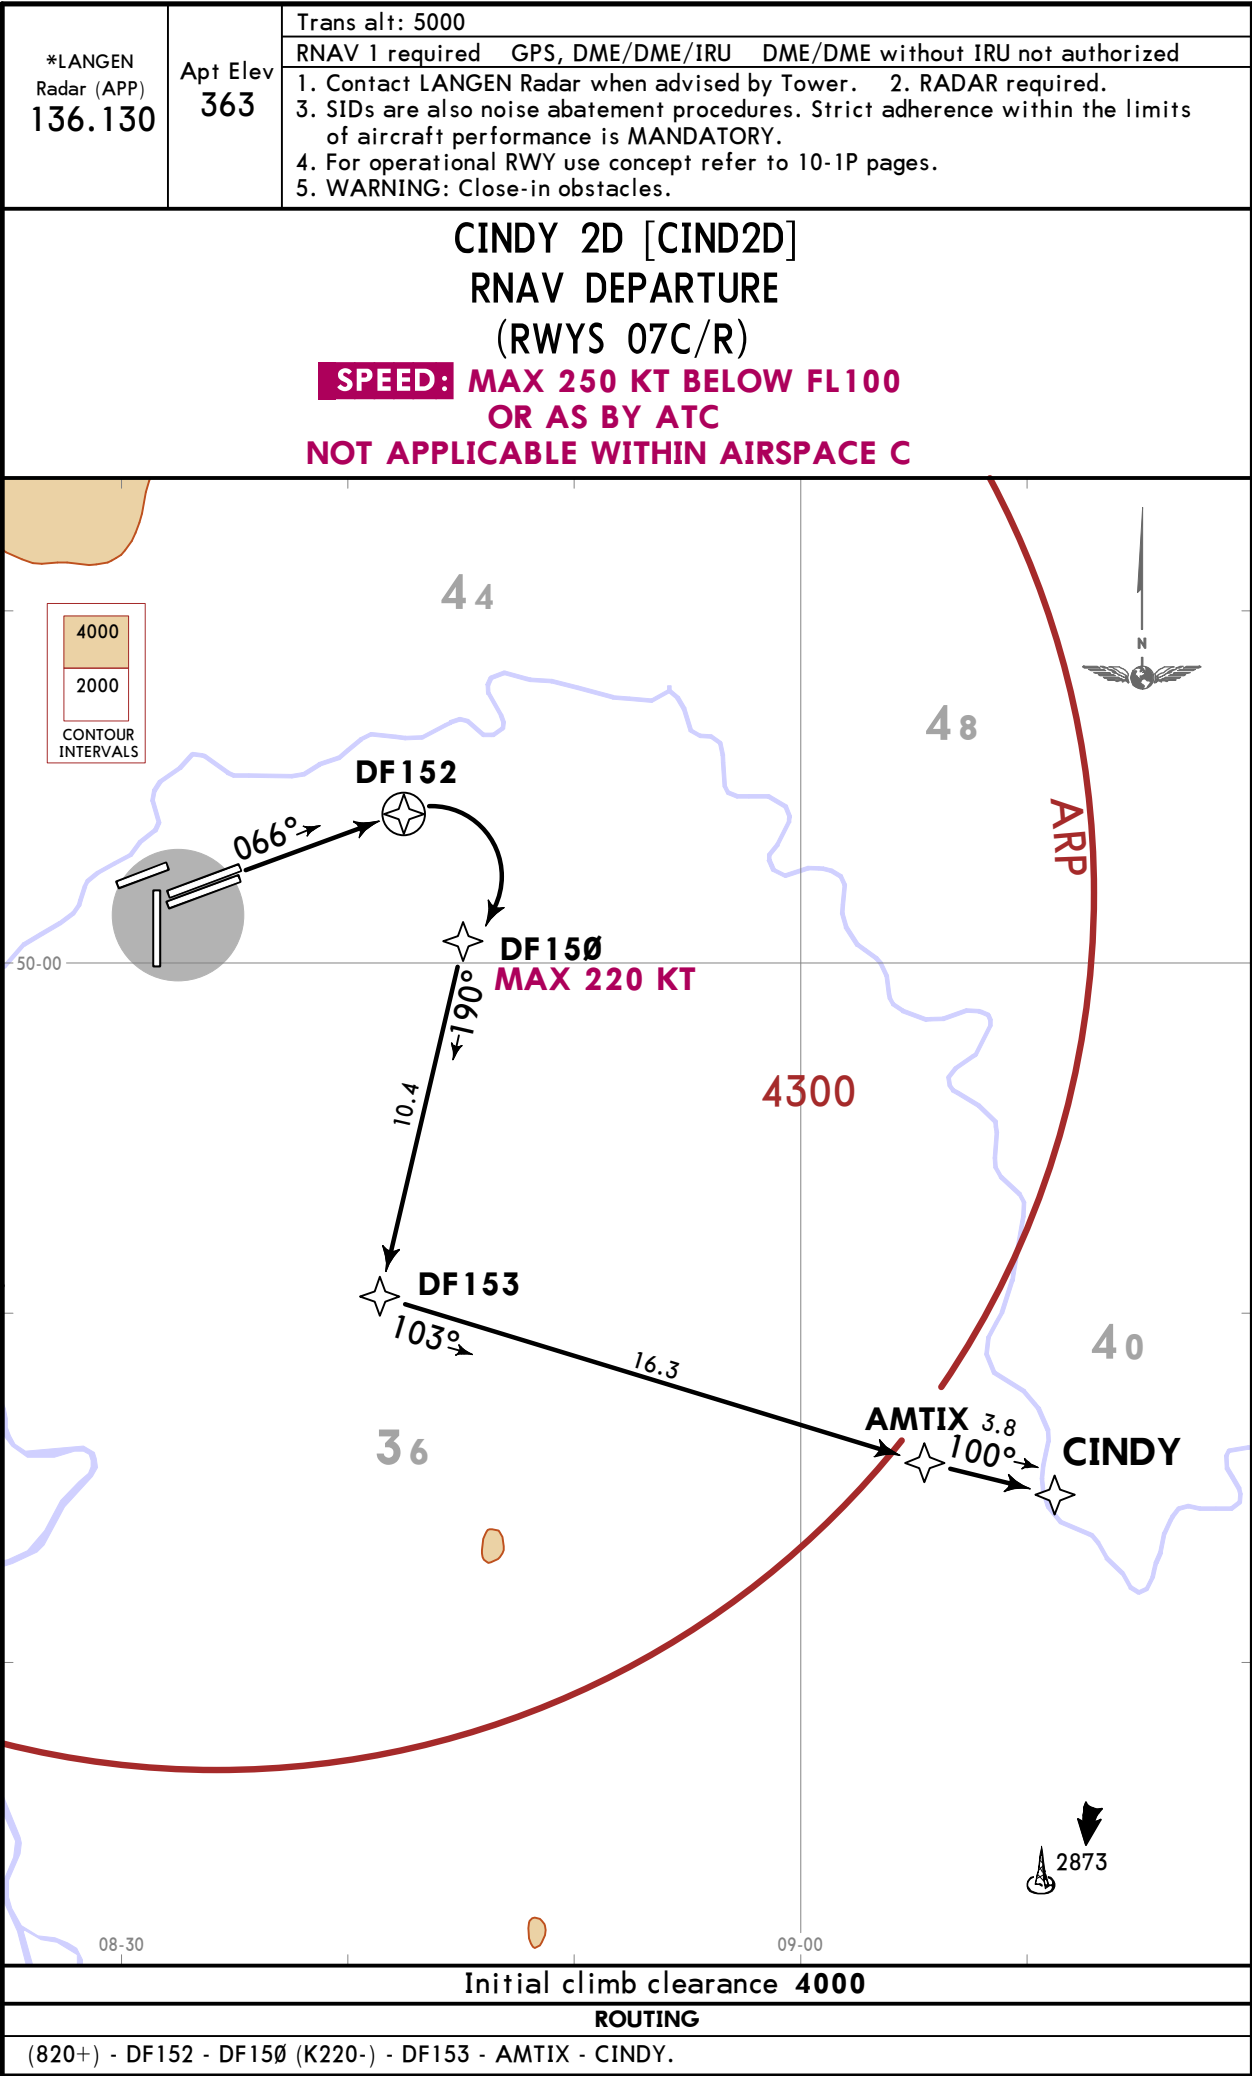


RNAV SID**RNAV SID**

EDDF/FRA
FRANKFURT/MAIN

JEPPesen
17 JAN 25 10-3E1 Eff 23 Jan


FRANKFURT/MAIN, GERMANY
RNAV SID

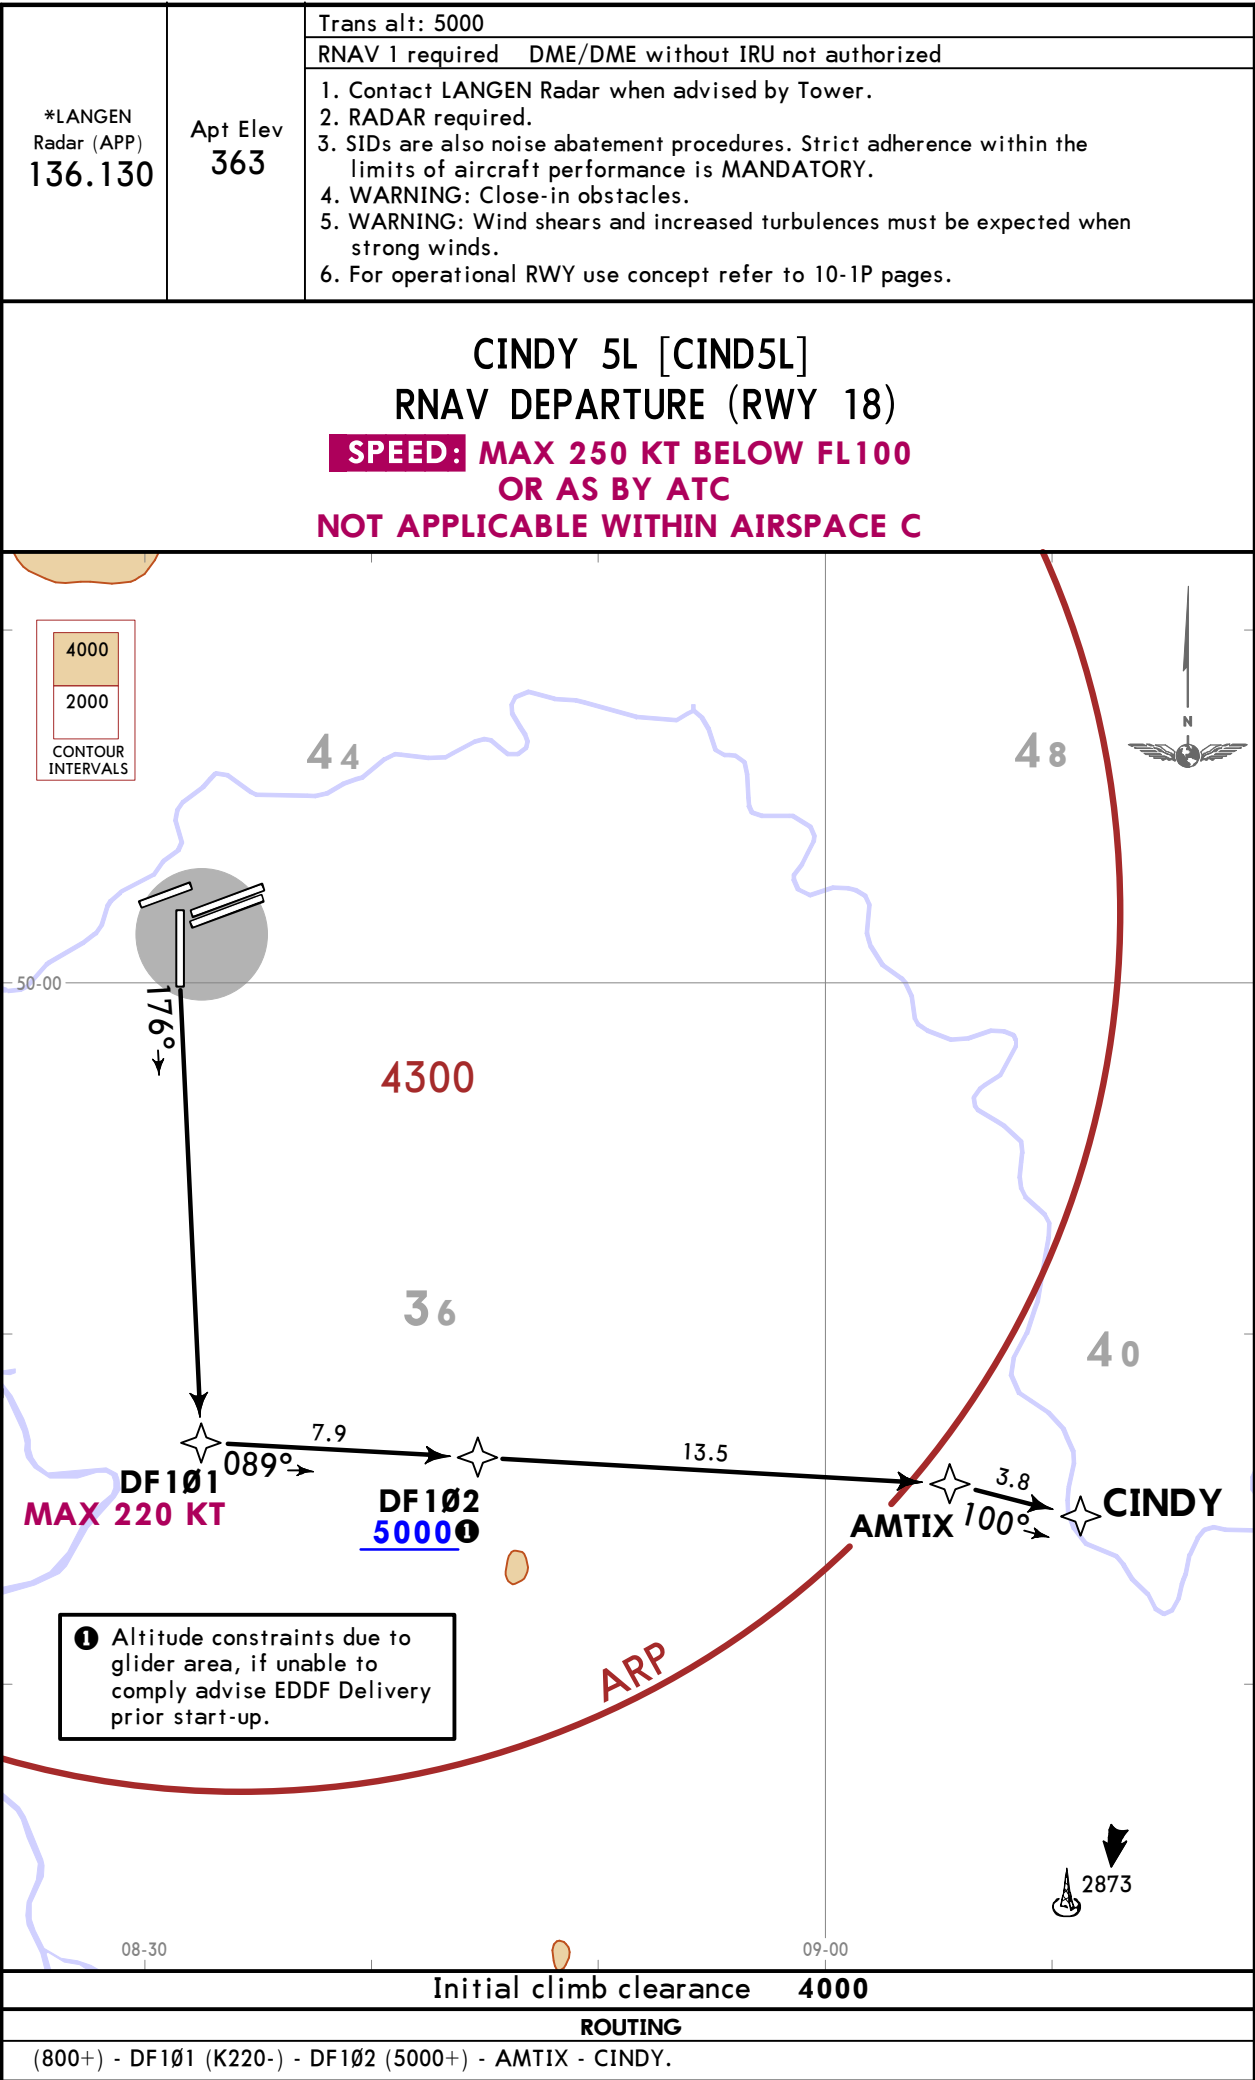

EDDF/FRA
FRANKFURT/MAIN

 JEPPESSEN **FRANKFURT/MAIN, GERMANY**

17 JAN 25 **10-3E2** **Eff 23 Jan** **RNAV SID**

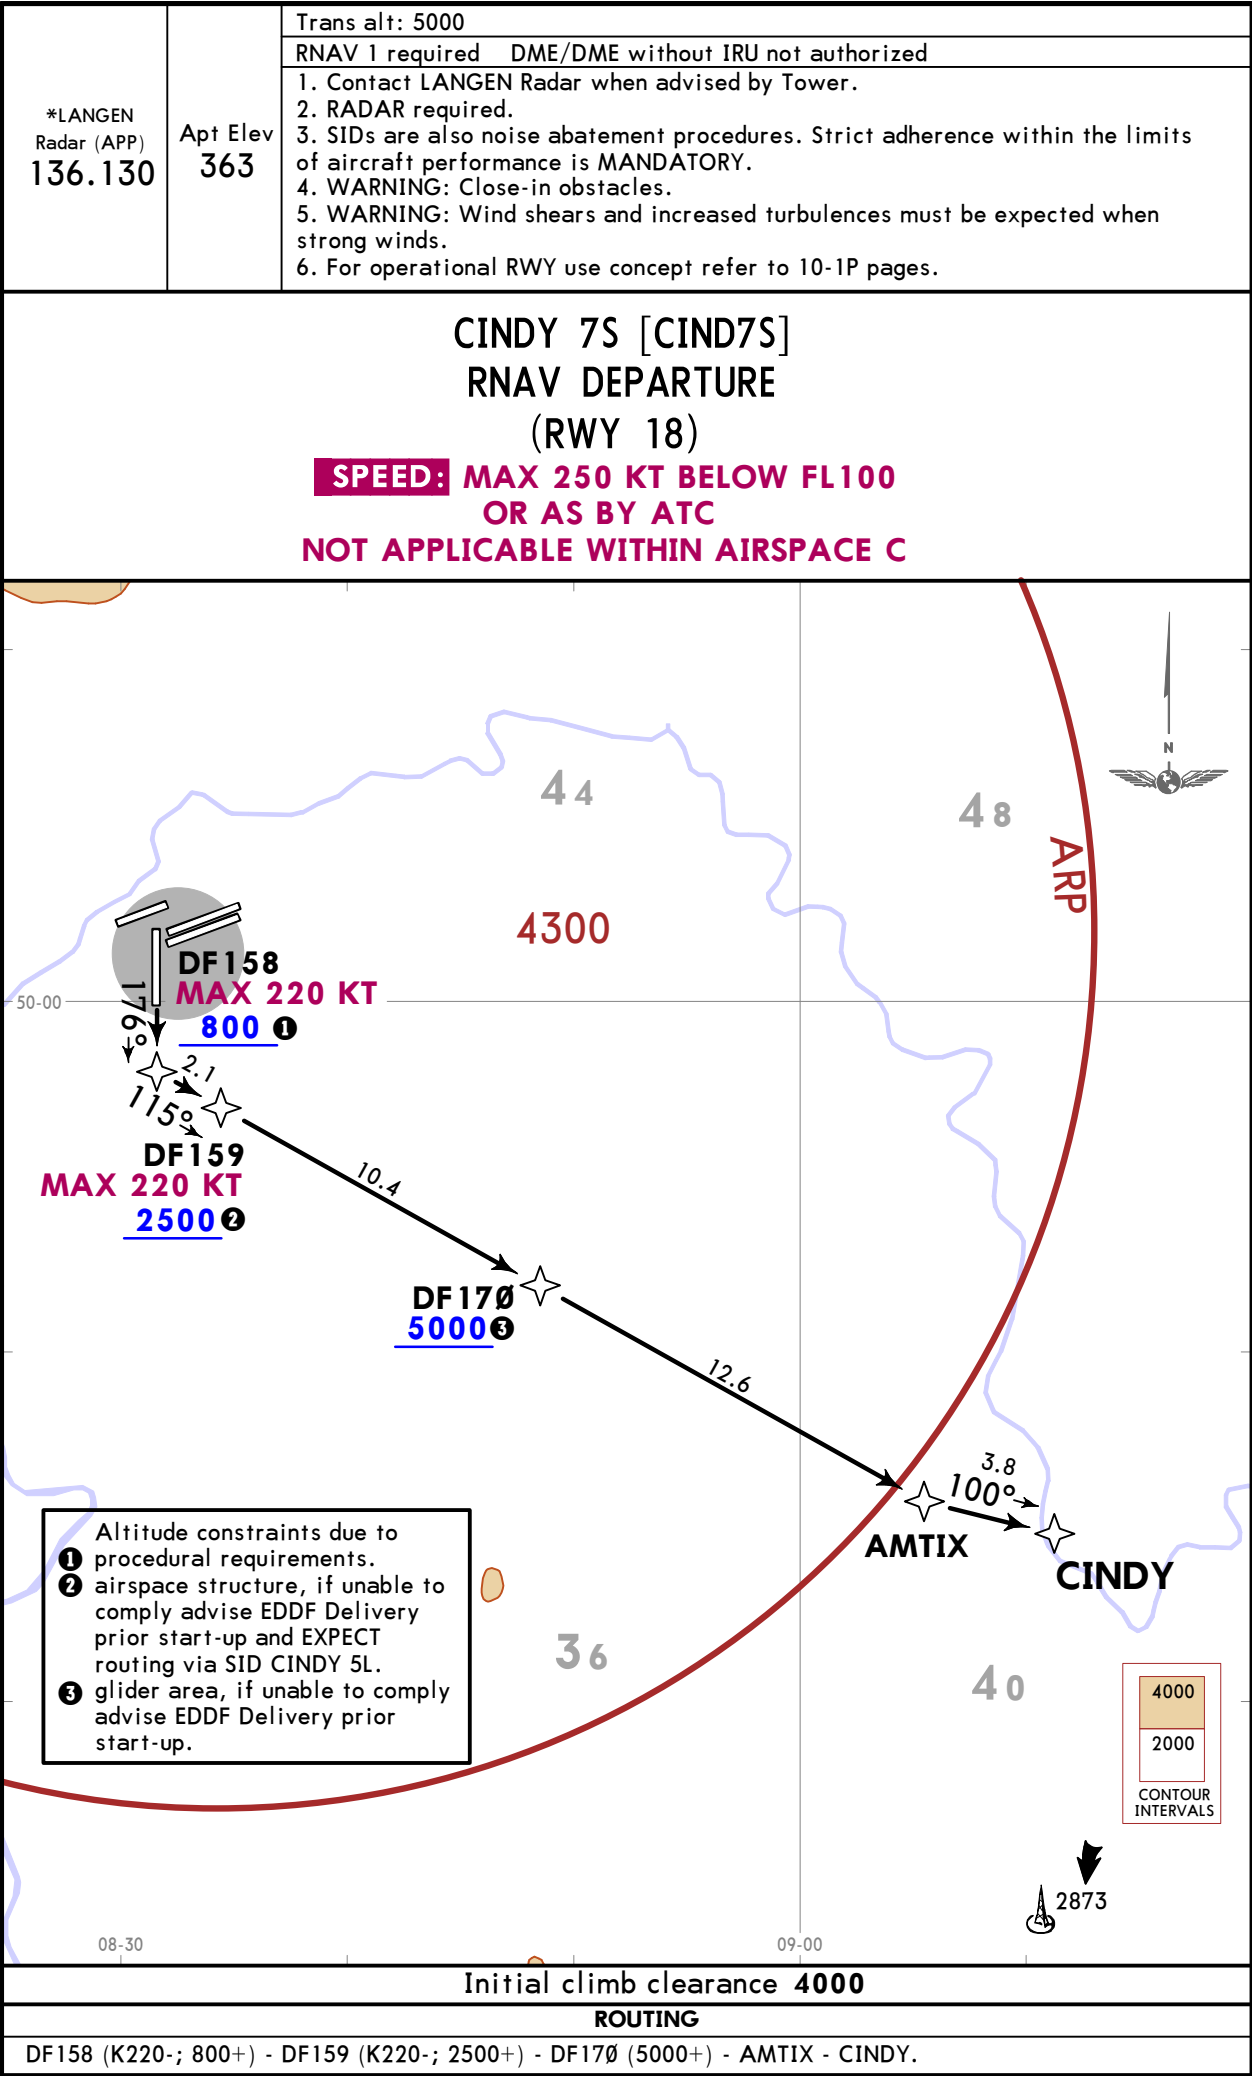

CHANGES: SIDs replaced by RNAV SIDs, chart reindexed.

EDDF / FRA
FRANKFURT / MAIN
JEPPESSEN
10-3E3
5 JUL 24
EET 11:00

Trans alt: 5000

RNAV 1 required GPS, DME/DME/IRU DME/DME without IRU not authorized

1. Contact LANGEN Radar when advised by Tower.

2. RADAR required.

3. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY.

4. Altitude constraints due to operational requirements. If unable to comply advise EDDF Delivery prior to start-up

5. For operational RWY use concept refer to 10-1P pages.

*LANGEN Radar (APP)

120.155

Apt Elev

363

MARUN 7F [MARU7F]

MARUN 2G [MARU2G]


RNAV DEPARTURES

(RWYS 25L/C)

SPEED: MAX 250 KT BELOW FL100

OR AS BY ATC

NOT APPLICABLE WITHIN AIRSPACE C

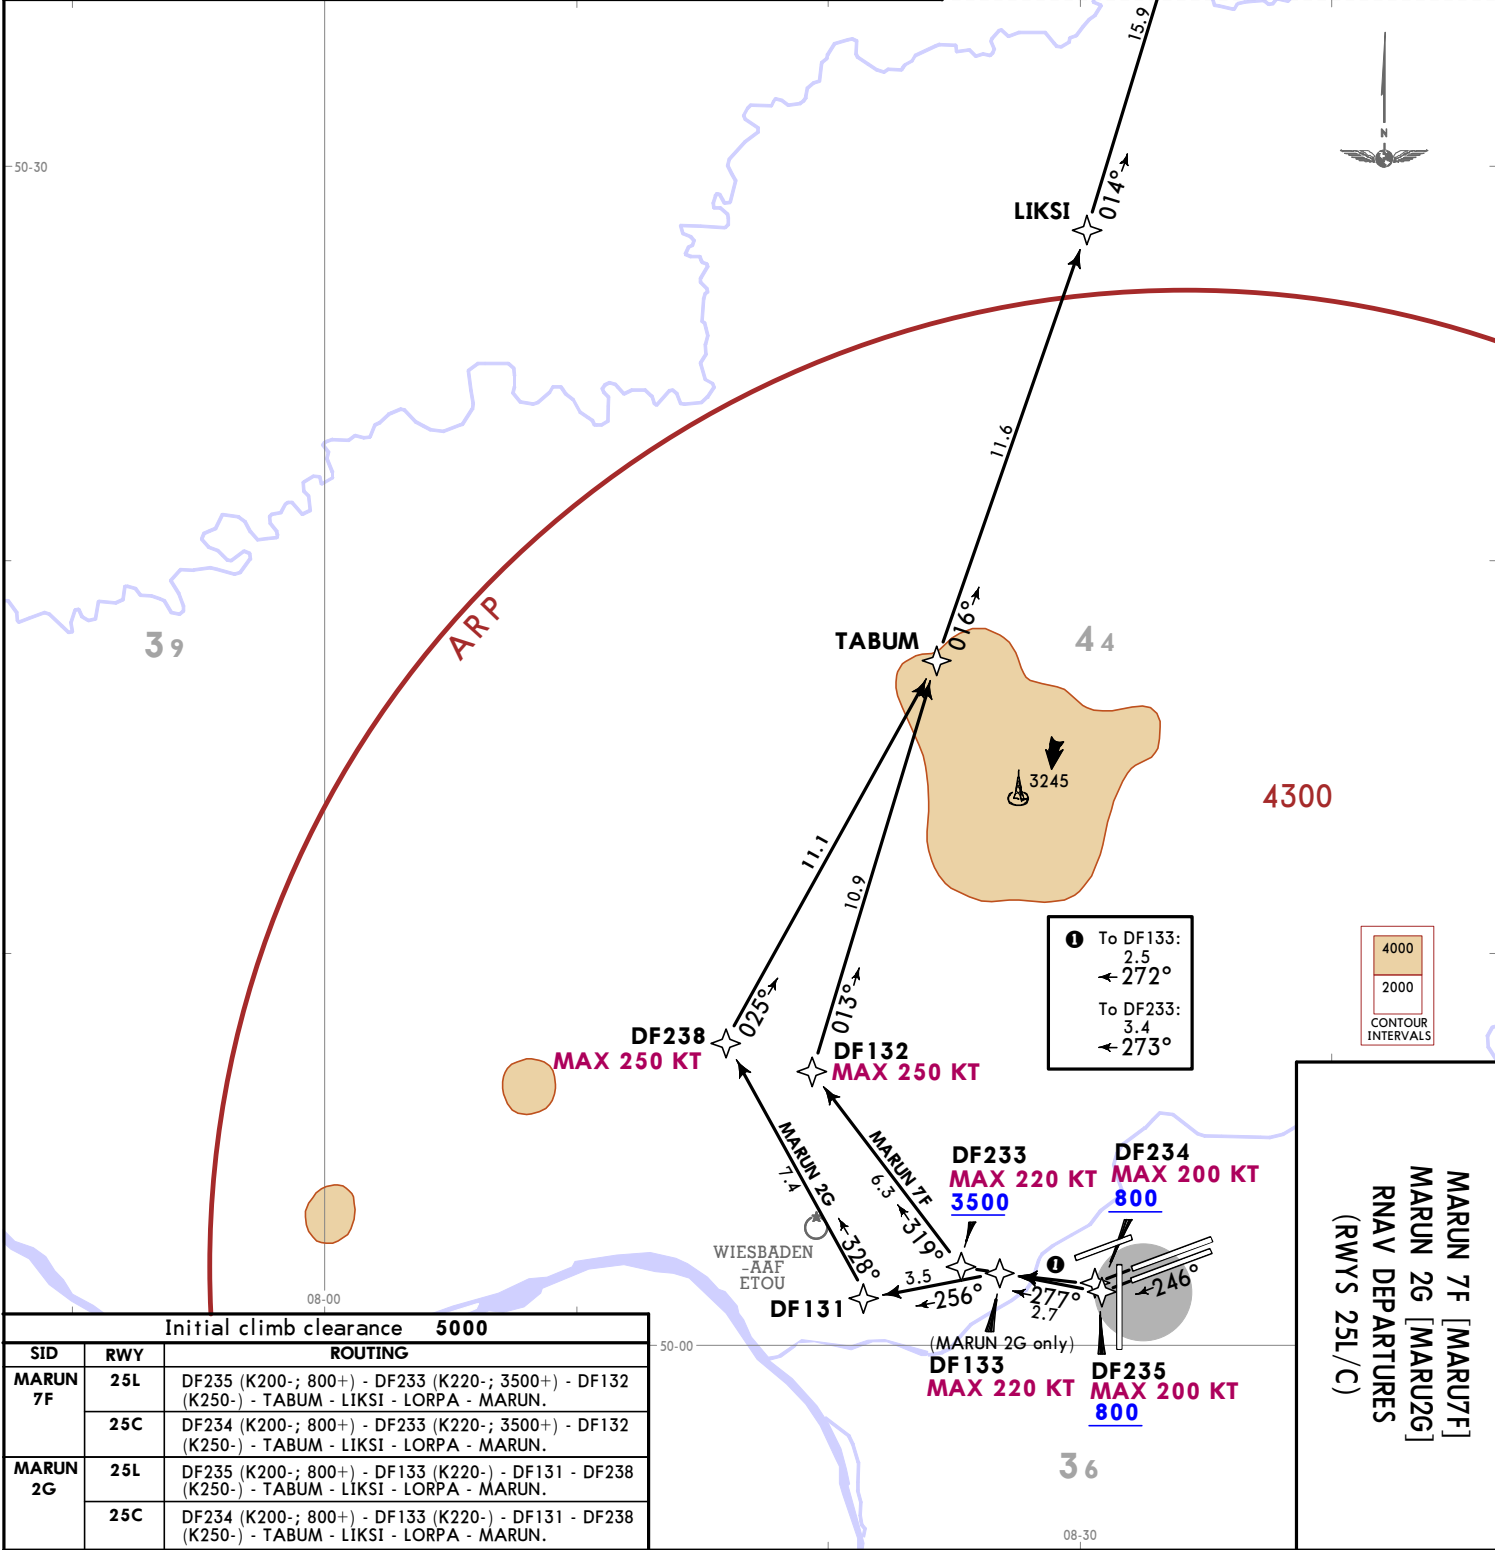

© JEPPESSEN, 2024. ALL RIGHTS RESERVED.

FRANKFURT / MAIN, GERMANY
RNAV SID


EDDF/FRA
FRANKFURT/MAIN

JEPPESEN FRANKFURT/MAIN, GERMANY
5 JUL 24 10-3E4 Eff 11 Jul RNAV SID

*LANGEN Radar (APP) 120.155	Apt Elev 363	Trans alt: 5000	
		RNAV 1 required GPS, DME/DME/IRU DME/DME without IRU not authorized	
		1. Contact LANGEN Radar when advised by Tower. 2. RADAR required.	
		3. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY.	
		4. For operational RWY use concept refer to 10-1P pages.	

MARUN 2N [MARU2N]
RNAV DEPARTURE (RWYS 25L/C)
SPEED: MAX 250 KT BELOW FL100
OR AS BY ATC
NOT APPLICABLE WITHIN AIRSPACE C

25
20
15
10
5
0
5

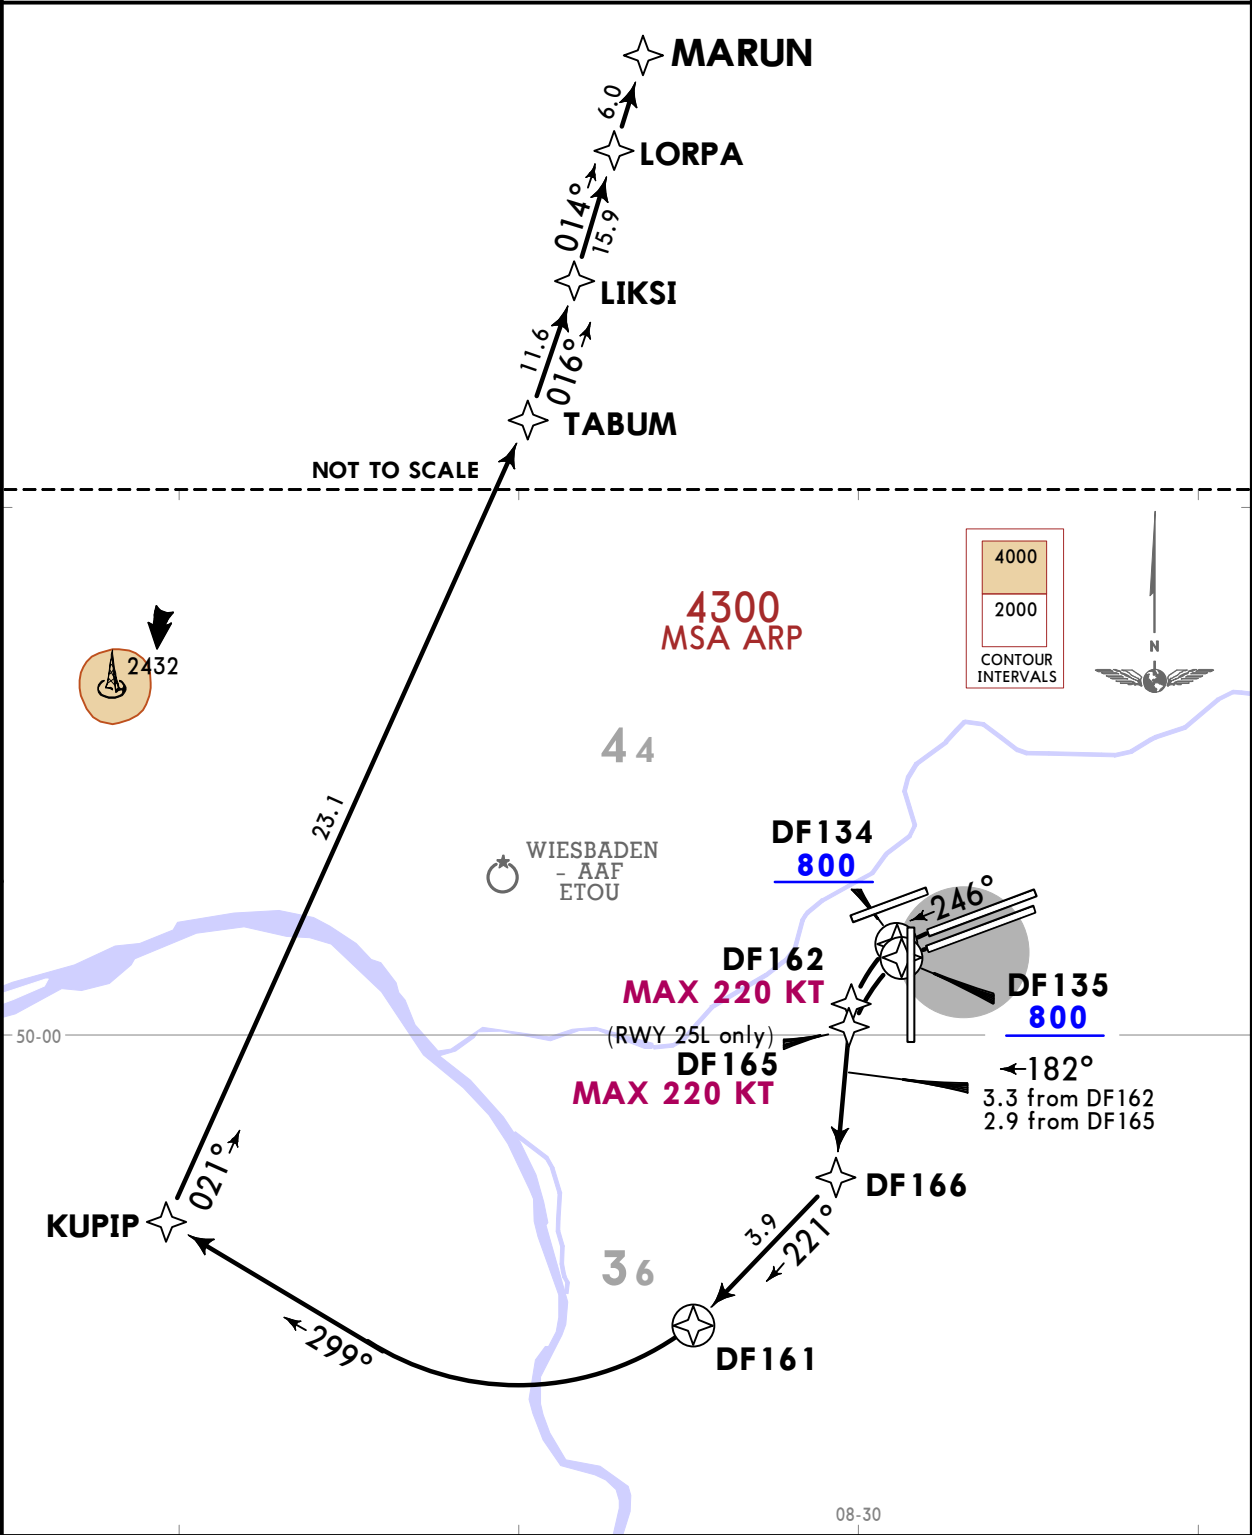


RWY	ROUTING
25L	DF135 (800+) - DF165 (K220-) - DF166 - DF161 - KUPIP - TABUM - LIKSI - LORPA - MARUN.
25C	DF134 (800+) - DF162 (K220-) - DF166 - DF161 - KUPIP - TABUM - LIKSI - LORPA - MARUN.

CHANGES: Chart reindexed.

EDDF/FRA
FRANKFURT/MAIN
JEPPesen
5 JUL 24 (10-3E5)
EFF 11 Jul

FRANKFURT/MAIN, GERMANY
RNAV SID

*LANGEN Radar (APP) 120.155	Apt Elev 363	Trans alt: 5000	MARUN 4R [MARU4R] RNAV DEPARTURE (RWY 18) BY ATC SPEED: MAX 250 KT BELOW FL100 OR AS BY ATC NOT APPLICABLE WITHIN AIRSPACE C
		RNAV 1 required GPS, DME/DME/IRU DME/DME without IRU not authorized	
		1. Contact LANGEN Radar when advised by Tower. 2. RADAR required. 3. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY. 4. For operational RWY use concept refer to 10-1P pages. 5. WARNING: Close-in obstacles. 6. WARNING: Wind shears and increased turbulences must be expected when strong winds. 7. Do not turn before DER.	

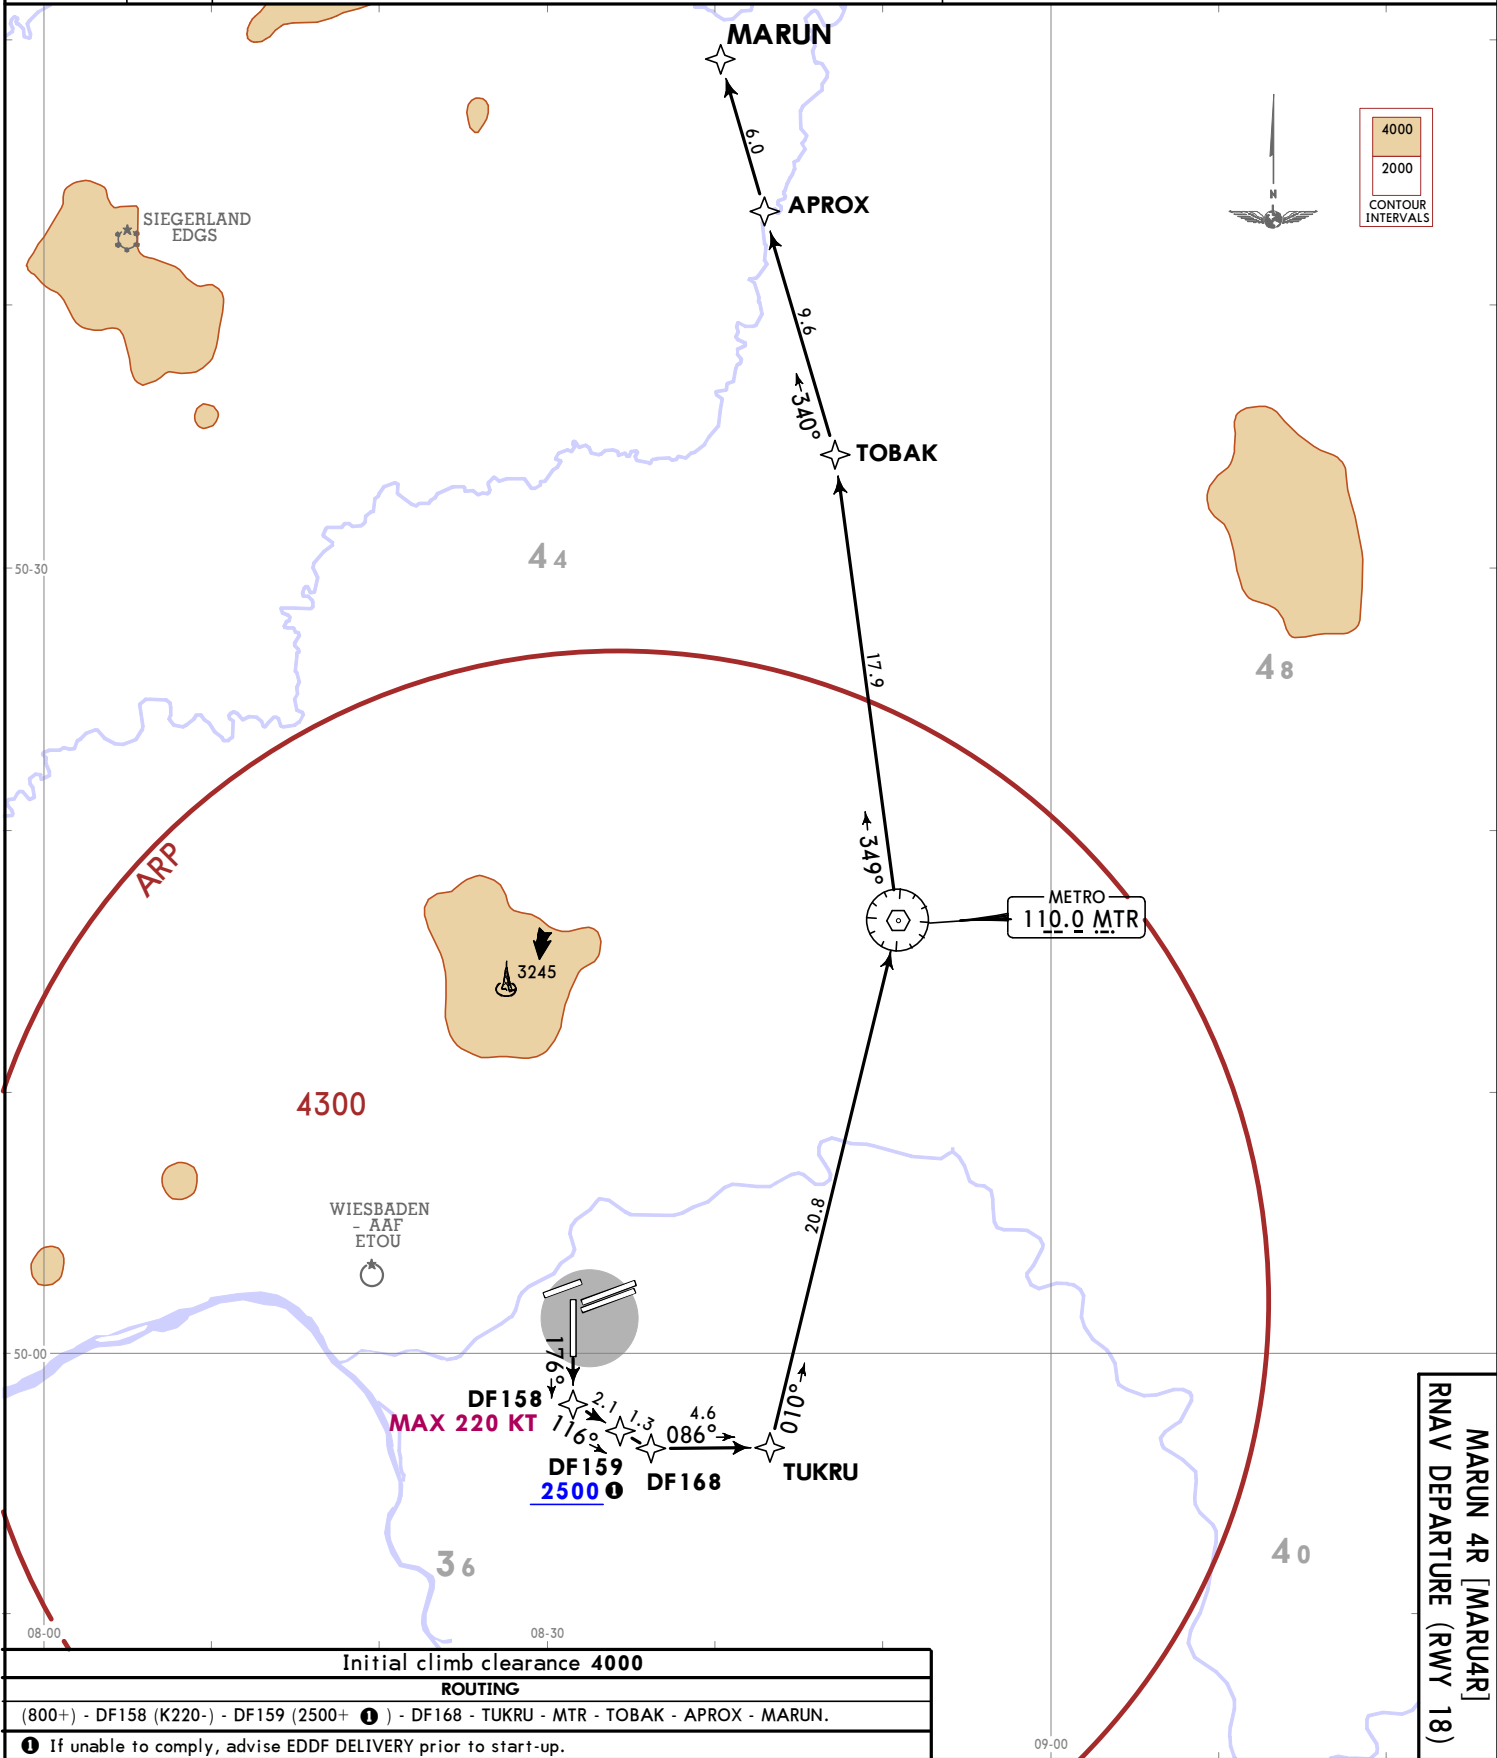

© JEPPesen, 2024. ALL RIGHTS RESERVED.

CHANGES: Chart reindexed.

*LANGEN
Radar (APP)
120.155

Apt Elev
363

Trans alt: 5000

RNAV 1 required GPS, DME/DME/IRU DME/DME without IRU not authorized

1. Contact LANGEN Radar when advised by Tower.

2. RADAR required.

3. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY.

4. For operational RWY use concept refer to 10-1P pages.

5. WARNING: Close-in obstacles.

6. WARNING: Wind shears and increased turbulences must be expected when strong winds.

7. Do not turn before DER.

MARUN 8S [MARU8S]


RNAV DEPARTURE (RWY 18)

WILL ONLY BE ASSIGNED WHEN
LANDING DIRECTION IS RWY 25

SPEED: MAX 250 KT BELOW FL100

OR AS BY ATC

NOT APPLICABLE WITHIN AIRSPACE C

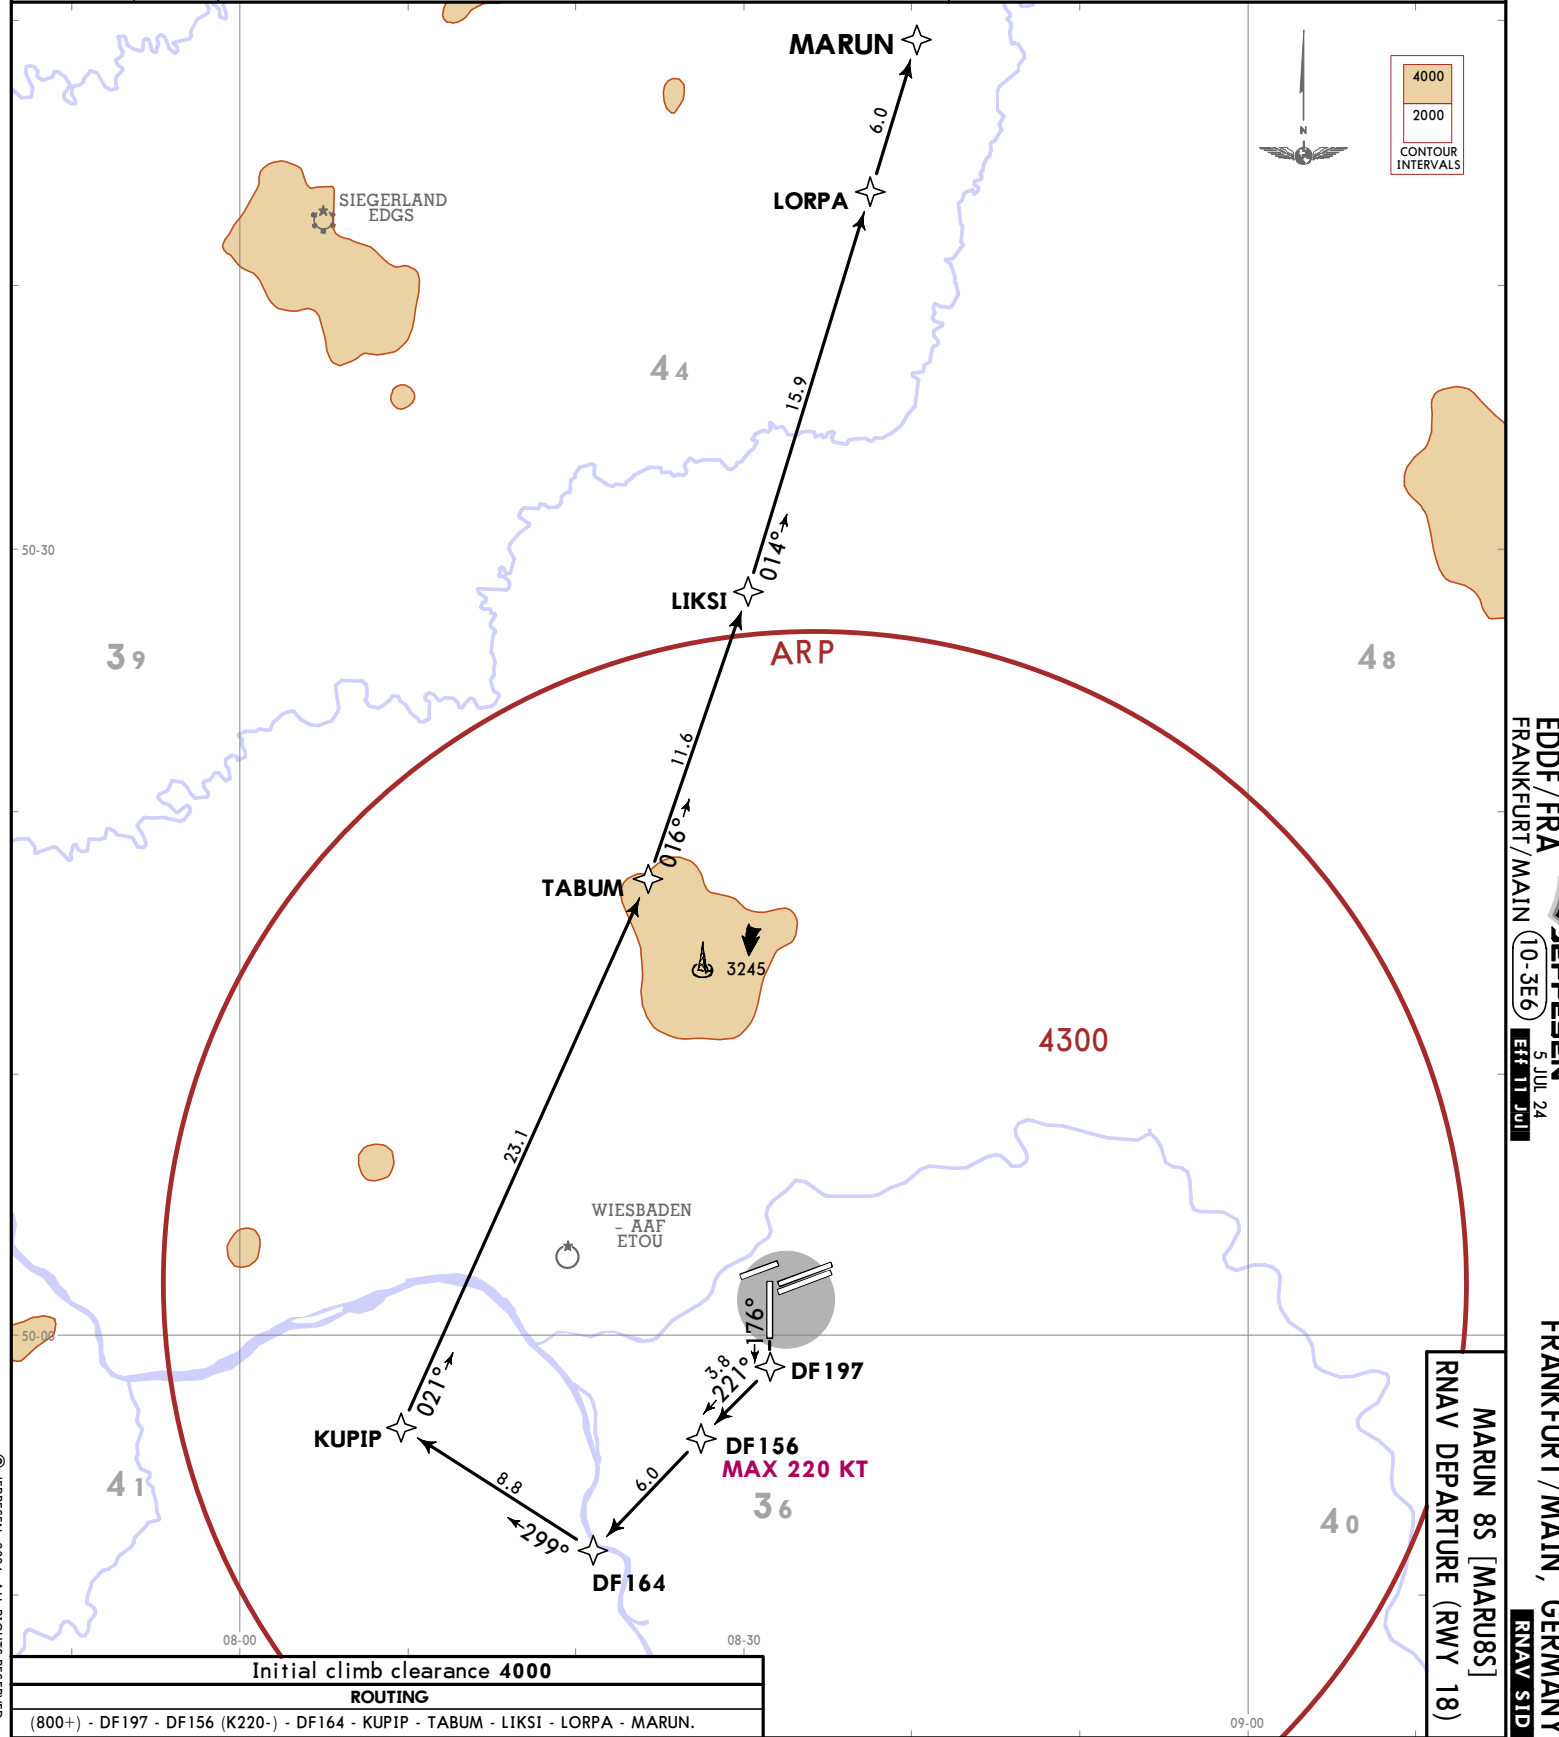

© JEPPesen, 2024. ALL RIGHTS RESERVED.

EDDF / FRA
FRANKFURT / MAIN
JEPPesen
10-3E6
5 JUL 24
Eff 11 JUL


FRANKFURT / MAIN, GERMANY
RNAV SID
MARUN 8S [MARU8S]
RNAV DEPARTURE (RWY 18)

EDDF/FRA
FRANKFURT/MAIN

JEPPesenFRANKFURT/MAIN, GERMANY

5 JUL 24 10-3E7 Eff 11 Jul

RNAV SID

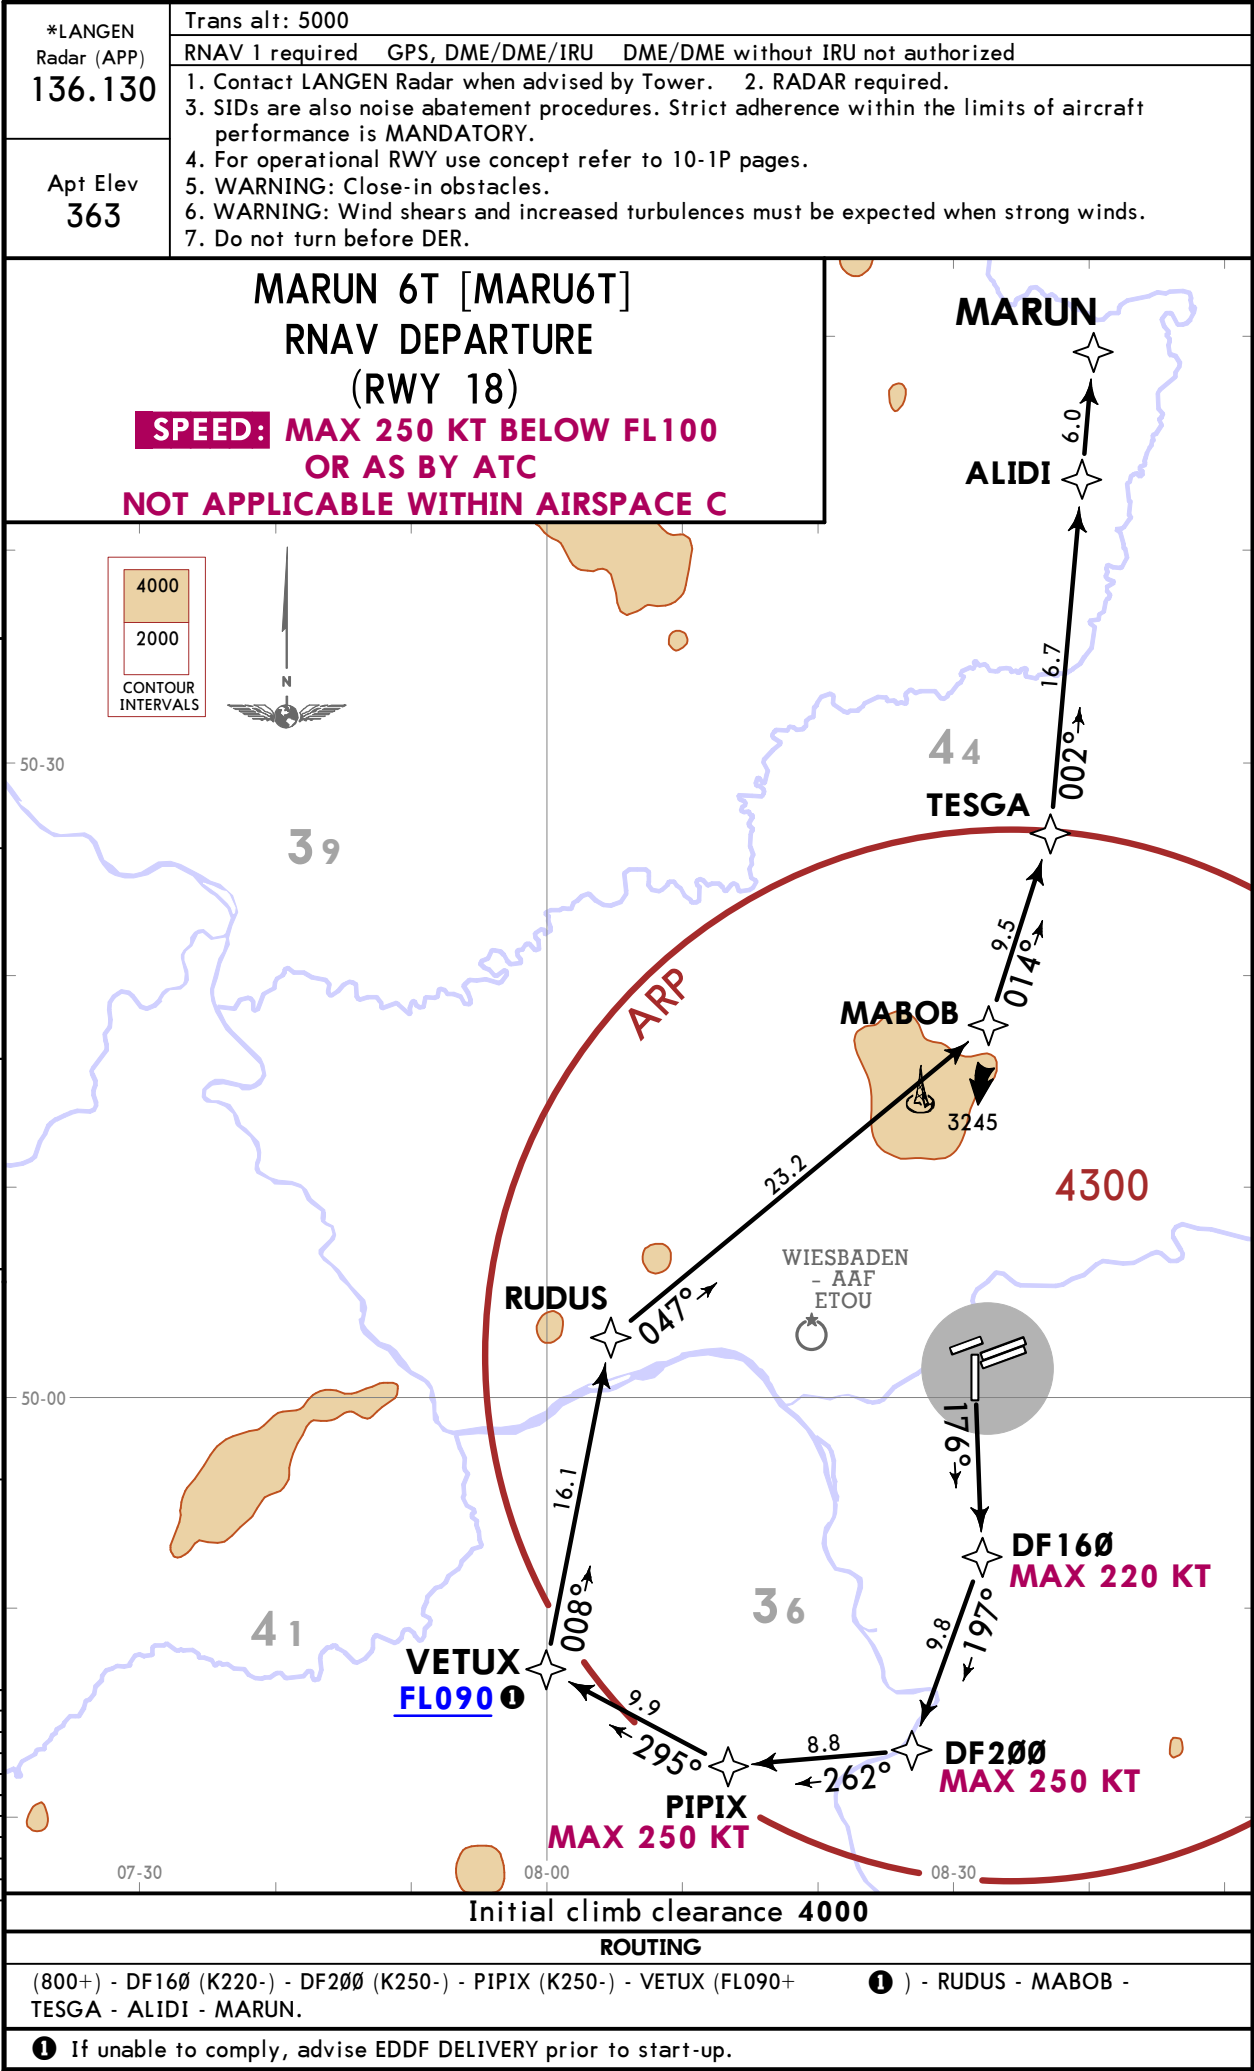

COLOGNE-BONN
EDDK

*LANGEN
Radar
120.155

Apt Elev
363

Trans alt: 5000

RNAV 1 required GPS, DME/DME/IRU DME/DME without IRU not authorized

1. Contact LANGEN Radar when advised by Tower.
2. RADAR required.
3. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY.
4. Altitude constraints due to operational requirements. If unable to comply advise EDDF Delivery prior to start-up
5. For operational RWY use concept refer to 10-1P pages.

OBOKA 4G [OBOK4G]
RNAV DEPARTURE
(RWYS 25L/C)

FLIGHTS HAVE TO BE ABLE
TO CROSS OBOKA AT OR ABOVE FL170 EXCEPT FLIGHTS TO EDDK
IF UNABLE TO COMPLY

ADVISE EDDF DELIVERY PRIOR TO START-UP
**SPEED: MAX 250 KT BELOW FL100
OR AS BY ATC**
NOT APPLICABLE WITHIN AIRSPACE C


Initial climb clearance 5000

RWY
25L

DF235 (K200+; 800+) - DF133 (K220-) - DF136 (K250-) - ESUPI - MASIR - RAVKI - DITAM - OBOKA.

RWY
25C

DF234 (K200+; 800+) - DF133 (K220-) - DF136 (K250-) - ESUPI - MASIR - RAVKI - DITAM - OBOKA.

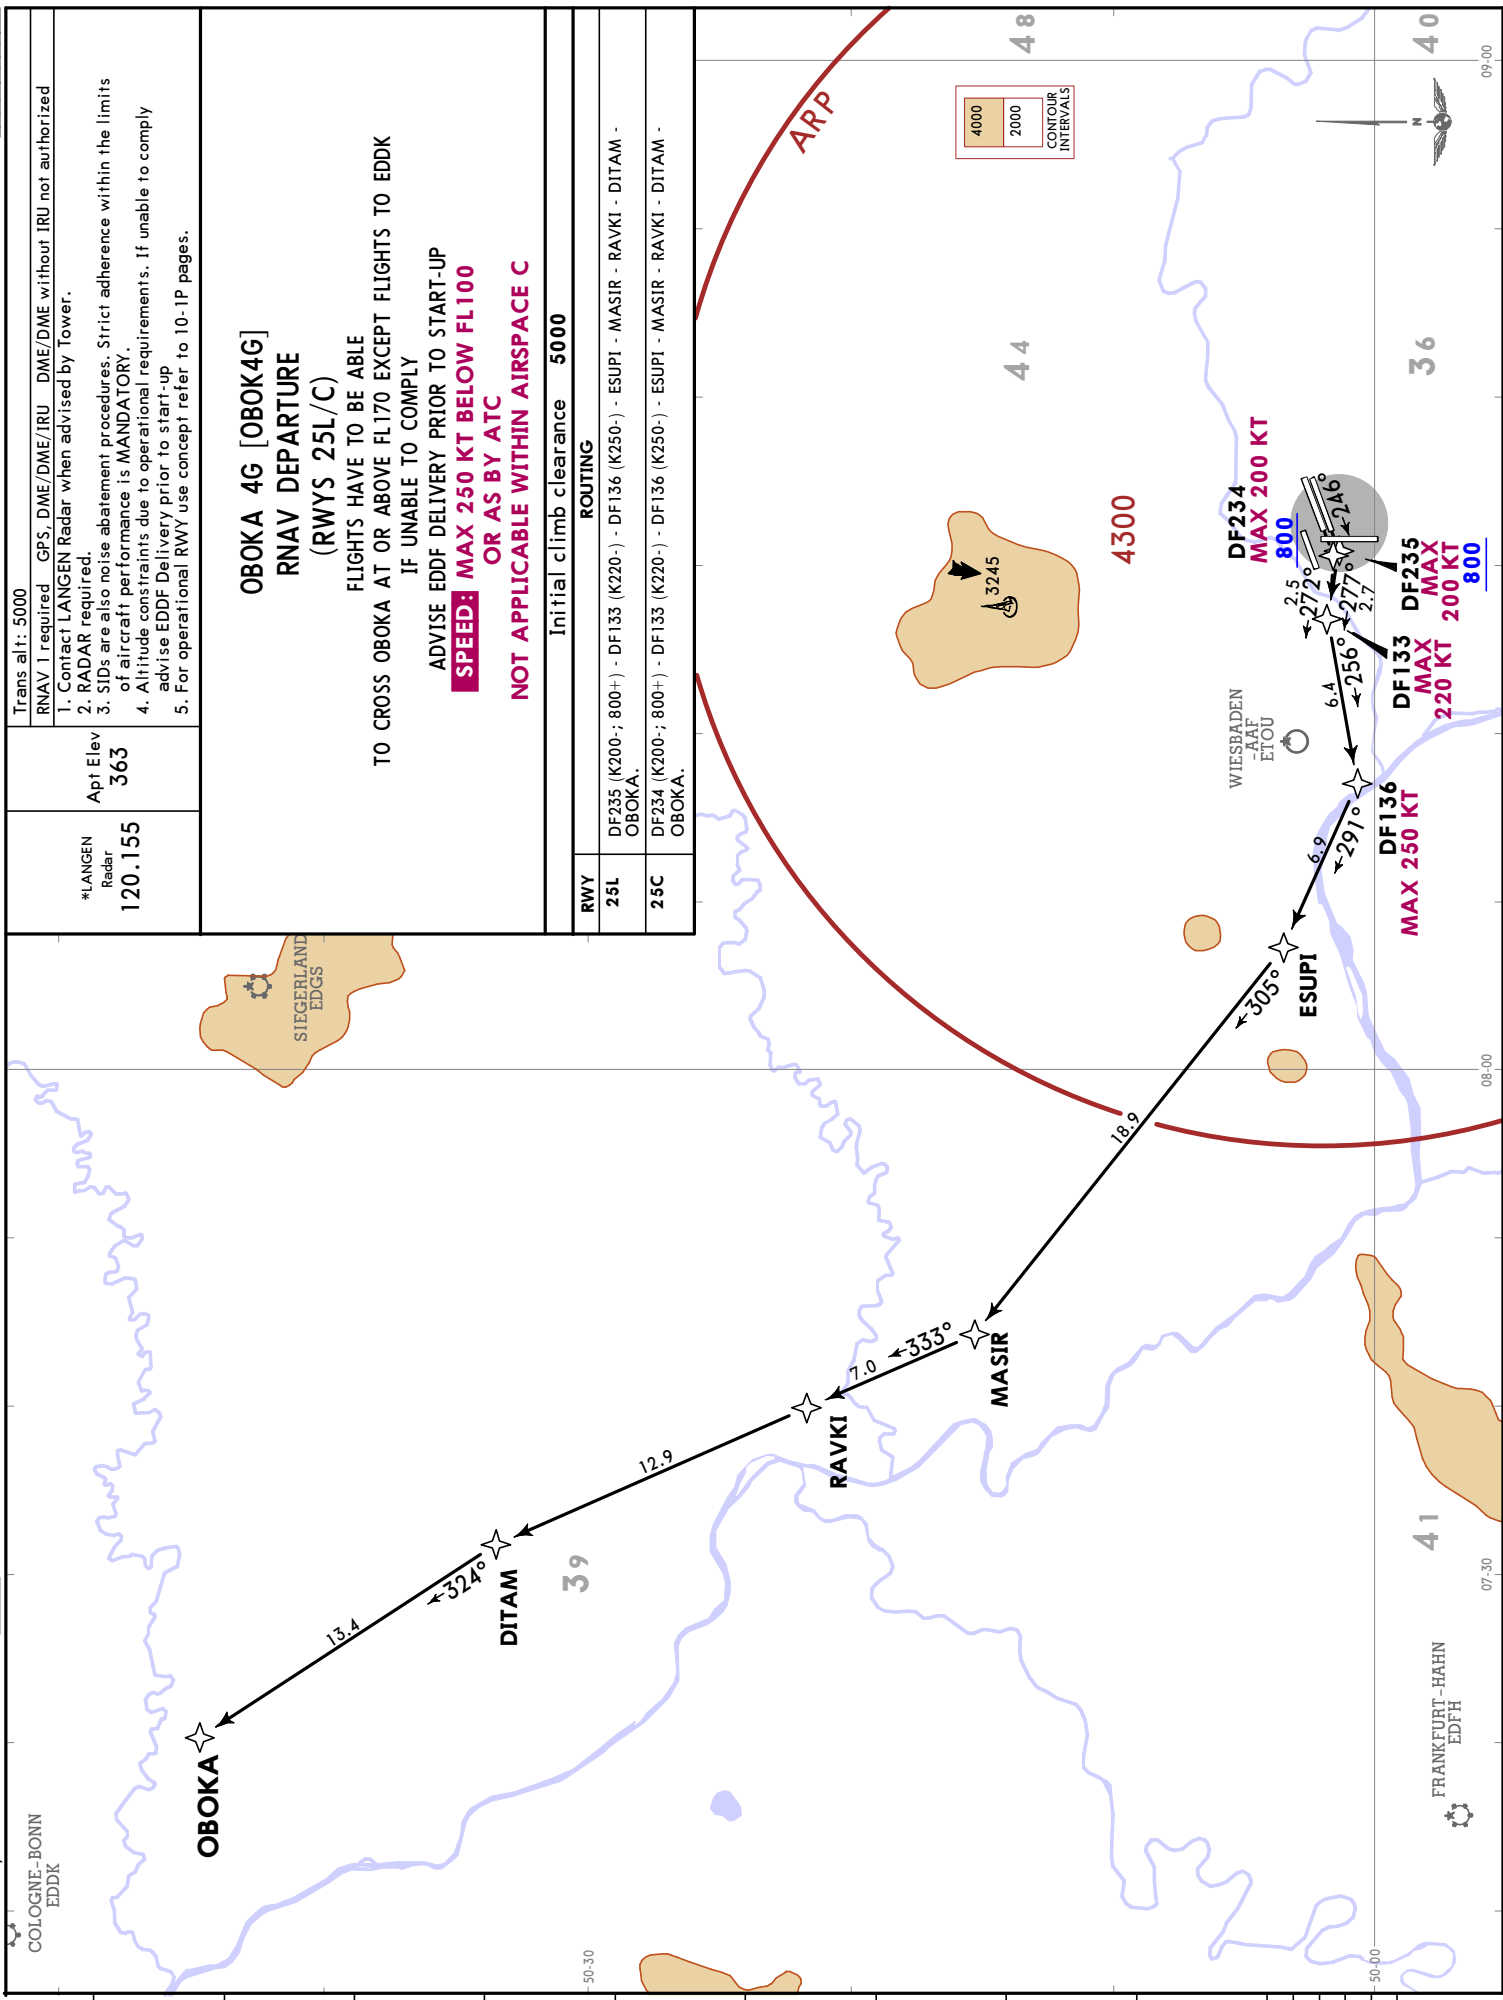




Apt Elev
363

RNAV 1 required	GPS, DME/DME/IRU	DME/DME without IRU not authorized
-----------------	------------------	------------------------------------

1. Contact LANGEN Radar when advised by Tower.
2. RADAR required.
3. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY.
4. For operational RWY use concept refer to 10-1P pages.
5. WARNING: Close-in obstacles.
6. WARNING: Wind shears and increased turbulences must be expected when strong winds.
7. Do not turn before DER.

SPEED: MAX 250 KT BELOW FL100
OR AS BY ATC
NOT APPLICABLE WITHIN AIRSPACE C



13.

39

MASIR

SIEGERLAND
EDGS

ARP

4300

3245

WIESBADEN
- AAF
ETOU

(OBOKA 4S only)

DF 19

MAX 220 RT

0.

6.0
A 4S

БОНА

99.0% DE 144

V DF164

○

23



XAMUB

References

JEPPESSEN
17 JAN 25 10-3E10 **Eff 23 Jan**

FRANKFURT/MAIN, GERMANY
RNAV SID

SID

ROUTING

SID	ROUTING
OBOKA 2L	(800+) - DF16Ø (K220-) - XAMUB - MASIR - RAVKI - DITAM - OBOKA.

OBOKA 2L	(500+) - DF109 - (K220-) - XAMOB - MASIR - RAVKI - DITAM - OBOKA.
OBOKA 4S	(800+) - DF197 - DF156 (K220-) - DF164 - KUPIP - MASIR - RAVKI - DITAM - OBOKA.

OBOKA 2L [OBOK2L]
OBOKA 4S [OBOK4S]
RNAV DEPARTURES (RWY 18)

© JEPPESEN, 2024. ALL RIGHTS RESERVED



Trans alt: 5000

RNAV 1 required

DME/DME without IRU not authorized

1. Contact LANGEN Radar when advised by Tower. 2. RADAR required.

3. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY.

4. For operational RWY use concept refer to 10-1P pages.

5. WARNING: Close-in obstacles.

6. WARNING: Wind shears and increased turbulences must be expected when strong winds.

7. Do not turn before DER.

#LANGEN

Radar (APP)

136.130

Apt Elev

363

OBOKA 3T [OBOK3T]

RNAV DEPARTURE

(RWY 18)

FLIGHTS HAVE TO BE ABLE

TO CROSS OBOKA AT OR ABOVE FL170 EXCEPT FLIGHTS TO EDDK

IF UNABLE TO COMPLY

ADVISE EDDF DELIVERY PRIOR TO START-UP

SPEED: MAX 250 KT BELOW FL100

OR AS BY ATC


NOT APPLICABLE WITHIN AIRSPACE C

Initial climb clearance 4000

ROUTING

(800+) - DF160 (K220+) - DF200 (K250+) - PIPIX (K250+) - VETUX (FL090+) - RUDUS - MASIR - RAVKI - DITAM - OBOKA.


❶ If unable to comply, advise EDDF DELIVERY prior to start-up.

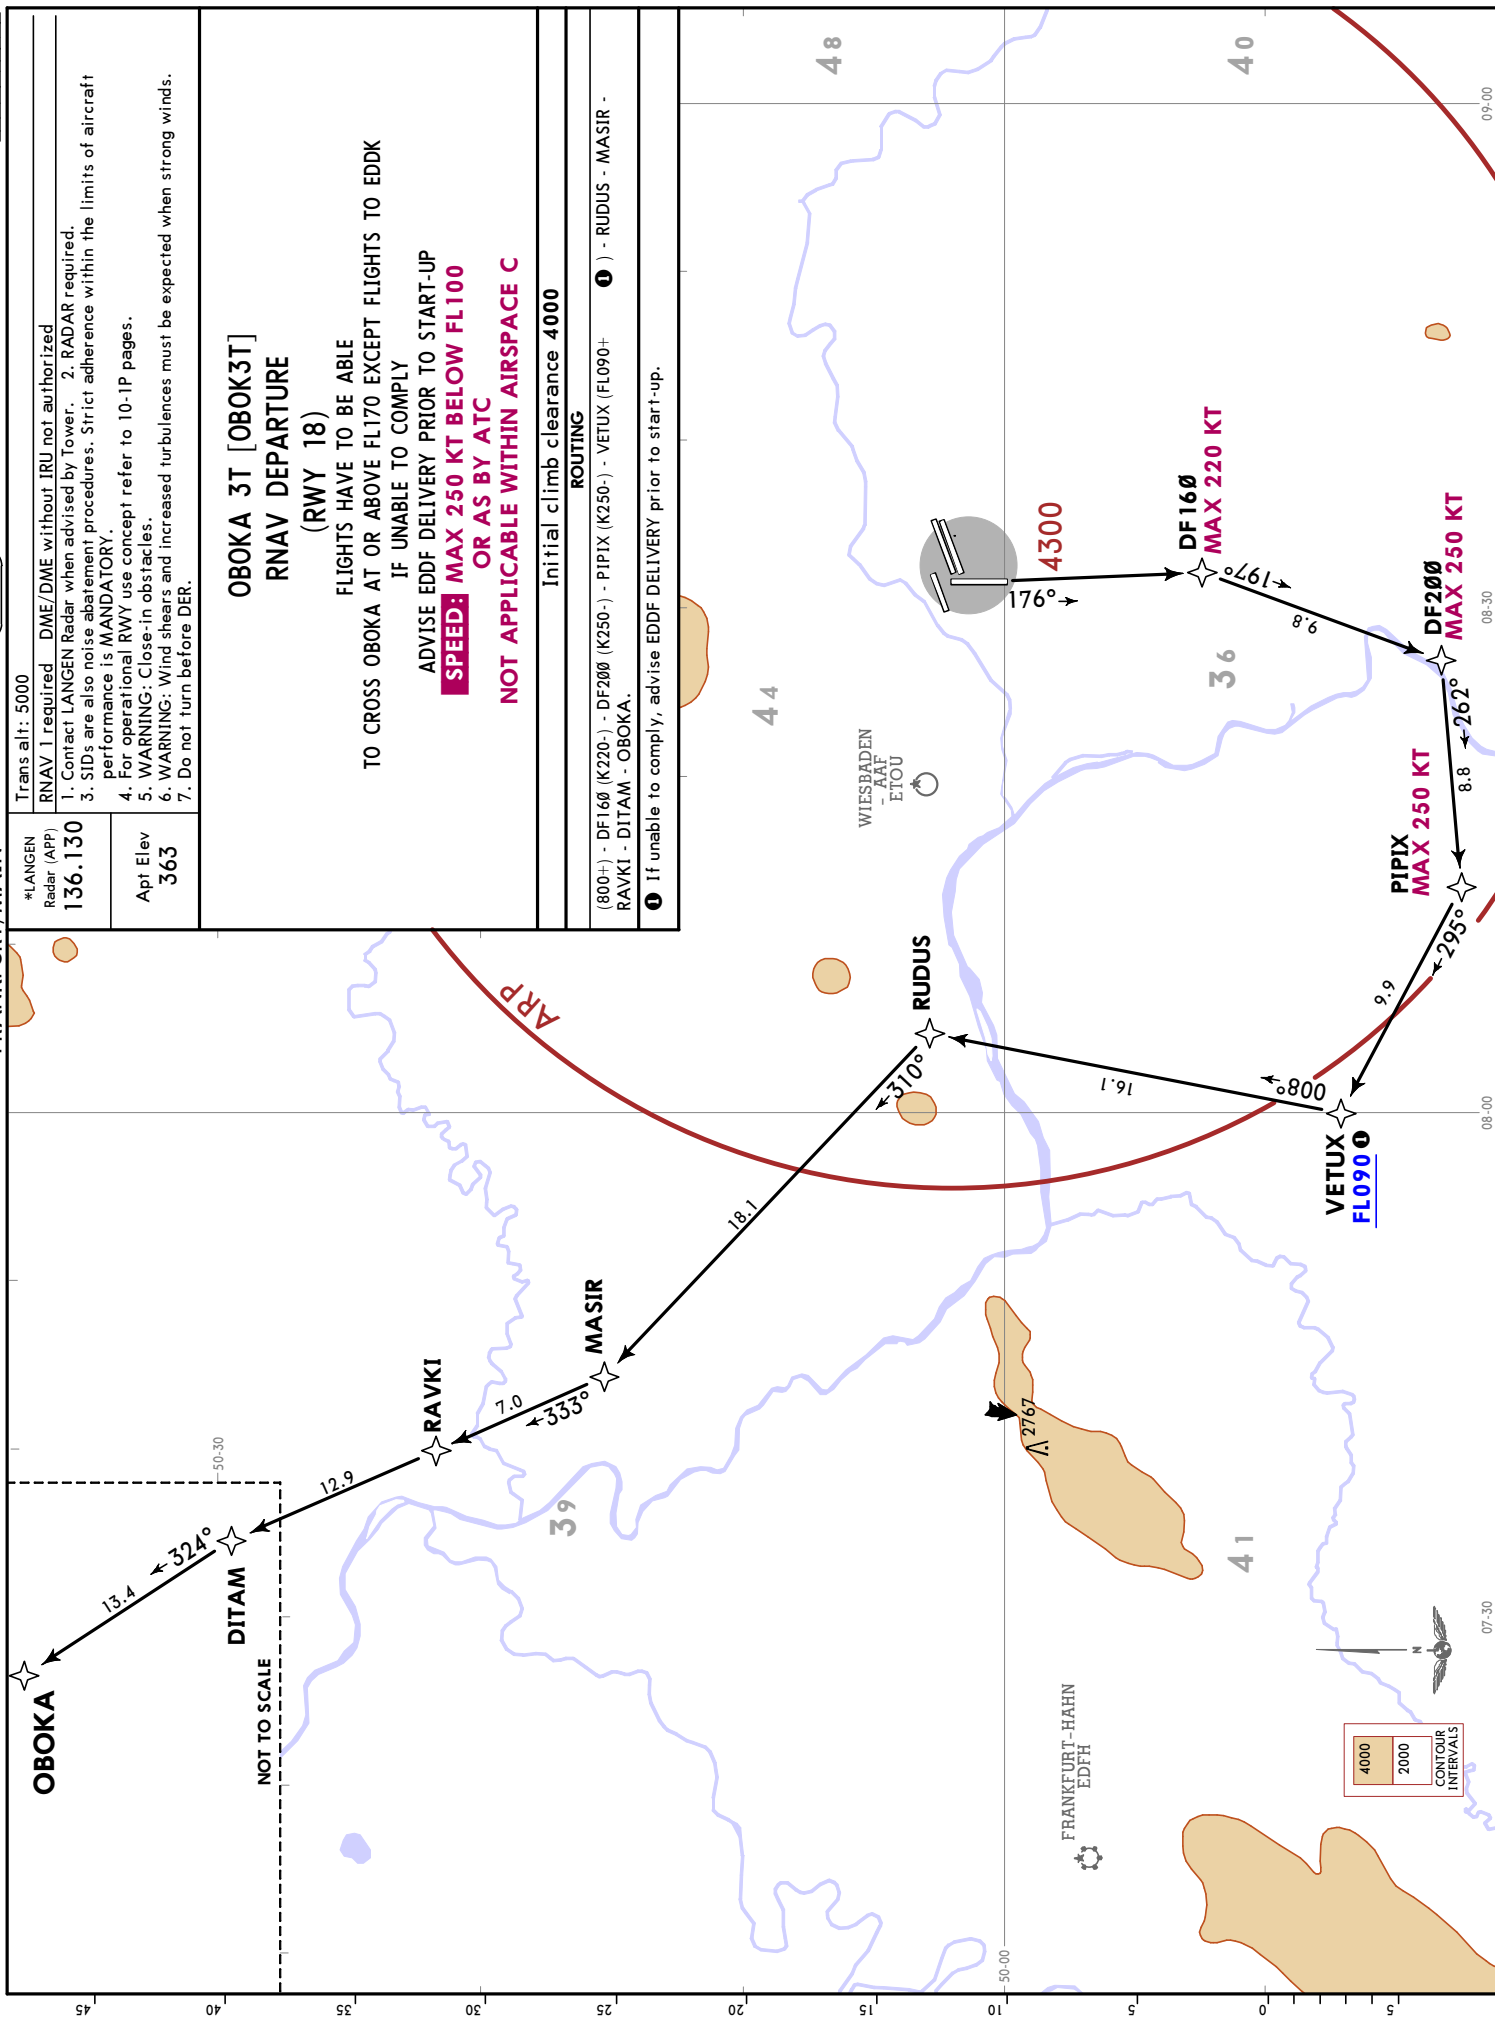

EDDF/FRA
FRANKFURT/MAIN

JEPPESSEN
5 JUL 24 10-3G1 Eff 11 Jul


FRANKFURT/MAIN, GERMANY
RNAV SID

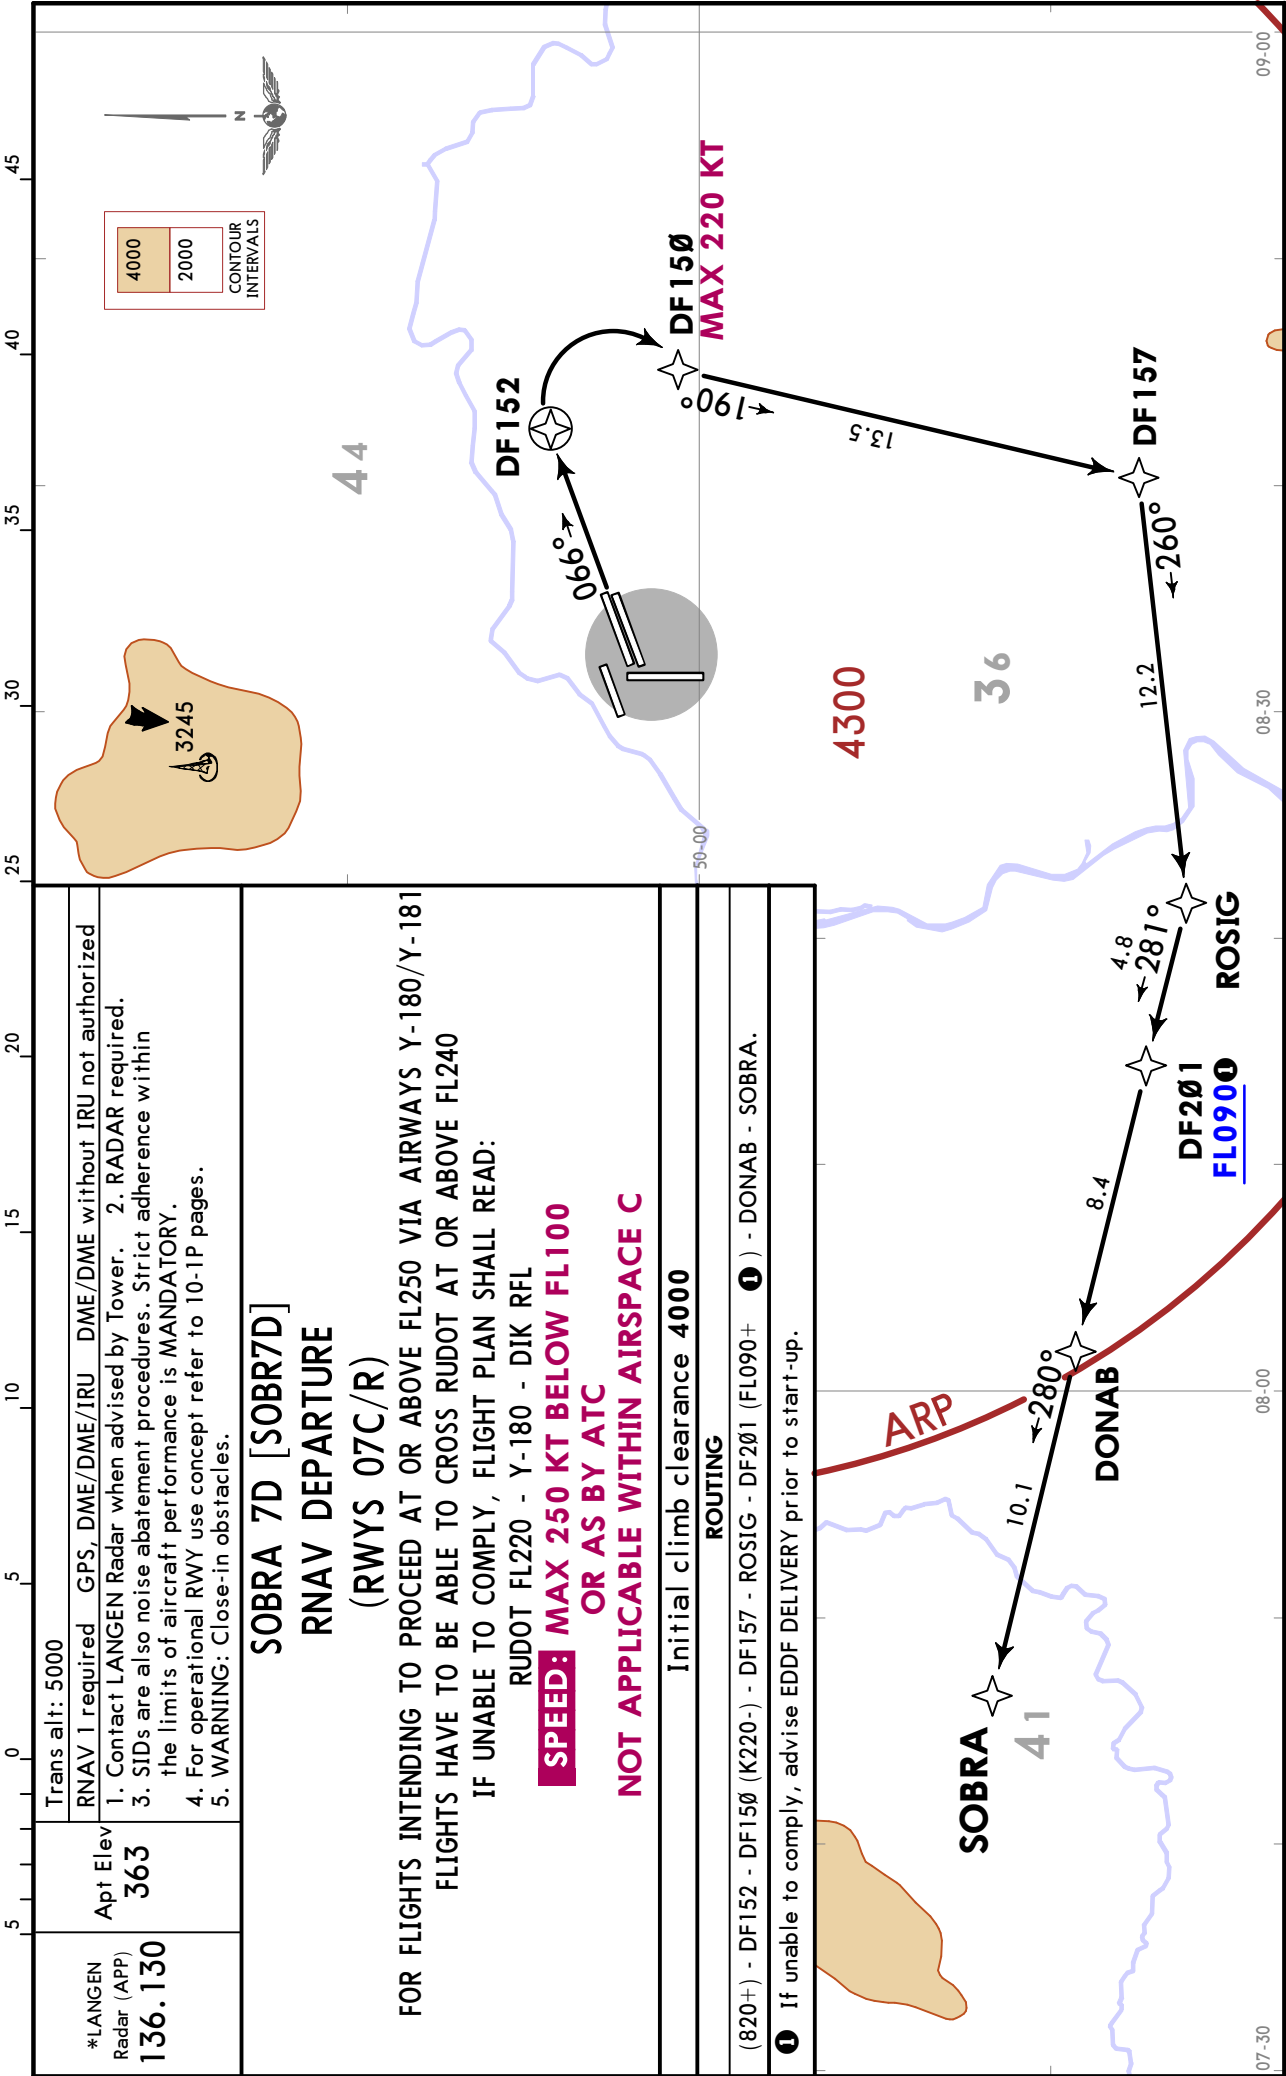

EDDF/FRA
FRANKFURT/MAIN

JEPPESSEN
5 JUL 24 10-3G2 Eff 11 Jul

FRANKFURT/MAIN, GERMANY
RNAV SID

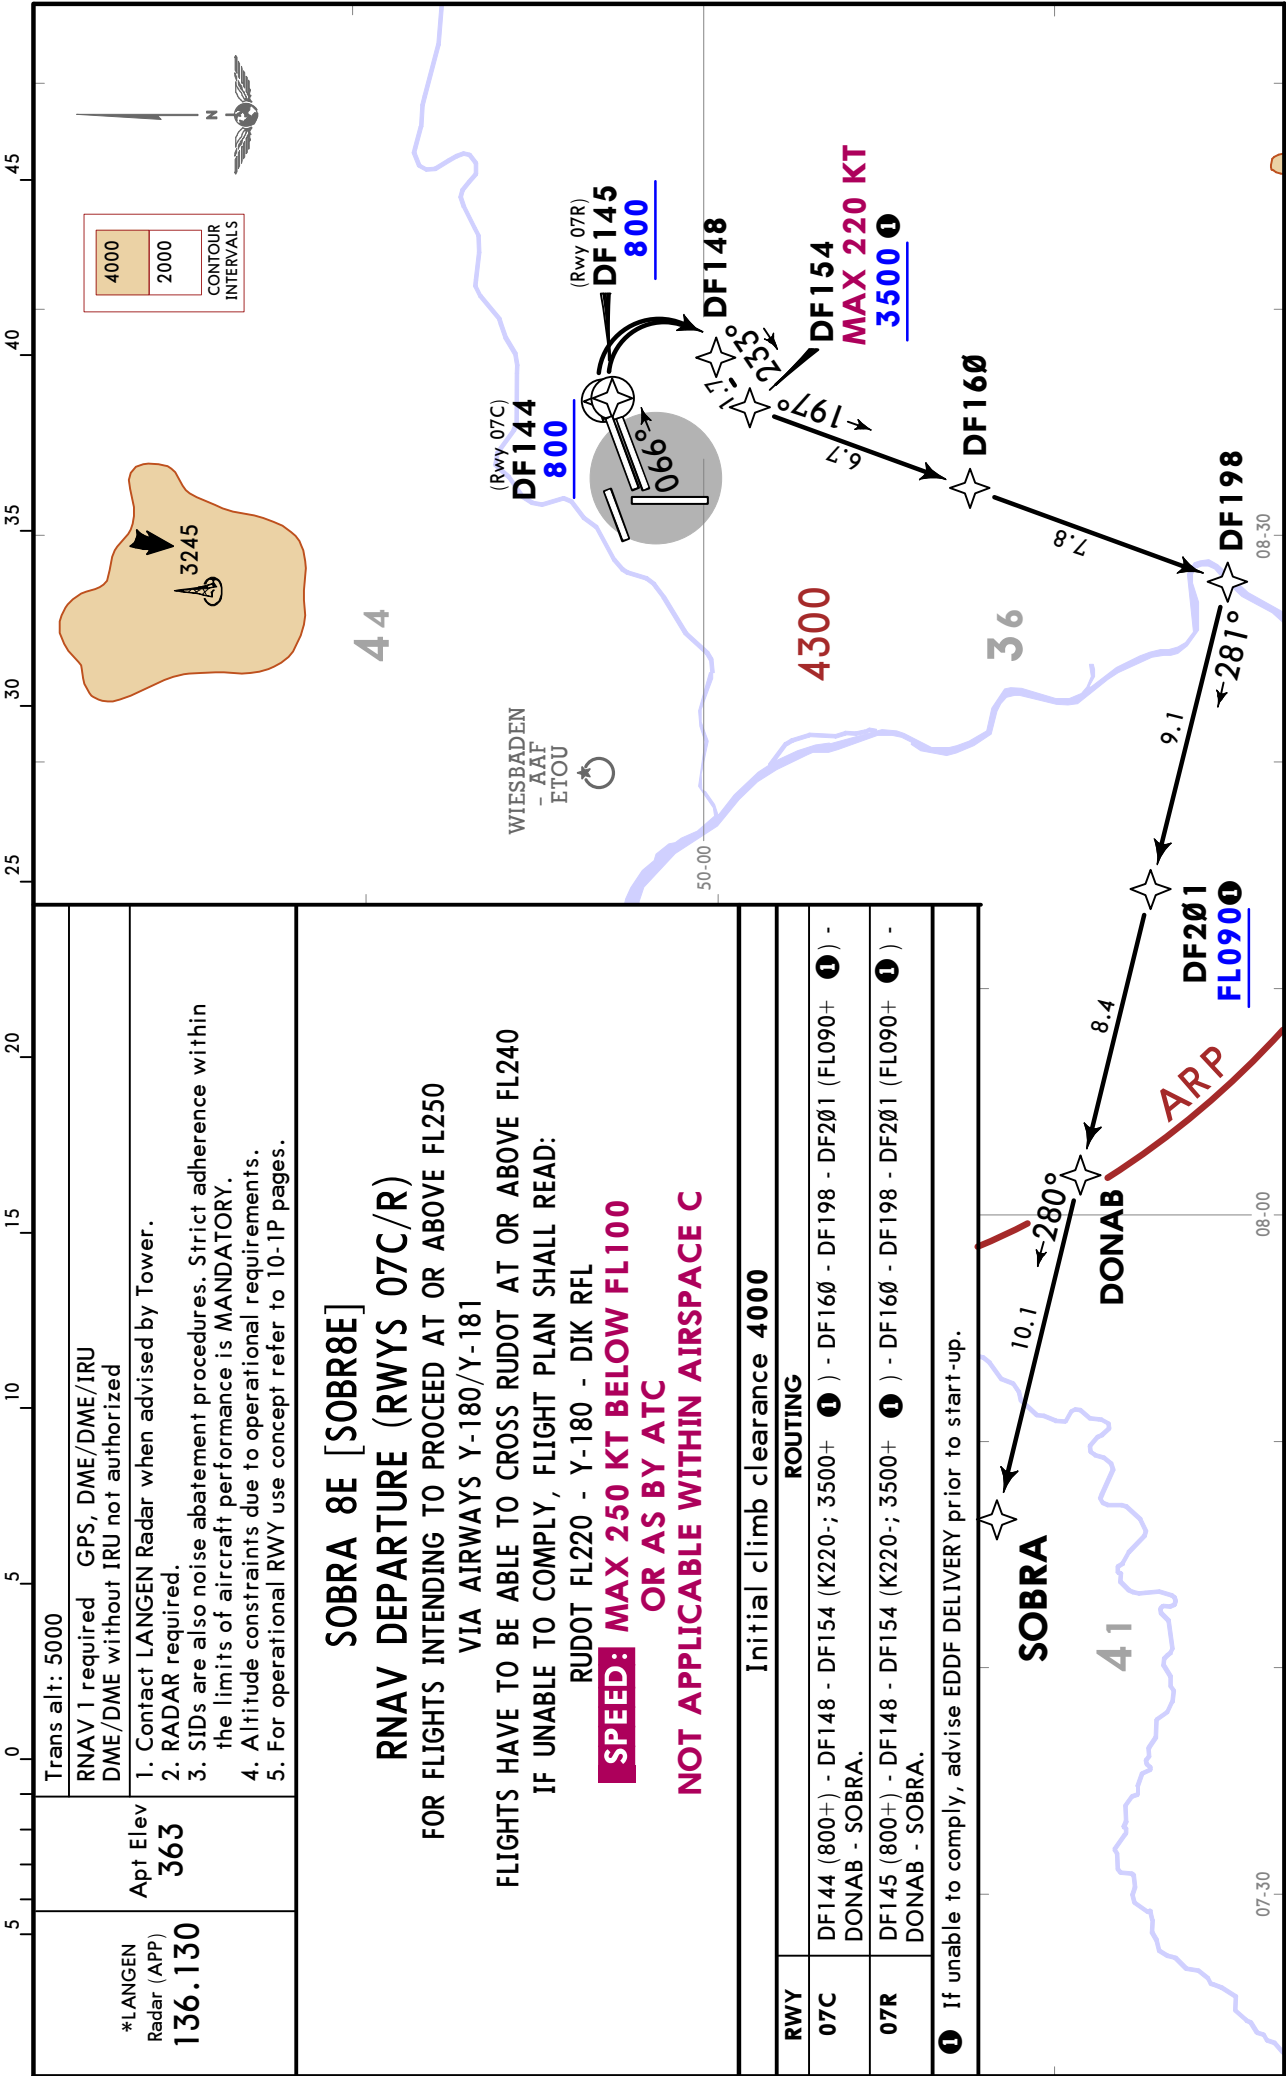


EDDF/FRA
FRANKFURT/MAIN

JEPPesen 17 JAN 25 10-3G3 Eff 23 Jan

FRANKFURT/MAIN, GERMANY

RNAV SID

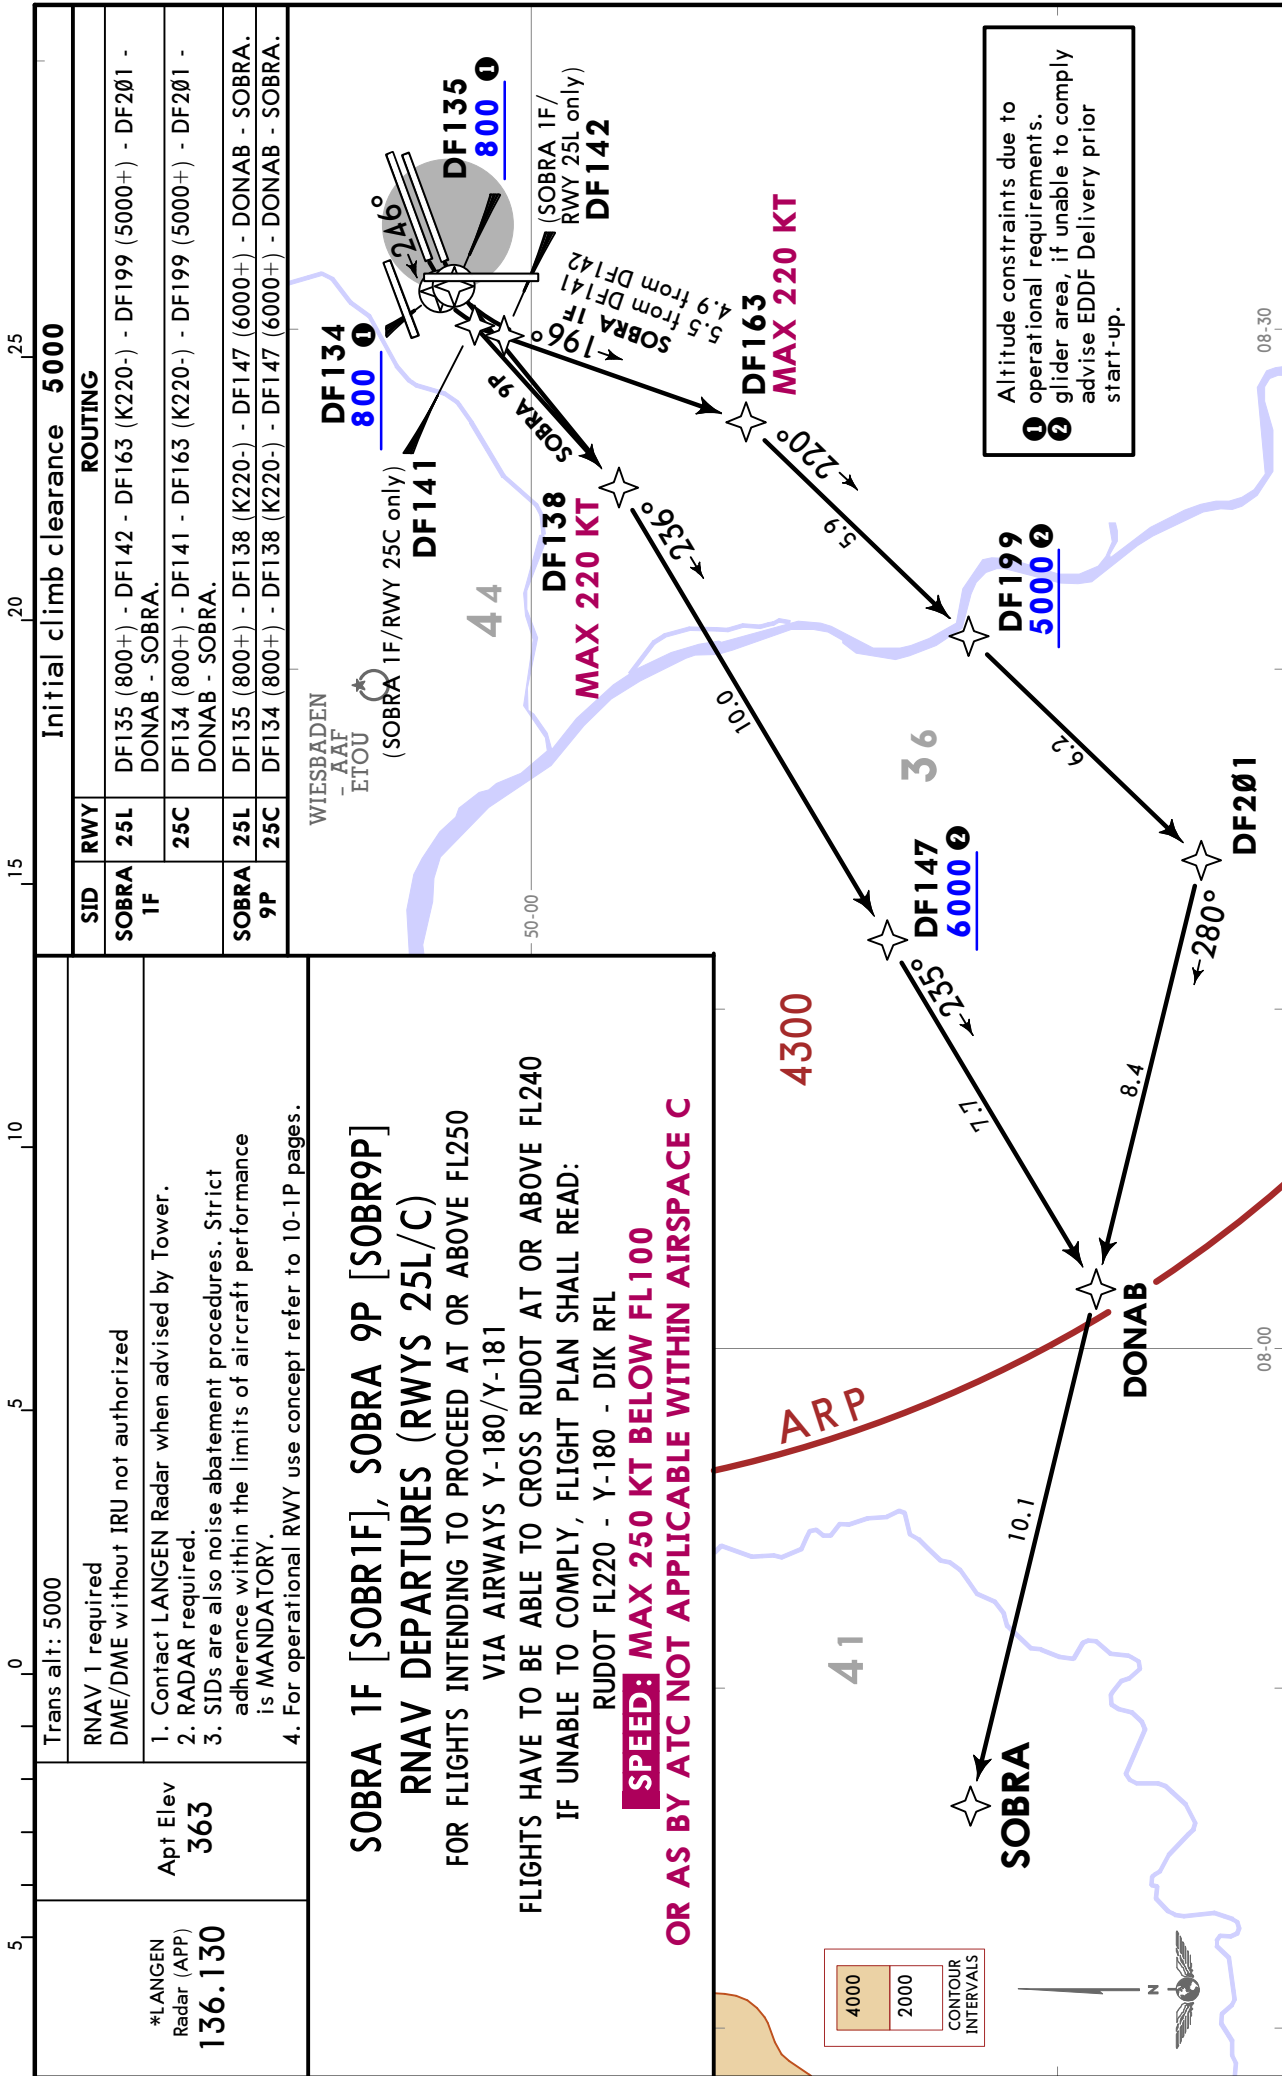

EDDF/FRA
FRANKFURT/MAIN


JEPPESSEN
5 JUL 24 (10-3G5) Eff 11 Jul

FRANKFURT/MAIN, GERMANY
RNAV SID


*LANGEN Radar (APP) 136.130	Apt Elev 363	Trans alt: 5000
		RNAV 1 required GPS, DME/DME/IRU DME/DME withou IRU not authorized
		1. Contact LANGEN Radar when advised by Tower. 2. RADAR required. 3. WARNING: Close-in obstacles. 4. WARNING: Wind shears and increased turbulences must be EXPECTED when strong winds. 5. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY. 6. Do not turn before DER.


SOBRA 2L [SOBR2L]
RNAV DEPARTURE
(RWY 18)

FOR FLIGHTS INTENDING TO PROCEED AT OR ABOVE FL250 VIA AIRWAYS Y-180/Y-181
FLIGHTS HAVE TO BE ABLE TO CROSS RUDOT AT OR ABOVE FL240
IF UNABLE TO COMPLY FPL SHALL READ RUDOT FL220 - Y-180 - DIK RFL
SPEED: MAX 250 KT BELOW FL100 OR AS BY ATC
NOT APPLICABLE WITHIN AIRSPACE C

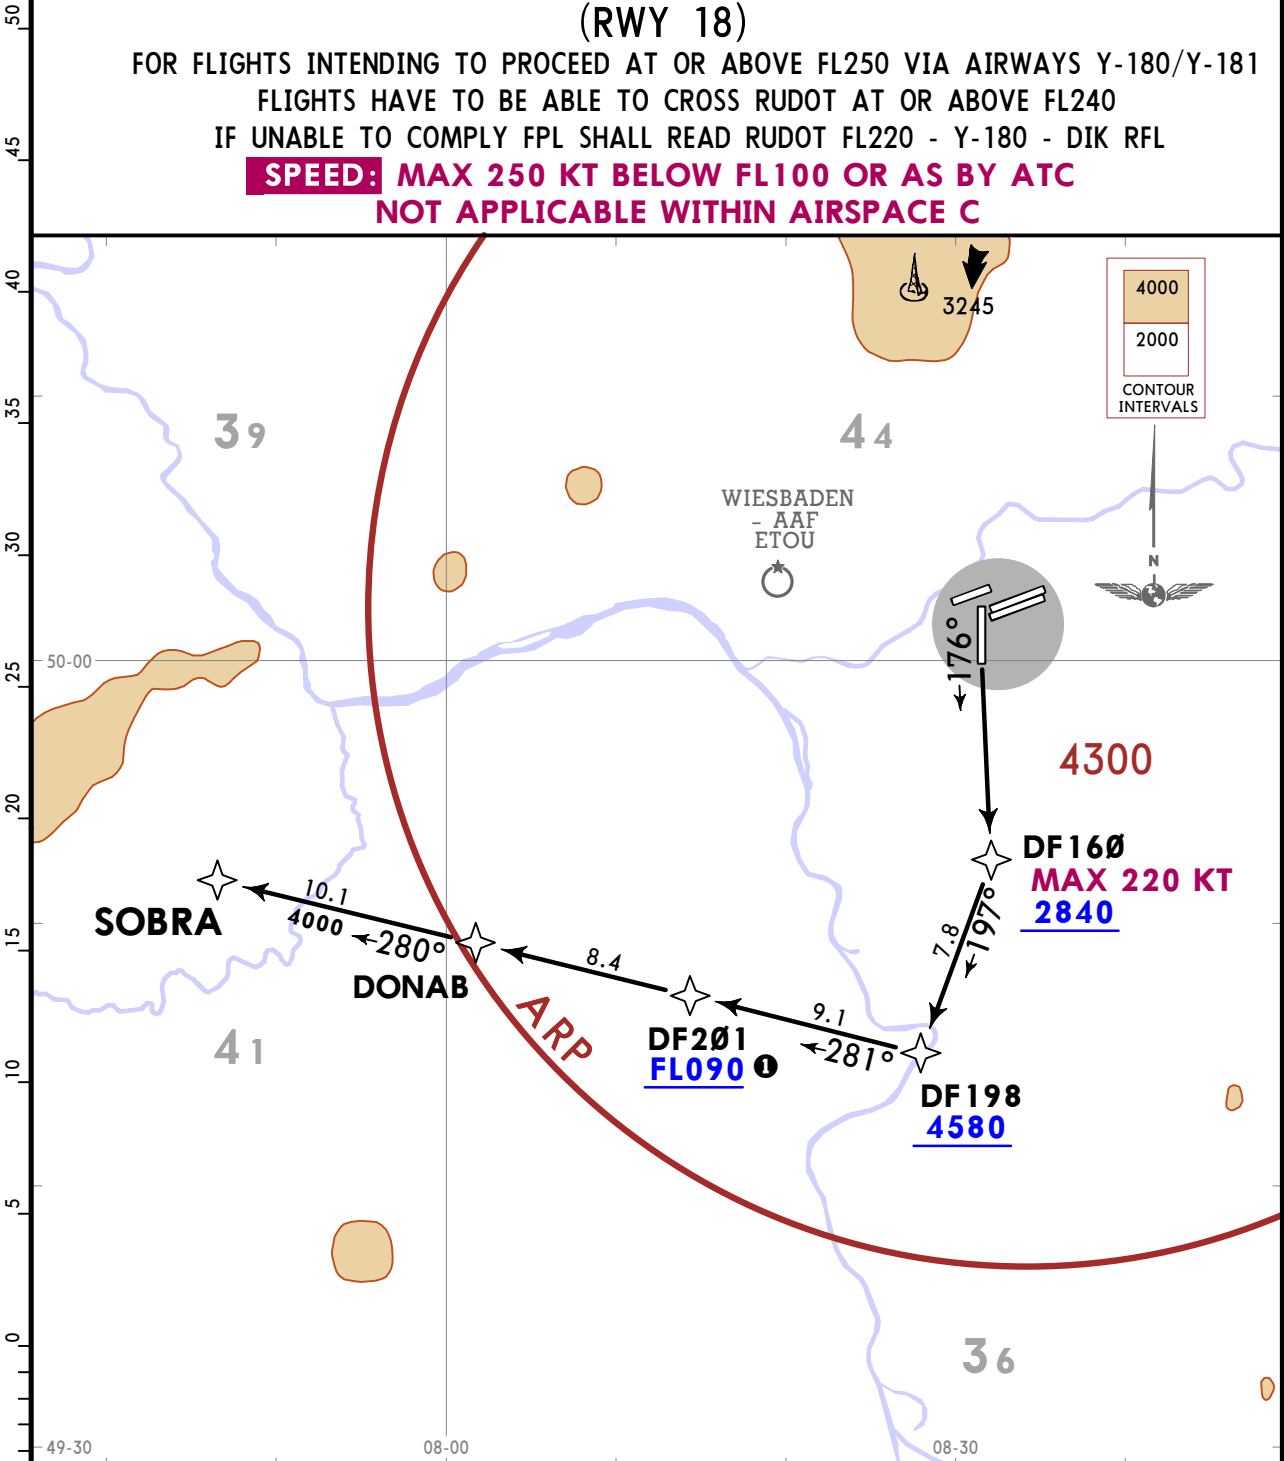

Initial climb clearance 4000
ROUTING
(800+) - DF160 (K220-; 2840+) - DF198 (4580+) - DF201 (FL090+) ❶ - DONAB - SOBRA.
❶ If unable to comply, advise EDDF DELIVERY prior to start-up and EXPECT routing via SID ULKIG 3L.

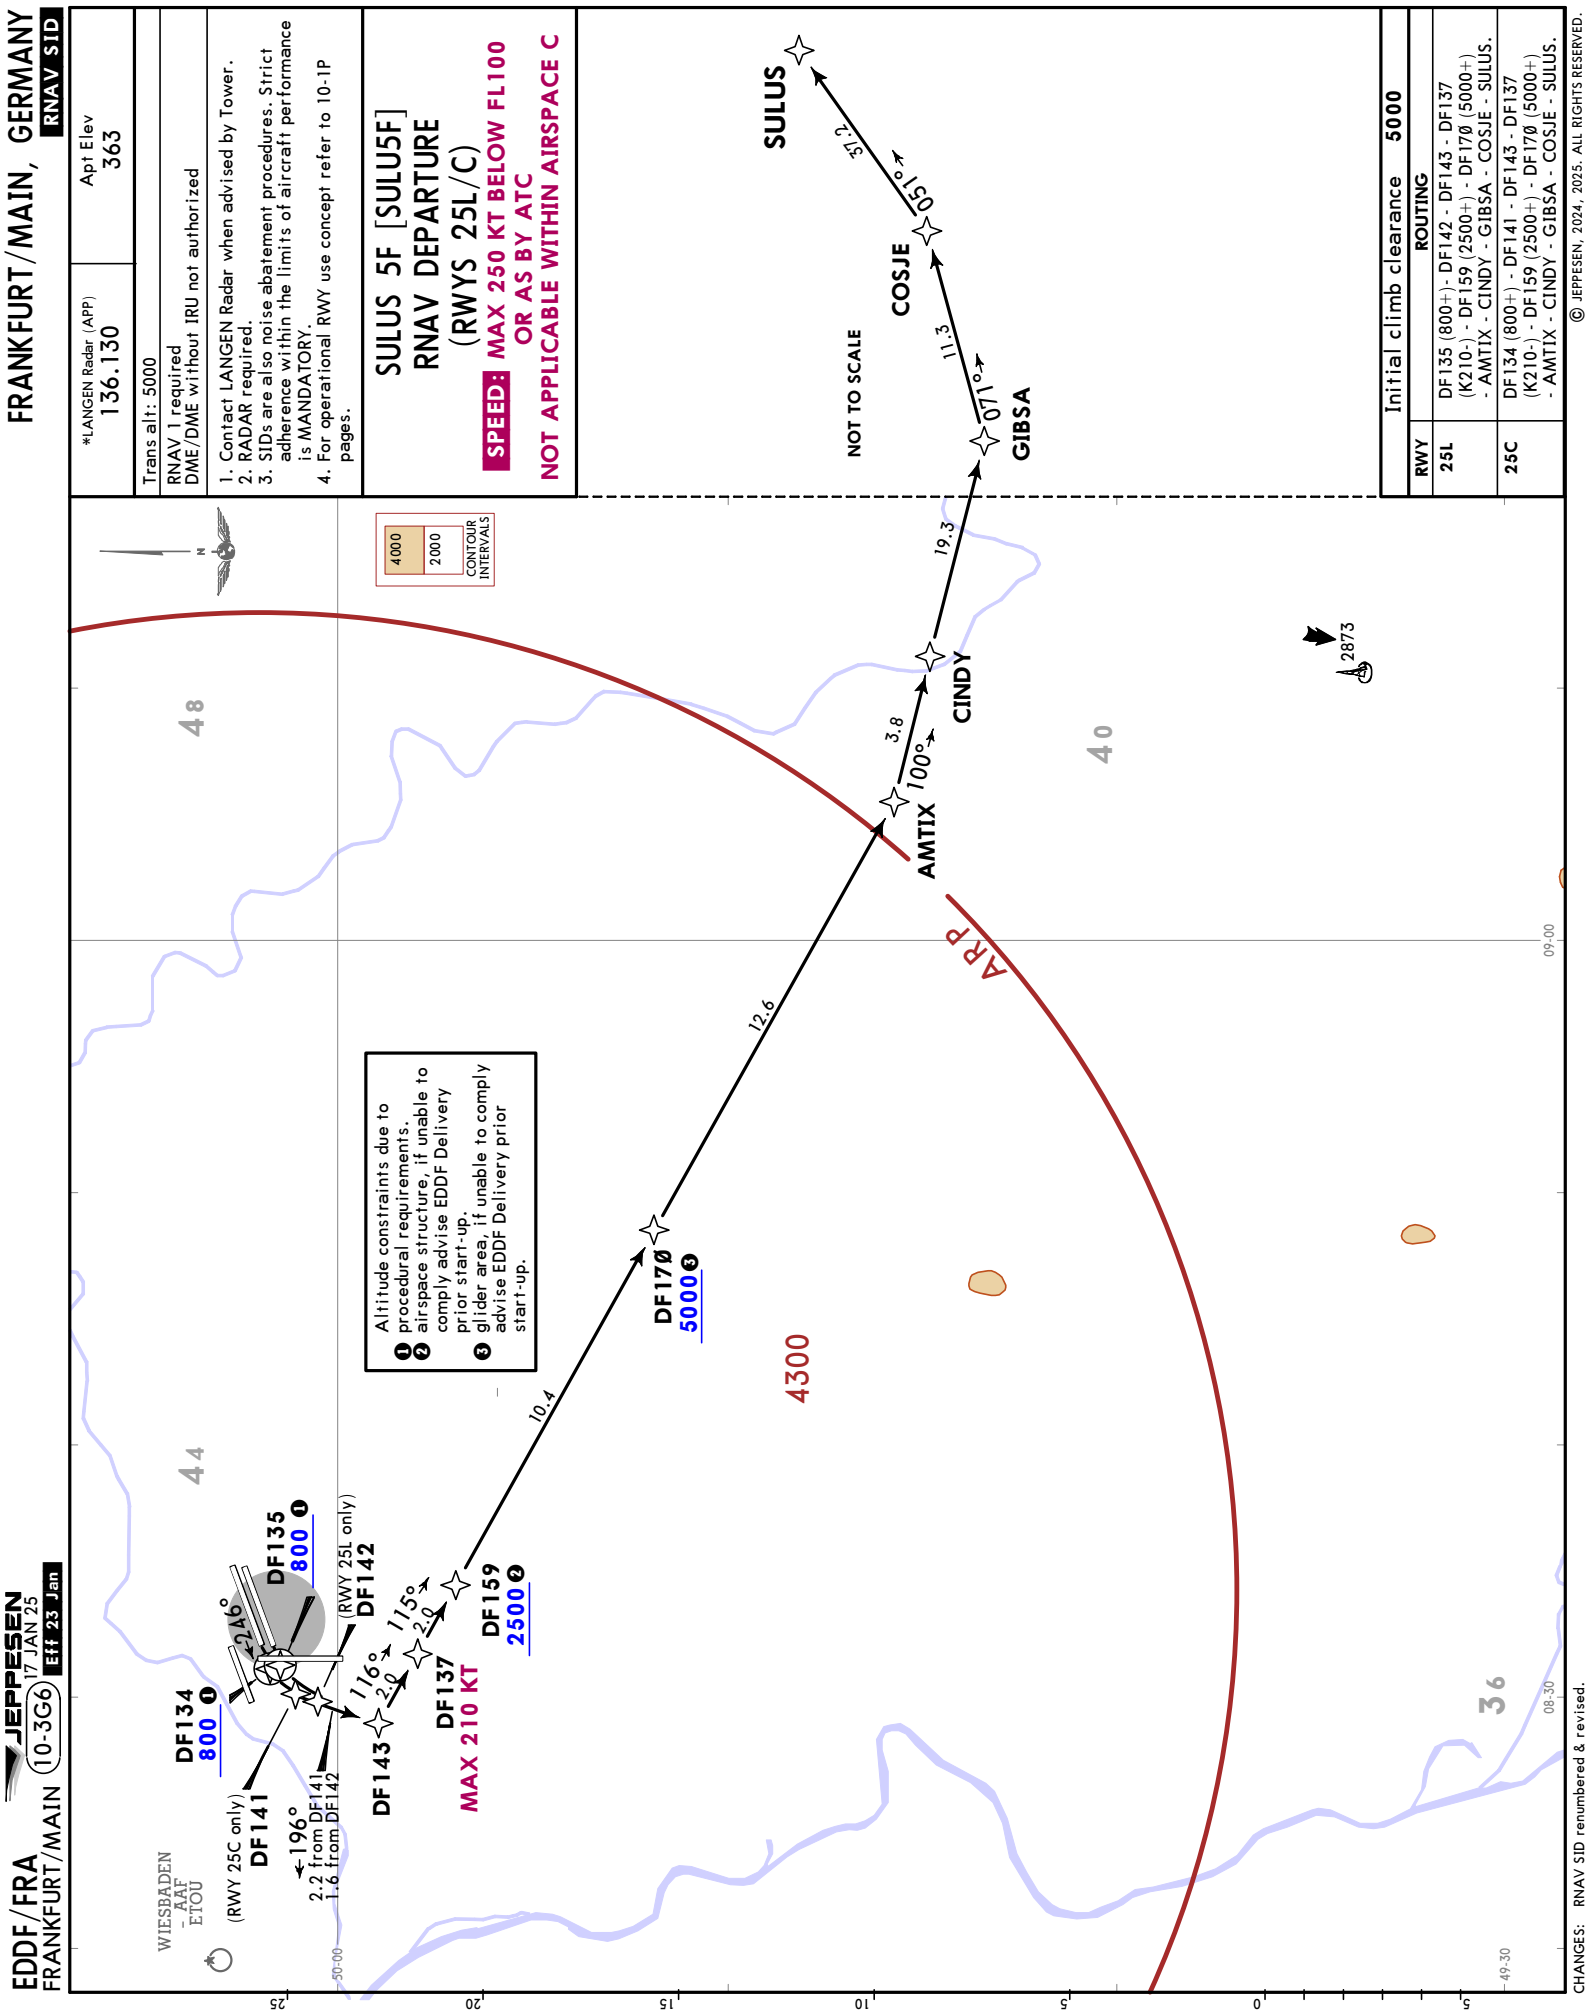

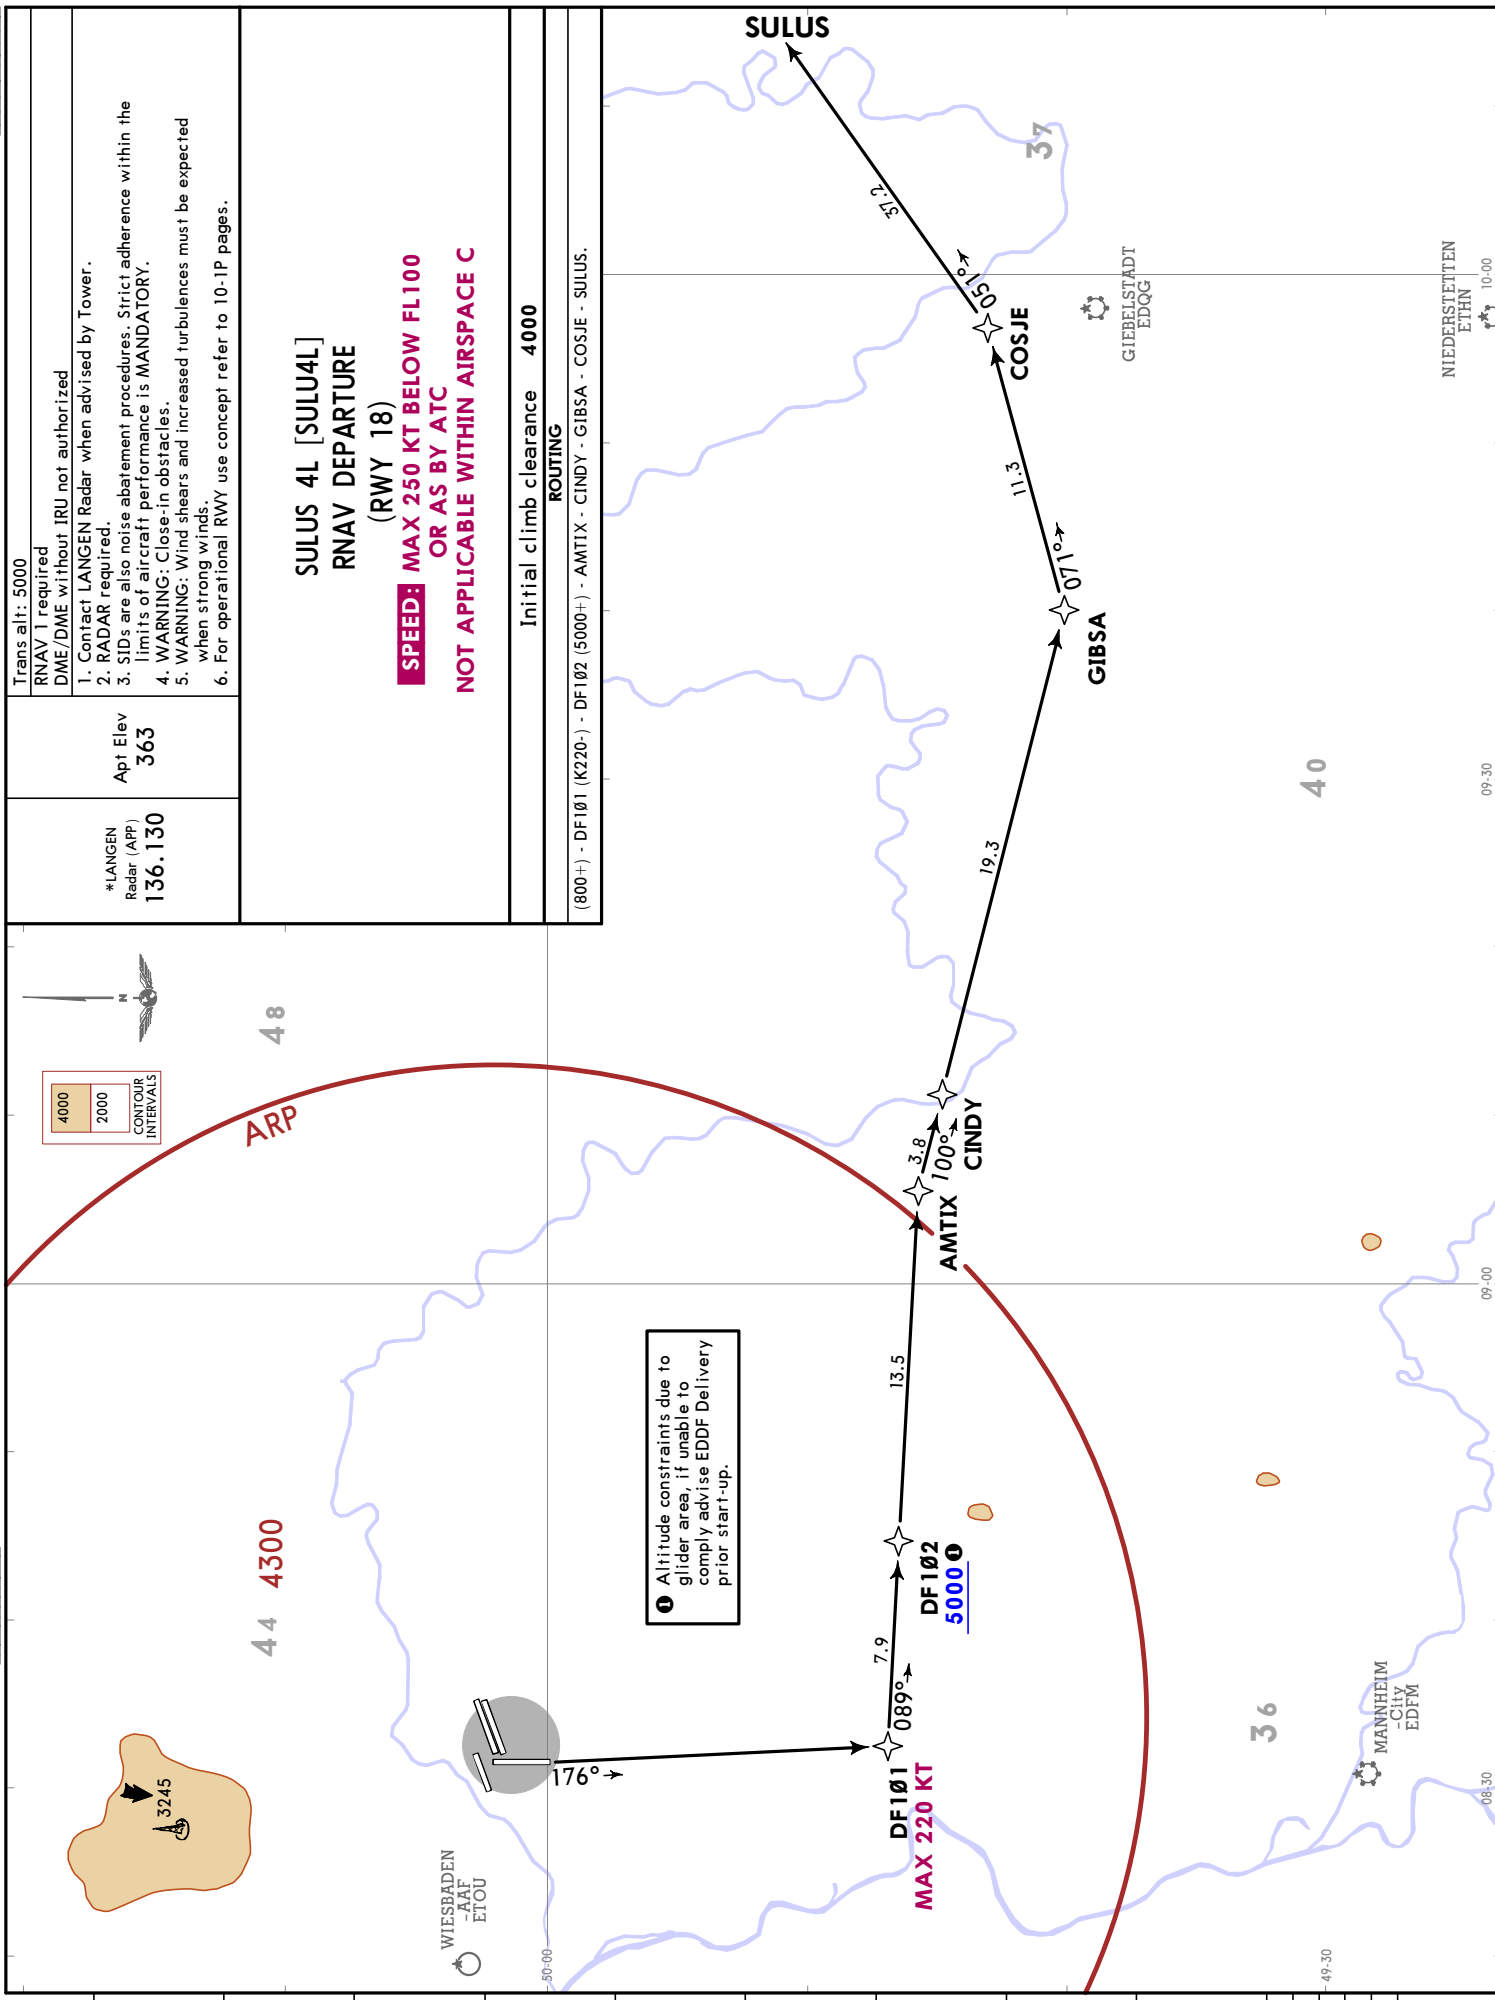




EDDF/FRA
FRANKFURT/MAIN

JEPPESEN FRANKFURT/MAIN, GERMANY
5 JUL 24 10-3G9 Eff 11 Jul RNAV SID

*LANGEN Radar (APP) 120.155	Apt Elev 363
Trans alt: 5000	
RNAV 1 required GPS, DME/DME/IRU	
DME/DME without IRU not authorized	
1. Contact LANGEN Radar when advised by Tower.	
2. RADAR required.	
3. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY.	
4. Altitude constraints due to operational requirements. If unable to comply advise FRANKFURT Delivery prior to start-up	
5. For operational RWY use concept refer to 10-1P pages.	

TOBAK 8F [TOBA8F]
TOBAK 3G [TOBA3G]
RNAV DEPARTURES
(RWYS 25L/C)
NOT FOR FLIGHTS CONTINUING VIA AIRWAY Z-10
**SPEED: MAX 250 KT BELOW FL100
OR AS BY ATC**
NOT APPLICABLE WITHIN AIRSPACE C

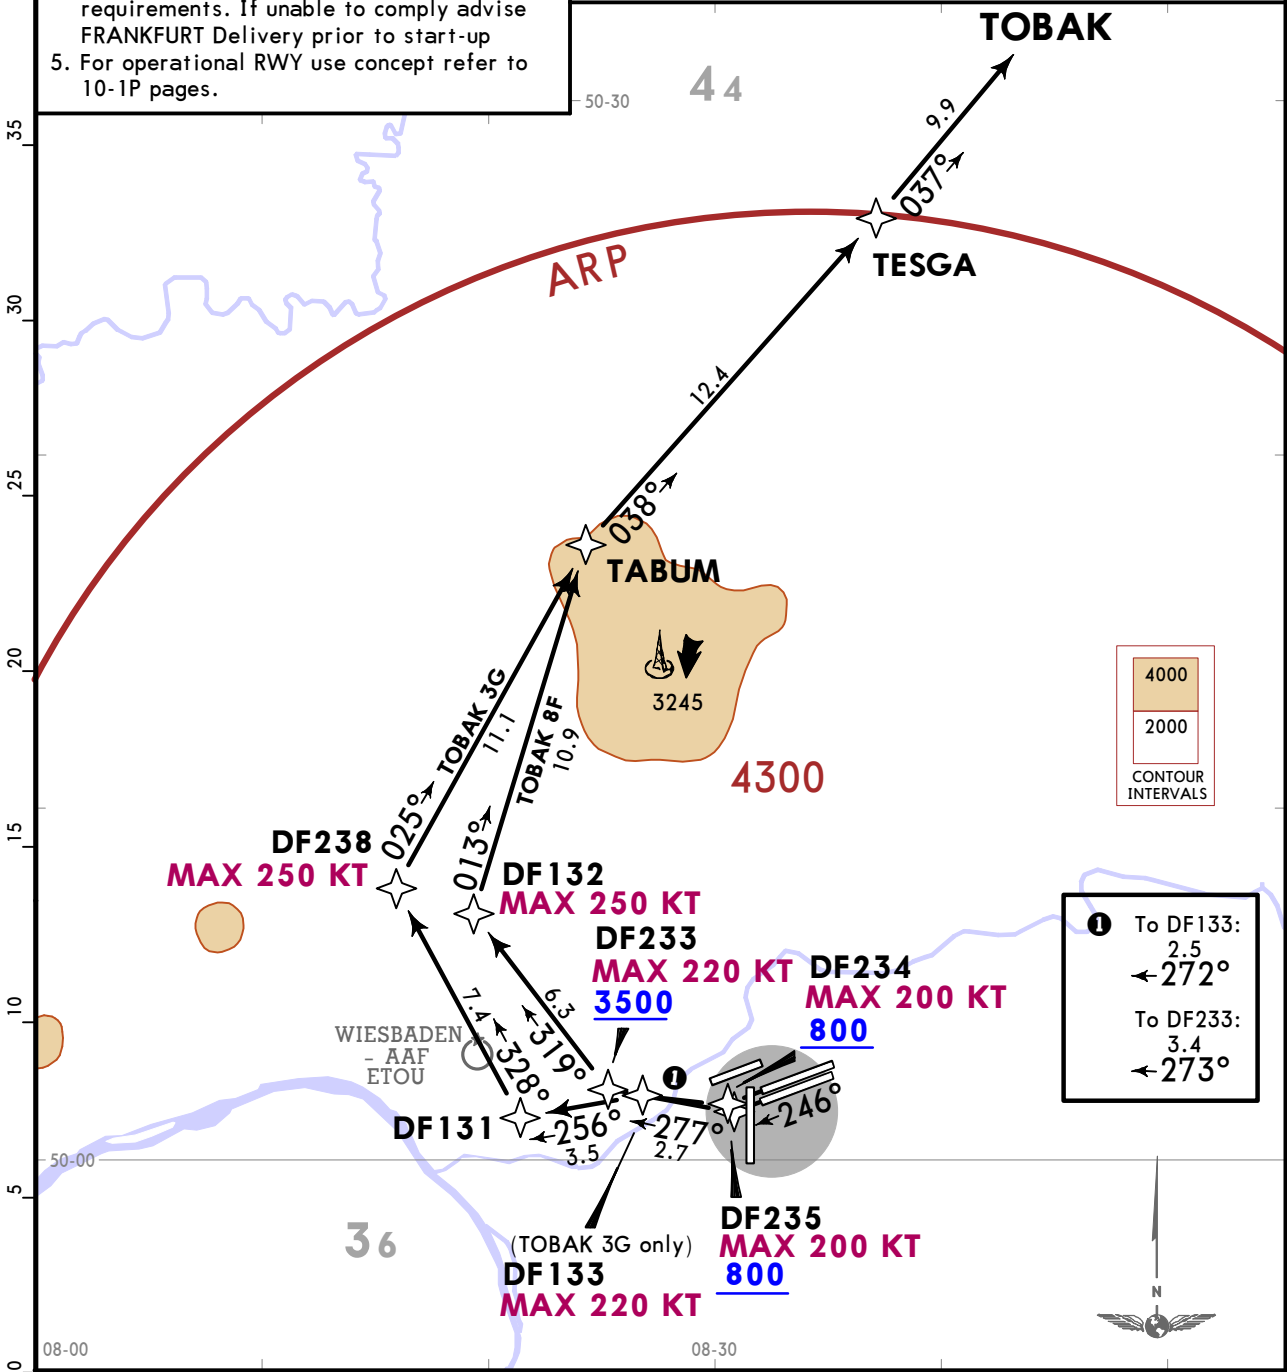

Initial climb clearance 5000		
SID	RWY	ROUTING
TOBAK 8F	25L	DF235 (K200-; 800+) - DF233 (K220-; 3500+) - DF132 (K250-) - TABUM - TESGA - TOBAK.
	25C	DF234 (K200-; 800+) - DF233 (K220-; 3500+) - DF132 (K250-) - TABUM - TESGA - TOBAK.
TOBAK 3G	25L	DF235 (K200-; 800+) - DF133 (K220-) - DF131 - DF238 (K250-) - TABUM - TESGA - TOBAK.
	25C	DF234 (K200-; 800+) - DF133 (K220-) - DF131 - DF238 (K250-) - TABUM - TESGA - TOBAK.


EDDF/FRA
FRANKFURT/MAIN

JEPPESEN
17 JAN 25 10-3H Eff 23 Jan

FRANKFURT/MAIN, GERMANY
RNAV SID

*LANGEN Radar (APP) 120.155	Apt Elev 363	Trans alt: 5000
		RNAV 1 required GPS, DME/DME/IRU DME/DME without IRU not authorized
		1. Contact LANGEN Radar when advised by Tower. 2. RADAR required. 3. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY. 4. Altitude constraints due to operational requirements. 5. For operational RWY use concept refer to 10-1P pages.

TOBAK 4N [TOBA4N]
RNAV DEPARTURE (RWYS 25L/C)
NOT FOR FLIGHTS CONTINUING VIA AIRWAY Z-10
SPEED: MAX 250 KT BELOW FL100
OR AS BY ATC
NOT APPLICABLE WITHIN AIRSPACE C

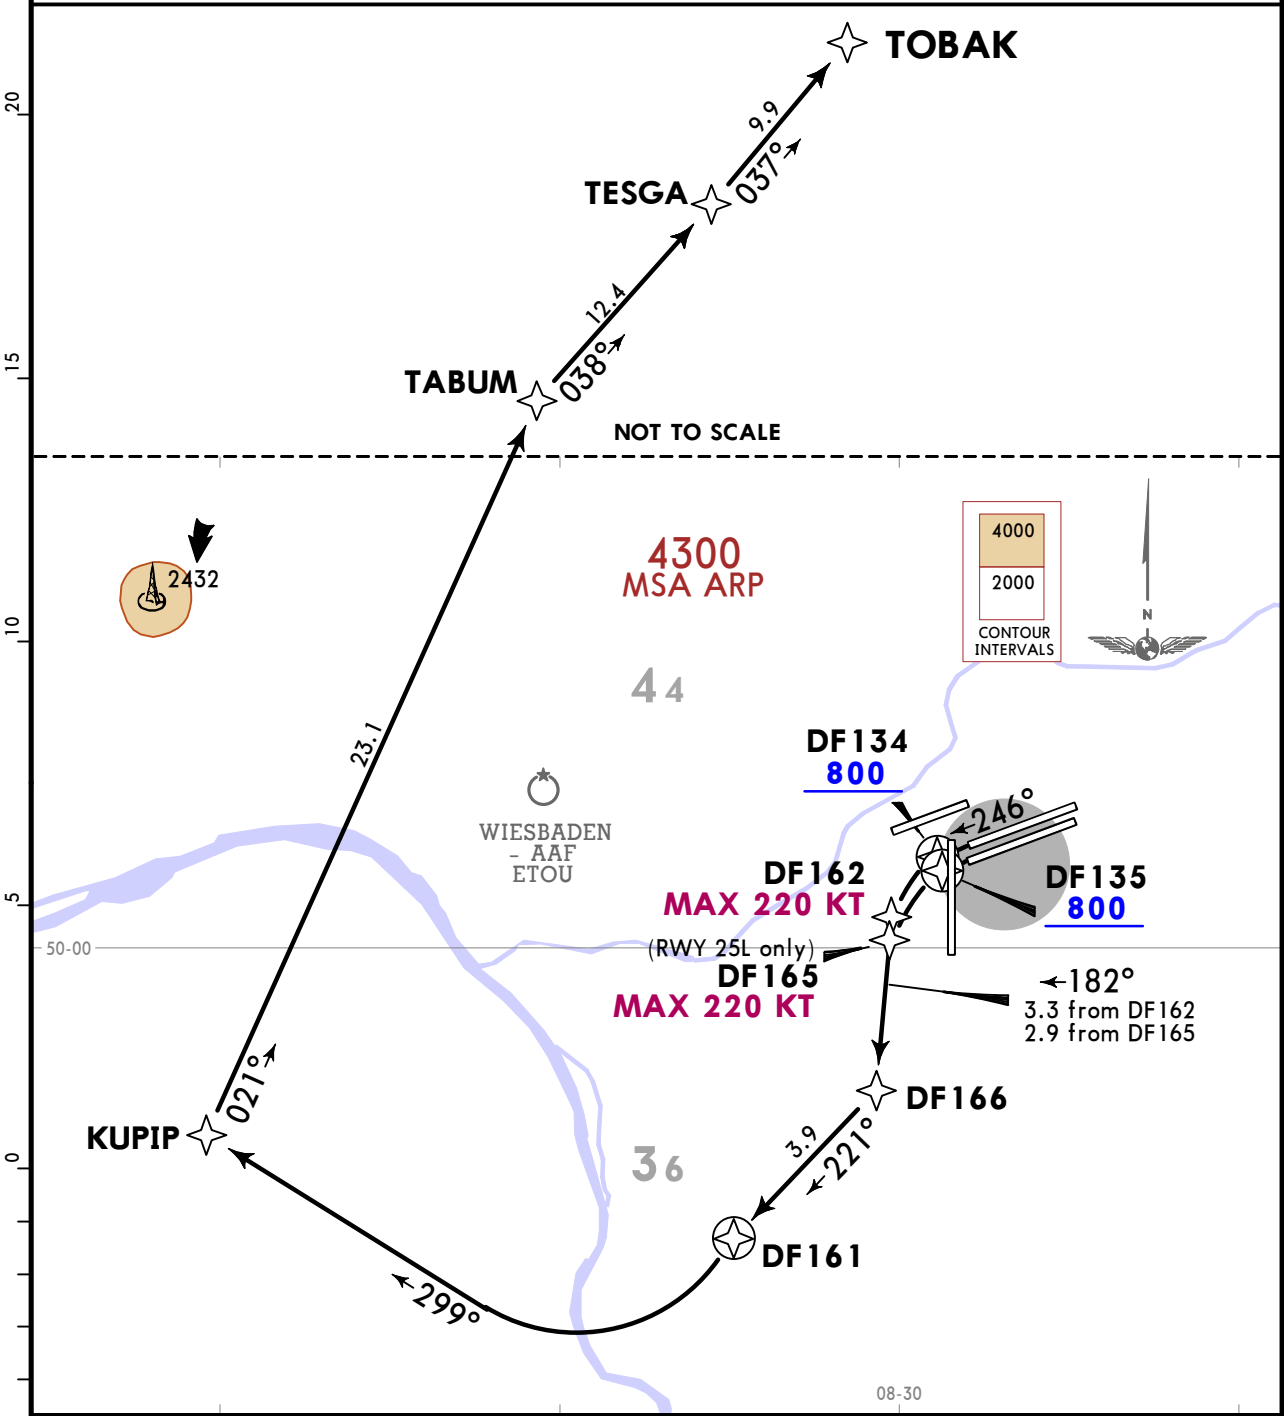

Initial climb clearance 5000	
RWY	ROUTING
25L	DF135 (800+) - DF165 (K220-) - DF166 - DF161 - KUPIP - TABUM - TESGA - TOBAK.
25C	DF134 (800+) - DF162 (K220-) - DF166 - DF161 - KUPIP - TABUM - TESGA - TOBAK.

EDDF/FRA
FRANKFURT/MAIN

JEPPESSEN
17 JAN 25 10-3J Eff 23 Jan

FRANKFURT/MAIN, GERMANY
RNAV SID

*LANGEN
Radar (APP)
120.155

Apt Elev
363

Trans alt: 5000


RNAV 1 required DME/DME without IRU not authorized

1. Contact LANGEN Radar when advised by Tower. 2. RADAR required.
3. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY.
4. For operational RWY use concept refer to 10-1P pages.
5. WARNING: Close-in obstacles.
6. WARNING: Wind shears and increased turbulences must be expected when strong winds.
7. Do not turn before DER.

TOBAK 4R [TOBA4R]
RNAV DEPARTURE (RWY 18)
BY ATC

NOT FOR FLIGHTS CONTINUING VIA AIRWAY Z-10

SPEED: MAX 250 KT BELOW FL100 OR AS BY ATC
NOT APPLICABLE WITHIN AIRSPACE C

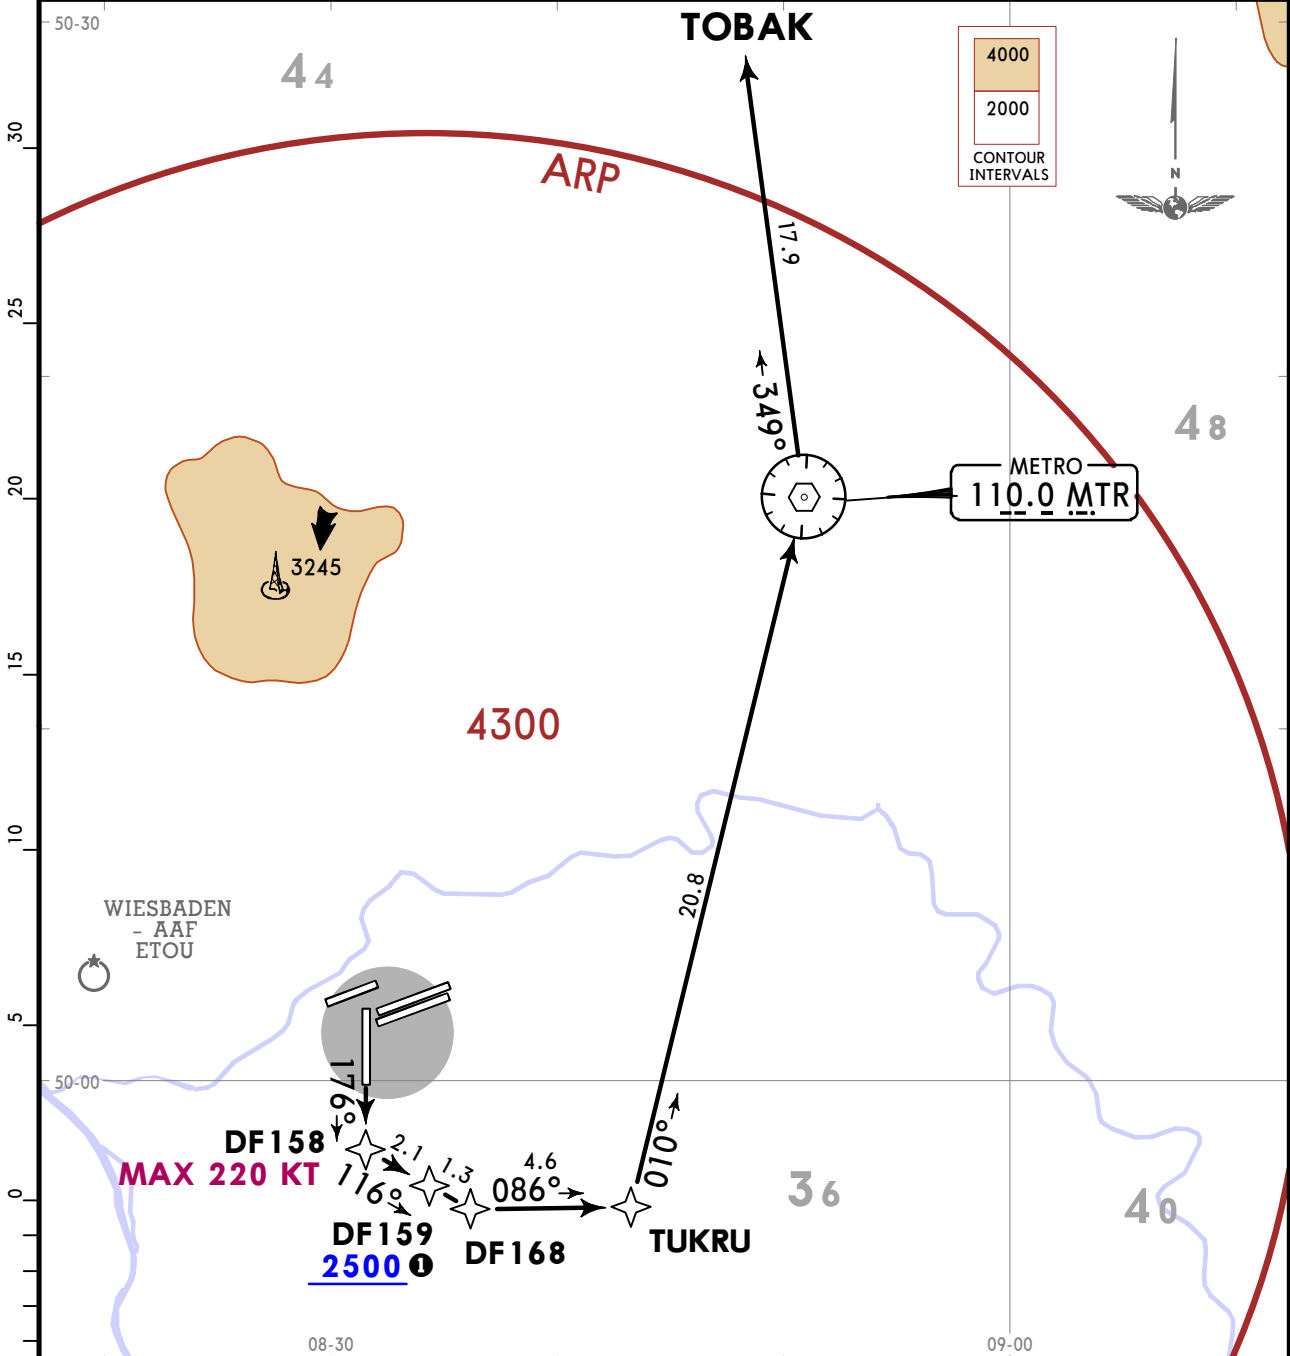

Initial climb clearance 4000

ROUTING


(800+) - DF158 (K220-) - DF159 (2500+ ①) - DF168 - TUKRU - MTR - TOBAK.

① If unable to comply, advise EDDF DELIVERY prior to start-up.

EDDF/FRA
FRANKFURT/MAIN

JEPPesen
17 JAN 25 10-3J1 Eff 23 Jan

FRANKFURT/MAIN, GERMANY
RNAV SID

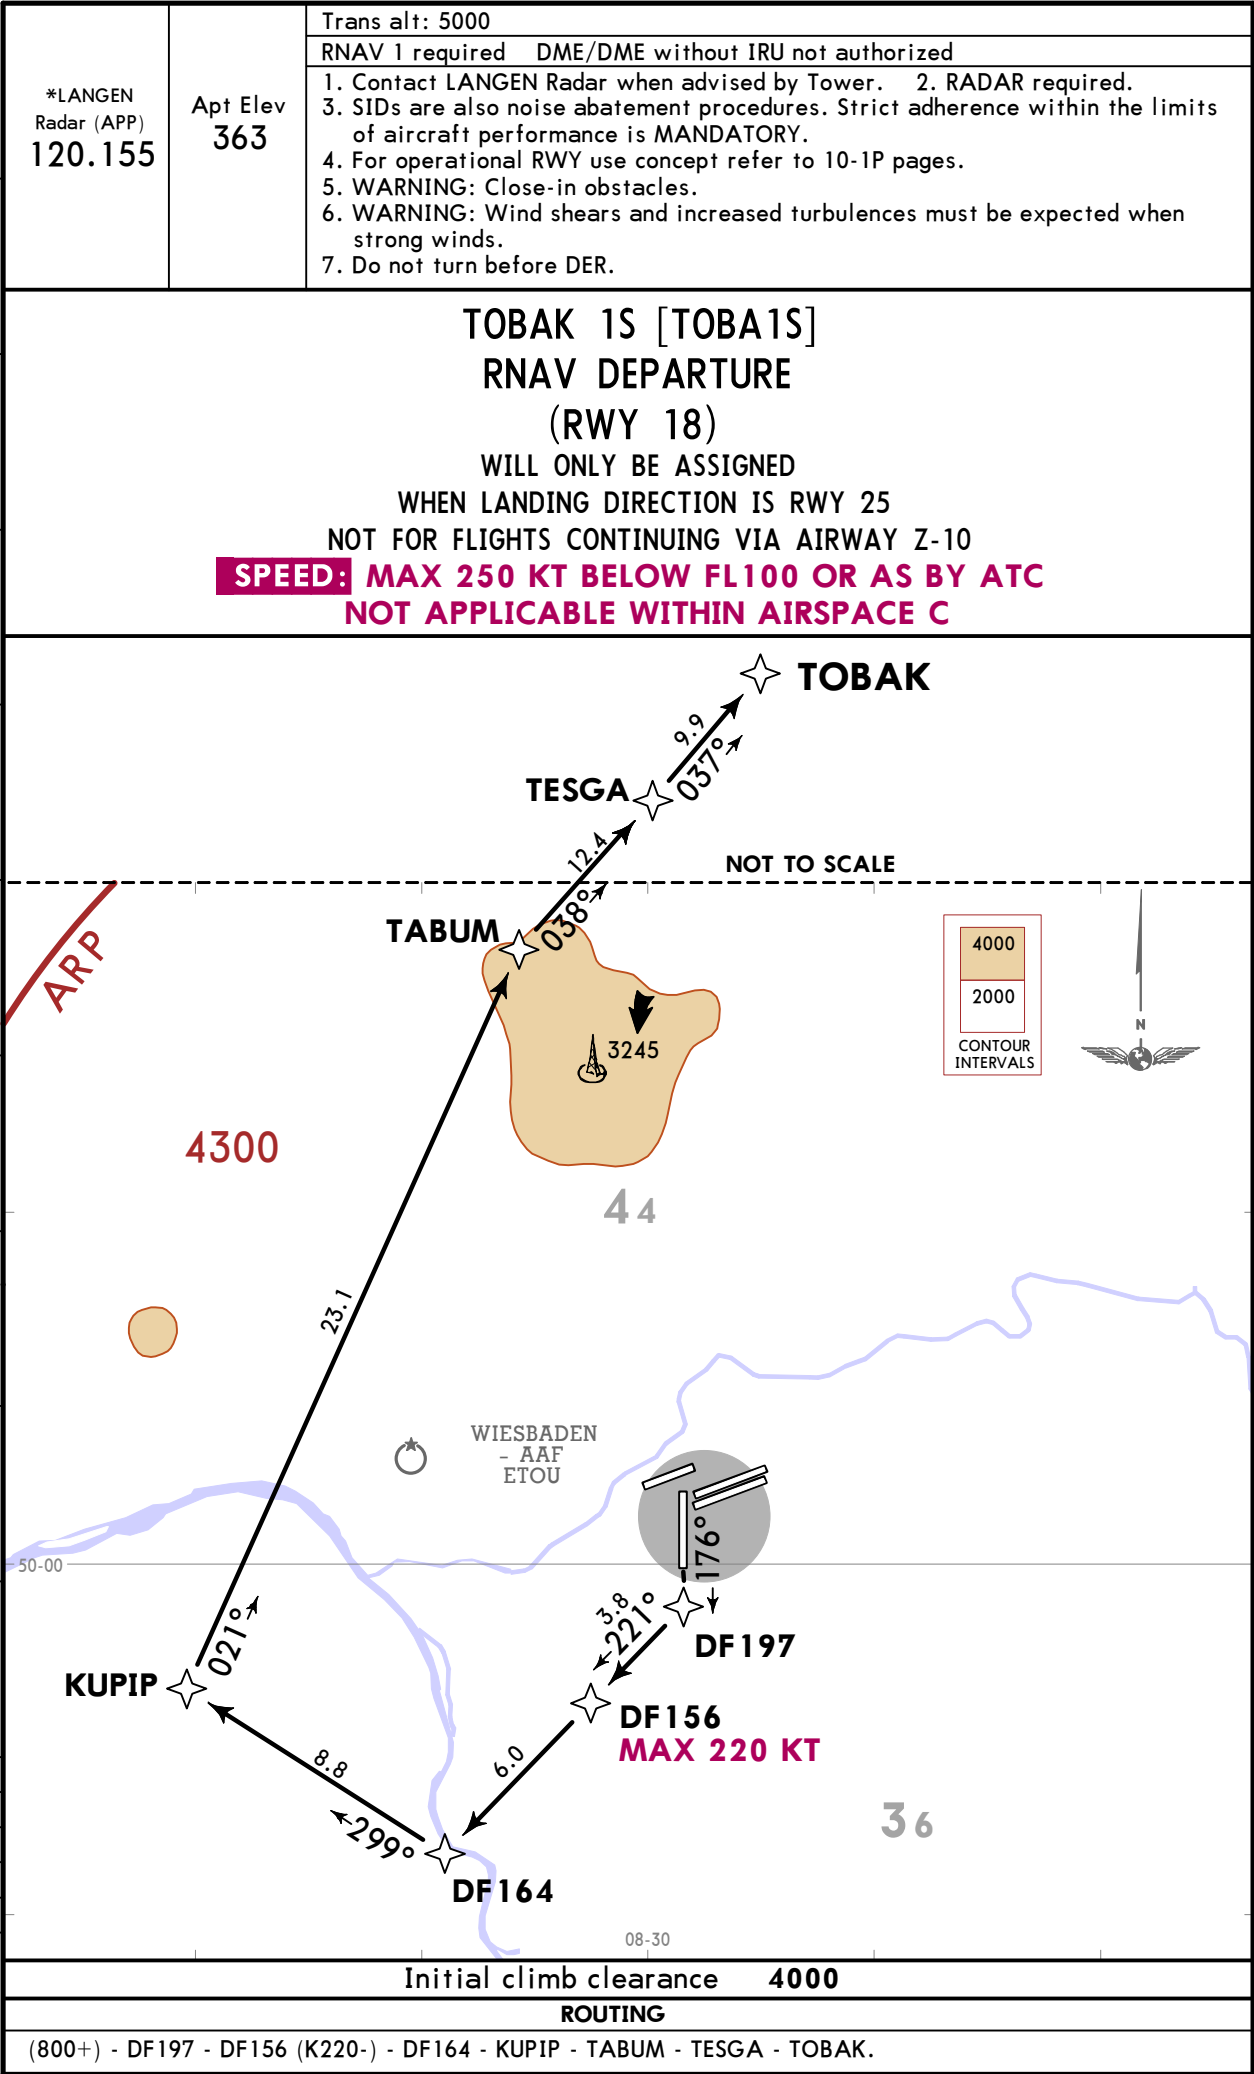

EDDF/FRA
FRANKFURT/MAIN


JEPPESEN FRANKFURT/MAIN, GERMANY
17 JAN 25 10-3K Eff 23 Jan RNAV SID

*LANGEN Radar (APP) 136.130	Trans alt: 5000 RNAV 1 required DME/DME without IRU not authorized
Apt Elev 363	1. Contact LANGEN Radar when advised by Tower. 2. RADAR required. 3. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY. 4. For operational RWY use concept refer to 10-1P pages. 5. WARNING: Close-in obstacles. 6. WARNING: Wind shears and increased turbulences must be expected when strong winds. 7. Do not turn before DER.

TOBAK 8T [TOBA8T]
RNAV DEPARTURE
(RWY 18)

NOT FOR FLIGHTS CONTINUING VIA AIRWAY Z-10

SPEED: MAX 250 KT BELOW FL100 OR AS BY ATC
NOT APPLICABLE WITHIN AIRSPACE C

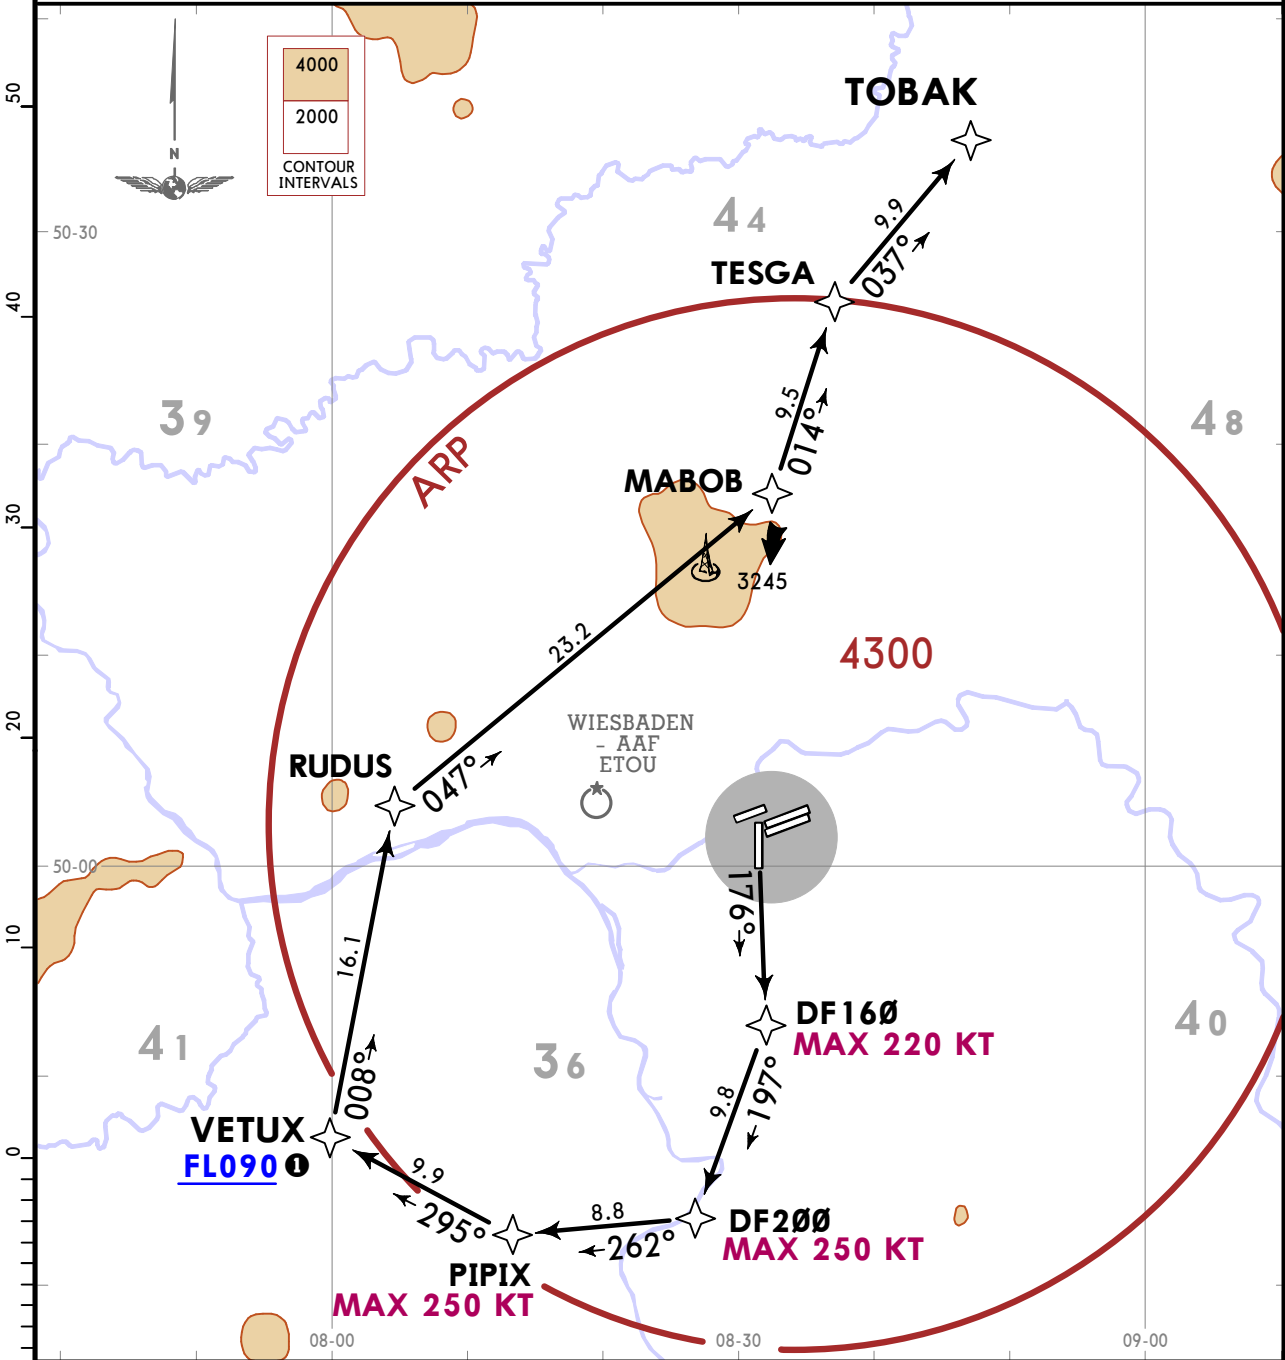

Initial climb clearance 4000	
ROUTING	
(800+) - DF160 (K220-) - DF200 (K250-) - PIPIX (K250-) - VETUX (FL090+)	① - RUDUS - MABOB - TESGA - TOBAK.
① If unable to comply, advise EDDF DELIVERY prior to start-up.	


EDDF / FRA
FRANKFURT / MAIN
17 JAN 25

10-3L

Eff 23 Jan

JEPPESSEN FRANKFURT/MAIN, GERMANY
5 (10-3L) **Eff 23 Jan** **RNAV SID**

RNAV SID

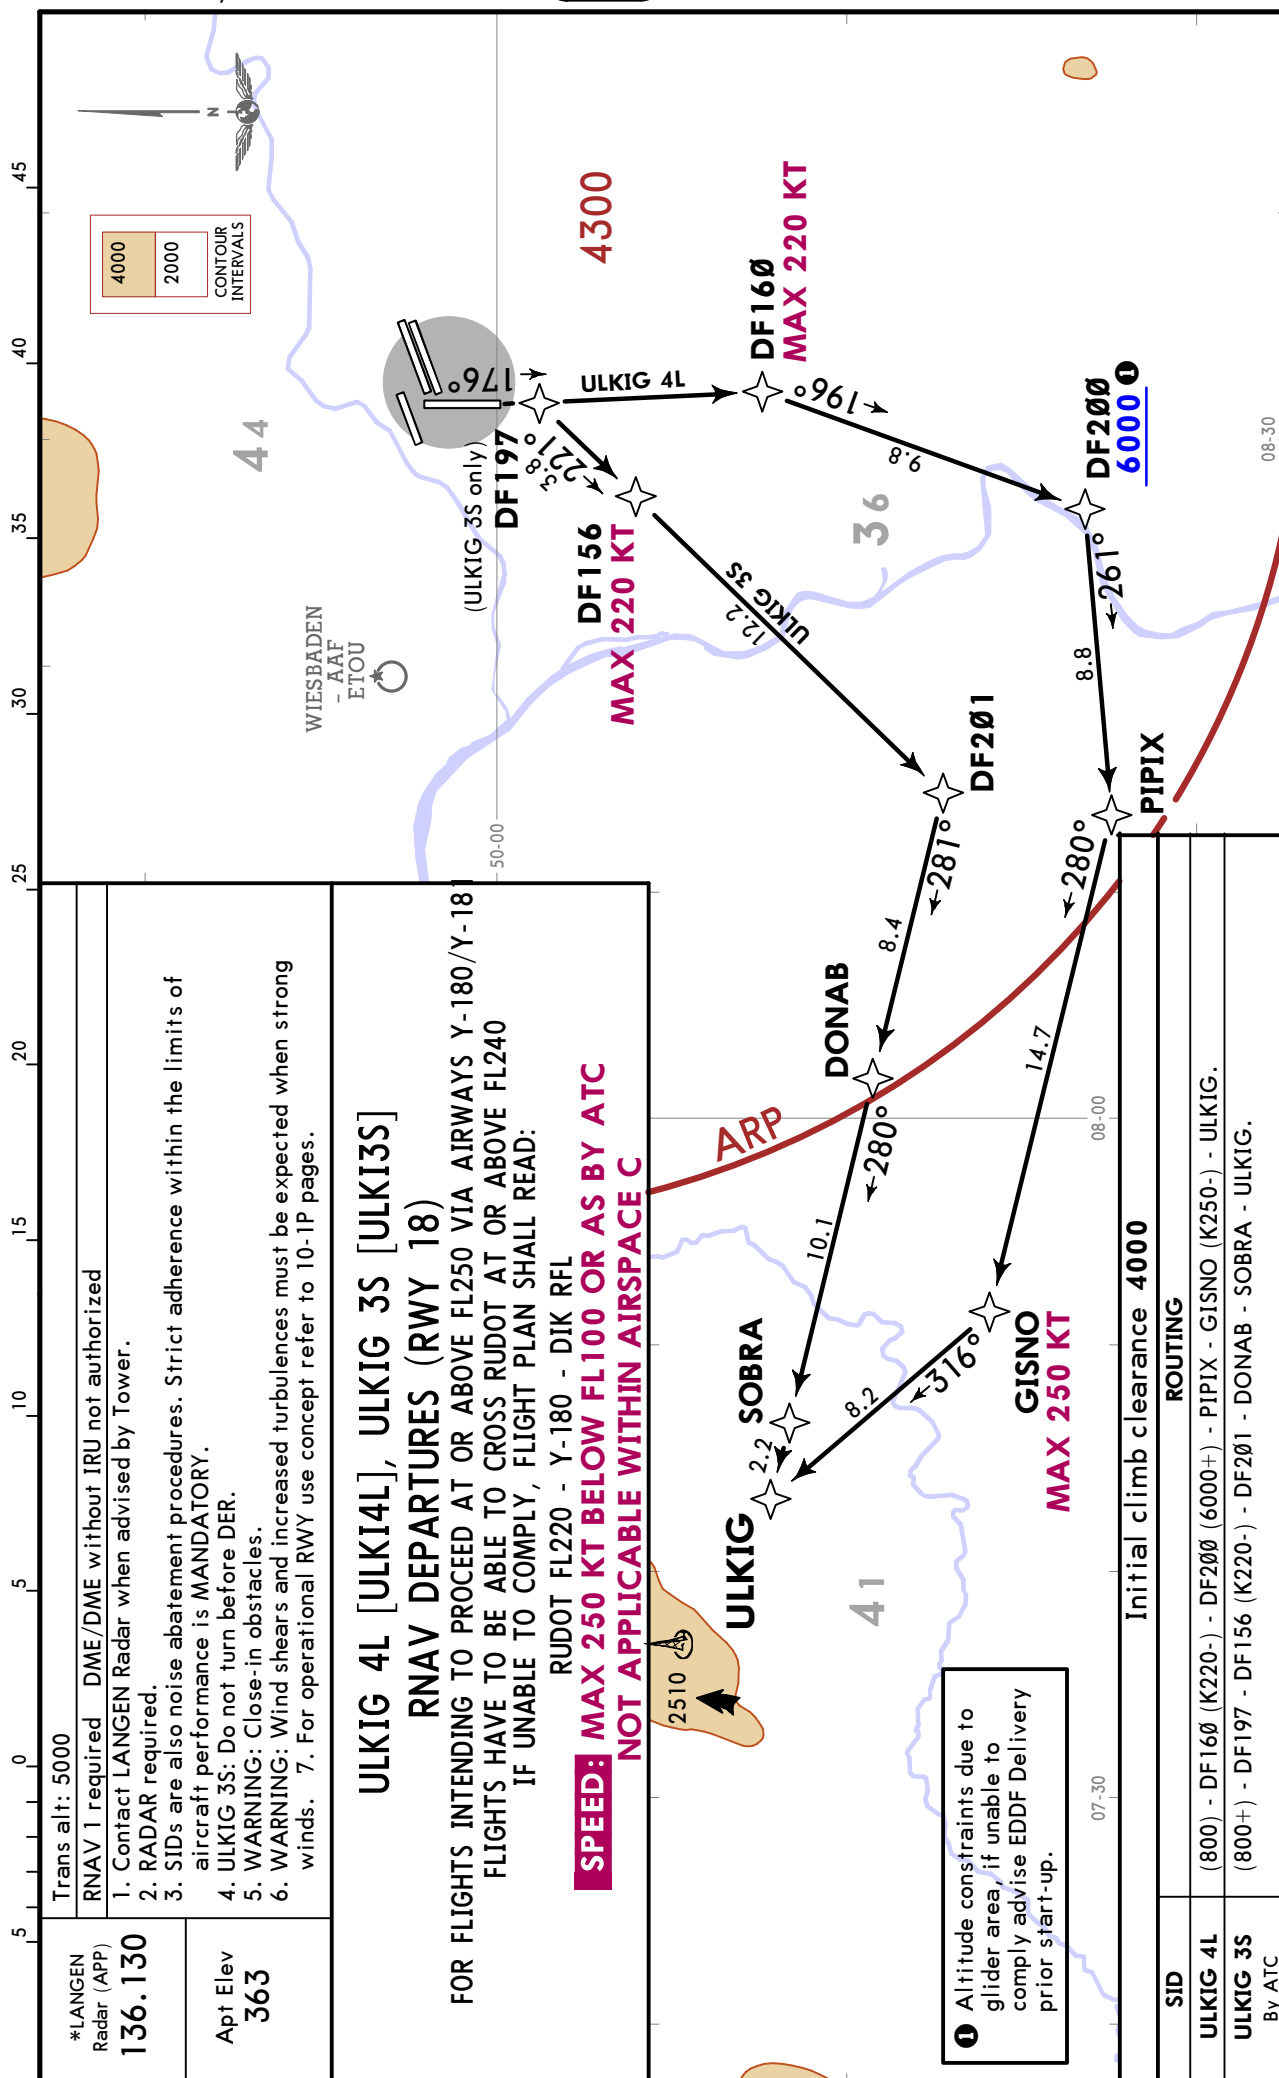


EDDF/FRA
FRANKFURT/MAIN

JEPPESSEN FRANKFURT/MAIN, GERMANY
4 AUG 23 **10-3L1** **Eff 10 Aug** **SID**

*LANGEN Radar 136.130	Apt Elev 363	Trans alt: 5000 1. Contact LANGEN Radar when advised by Tower. 2. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY. 3. WARNING: Close-in obstacles. 4. WARNING: Wind shears and increased turbulences must be expected when strong winds 5. For operational RWY use concept refer to 10-1P pages.
-----------------------------	-----------------	---

FRANKENSTEIN 1B (FKS 1B)
DEPARTURE
(RWY 18)
BY ATC

**SPEED: MAX 250 KT BELOW FL100
OR AS BY ATC
NOT APPLICABLE WITHIN AIRSPACE C**

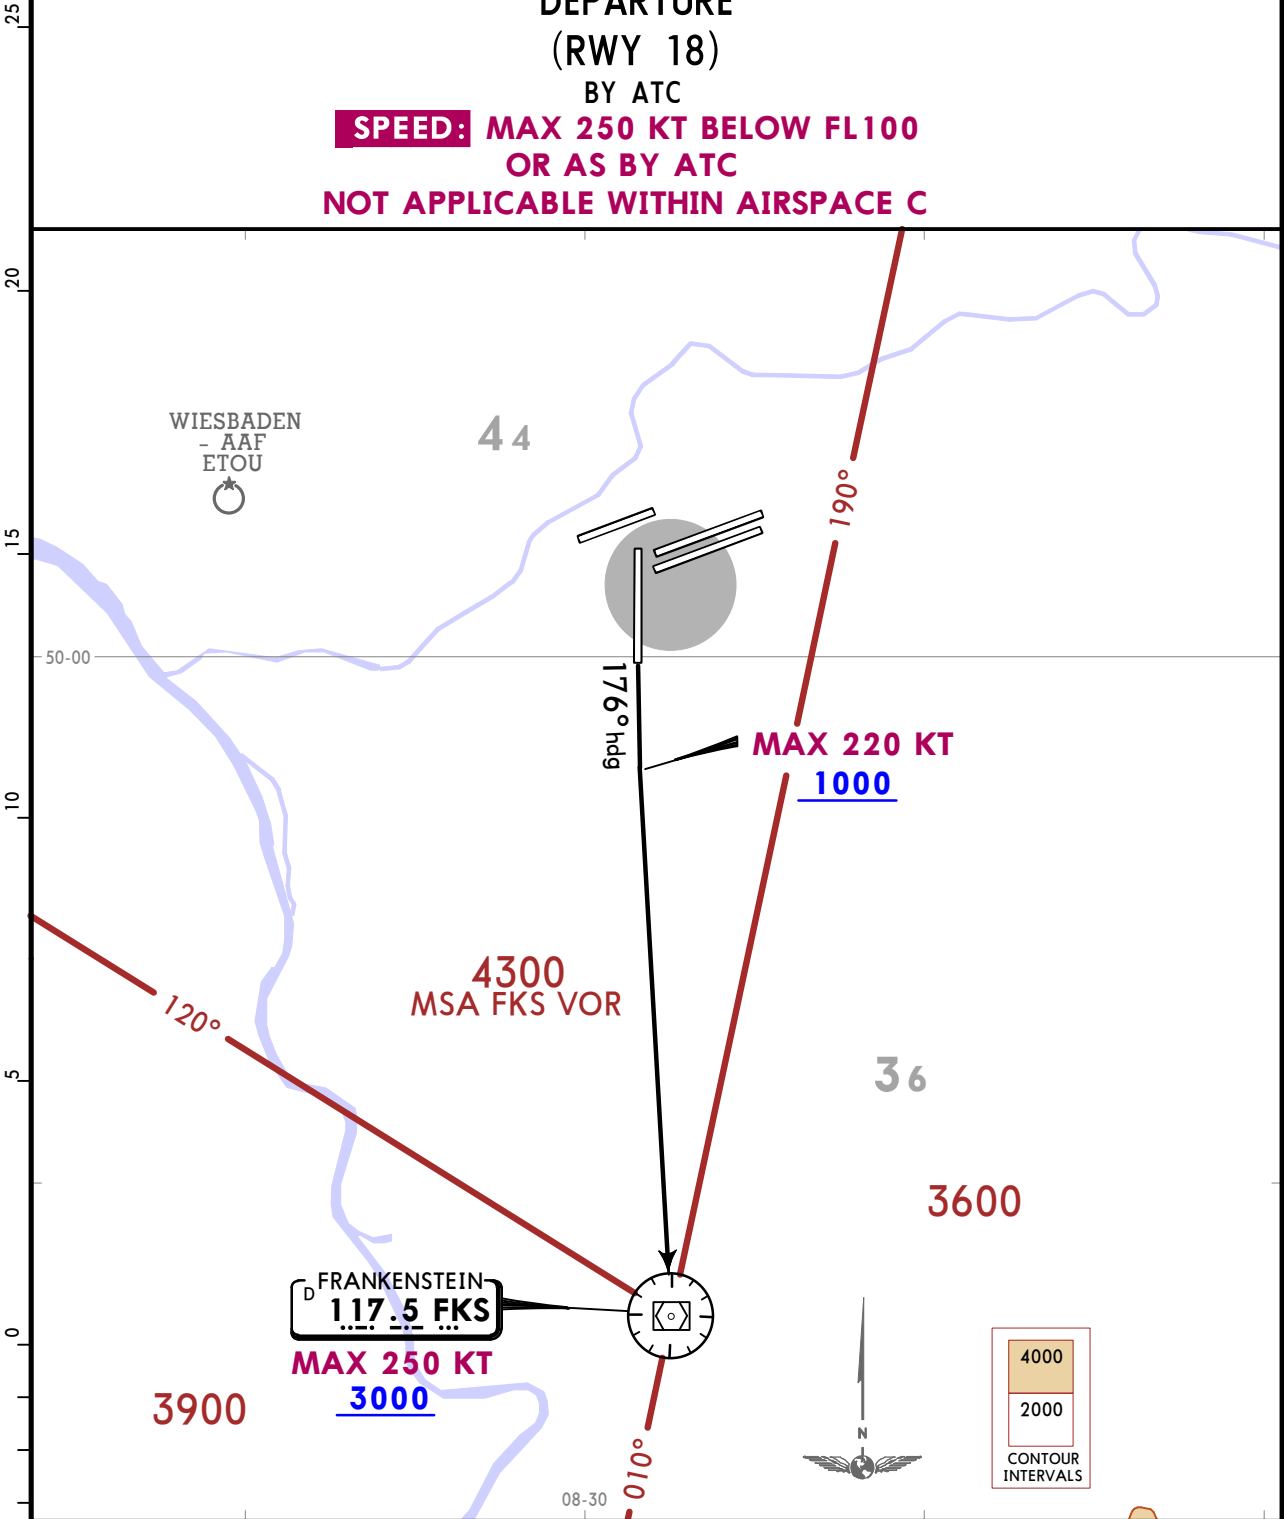

This SID requires a minimum climb gradient
of
3.5% until FKS.

Gnd speed-KT	75	100	150	200	250	300
3.5% V/V (fpm)	266	354	532	709	886	1063

Initial climb clearance **4000**

ROUTING

Climb on 176° heading to at or above 1000, direct to FKS.



EDDF/FRA
FRANKFURT/MAIN

JEPPESEN FRANKFURT/MAIN, GERMANY
5 JUL 24 10-3L5 Eff 11 Jul SID

*LANGEN
Radar (APP)
120.155


Apt Elev
363

Trans alt: 5000
1. Contact LANGEN Radar when advised by Tower.
2. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY.
3. For operational RWY use concept refer to 10-1P pages.

MARUN 5H

DEPARTURE (RWY 25L)

**SPEED: MAX 250 KT BELOW FL100
OR AS BY ATC
NOT APPLICABLE WITHIN AIRSPACE C**




MSA 117.5 FKS VOR

This SID requires minimum climb gradients of
8.5% (520 FT/NM) until passing 800, then
6.8% (415 FT/NM) until passing 6000 due to operational requirements.

Gnd speed-KT	75	100	150	200	250	300
6.8% V/V (fpm)	516	689	1033	1377	1722	2066
8.5% V/V (fpm)	646	861	1291	1722	2152	2582

If unable to comply advise FRANKFURT Delivery prior to start-up.

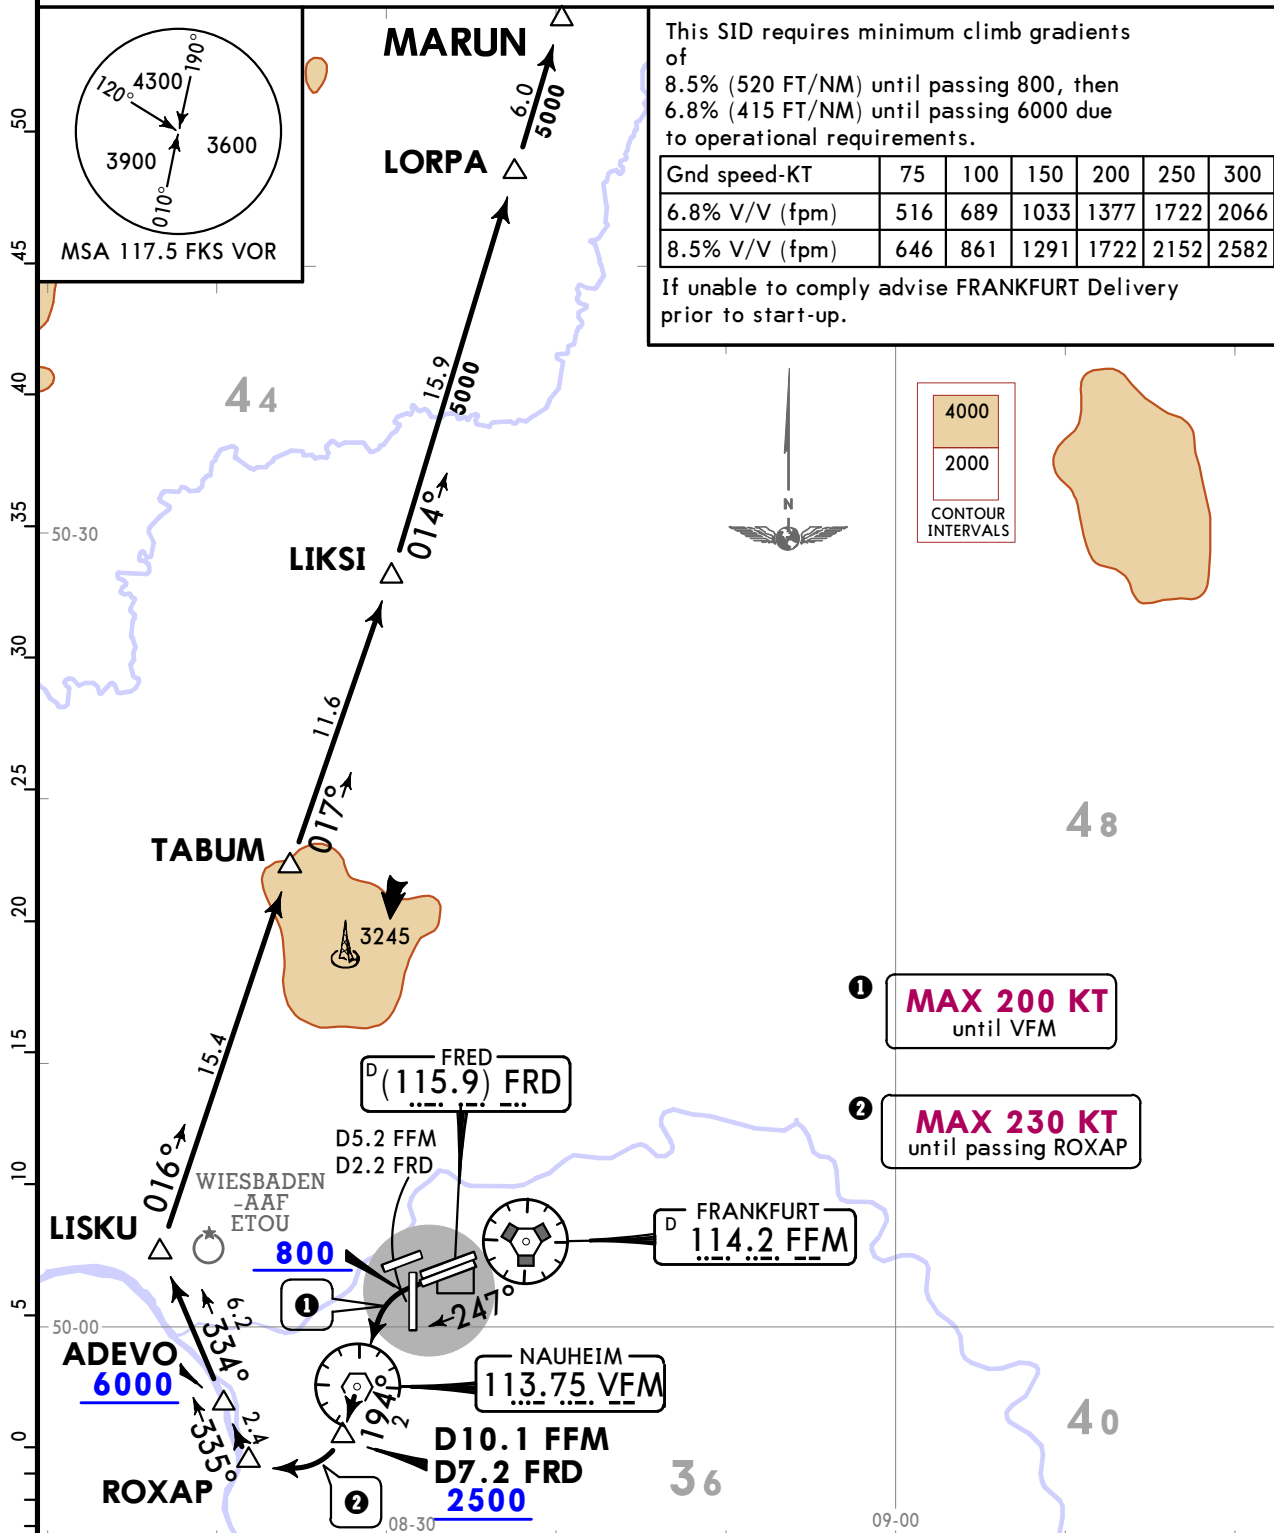

Initial climb clearance **FL070**

ROUTING

On runway track to D5.2 FFM/D2.2 FRD, turn LEFT direct to VFM, VFM R194 to D10.1 FFM/D7.2 FRD ③, turn RIGHT to ROXAP, to ADEVO, to LISKU, to TABUM, to LIKSI, to LORPA, to MARUN.

③ After D10.1 FFM/D7.2 FRD RNAV 5 equipment necessary.

EDDF/FRA
FRANKFURT/MAIN

JEPPesenFRANKFURT/MAIN, GERMANY
12 JUL 24 10-3M

SID

*LANGEN
Radar (APP)
120.155


Apt Elev
363

Trans alt: 5000
1. Contact LANGEN Radar when advised by Tower.
2. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY.
3. For operational RWY use concept refer to 10-1P pages.

MARUN 7M

DEPARTURE (RWY 25C)

SPEED: MAX 250 KT BELOW FL100
OR AS BY ATC
NOT APPLICABLE WITHIN AIRSPACE C




MSA 117.5 FKS VOR

This SID requires minimum climb gradients of
8.5% (520 FT/NM) until passing 800, then
6.8% (415 FT/NM) until passing 6000 due to operational requirements.

Gnd speed-KT	75	100	150	200	250	300
6.8% V/V (fpm)	516	689	1033	1377	1722	2066
8.5% V/V (fpm)	646	861	1291	1722	2152	2582

If unable to comply advise FRANKFURT Delivery prior to start-up.

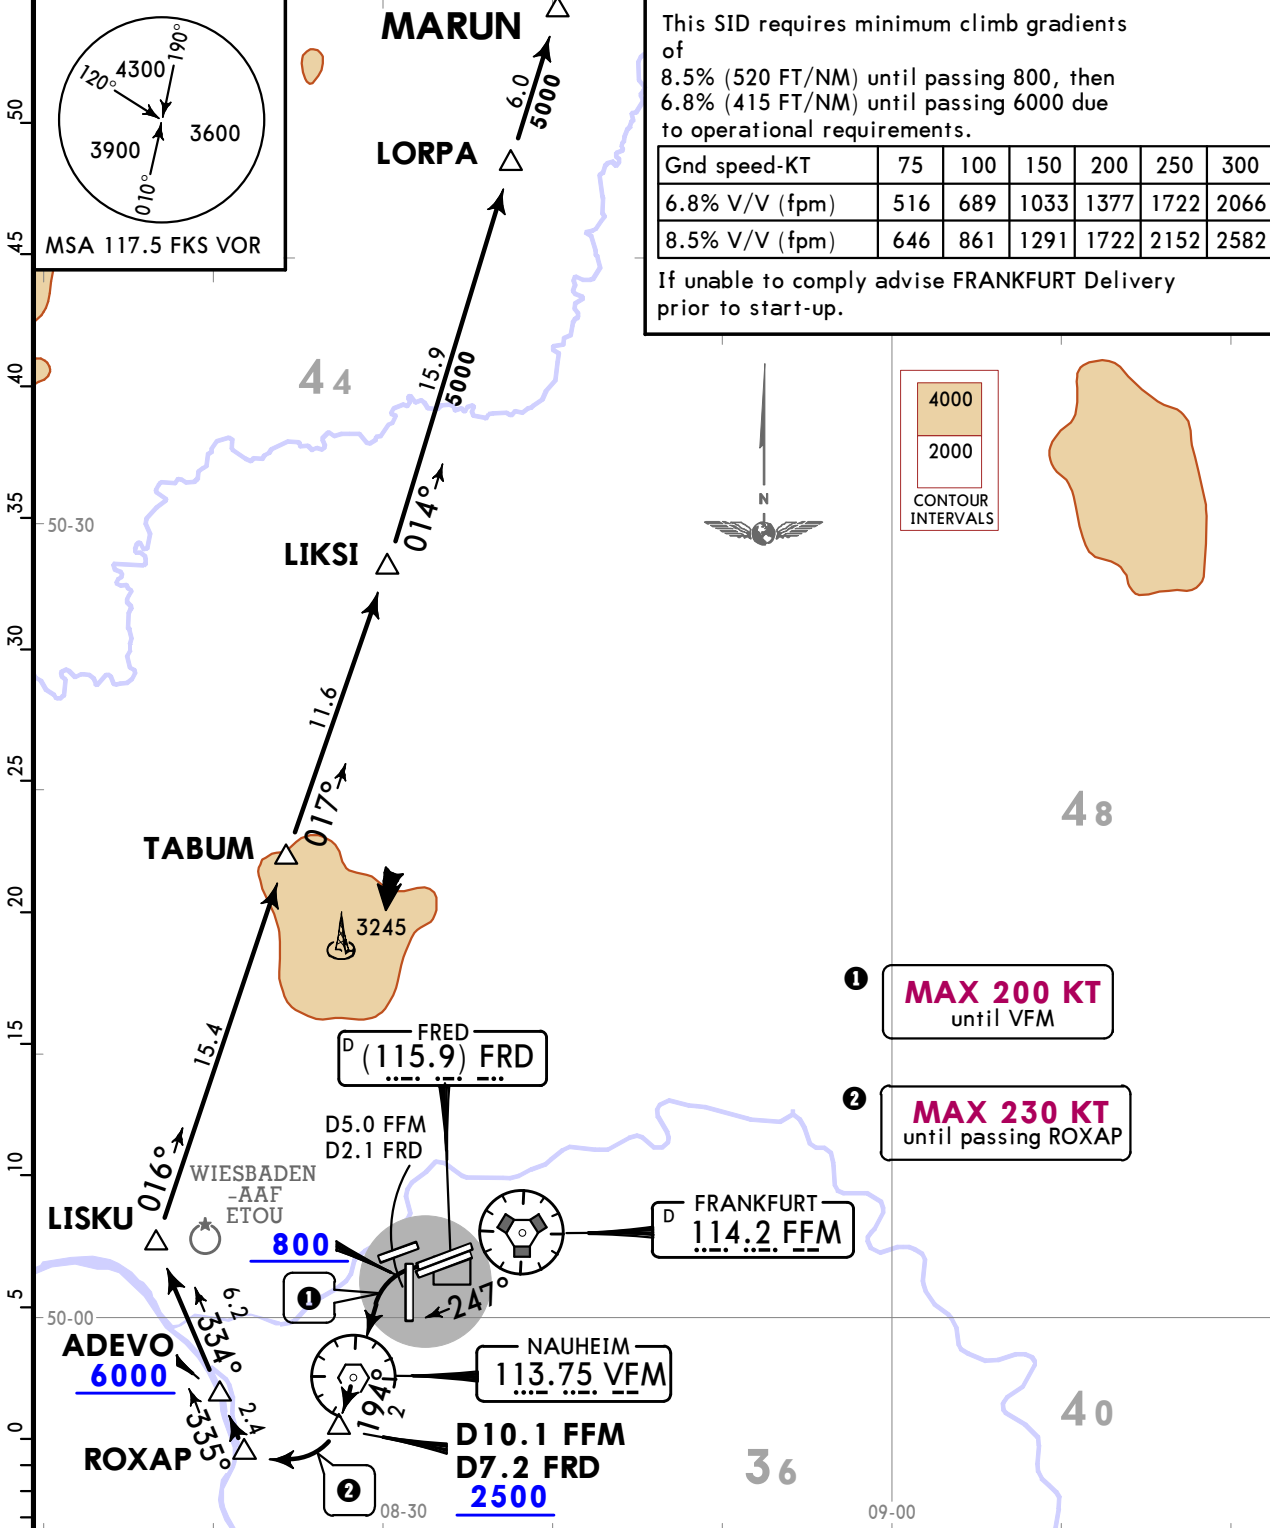

Initial climb clearance **FL070**

ROUTING

On runway track to D5.0 FFM/D2.1 FRD, turn LEFT direct to VFM, VFM R194 to D10.1 FFM/D7.2 FRD ③, turn RIGHT to ROXAP, to ADEVO, to LISKU, to TABUM, to LIKSI, to LORPA, to MARUN.

③ After D10.1 FFM/D7.2 FRD RNAV 5 equipment necessary.



EDDF/FRA
FRANKFURT/MAIN

JEPPesen
12 JUL 24 10-3N


FRANKFURT/MAIN, GERMANY
SID


*LANGEN Radar (APP) 120.155	Apt Elev 363	Trans alt: 5000 1. Contact LANGEN Radar when advised by Tower. 2. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY. 3. WARNING: Close-in obstacles. 4. For operational RWY use concept refer to 10-1P pages.
-----------------------------------	-----------------	---

METRO 6C (MTR 6C)
DEPARTURE
(RWYS 07C/R)
BY ATC
**SPEED: MAX 250 KT BELOW FL100
OR AS BY ATC**
NOT APPLICABLE WITHIN AIRSPACE C

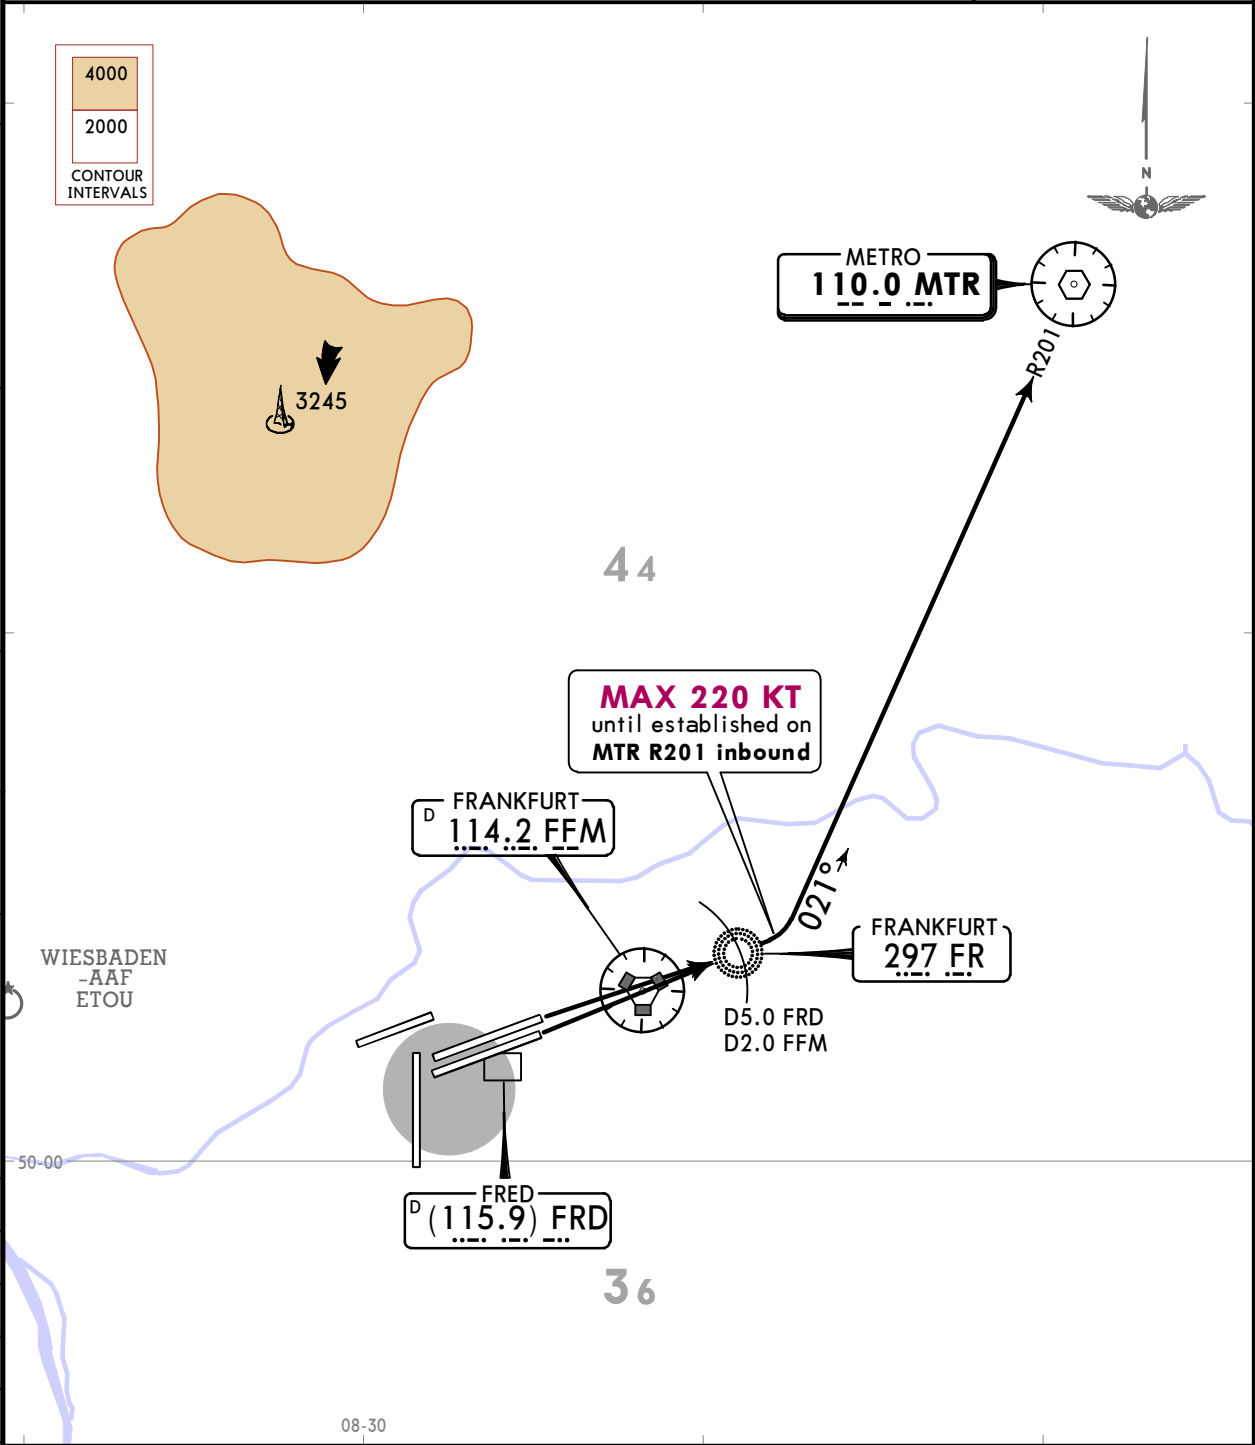

Initial climb clearance	5000
ROUTING	
Climb on runway track to 800, direct to FR (D5.0 FRD/D2.0 FFM outbound), turn LEFT IMMEDIATELY, intercept MTR R201 inbound to MTR.	

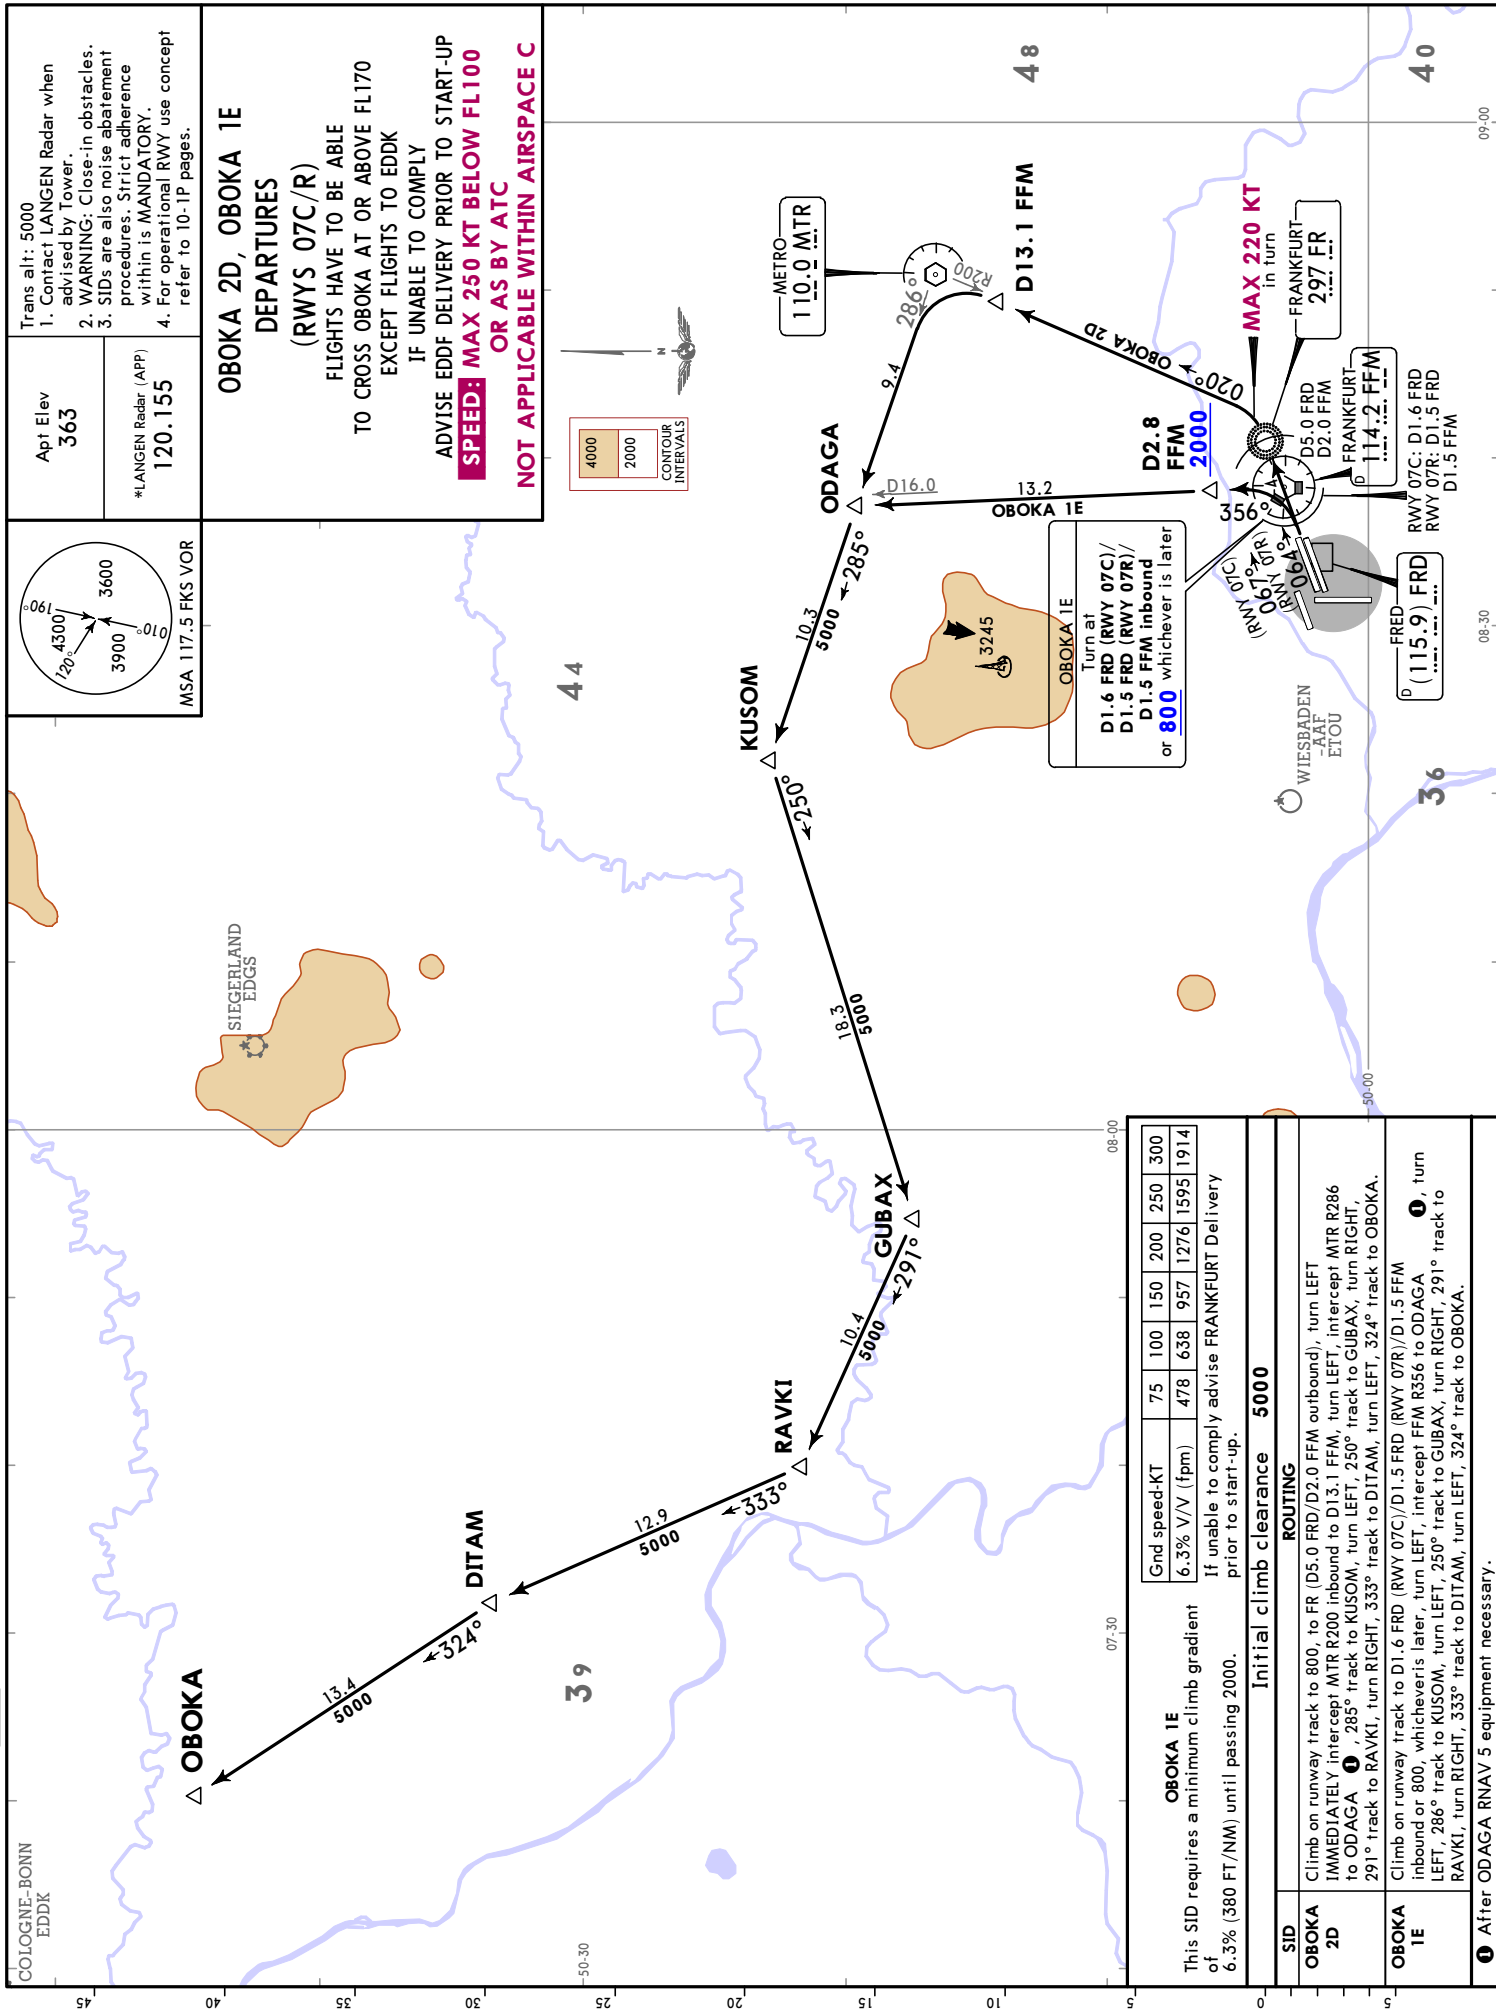

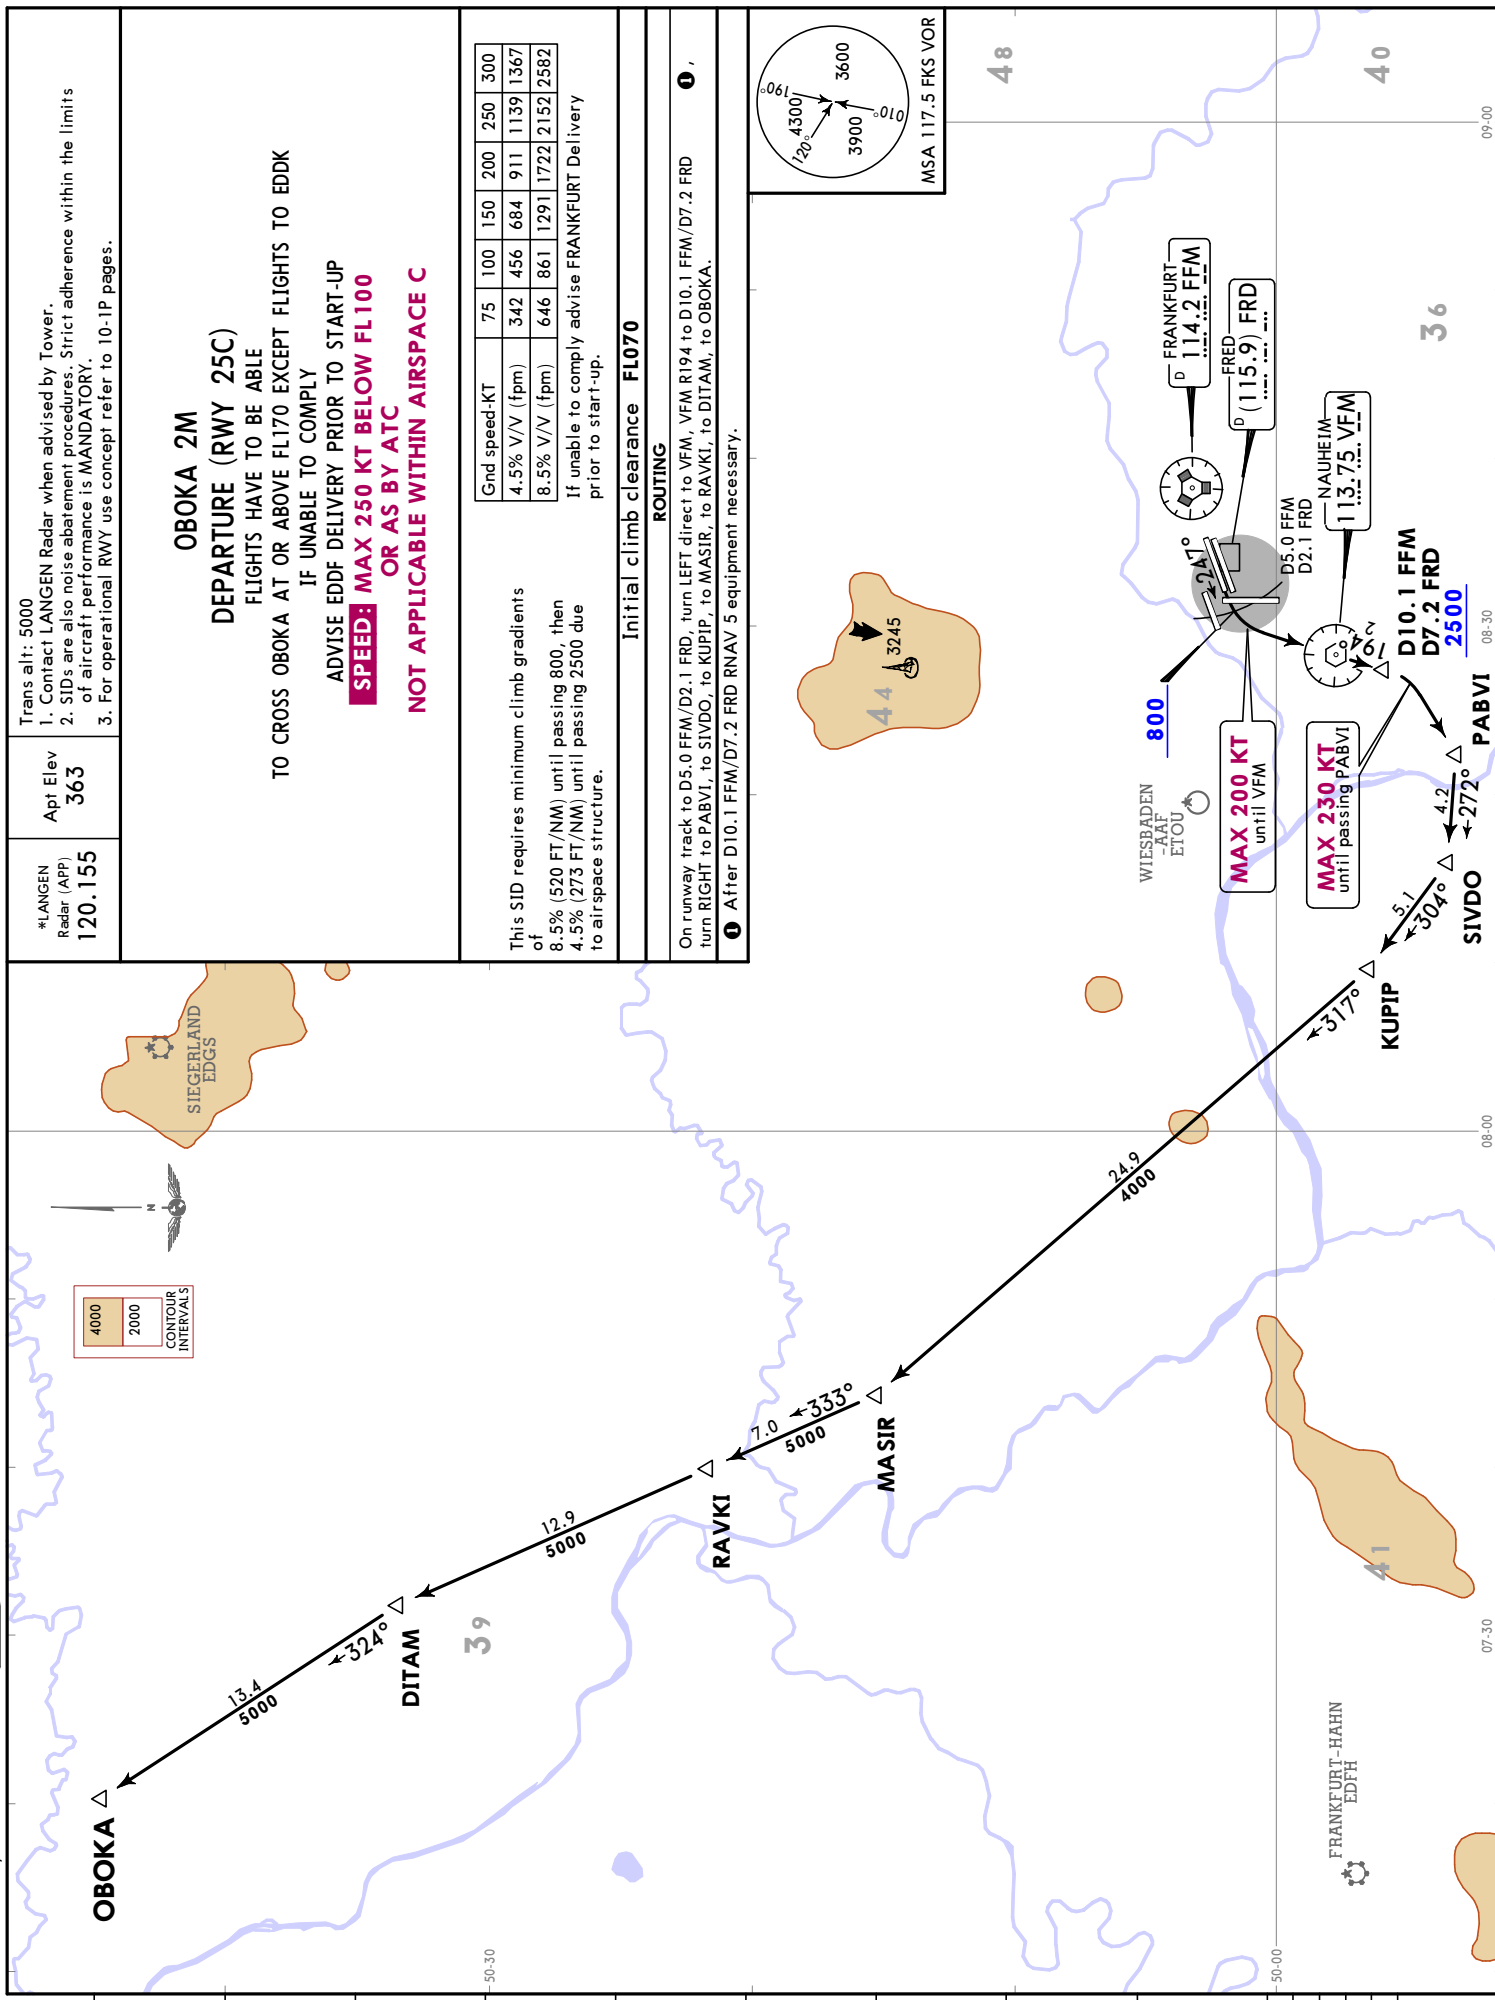

Trans alt: 5000
1. Contact LANGEN Radar when advised by Tower.
2. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY.
3. For operational RWY use concept refer to 10-1P pages.

*LANGEN
Radar (APP)
120.155

Apt Elev
363

OBOKA 2M
DEPARTURE (RWY 25C)
FLIGHTS HAVE TO BE ABLE
TO CROSS OBOKA AT OR ABOVE FL170 EXCEPT FLIGHTS TO EDDK
IF UNABLE TO COMPLY
ADVISE EDDF DELIVERY PRIOR TO START-UP
SPEED: MAX 250 KT BELOW FL100
OR AS BY ATC
NOT APPLICABLE WITHIN AIRSPACE C



Gnd speed-KT	75	100	150	200	250	300
4.5% V/V (fpm)	342	456	684	911	1139	1367
8.5% V/V (fpm)	646	861	1291	1722	2152	2582

This SID requires minimum climb gradients of
8.5% (520 FT/NM) until passing 800, then
4.5% (273 FT/NM) until passing 2500 due to airspace structure.

Initial climb clearance **FL070**

ROUTING

On runway track to D5.0 FFM/D2.1 FRD, turn LEFT direct to VFM, VFM R194 to D10.1 FFM/D7.2 FRD turn RIGHT to PABVI, to SIVDO, to KUPIP, to MASIR, to RAVKI, to DITAM, to OBOKA.
1 After D10.1 FFM/D7.2 FRD RNAV 5 equipment necessary.

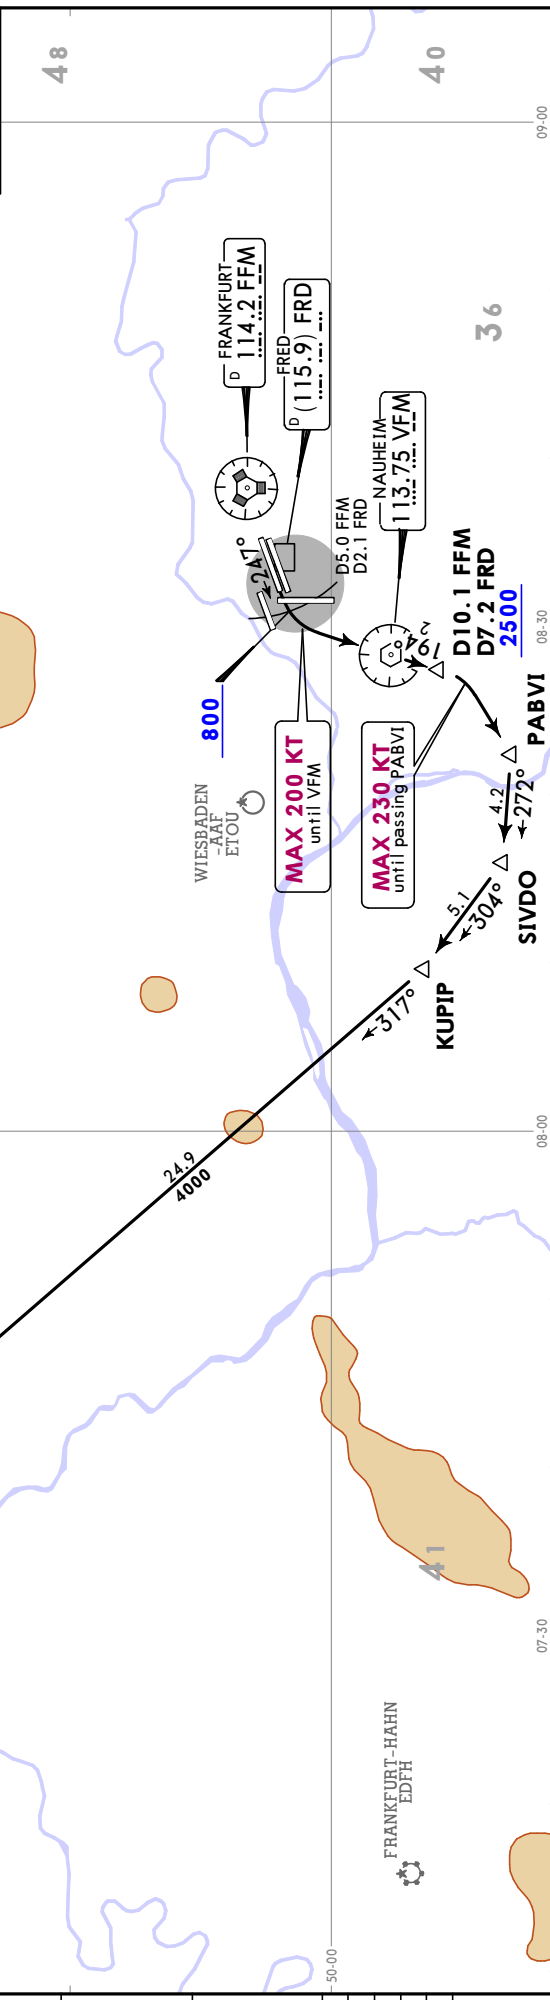

EDDF/FRA
FRANKFURT/MAIN

JEPPESEN FRANKFURT/MAIN, GERMANY
5 JUL 24 10-3N5 Eff 11 Jul SID

*LANGEN
Radar (APP)
120.155

Apt Elev
363

Trans alt: 5000
1. Contact LANGEN Radar when advised by Tower.
2. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY.
3. For operational RWY use concept refer to 10-1P pages.

25

20

15

10

5

0

5

120°

190°

010°


4300

3900

3600

MSA 117.5 FKS VOR

TAUNUS 3Q (TAU 3Q)
DEPARTURE
(RWYS 25L/C)
BY ATC
**SPEED: MAX 250 KT BELOW FL100
OR AS BY ATC**
NOT APPLICABLE WITHIN AIRSPACE C

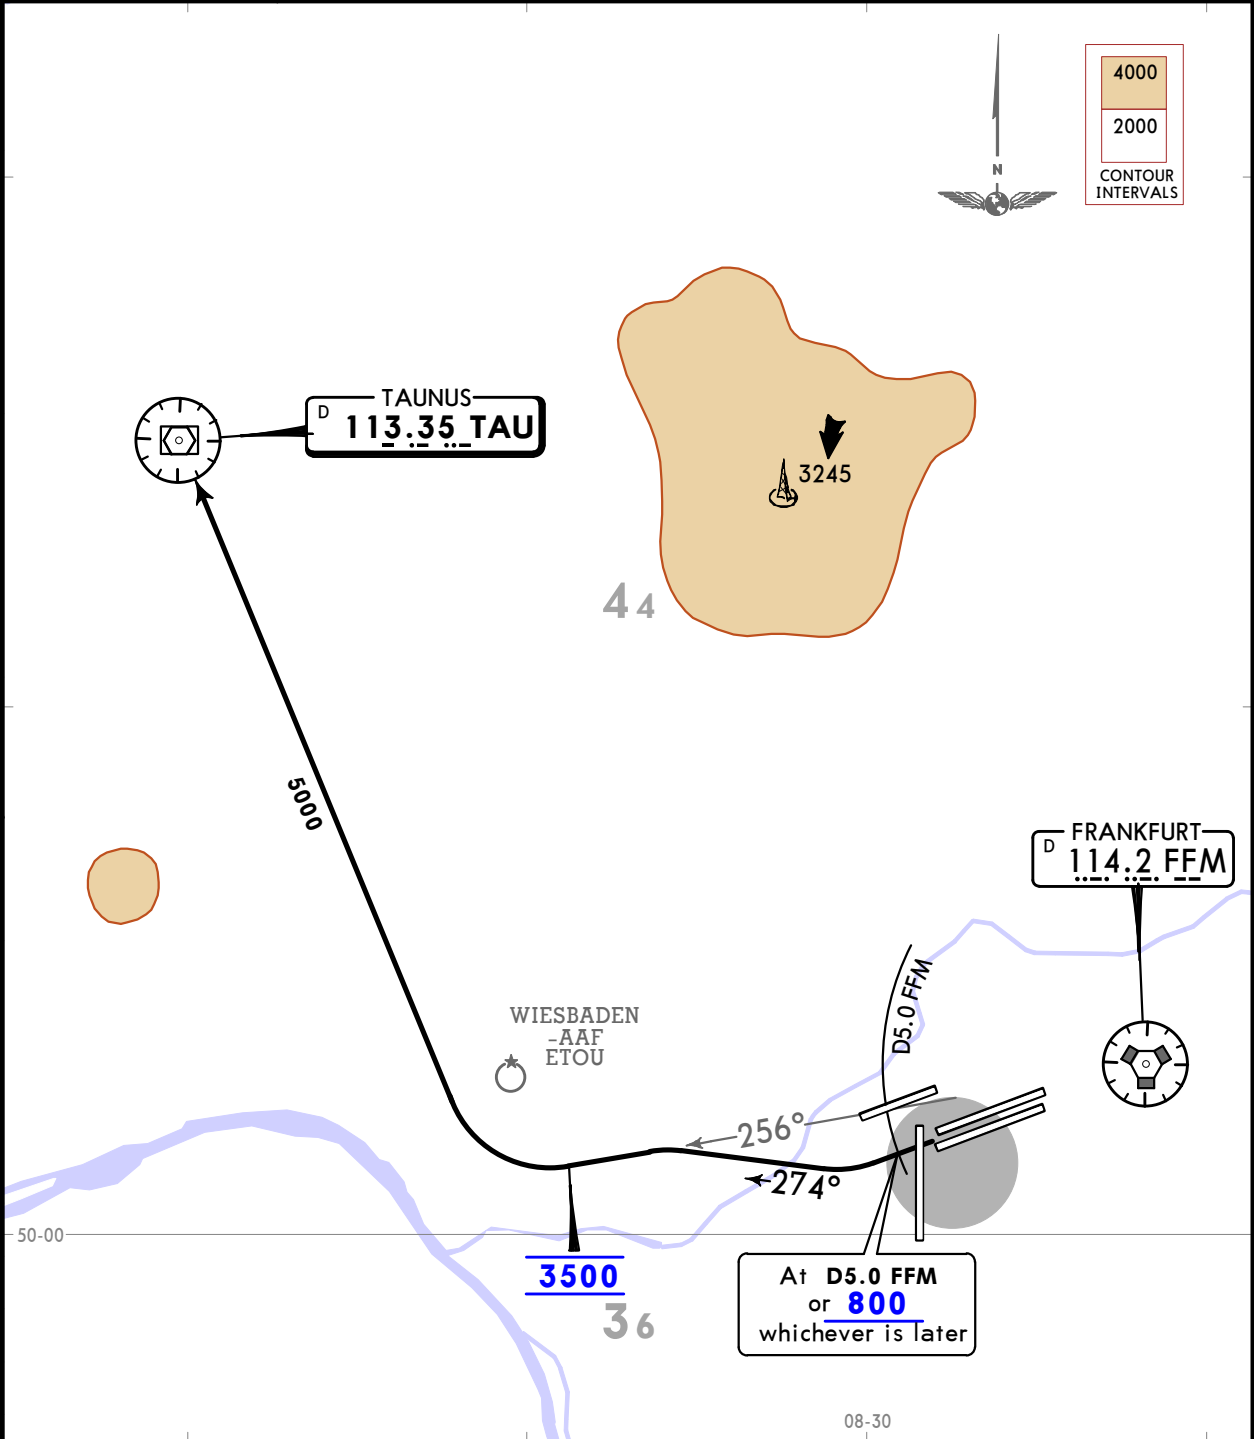


Initial climb clearance 5000

ROUTING


Climb on runway track to D5.0 FFM or 800, whichever is later, turn RIGHT, 274° track (RWY 25L: 281° track), intercept FFM R256, at 3500 turn RIGHT to TAU, but not before reaching FFM R258.

Trans alt: 5000

1. Contact LANGEN Radar when advised by Tower.
2. **WARNING:** Close-in obstacles
3. **SIDs** are also noise abatement procedures. Strict adherence within the limits of aircraft performance is **MANDATORY**.
4. For operational RWY use concept refer to 10-1P pages.




NOT APPLICABLE WITHIN AIRSPACE C



EDDF/FRA
FRANKFURT/MAIN

JEPPESSEN FRANKFURT/MAIN, GERMANY
4 AUG 23 10-3N7 Eff 10 Aug SID

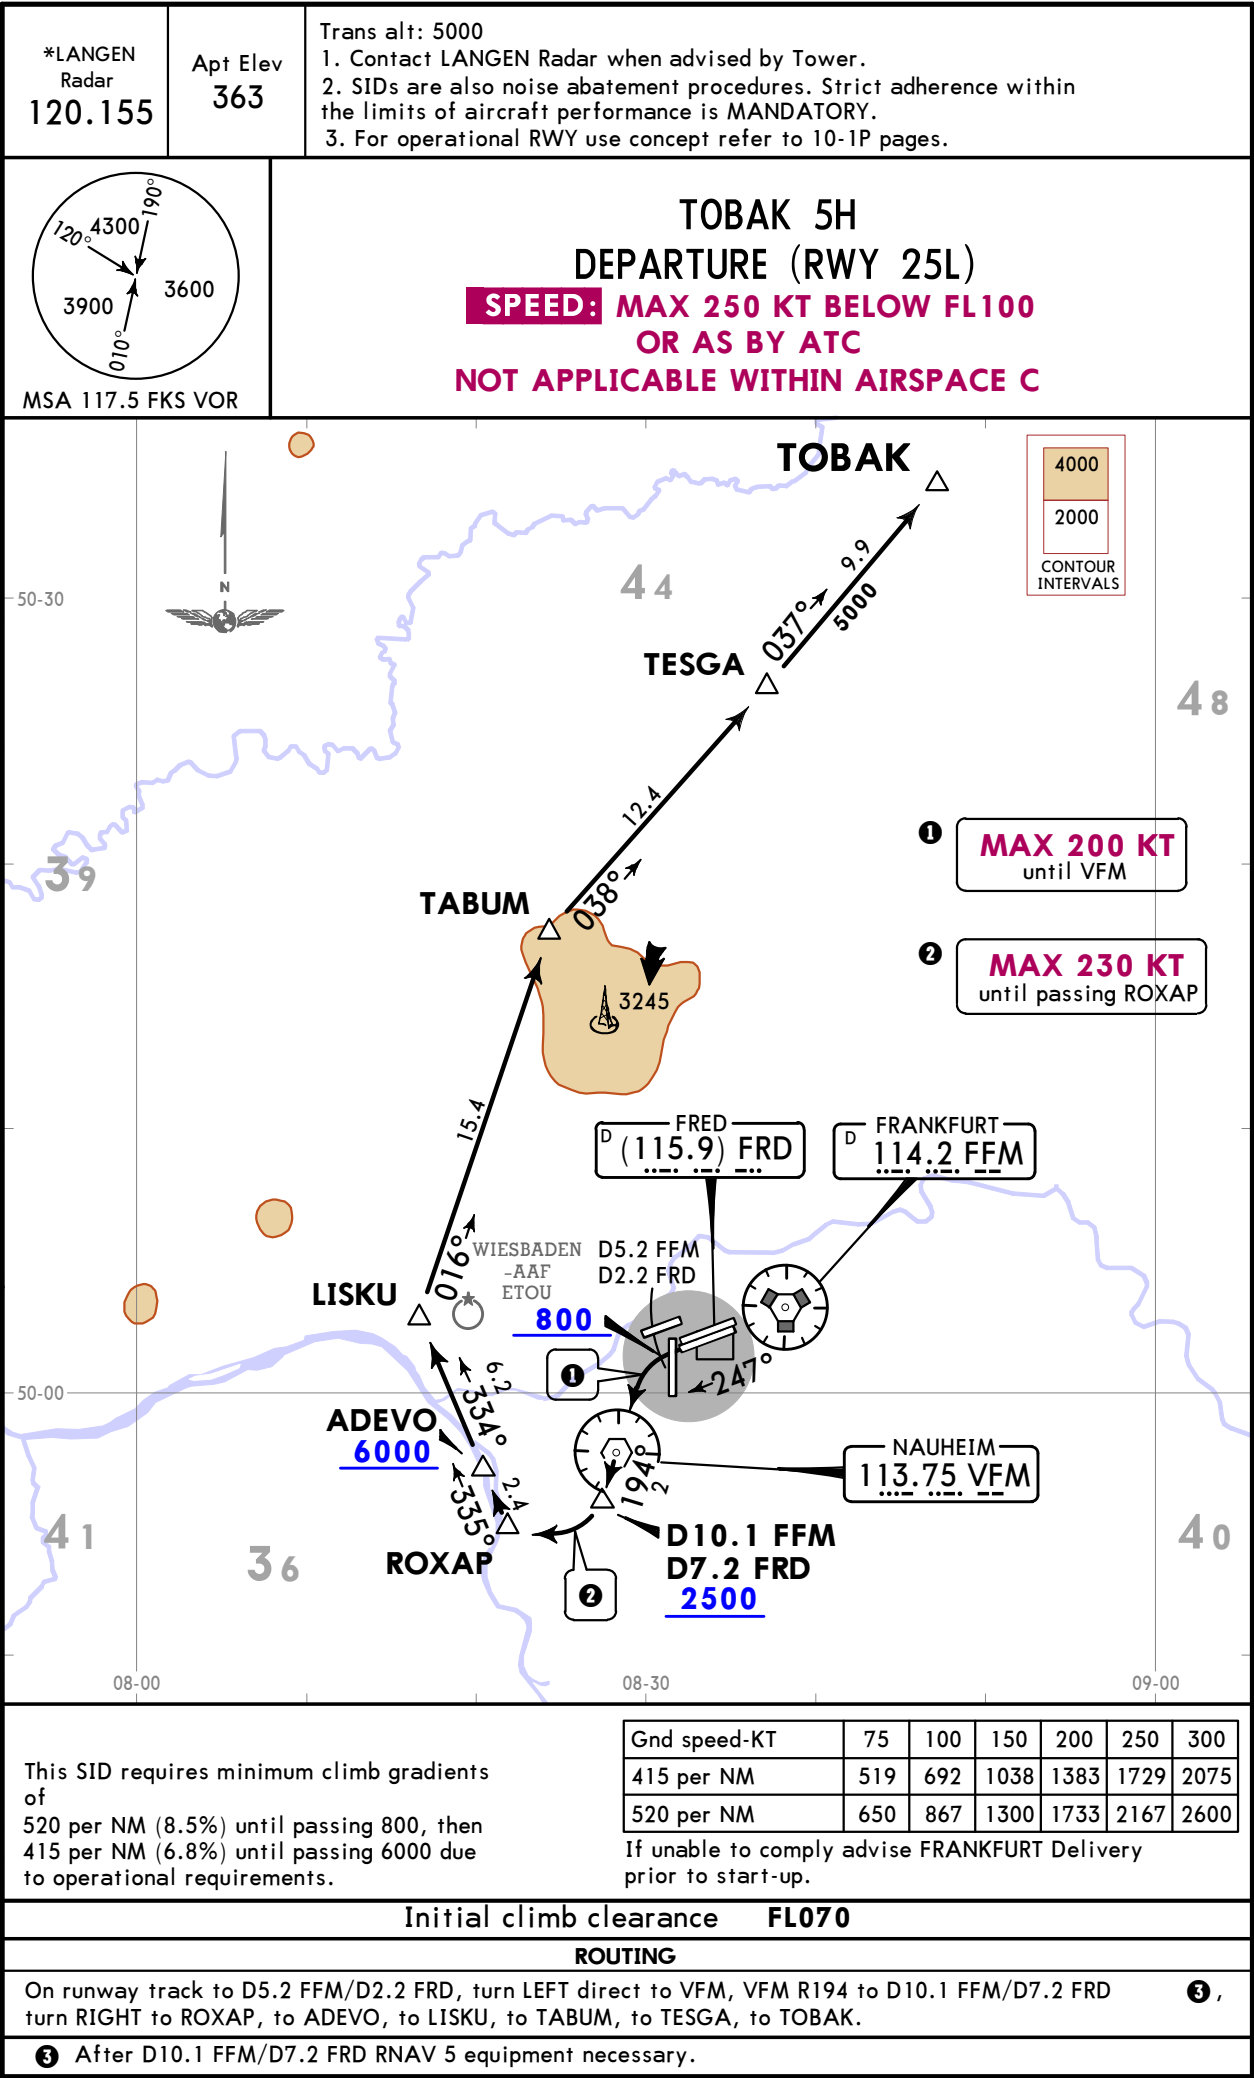


EDDF/FRA
FRANKFURT/MAIN

JEPPESEN FRANKFURT/MAIN, GERMANY
4 AUG 23 10-3N8 Eff 10 Aug SID

*LANGEN
Radar
120.155


Apt Elev
363

Trans alt: 5000
1. Contact LANGEN Radar when advised by Tower.
2. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY.
3. For operational RWY use concept refer to 10-1P pages.



MSA 117.5 FKS VOR

TOBAK 7M
DEPARTURE (RWY 25C)
**SPEED: MAX 250 KT BELOW FL100
OR AS BY ATC**
NOT APPLICABLE WITHIN AIRSPACE C

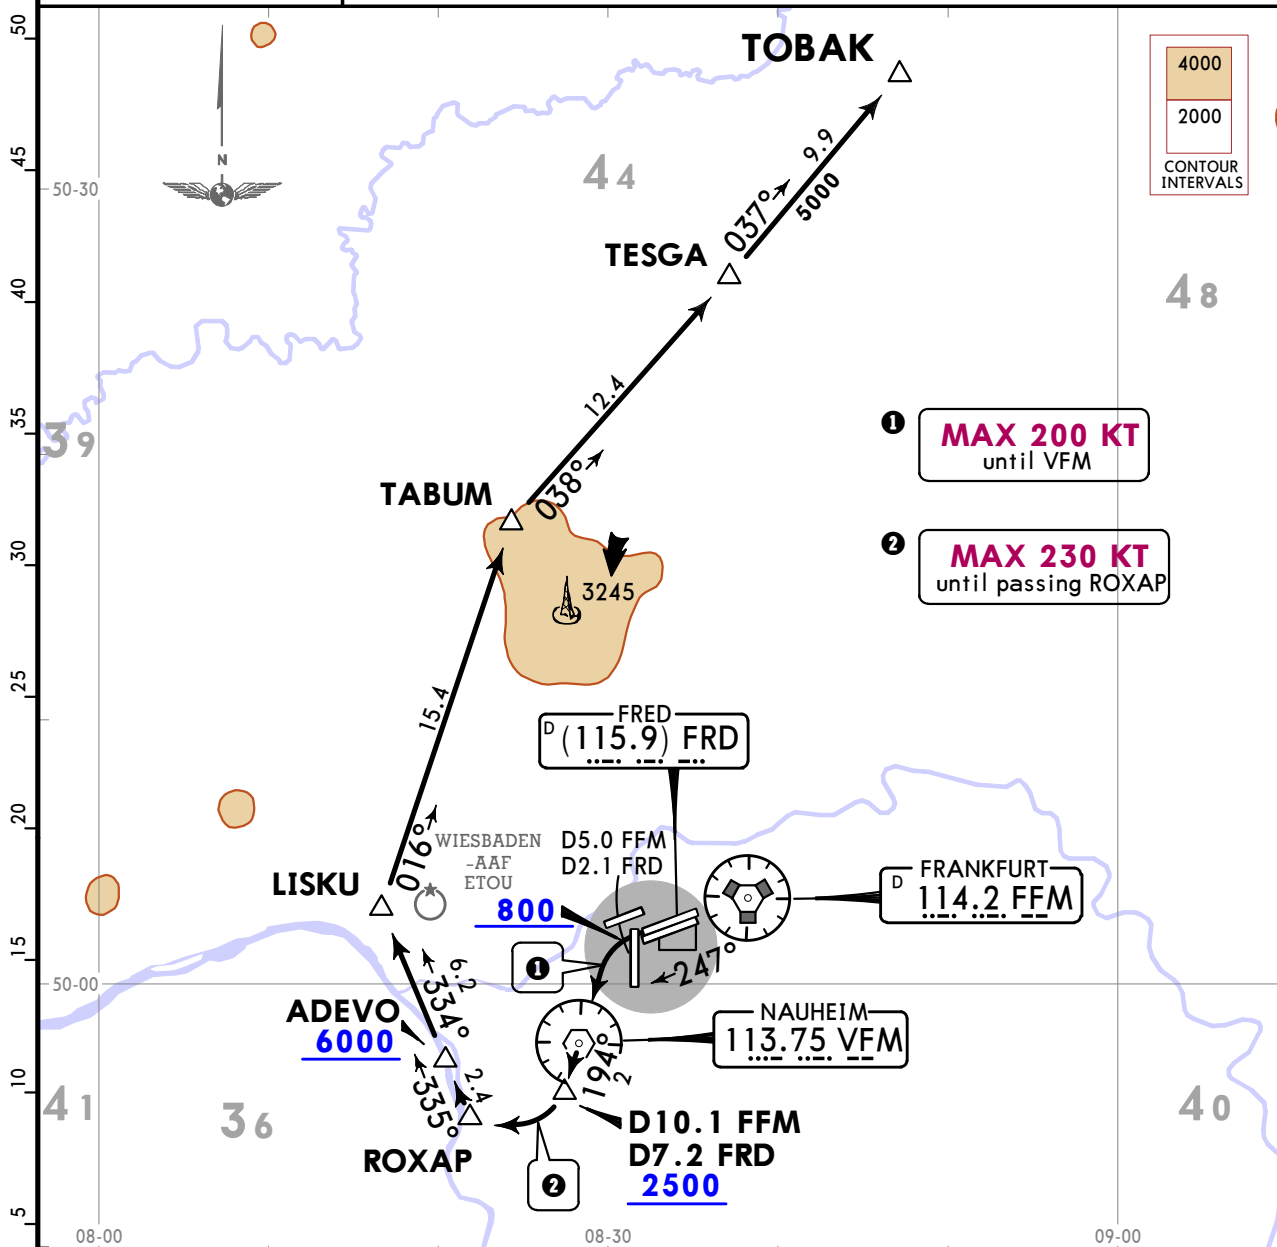

This SID requires minimum climb gradients of
520 per NM (8.5%) until passing 800, then
415 per NM (6.8%) until passing 6000 due to operational requirements.

Gnd speed-KT	75	100	150	200	250	300
415 per NM	519	692	1038	1383	1729	2075
520 per NM	650	867	1300	1733	2167	2600

If unable to comply advise FRANKFURT Delivery prior to start-up.

Initial climb clearance **FL070**

ROUTING

On runway track to D5.0 FFM/D2.1 FRD, turn LEFT direct to VFM, VFM R194 to D10.1 FFM/D7.2 FRD ③, turn RIGHT to ROXAP, to ADEVO, to LISKU, to TABUM, to TESGA, to TOBAK.


③ After D10.1 FFM/D7.2 FRD RNAV 5 equipment necessary.

EDDF/FRA
FRANKFURT/MAIN

17 JAN 25 10-3P

Eff 23 Jan


RNAV SID (OVERLAY)

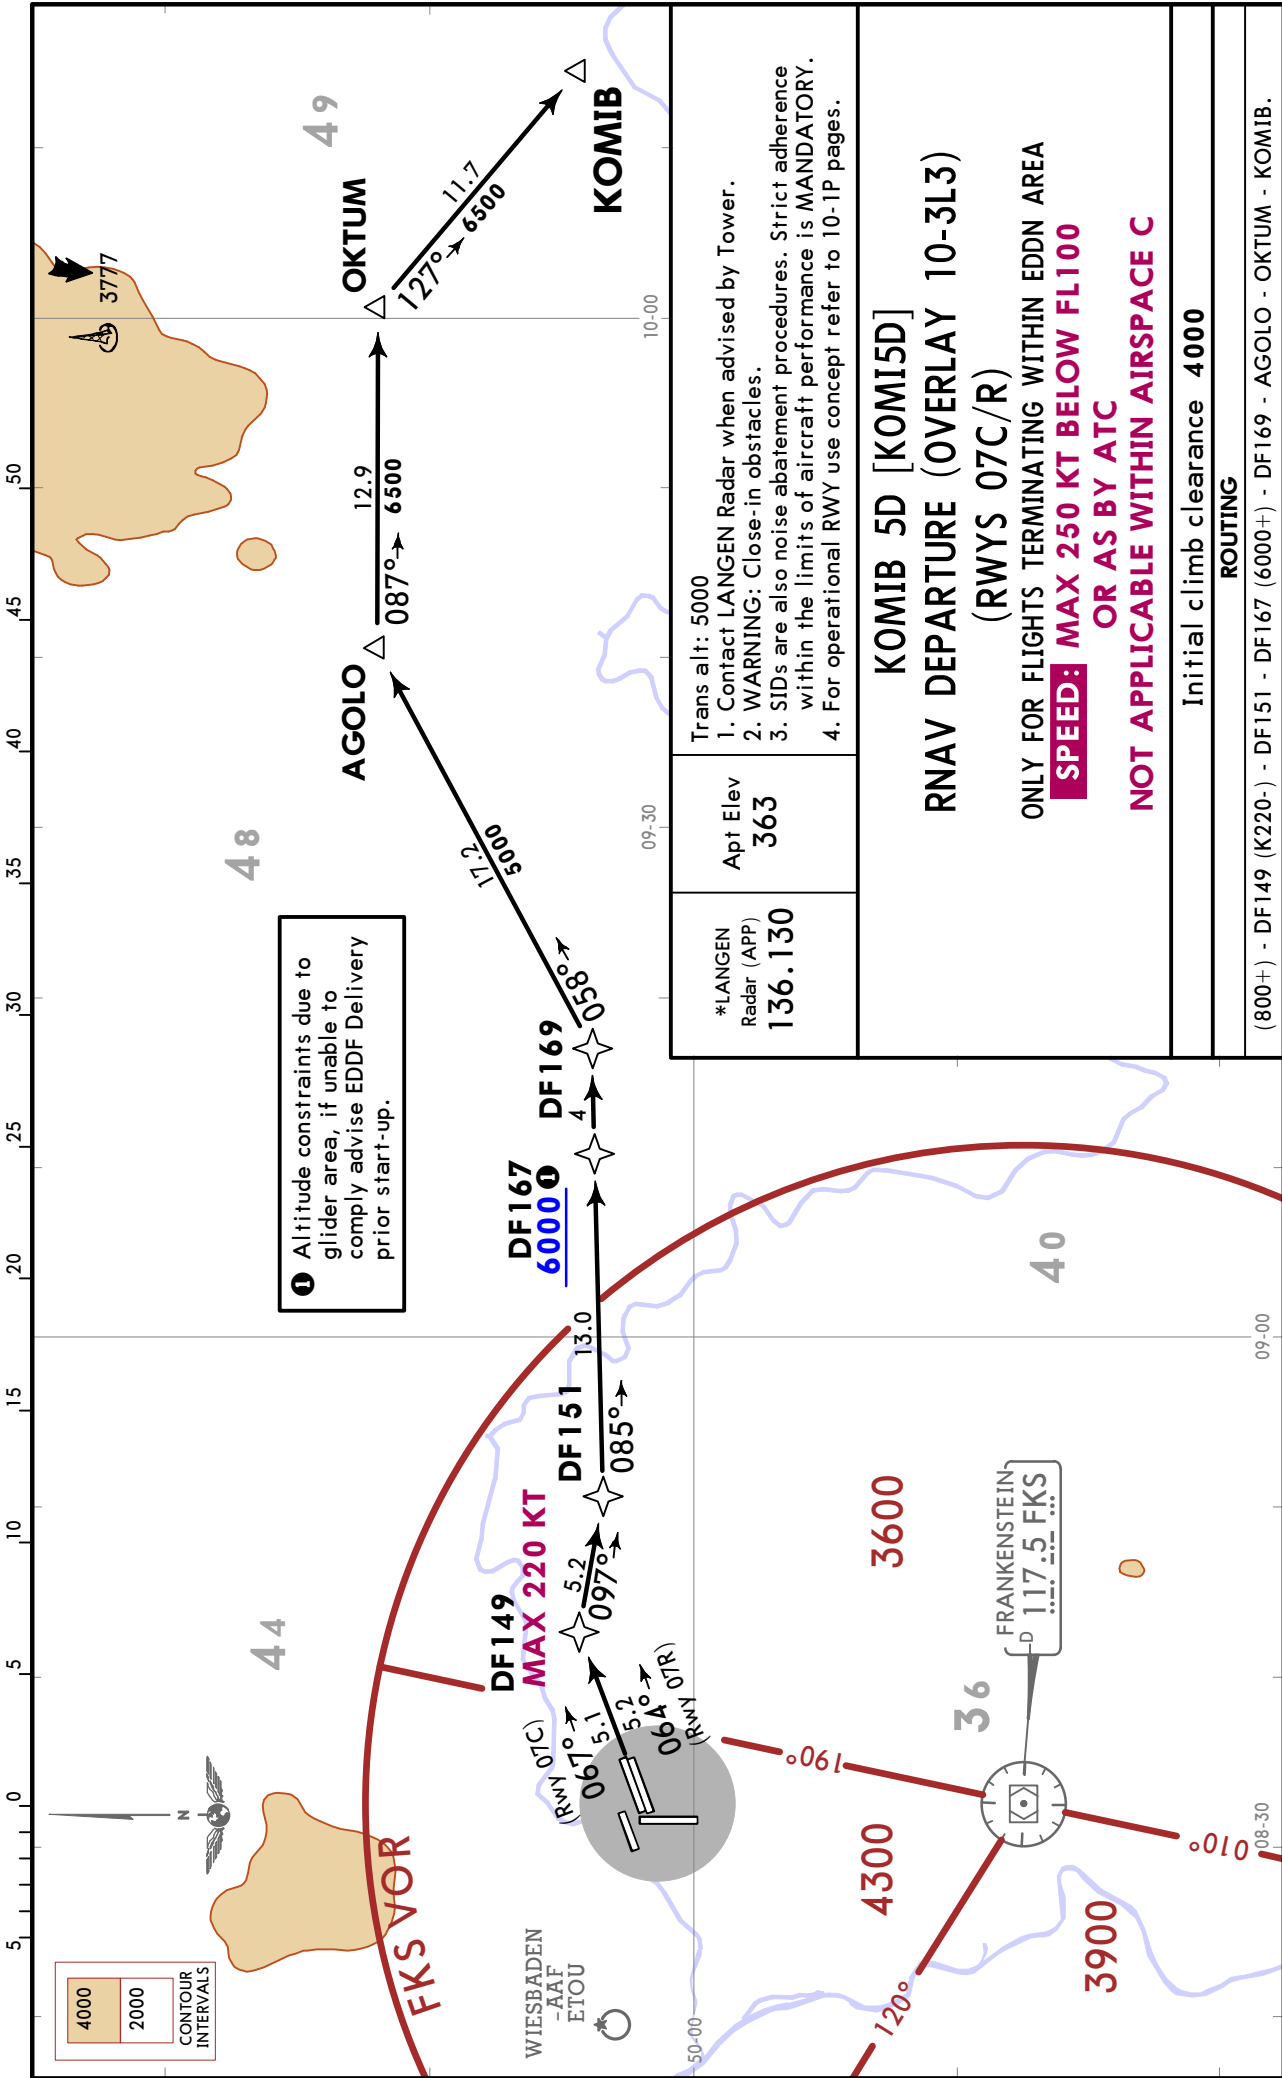

FRANKFURT/MAIN, GERMANY

EDDF / FRA
FRANKFURT/MAIN

JEPPESSEN
10-3Q
5 JUL 24
EFF 11 JUL

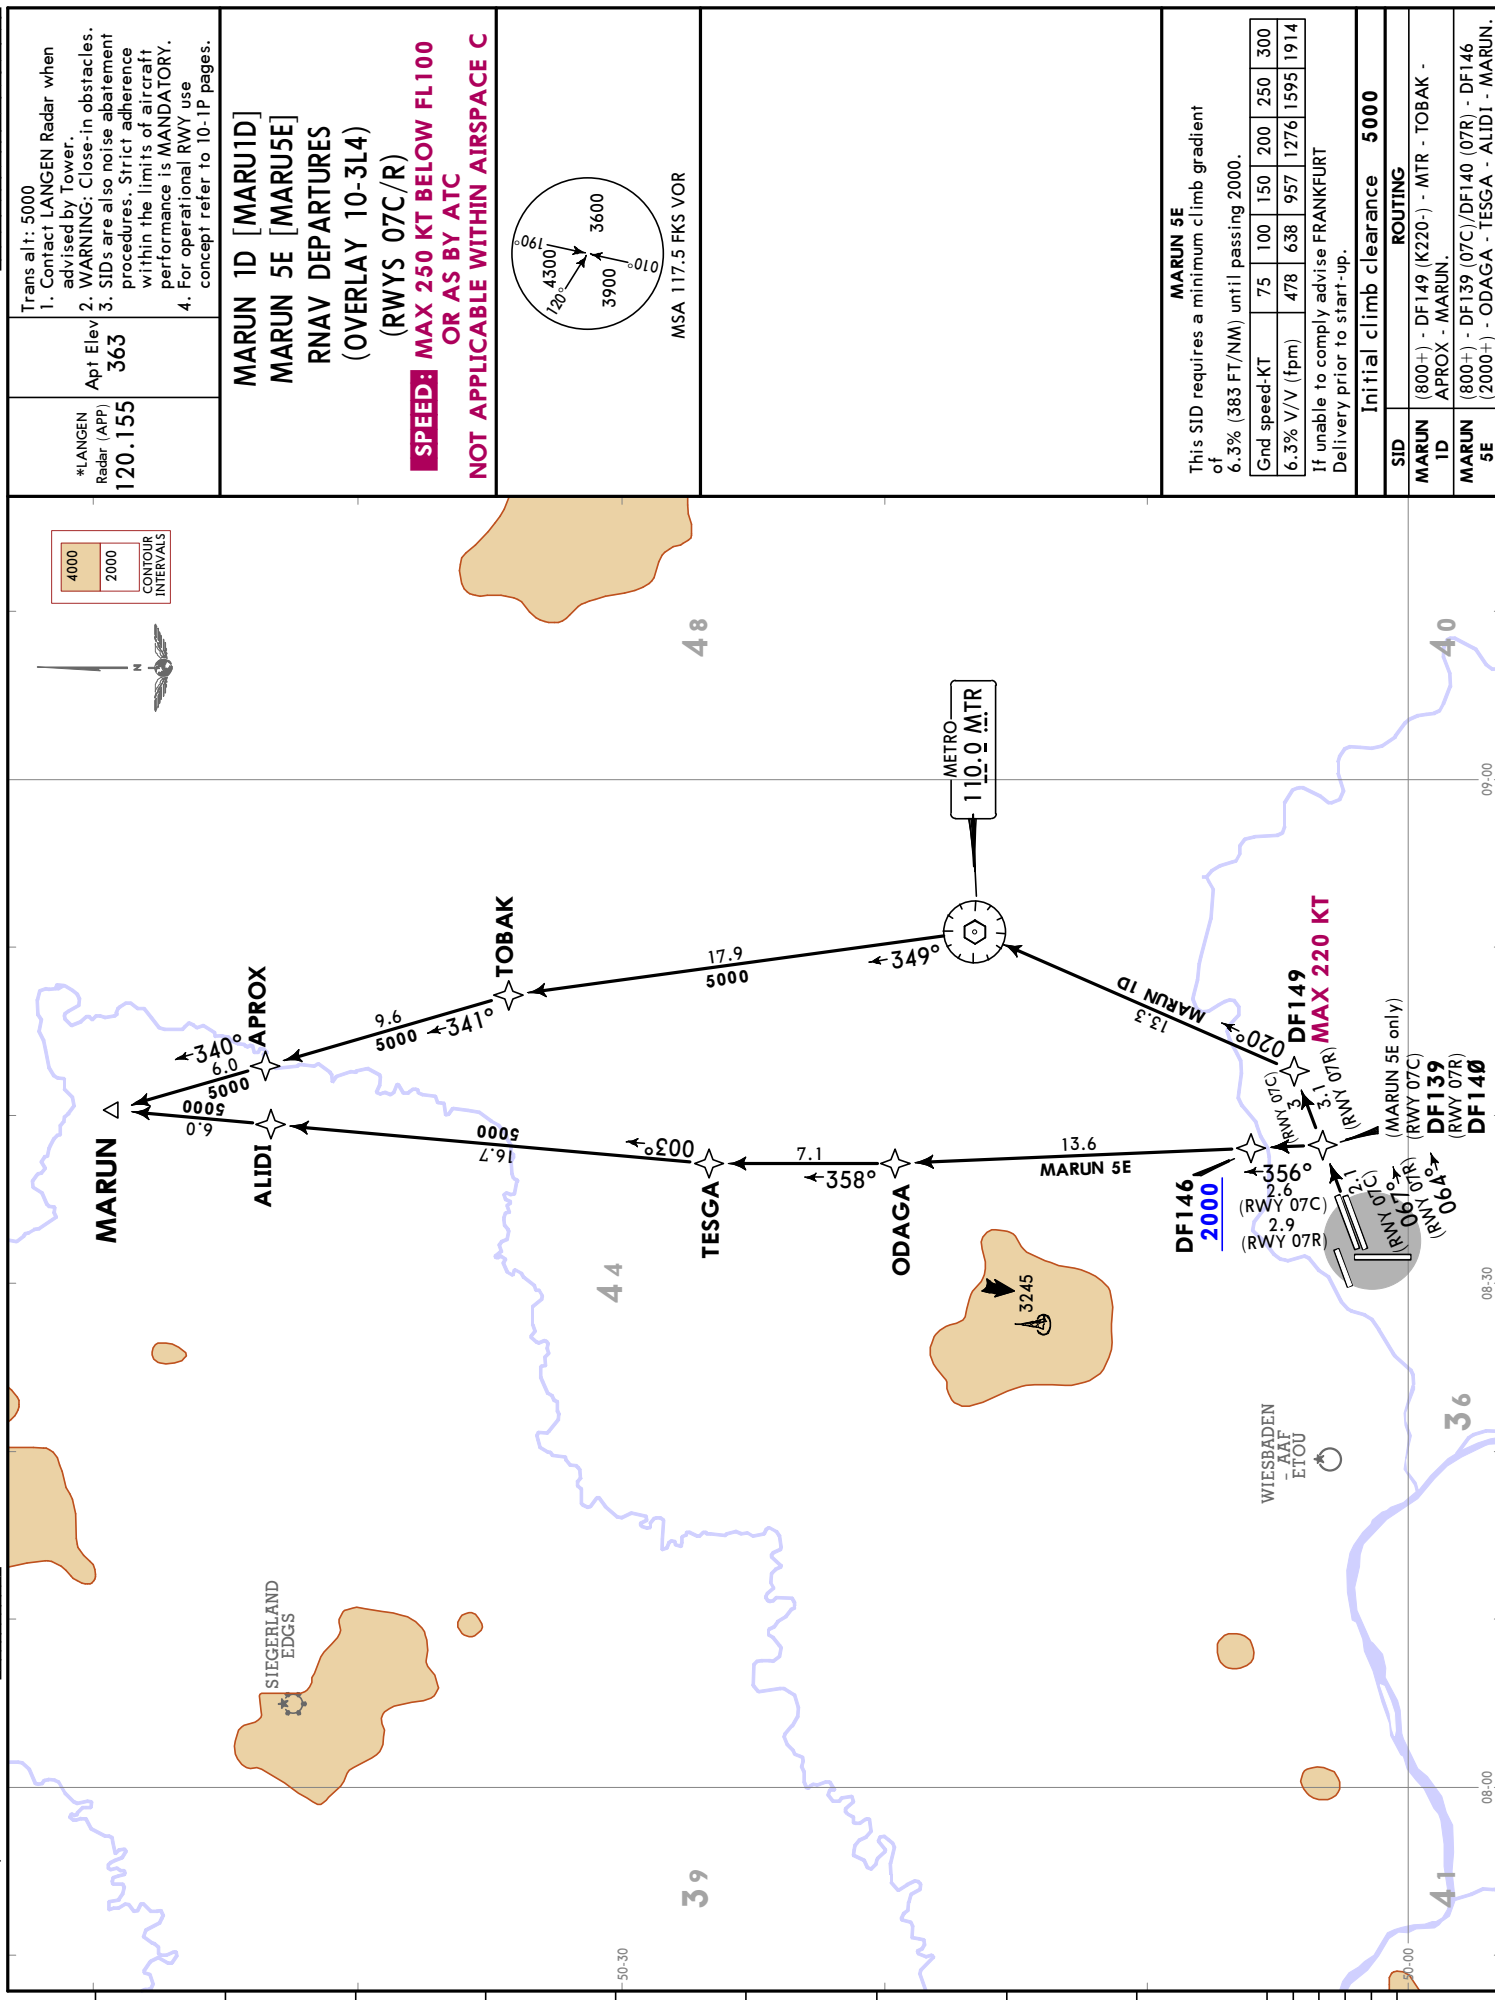

*LANGEN
Radar (APP)
120.155

Apt Elev
363

Trans alt: 5000
1. Contact LANGEN Radar when
advised by Tower.
2. WARNING: Close-in obstacles.
3. SIDs are also noise abatement
procedures. Strict adherence
within the limits of aircraft
performance is MANDATORY.
4. For operational RWY use
concept refer to 10-1P pages.

MARUN 1D [MARU1D]
MARUN 5E [MARU5E]
RNAV DEPARTURES
(OVERLAY 10-3L4)
(RWYS 07C/R)
**SPEED: MAX 250 KT BELOW FL100
OR AS BY ATC**
NOT APPLICABLE WITHIN AIRSPACE C

MSA 117.5 FKS VOR

MARUN 5E

This SID requires a minimum climb gradient
of 6.3% (383 FT/NM) until passing 2000.

Grnd speed-KT	75	100	150	200	250	300
6.3% V/V (fpm)	478	638	957	1276	1595	1914

If unable to comply advise FRANKFURT
Delivery prior to start-up.

Initial climb clearance

5000

SID

ROUTING

**MARUN
1D**

(800+) - DF 149 (K220-) - MTR - TOBAK -
APROX - MARUN.

**MARUN
5E**

(800+) - DF 139 (07C)/DF140 (07R) - DF146
(2000+) - ODAGA - TESGA - ALIDI - MARUN.

CHANGES: RNAV SID MARUN 9D renumbered 1D, tracks updated.

© JEPPESSEN, 2023, 2024. ALL RIGHTS RESERVED.

EDDF/FRA
FRANKFURT/MAIN

5 JUL 24

10-3Q1

Eff 11 Jul

RNAV SID (OVERLAY)

*LANGEN
Radar (APP)
120.155

Apt Elev
363

Trans alt: 5000

1. Contact LANGEN Radar when advised by Tower.
2. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY.
3. For operational RWY use concept refer to 10-1P pages.


MARUN 5H [MARU5H]

RNAV DEPARTURE (OVERLAY 10-3L5) (RWY 25L)

SPEED: MAX 250 KT BELOW FL100


OR AS BY ATC

NOT APPLICABLE WITHIN AIRSPACE C

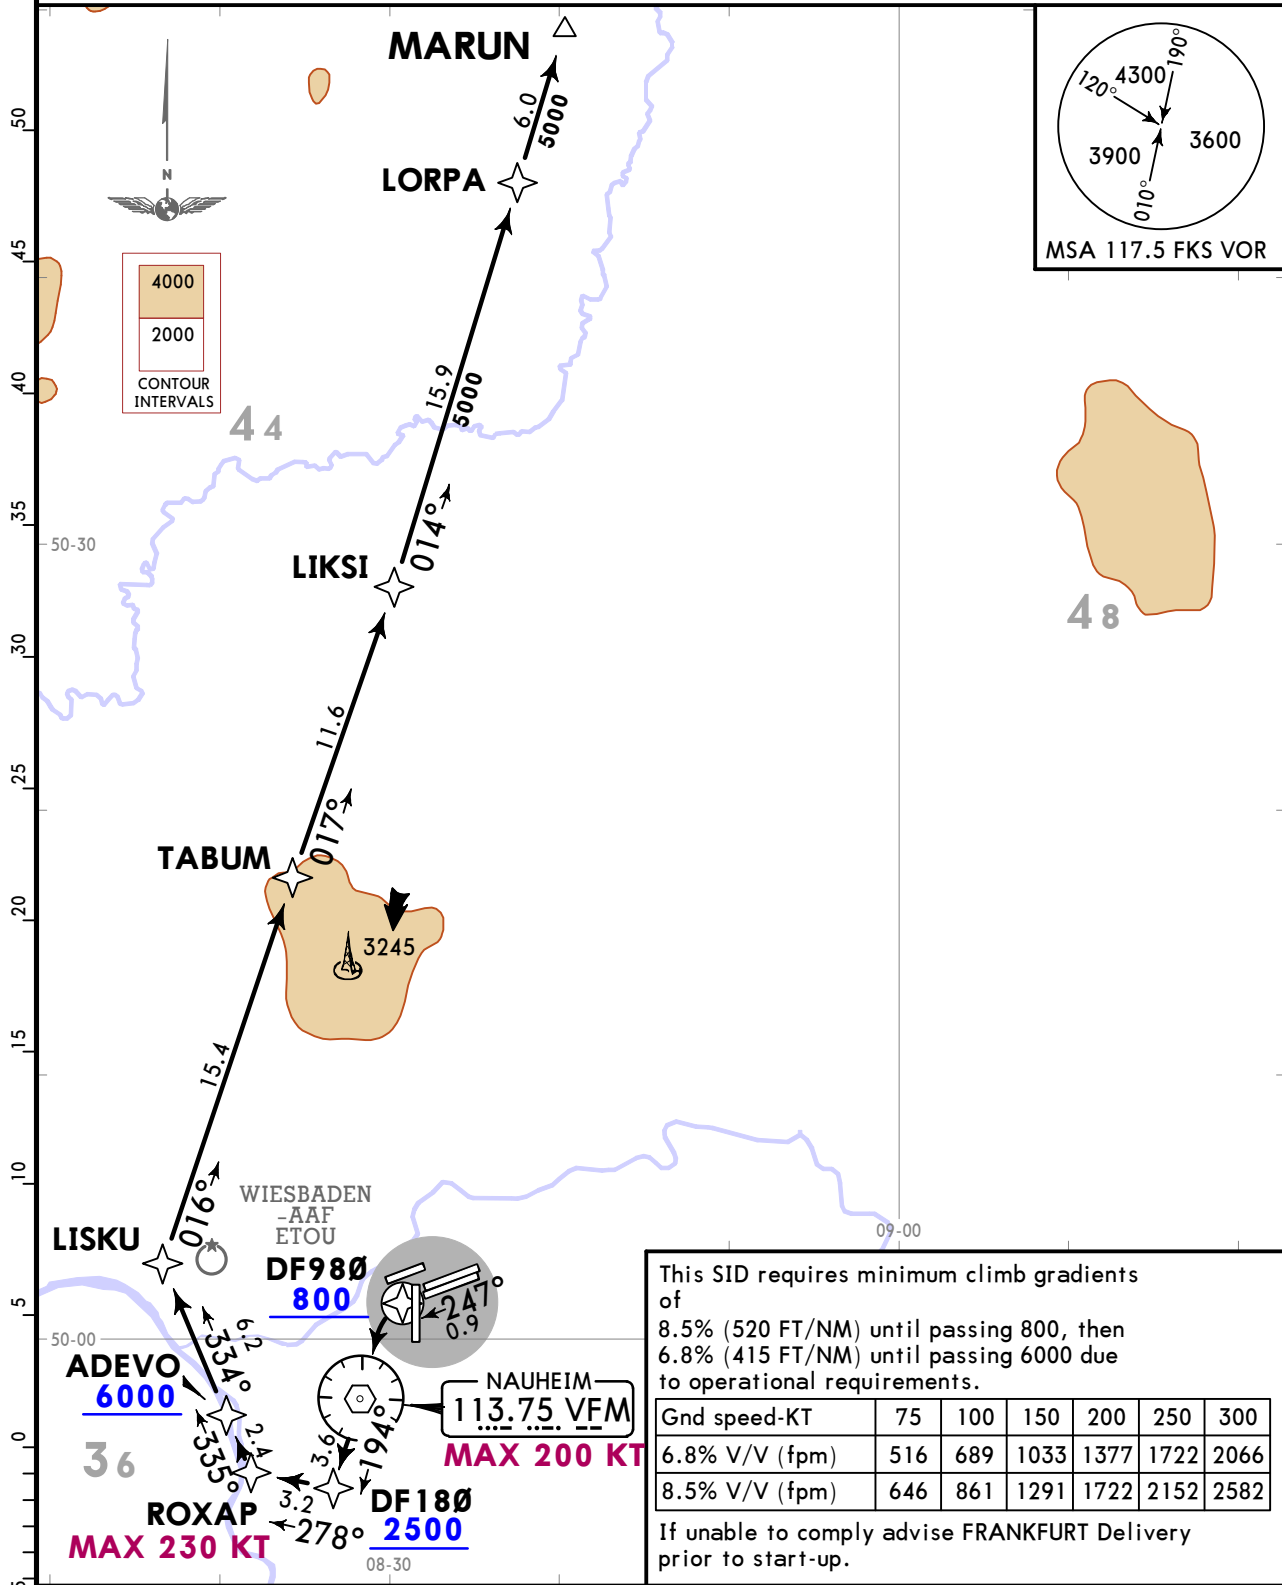


EDDF/FRA
FRANKFURT/MAIN

JEPPESSEN FRANKFURT/MAIN, GERMANY
5 JUL 24 10-3Q2 Eff 11 Jul RNAV SID (OVERLAY)

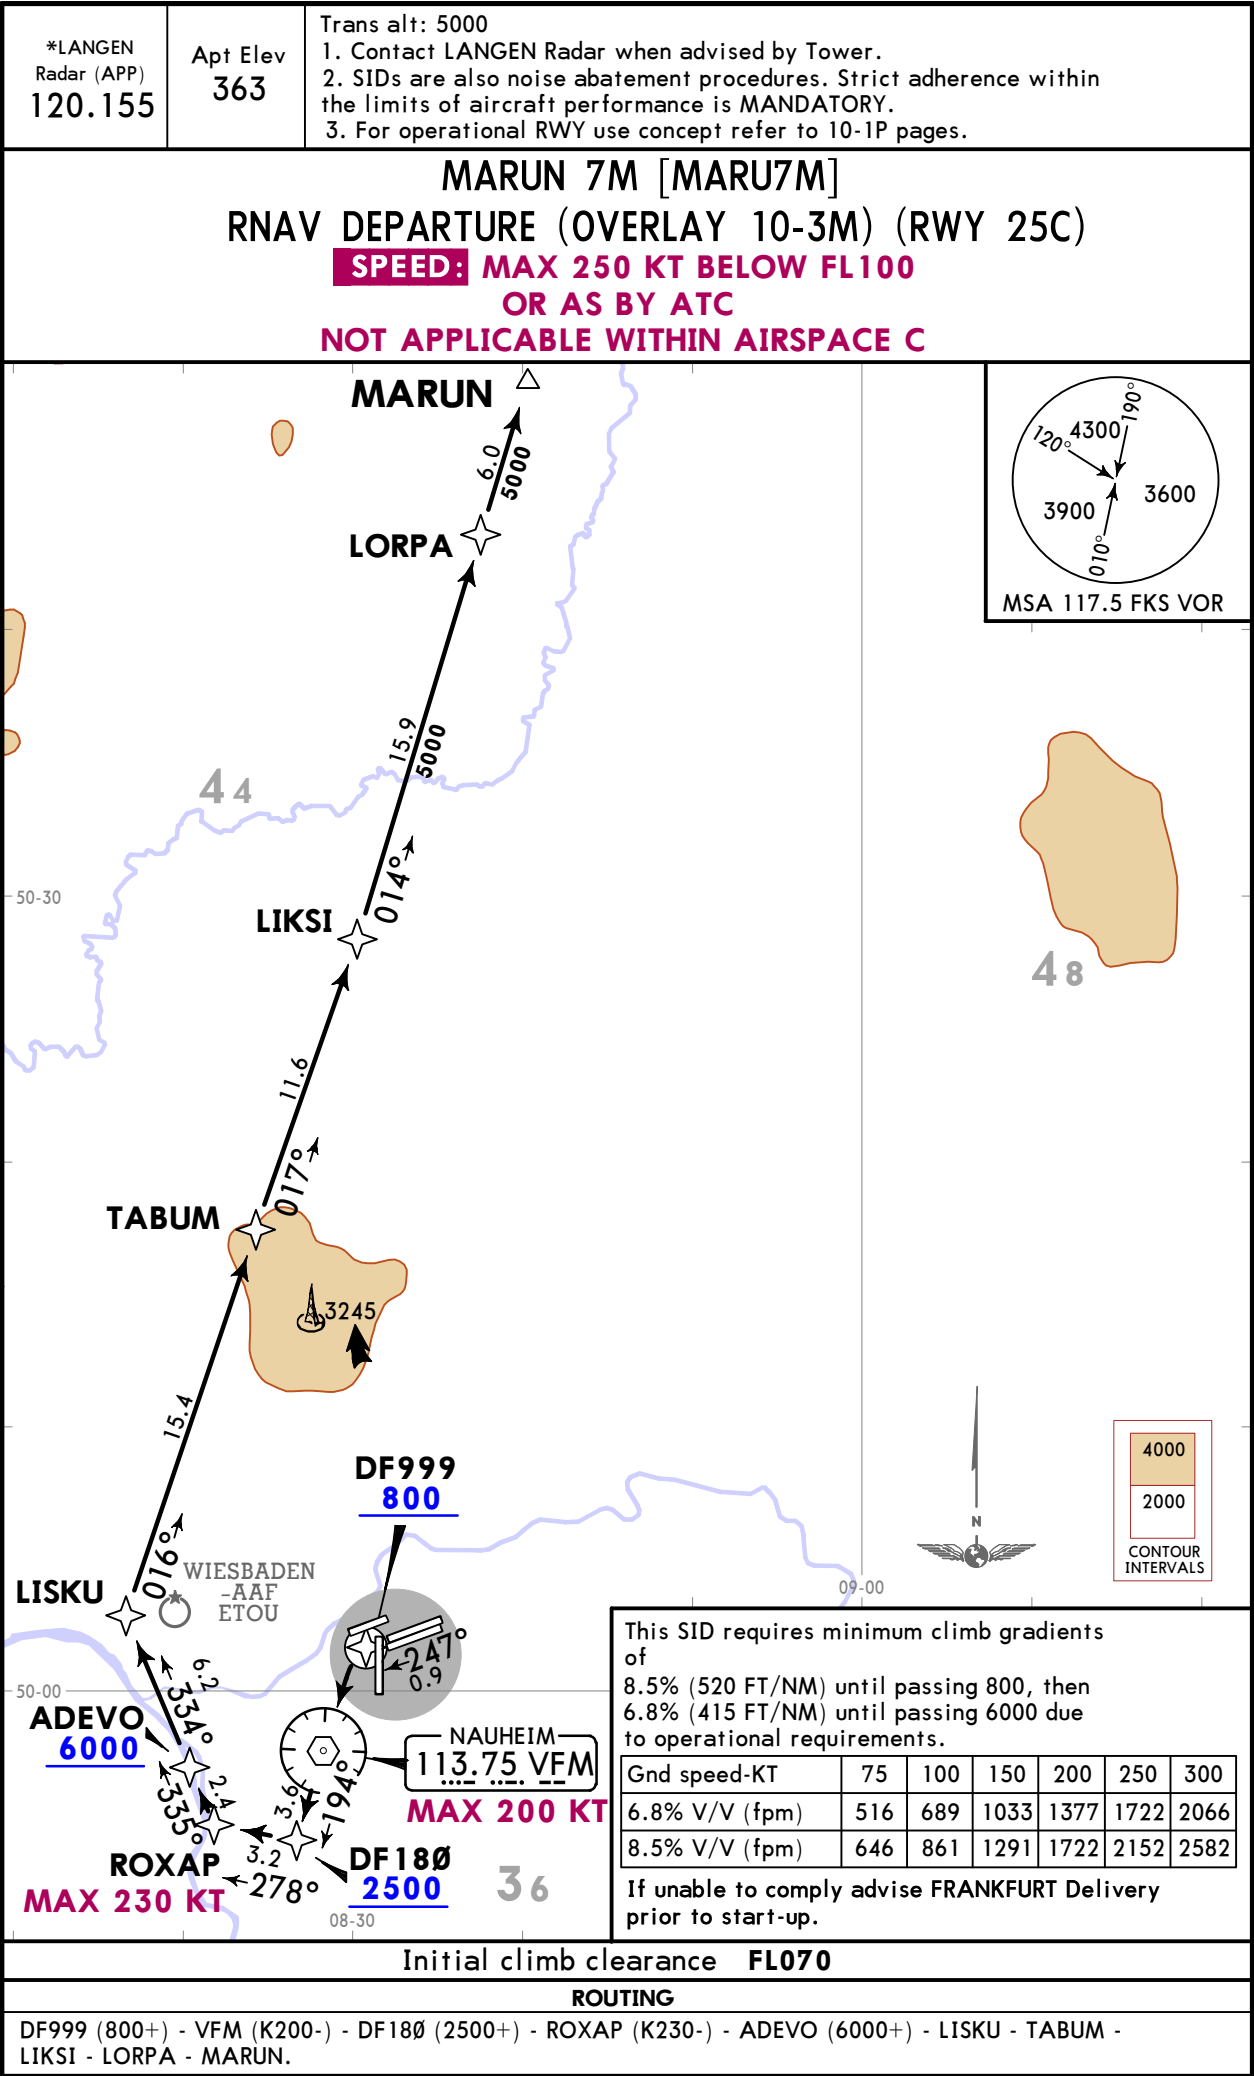

5 JUL 24
Eff 11 Jul



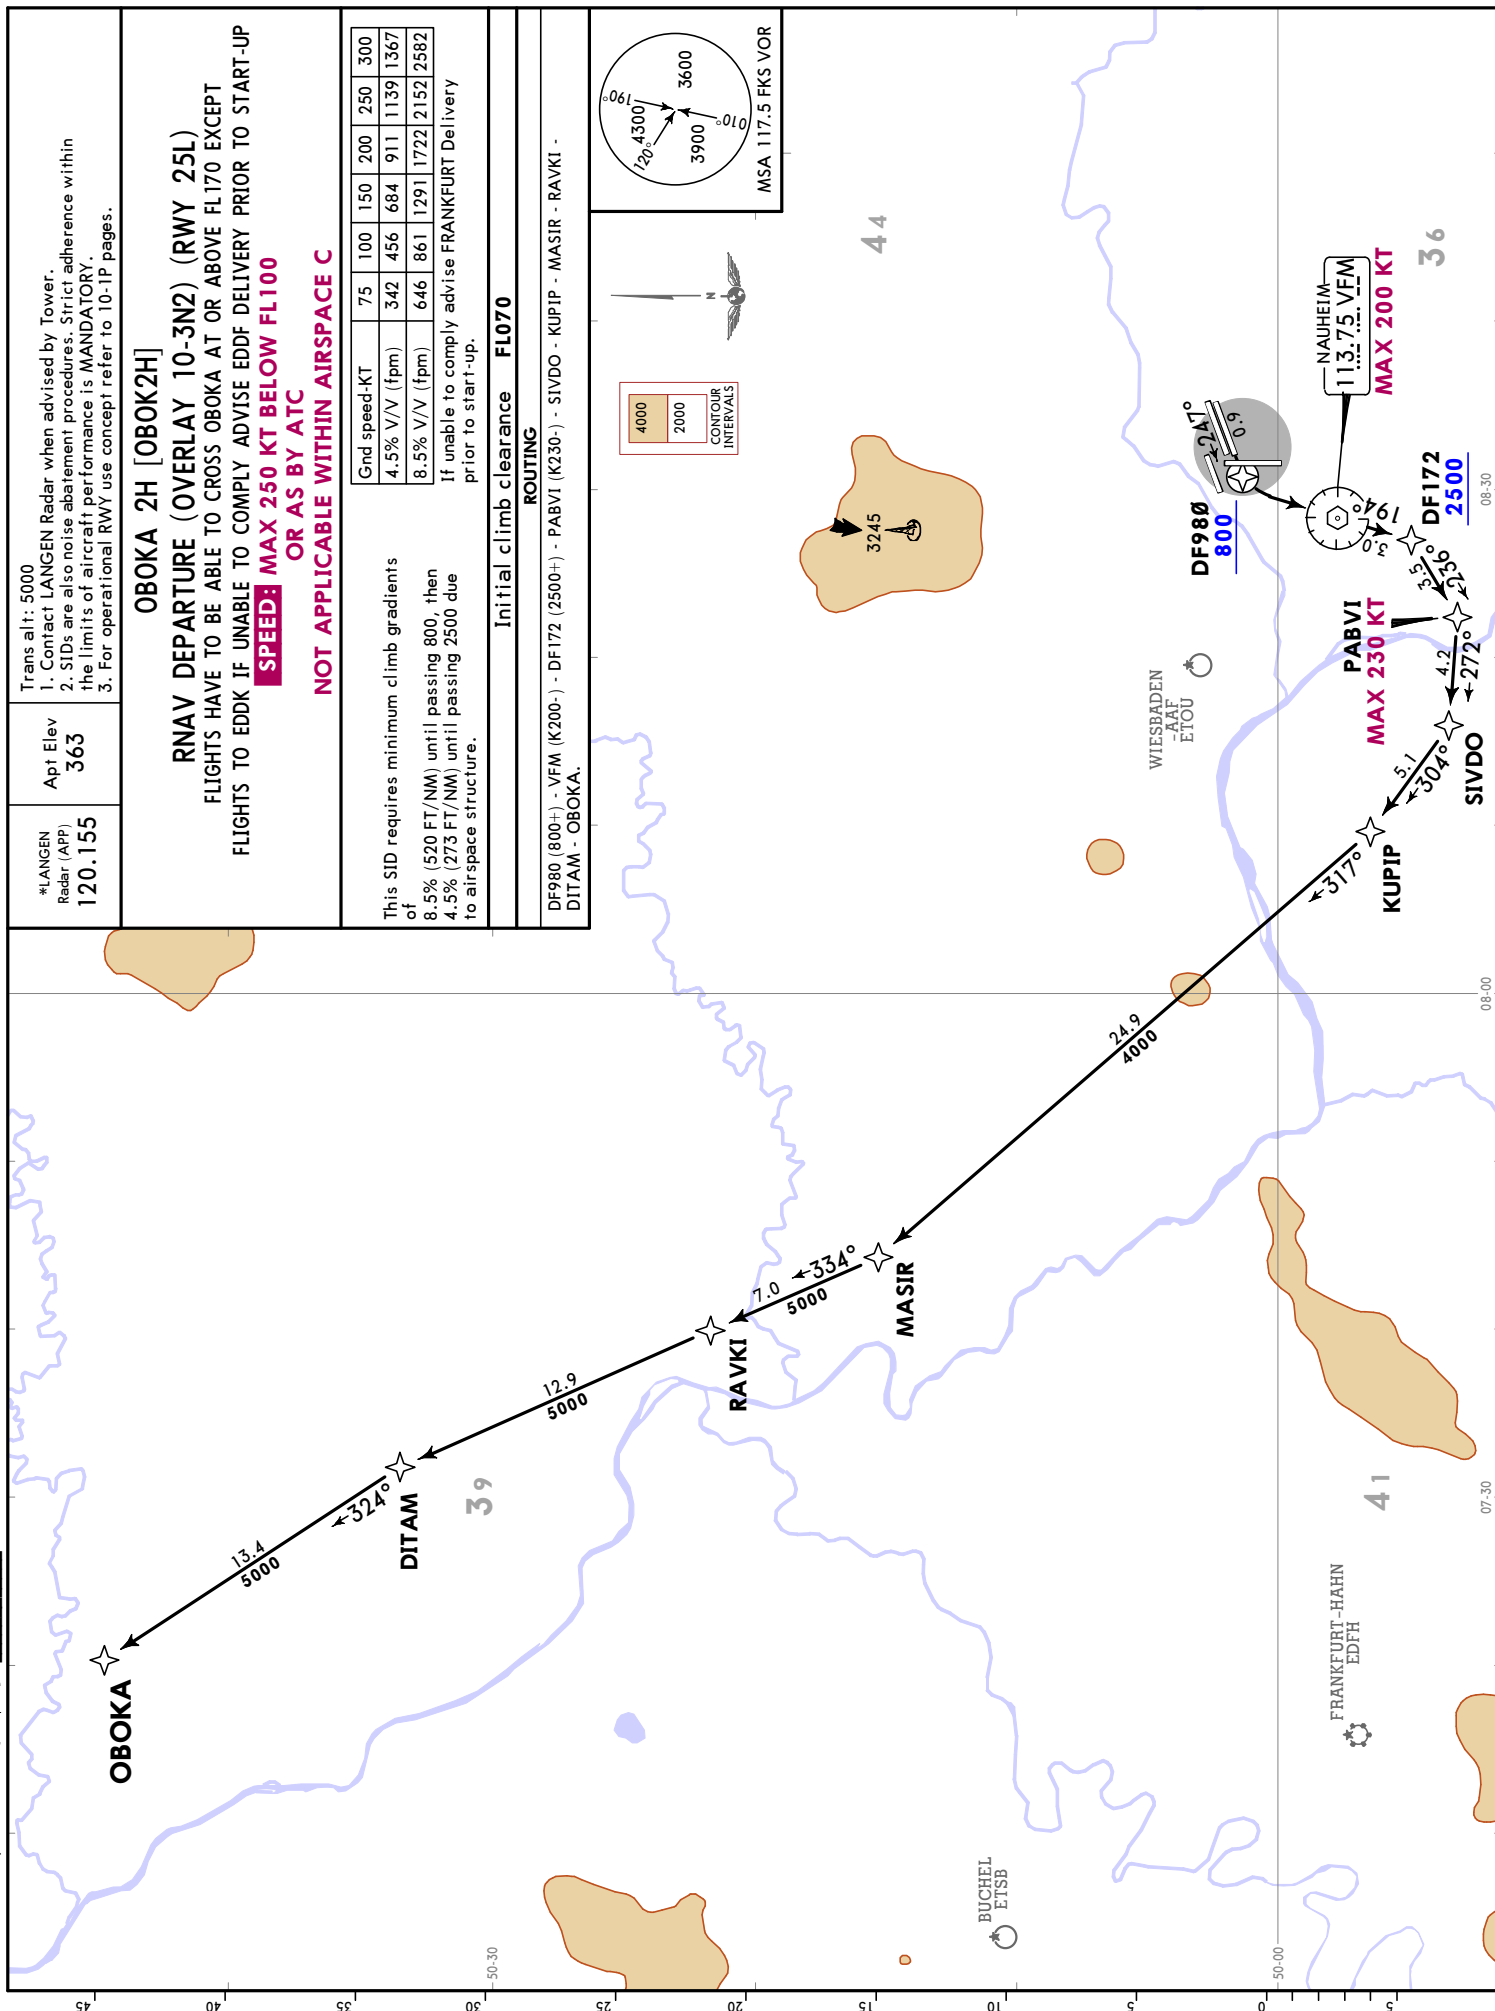

*LANGEN
Radar (APP)
120.155

Apt Elev
363

Trans alt: 5000
1. Contact LANGEN Radar when advised by Tower.
2. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY.
3. For operational RWY use concept refer to 10-1P pages.

OBOKA 2M [OBOK2M]
RNAV DEPARTURE
(OVERLAY 10-3N3) (RWY 25C)
FLIGHTS HAVE TO BE ABLE
TO CROSS OBOKA AT OR ABOVE FL170
EXCEPT FLIGHTS TO EDDK
IF UNABLE TO COMPLY
ADVISE EDDF DELIVERY PRIOR TO START-UP
**SPEED: MAX 250 KT BELOW FL100
OR AS BY ATC**
NOT APPLICABLE WITHIN AIRSPACE C


This SID requires minimum climb gradients of
8.5% (520 FT/NM) until passing 800, then
4.5% (273 FT/NM) until passing 2500 due
to airspace structure.

Gnd speed-KT	75	100	150	200	250	300
4.5% V/V (fpm)	342	456	684	911	1139	1367
8.5% V/V (fpm)	646	861	1291	1722	2152	2582

If unable to comply advise FRANKFURT Delivery prior to start-up.


Initial climb clearance **FL070**

ROUTING
DF999 (800+) - VFM (K200-) - DF172 (2500+) -
PABVI (K230-) - SIVDO - KUPIP - MASIR - RAVKI -
DITAM - OBOKA.

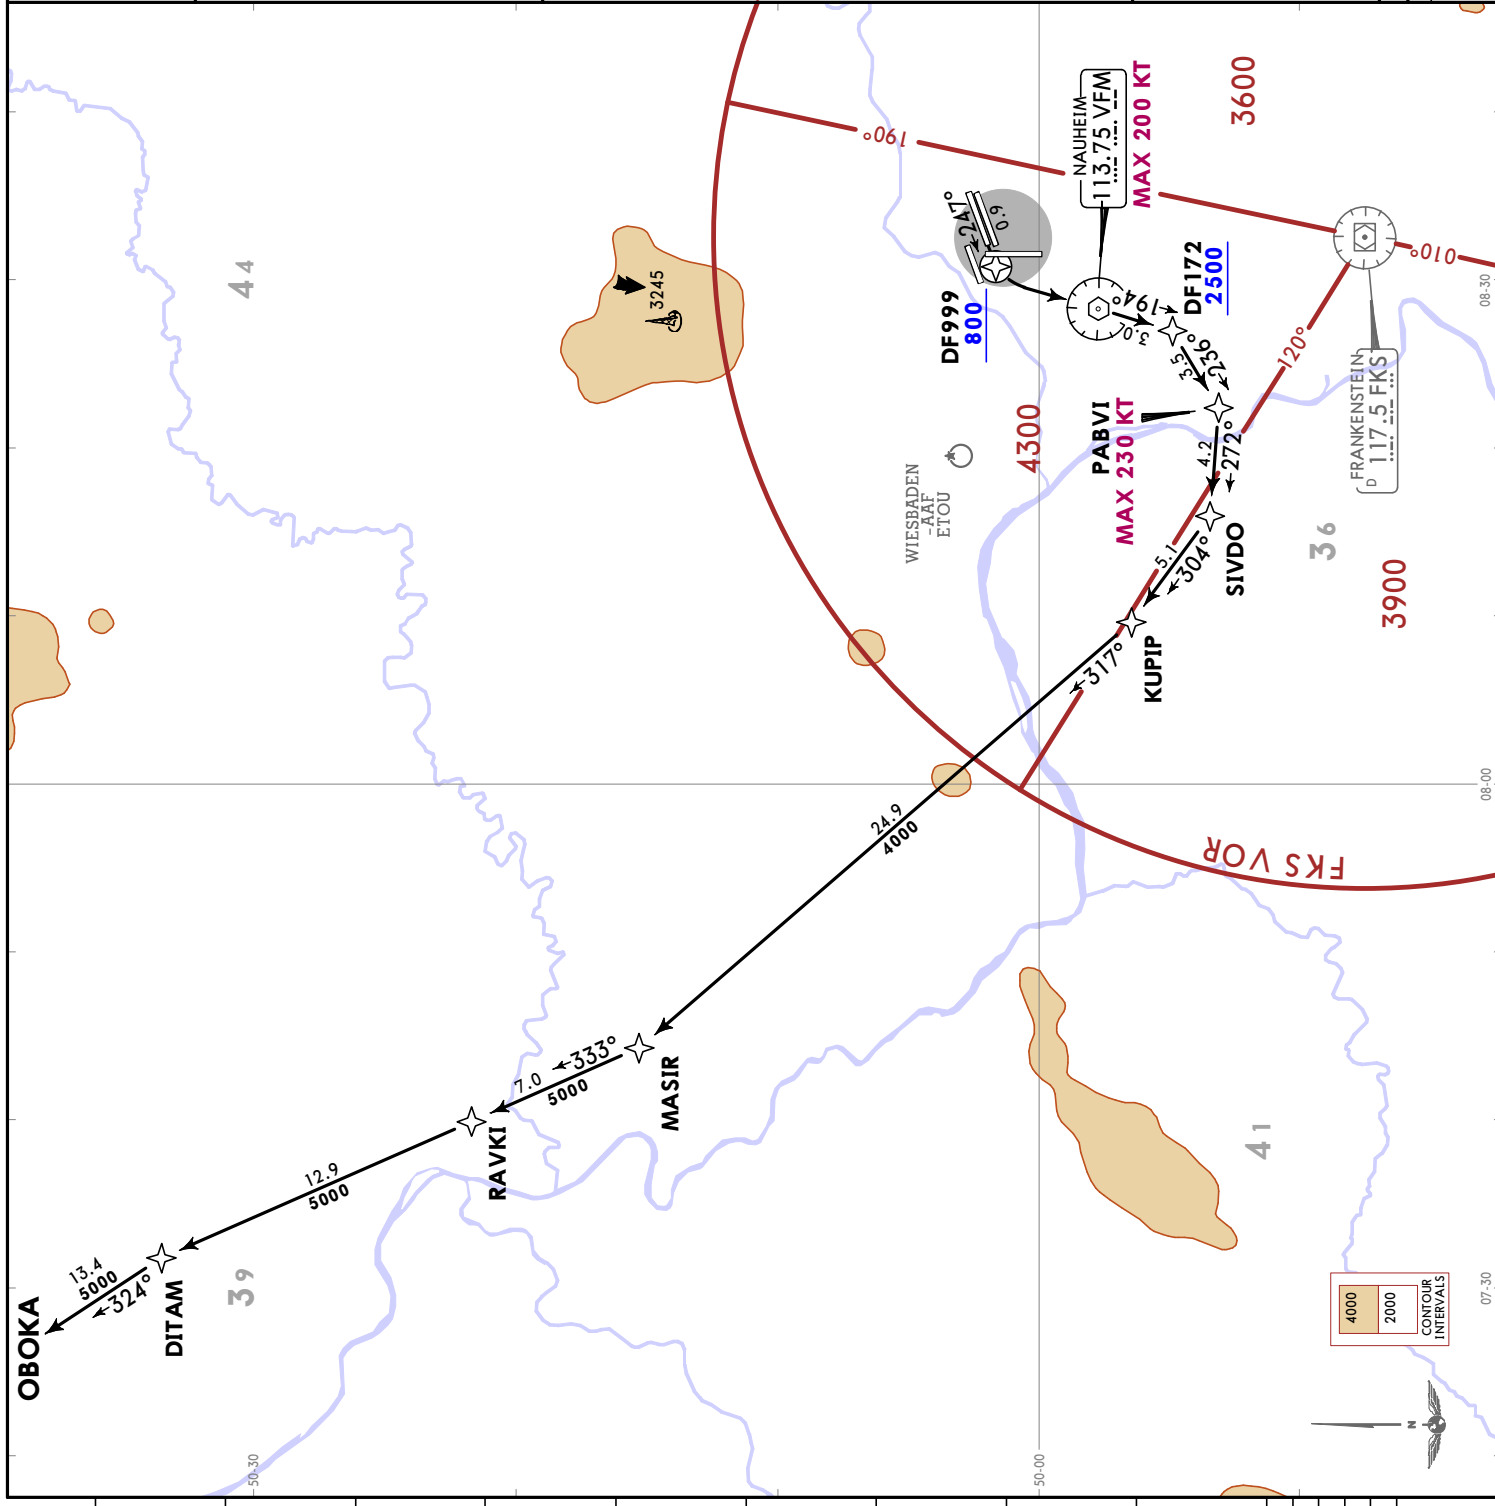

EDDF/FRA
FRANKFURT/MAIN

JEPPesen FRANKFURT/MAIN, GERMANY
17 JAN 25 10-3U Eff 23 Jan RNAV SID (OVERLAY)

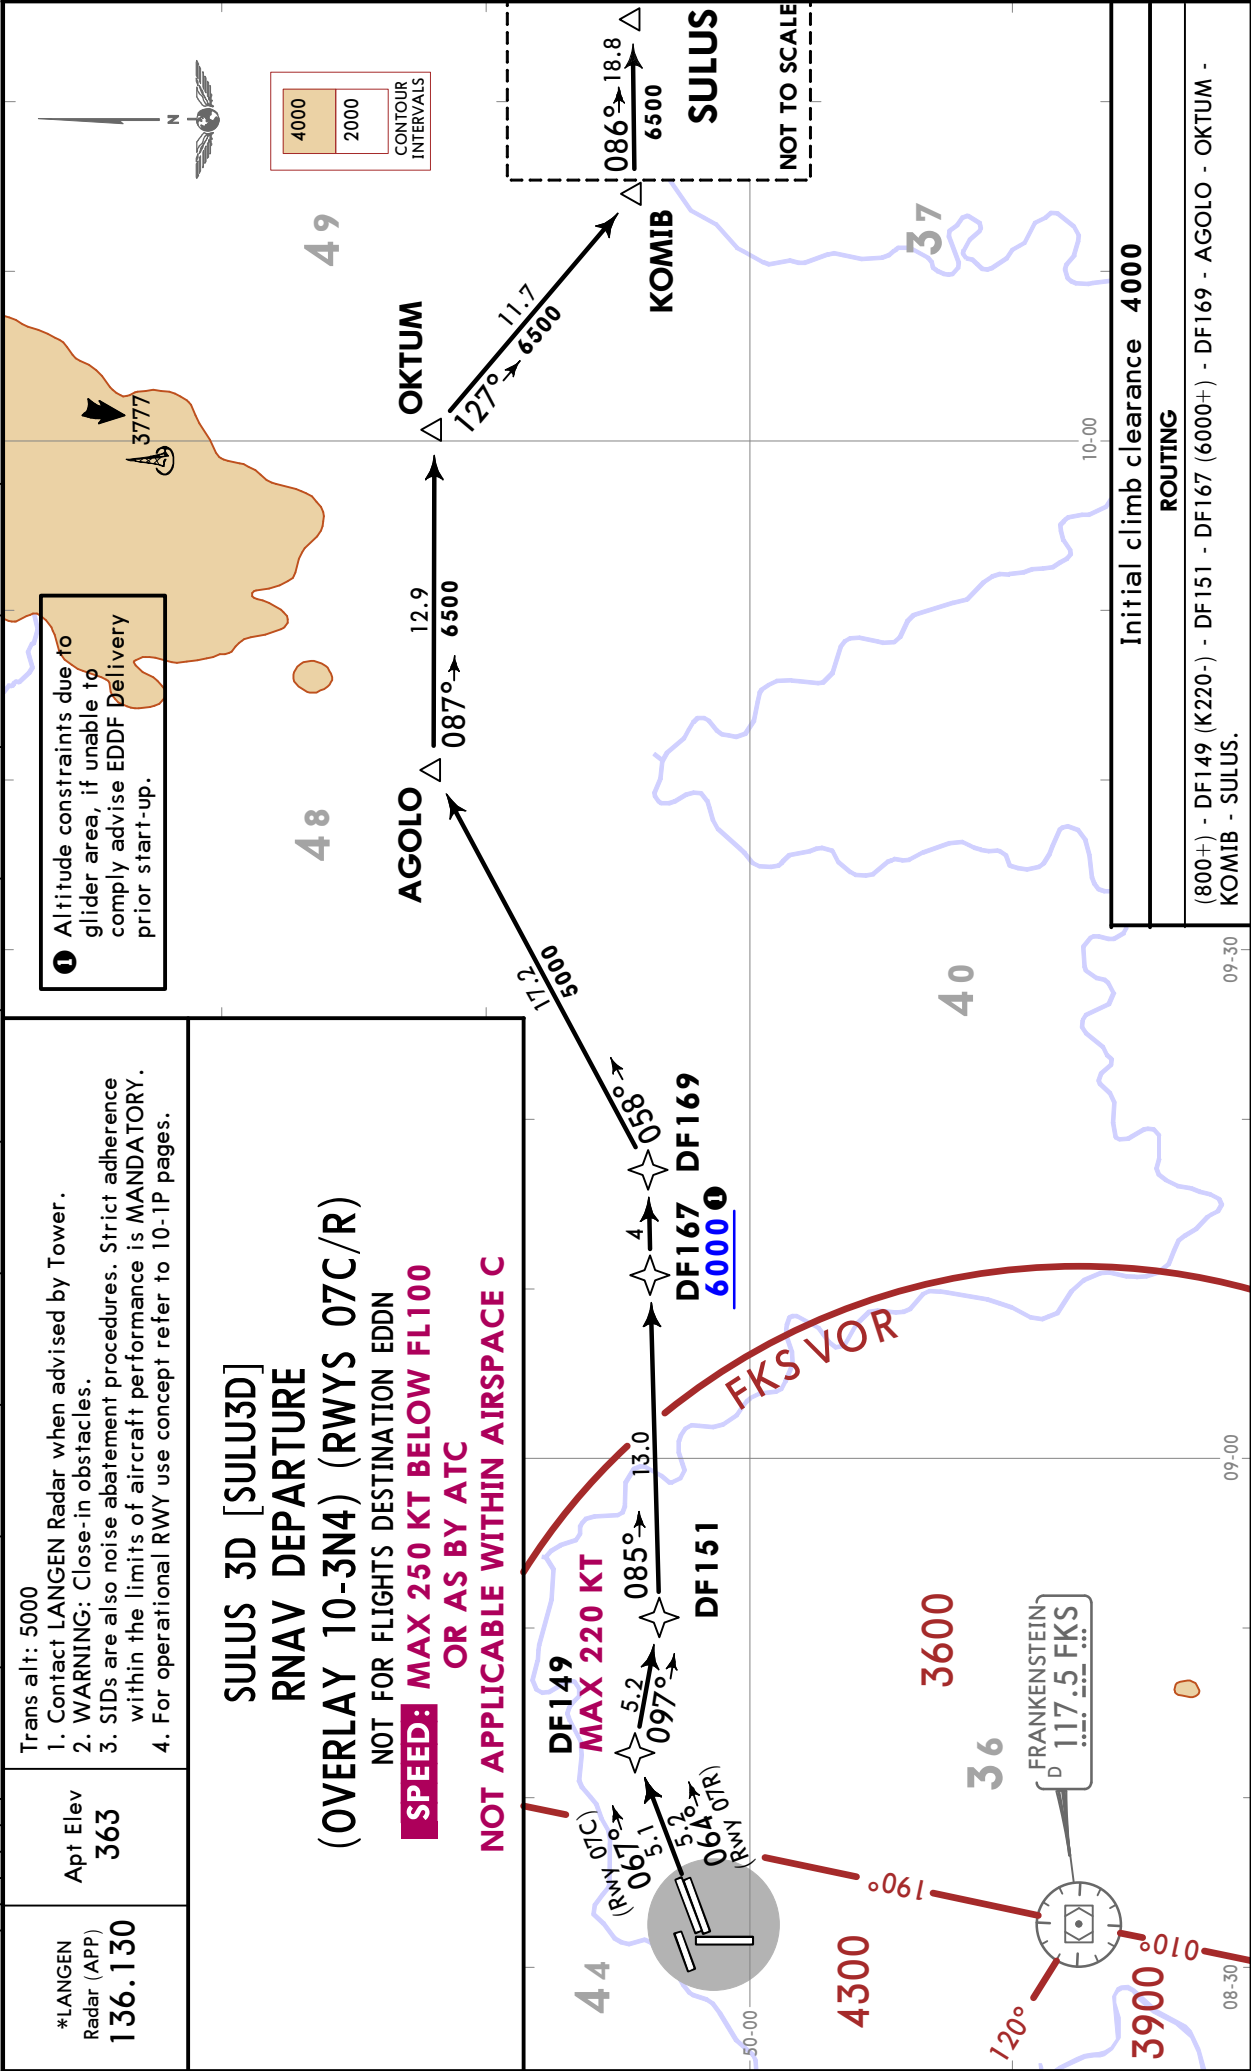


EDDF/FRA
FRANKFURT/MAIN

JEPPesenFRANKFURT/MAIN, GERMANY
17 JAN 25 10-3V Eff 23 Jan RNAV SID (OVERLAY)

*LANGEN Radar (APP) 120.155	Apt Elev 363	Trans alt: 5000 1. Contact LANGEN Radar when advised by Tower. 2. WARNING: Close-in obstacles. 3. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY. 4. For operational RWY use concept refer to 10-1P pages.
-----------------------------------	-----------------	---

TOBAK 1D [TOBA1D]
RNAV DEPARTURE (OVERLAY 10-3N6) (RWYS 07C/R)
NOT FOR FLIGHTS CONTINUING VIA AIRWAY Z-10
SPEED: MAX 250 KT BELOW FL100
OR AS BY ATC
NOT APPLICABLE WITHIN AIRSPACE C

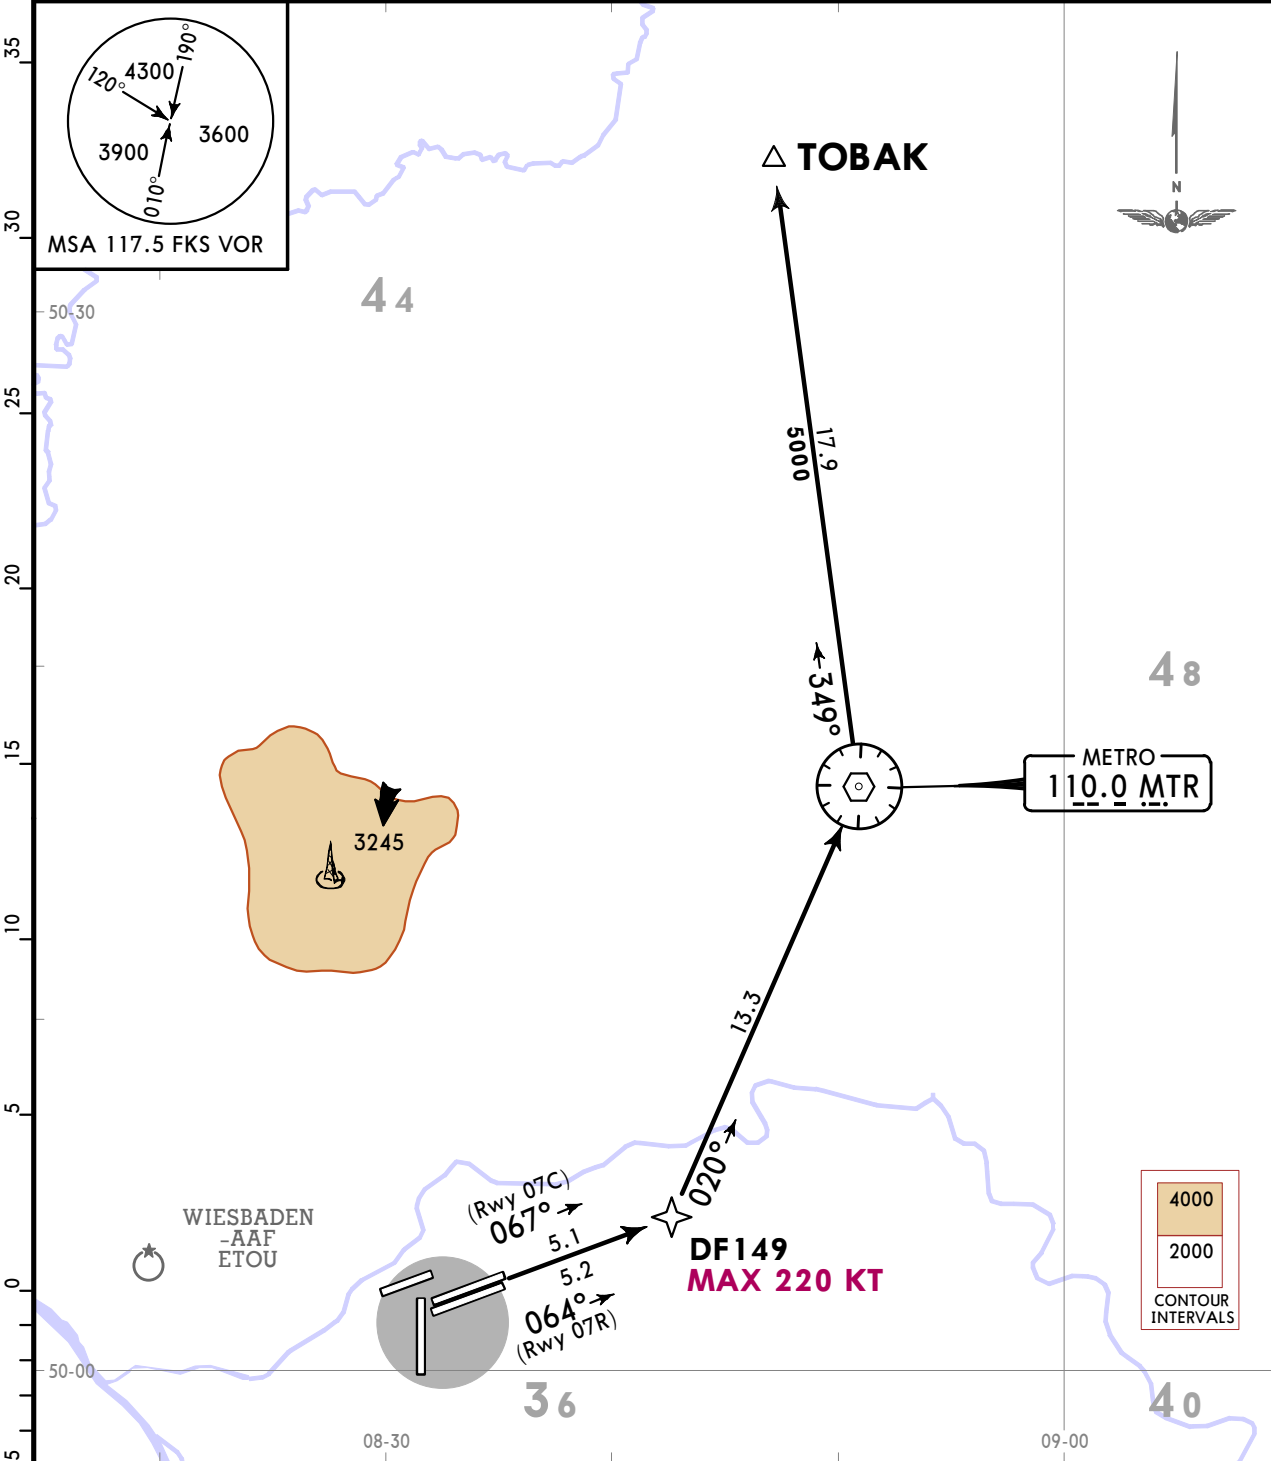

Initial climb clearance 5000
ROUTING
(800+) - DF149 (K220-) - MTR - TOBAK.

EDDF/FRA
FRANKFURT/MAIN

JEPPesen FRANKFURT/MAIN, GERMANY
5 JUL 24 10-3W Eff 11 Jul RNAV SID (OVERLAY)

*LANGEN
Radar (APP)
120.155

Apt Elev
363

Trans alt: 5000
1. Contact LANGEN Radar when advised by Tower.
2. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY.
3. For operational RWY use concept refer to 10-1P pages.

4300
120°
3900
010°
3600
190°

MSA 117.5 FKS VOR

TOBAK 5H [TOBA5H]
RNAV DEPARTURE
(OVERLAY 10-3N7) (RWY 25L)
SPEED: MAX 250 KT BELOW FL100
OR AS BY ATC
NOT APPLICABLE WITHIN AIRSPACE C

This SID requires minimum climb gradients of
8.5% (520 FT/NM) until passing 800, then
6.8% (415 FT/NM) until passing 6000 due to operational requirements.

Gnd speed-KT	75	100	150	200	250	300
4.5% V/V (fpm)	342	456	684	911	1139	1367
8.5% V/V (fpm)	646	861	1291	1722	2152	2582

If unable to comply advise FRANKFURT Delivery prior to start-up.

Initial climb clearance FL070

ROUTING

DF980 (800+) - VFM (K200-) - DF180 (2500+) - ROXAP (K230-) - ADEVO (6000+) - LISKU - TABUM - TESGA - TOBAK.

CHANGES: Chart reindexed. © JEPPesen, 2024. ALL RIGHTS RESERVED.

EDDF/FRA
FRANKFURT/MAIN

JEPPESSEN FRANKFURT/MAIN, GERMANY
5 JUL 24 10-3X Eff 11 Jul RNAV SID (OVERLAY)

*LANGEN
Radar (APP)
120.155

Apt Elev
363

Trans alt: 5000
1. Contact LANGEN Radar when advised by Tower.
2. SIDs are also noise abatement procedures. Strict adherence within the limits of aircraft performance is MANDATORY.
3. For operational RWY use concept refer to 10-1P pages.

120°

190°

070°


4300

3900

3600

MSA 117.5 FKS VOR

TOBAK 7M [TOBA7M]
RNAV DEPARTURE
(OVERLAY 10-3N8) (RWY 25C)
SPEED: MAX 250 KT BELOW FL100
OR AS BY ATC
NOT APPLICABLE WITHIN AIRSPACE C

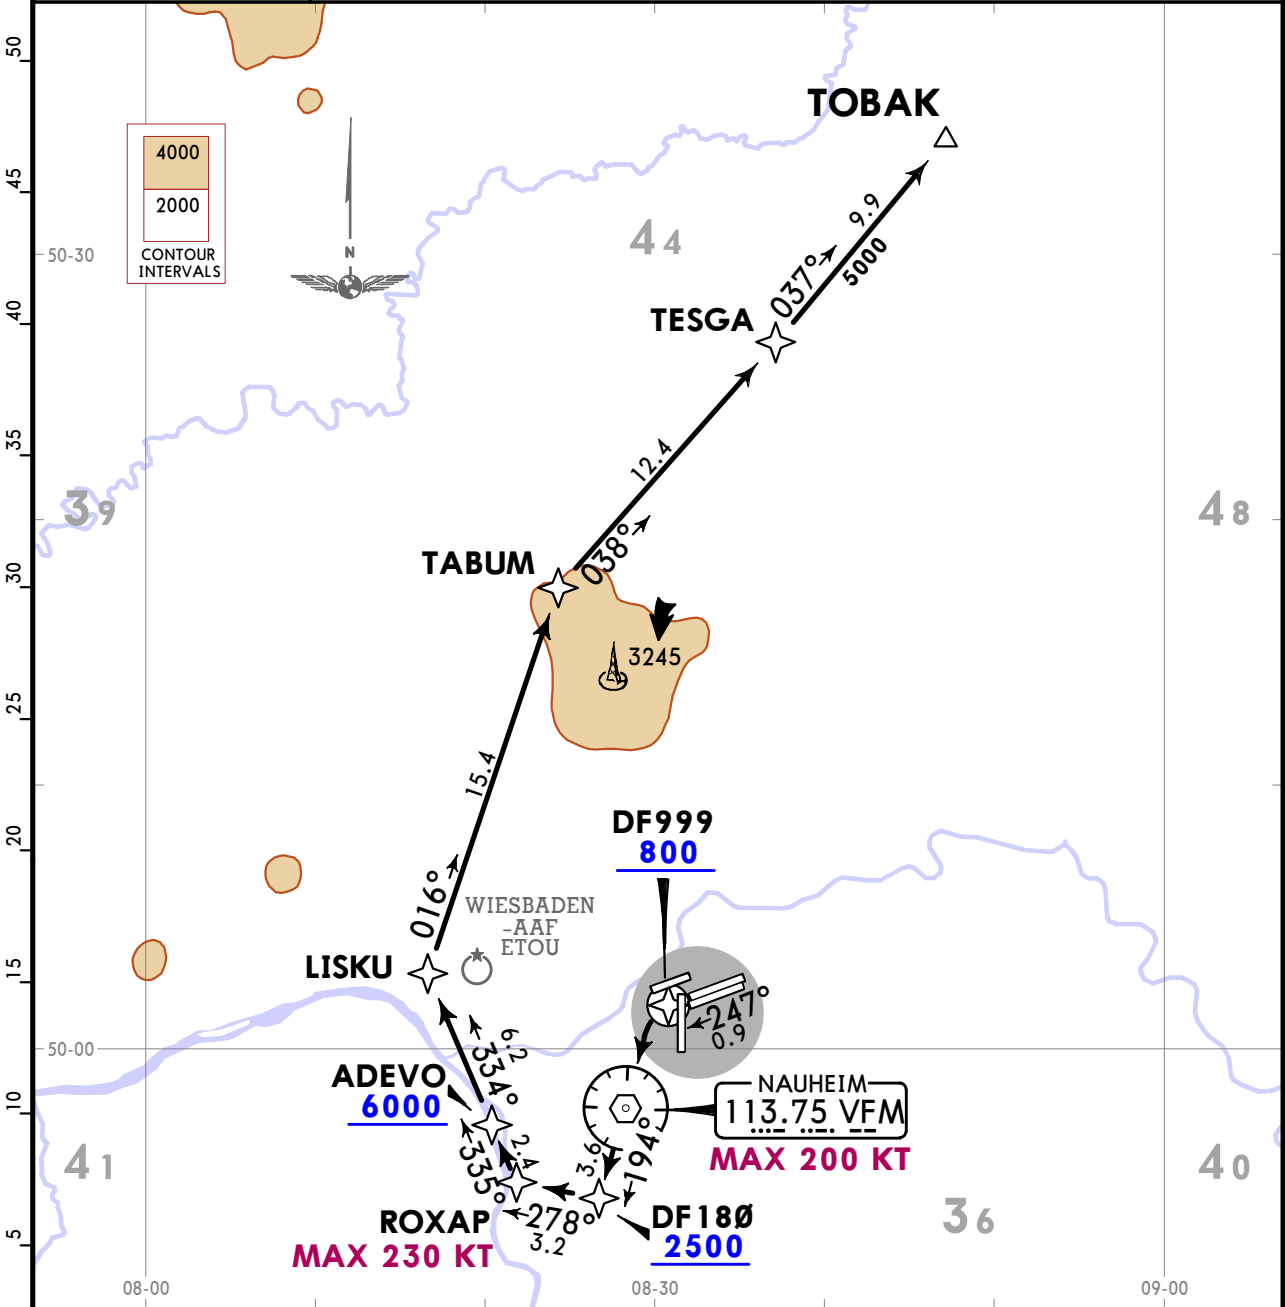

This SID requires minimum climb gradients of
8.5% (520 FT/NM) until passing 800, then
6.8% (415 FT/NM) until passing 6000 due to operational requirements.

Gnd speed-KT	75	100	150	200	250	300
6.8% V/V (fpm)	516	689	1033	1377	1722	2066
8.5% V/V (fpm)	646	861	1291	1722	2152	2582

If unable to comply advise FRANKFURT Delivery prior to start-up.

Initial climb clearance FL070

ROUTING

DF999 (800+) - VFM (K200-) - DF180 (2500+) - ROXAP (K230-) - ADEVO (6000+) - LISKU - TABUM - TESGA - TOBAK.