


EGLL/LHR
HEATHROW

JEPPESSEN
21 JUN 24 (11-1)


LONDON, UK
ILS DME or LOC DME Rwy 09L


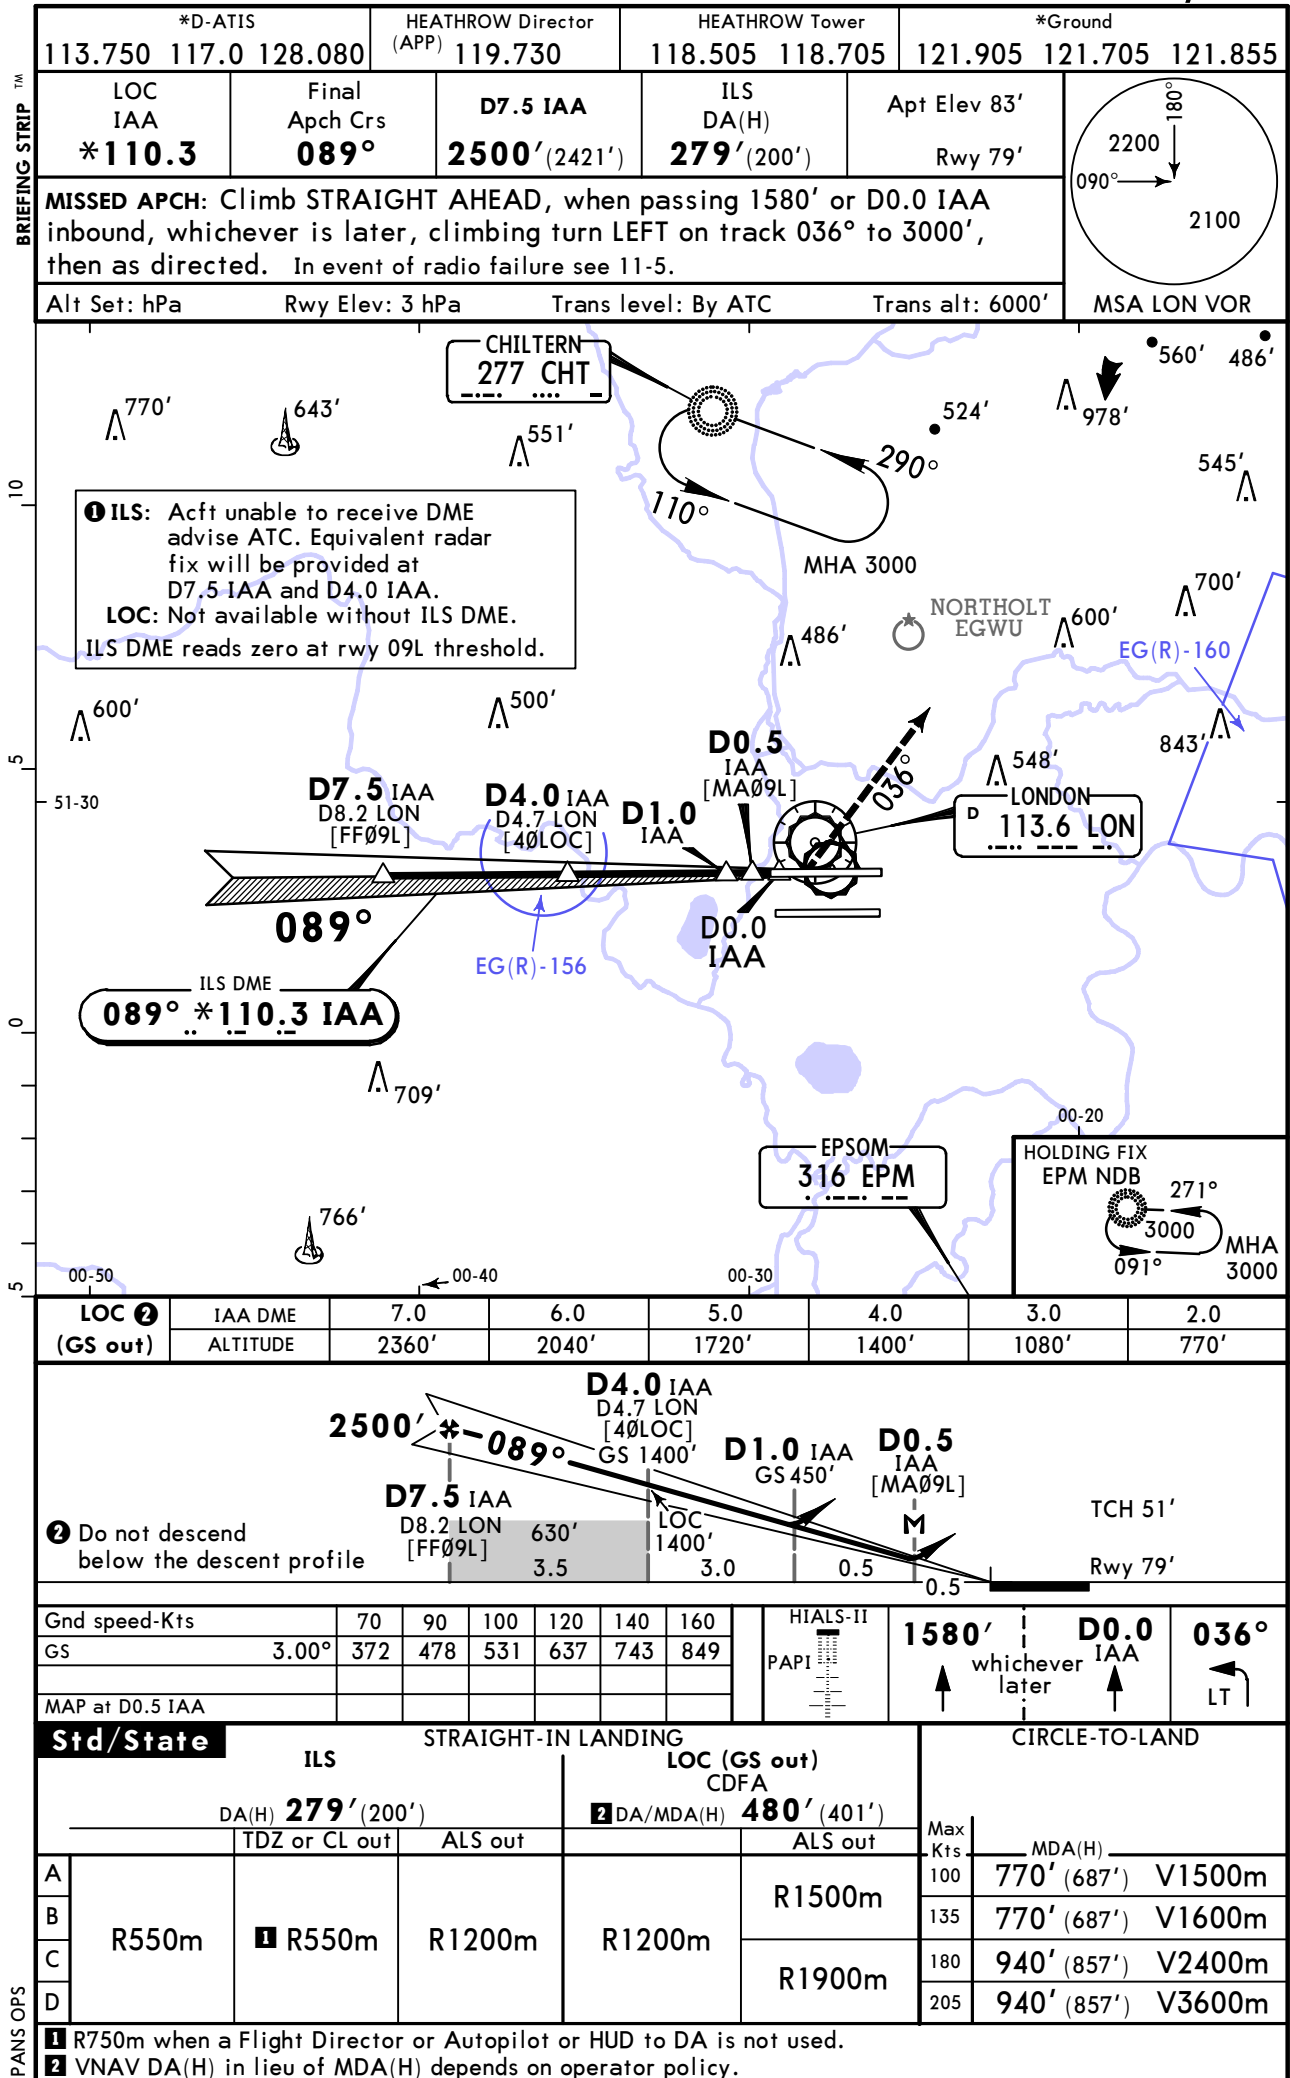


EGLL/LHR
HEATHROW

JEPPESSEN
21 JUN 24 (11-1A)

LONDON, UK
CAT II/III ILS DME Rwy 09L

*D-ATIS 113.750 117.0 128.080			HEATHROW Director (APP) 119.730		HEATHROW Tower 118.505 118.705		*Ground 121.905 121.705 121.855		
LOC IAA *110.3	Final Apch Crs 089°	D7.5 IAA 2500' (2421')		CAT IIIB, IIIA & II ILS Refer to Minimums		Apt Elev 83' Rwy 79'			
MISSED APCH: Climb STRAIGHT AHEAD, when passing 1580' or D0.0 IAA inbound, whichever is later, climbing turn LEFT on track 036° to 3000', then as directed. In event of radio failure see 11-5.									
Alt Set: hPa		Rwy Elev: 3 hPa		Trans level: By ATC		Trans alt: 6000'			
Special Aircrew & Acft Certification Required.									

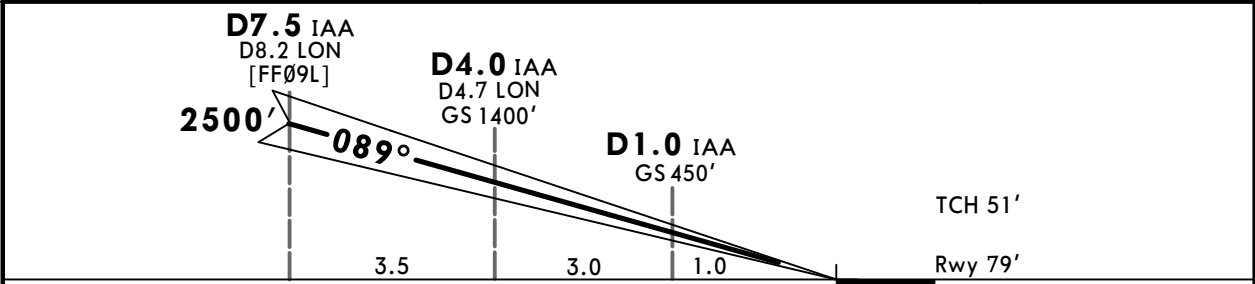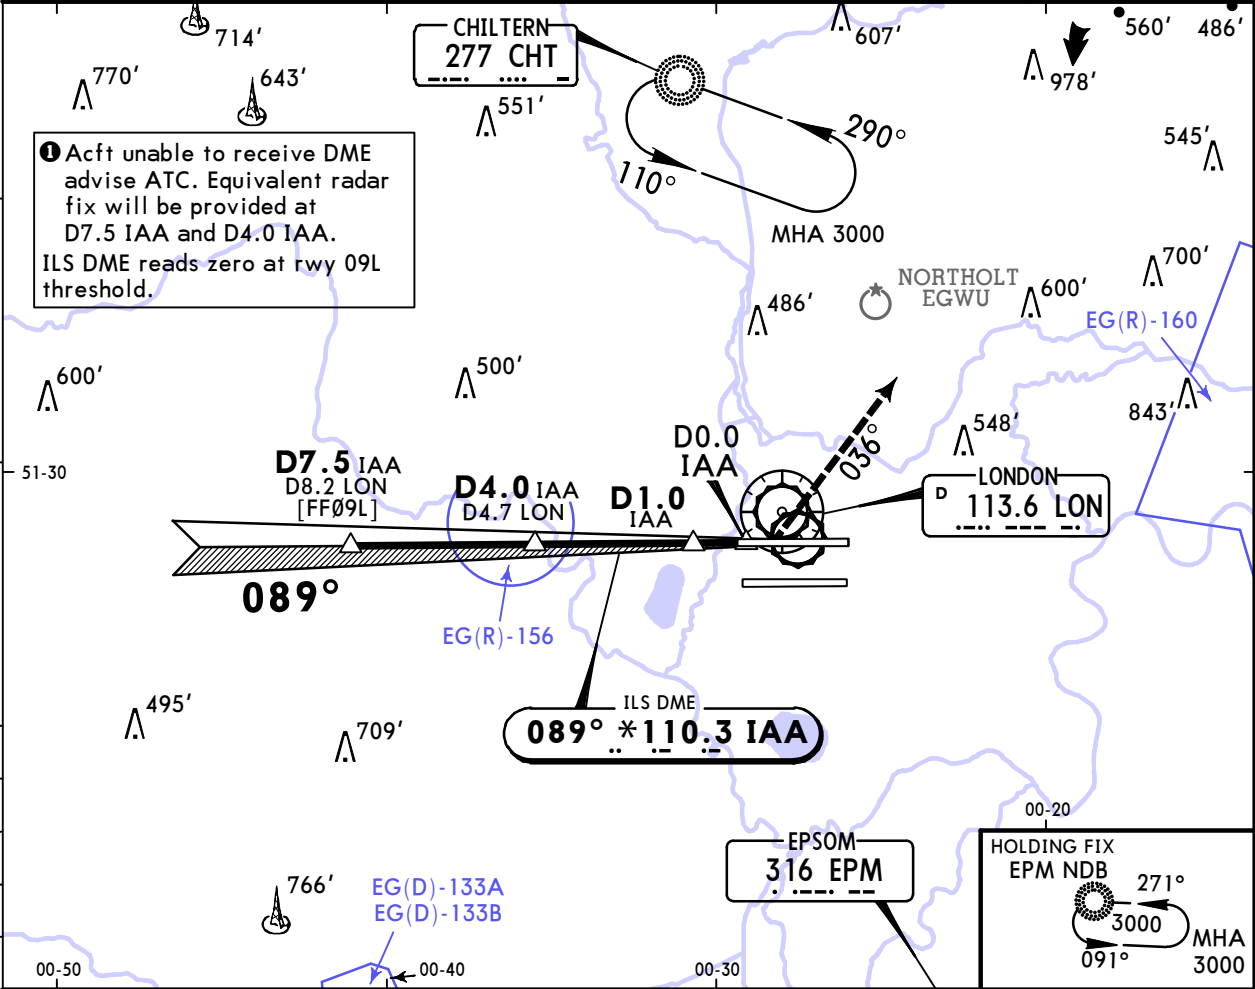

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II PAPI	1580'	D0.0 IAA	036°
GS	3.00°	372	478	531	637	743		↑	↑	LT
								↑	↑	


Std/State			STRAIGHT-IN LANDING		
CAT IIIB ILS		CAT IIIA ILS		CAT II ILS	
		DH 50'		RA 100' DA(H) 179' (100')	
R75m		R200m		R300m	

CAT D without autoland: R350m.

EGLL/LHR
HEATHROW

21 JUN 24
11-2

LONDON, UK
ILS DME or LOC DME Rwy 09R

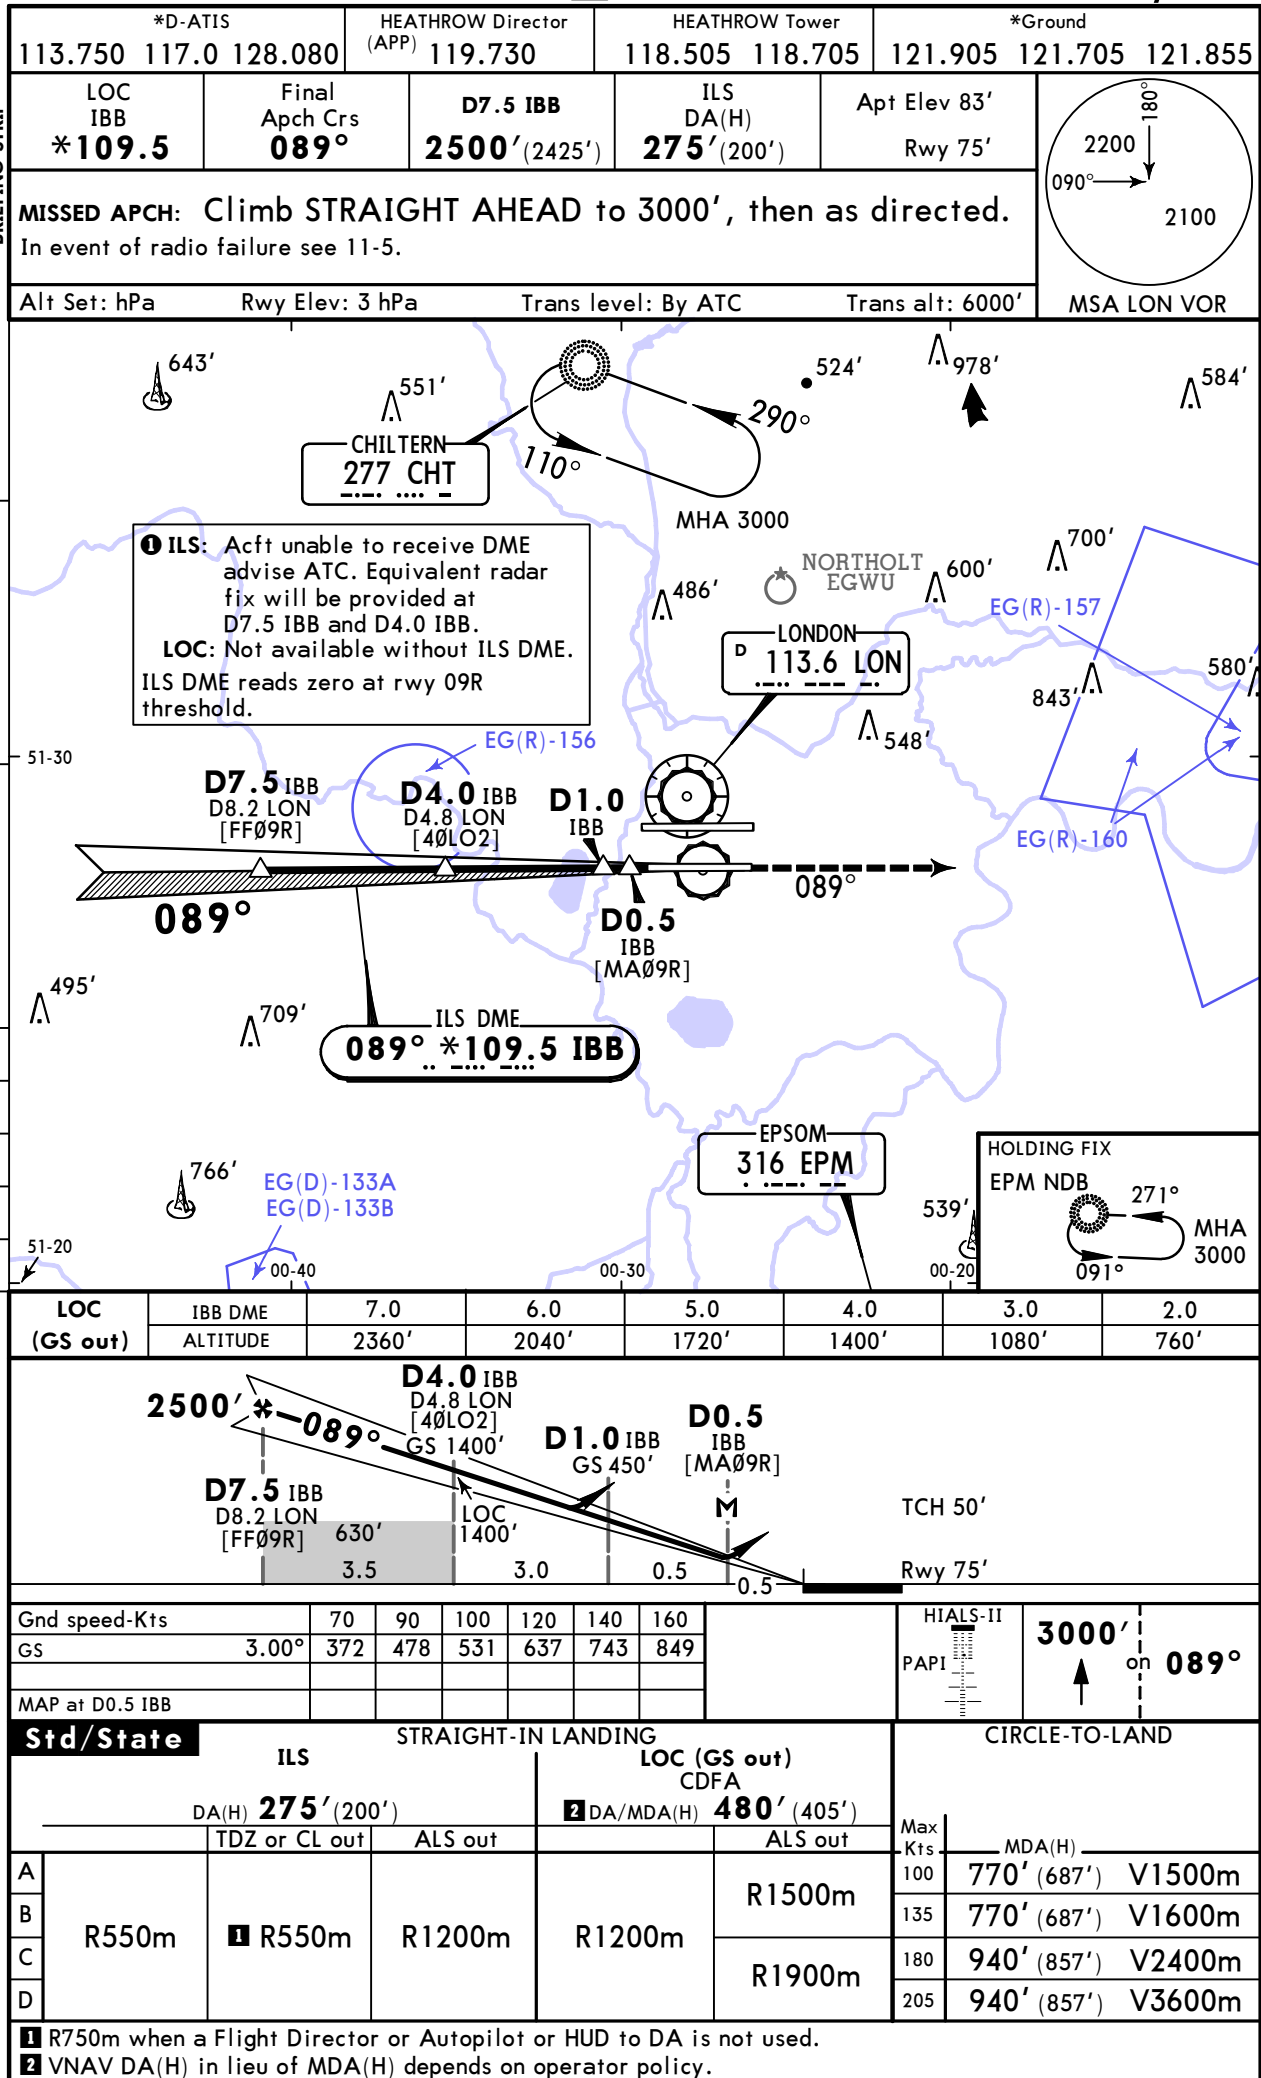

EGLL/LHR
HEATHROW

21 JUN 24 (11-3) ILS DME or LOC DME Rwy 27L

LONDON, UK

*D-ATIS

113.750 117.0 128.080

HEATHROW Director (APP)

119.730

HEATHROW Tower

118.505 118.705

*Ground

121.905 121.705 121.855

LOC ILL

*109.5

Final Apch Crs

269°

D7.5 ILL

2500' (2423')

ILS DA(H)

277' (200')

Apt Elev 83'

Rwy 77'

MISSED APCH: Climb STRAIGHT AHEAD, when passing 1080' or D0.0 ILL, whichever is later, climbing turn LEFT on track 147° to 2000'. When passing D6.0 LON climb without delay to 3000', then as directed.
In event of radio failure see 11-6.

Alt Set: hPa

Rwy Elev: 3 hPa

Trans level: By ATC

Trans alt: 6000'

MSA LON VOR

HOLDING FIX CHT NDB

CHILTERN 277 CHT

LONDON 113.6 LON

EG(R)-156

EG(R)-157

EG(R)-158

EG(R)-159

EG(D)-GVS

EG(R)-160

EG(R)-161

EG(R)-162

EG(R)-163

EG(R)-164

EG(R)-165

EG(R)-166

EG(R)-167

EG(R)-168

EG(R)-169

EG(R)-170

EG(R)-171

EG(R)-172

EG(R)-173

EG(R)-174

EG(R)-175

EG(R)-176

EG(R)-177

EG(R)-178

EG(R)-179

EG(R)-180

EG(R)-181

EG(R)-182

EG(R)-183

EG(R)-184

EG(R)-185

EG(R)-186

EG(R)-187

EG(R)-188

EG(R)-189

EG(R)-190

EG(R)-191

EG(R)-192

EG(R)-193

EG(R)-194

EG(R)-195

EG(R)-196

EG(R)-197

EG(R)-198

EG(R)-199

EG(R)-200

EG(R)-201

EG(R)-202

EG(R)-203

EG(R)-204

EG(R)-205

EG(R)-206

EG(R)-207

EG(R)-208

EG(R)-209

EG(R)-210

EG(R)-211

EG(R)-212

EG(R)-213

EG(R)-214

EG(R)-215

EG(R)-216

EG(R)-217

EG(R)-218

EG(R)-219

EG(R)-220

EG(R)-221

EG(R)-222

EG(R)-223

EG(R)-224

EG(R)-225

EG(R)-226

EG(R)-227

EG(R)-228

EG(R)-229

EG(R)-230

EG(R)-231

EG(R)-232

EG(R)-233

EG(R)-234

EG(R)-235

EG(R)-236

EG(R)-237

EG(R)-238

EG(R)-239

EG(R)-240

EG(R)-241

EG(R)-242

EG(R)-243

EG(R)-244

EG(R)-245

EG(R)-246

EG(R)-247

EG(R)-248

EG(R)-249

EG(R)-250

EG(R)-251

EG(R)-252

EG(R)-253

EG(R)-254

EG(R)-255

EG(R)-256

EG(R)-257

EG(R)-258

EG(R)-259

EG(R)-260

EG(R)-261

EG(R)-262

EG(R)-263

EG(R)-264

EG(R)-265

EG(R)-266

EG(R)-267

EG(R)-268

EG(R)-269

EG(R)-270

EG(R)-271

EG(R)-272

EG(R)-273

EG(R)-274

EG(R)-275

EG(R)-276

EG(R)-277

EG(R)-278

EG(R)-279

EG(R)-280

EG(R)-281

EG(R)-282

EG(R)-283

EG(R)-284

EG(R)-285

EG(R)-286

EG(R)-287

EG(R)-288

EG(R)-289

EG(R)-290

EG(R)-291

EG(R)-292

EG(R)-293

EG(R)-294

EG(R)-295

EG(R)-296

EG(R)-297

EG(R)-298

EG(R)-299

EG(R)-300

EG(R)-301

EG(R)-302

EG(R)-303

EG(R)-304

EG(R)-305

EG(R)-306

EG(R)-307

EG(R)-308

EG(R)-309

EG(R)-310

EG(R)-311

EG(R)-312

EG(R)-313

EG(R)-314

EG(R)-315

EG(R)-316

EG(R)-317

EG(R)-318

EG(R)-319

EG(R)-320

EG(R)-321

EG(R)-322

EG(R)-323

EG(R)-324

EG(R)-325

EG(R)-326

EG(R)-327

EG(R)-328

EG(R)-329

EG(R)-330

EG(R)-331

EG(R)-332

EG(R)-333

EG(R)-334

EG(R)-335

EG(R)-336

EG(R)-337

EG(R)-338

EG(R)-339

EG(R)-340

EG(R)-341

EG(R)-342

EG(R)-343

EG(R)-344

EG(R)-345

EG(R)-346

EG(R)-347

EG(R)-348

EG(R)-349

EG(R)-350

EG(R)-351

EG(R)-352

EG(R)-353

EG(R)-354

EG(R)-355

EG(R)-356

EG(R)-357

EG(R)-358

EG(R)-359

EG(R)-360

EG(R)-361

EG(R)-362

EG(R)-363

EG(R)-364

EG(R)-365

EG(R)-366

EG(R)-367

EG(R)-368

EG(R)-369

EG(R)-370

EG(R)-371

EG(R)-372

EG(R)-373

EG(R)-374

EG(R)-375

EG(R)-376

EG(R)-377

EG(R)-378

EG(R)-379

EG(R)-380

EG(R)-381

EG(R)-382

EG(R)-383

EG(R)-384

EG(R)-385

EG(R)-386

EG(R)-387

EG(R)-388

EG(R)-389

EG(R)-390

EG(R)-391

EG(R)-392

EG(R)-393

EG(R)-394

EG(R)-395

EG(R)-396

EG(R)-397

EG(R)-398

EG(R)-399

EG(R)-400

EG(R)-401

EG(R)-402

EG(R)-403

EG(R)-404

EG(R)-405

EG(R)-406

EG(R)-407

EG(R)-408

EG(R)-409

EG(R)-410

EG(R)-411

EG(R)-412

EG(R)-413

EG(R)-414

EG(R)-415

EG(R)-416

EG(R)-417

EG(R)-418

EG(R)-419

EG(R)-420

EG(R)-421

EG(R)-422

EG(R)-423

EG(R)-424

EG(R)-425

EG(R)-426

EG(R)-427

EG(R)-428

EG(R)-429

EG(R)-430

EG(R)-431

EG(R)-432

EG(R)-433

EG(R)-434

EG(R)-435

EG(R)-436

EG(R)-437

EG(R)-438

EG(R)-439

EG(R)-440

EG(R)-441

EG(R)-442

EG(R)-443

EG(R)-444

EG(R)-445

EG(R)-446

EG(R)-447

EG(R)-448

EG(R)-449

EG(R)-450

EG(R)-451

EG(R)-452

EG(R)-453

EG(R)-454

EG(R)-455

EG(R)-456

EG(R)-457

EG(R)-458

EG(R)-459

EG(R)-460

EG(R)-461

EG(R)-462

EG(R)-463

EG(R)-464

EG(R)-465

EG(R)-466

EG(R)-467

EG(R)-468

EG(R)-469

EG(R)-470

EG(R)-471

EG(R)-472

EG(R)-473

EG(R)-474

EG(R)-475

EG(R)-476

EG(R)-477

EG(R)-478

EG(R)-479

EG(R)-480

EG(R)-481

EG(R)-482

EG(R)-483

EG(R)-484

EG(R)-485

EG(R)-486

EG(R)-487

EG(R)-488

EG(R)-489

EG(R)-490

EG(R)-491

EG(R)-492

EG(R)-493

EG(R)-494

EG(R)-495

EG(R)-496

EG(R)-497

EG(R)-498

EG(R)-499

EG(R)-500

EG(R)-501

EG(R)-502

EG(R)-503

EG(R)-504

EG(R)-505

EG(R)-506

EG(R)-507

EG(R)-508

EG(R)-509

EG(R)-510

EG(R)-511

EG(R)-512

EG(R)-513

EG(R)-514

EG(R)-515

EG(R)-516

EG(R)-517

EG(R)-518

EG(R)-519

EG(R)-520

EG(R)-521

EG(R)-522

EG(R)-523

EG(R)-524

EG(R)-525

EG(R)-526

EG(R)-527

EG(R)-528

EG(R)-529

EG(R)-530

EG(R)-531

EG(R)-532

EG(R)-533

EG(R)-534

EG(R)-535

EG(R)-536

EG(R)-537

EG(R)-538

EG(R)-539

EG(R)-540


EG(R)-541

EG(R)-542



EGLL/LHR
HEATHROW

JEPPESSEN
21 JUN 24 (11-3A)

LONDON, UK
CAT II/III ILS DME Rwy 27L

*D-ATIS 113.750 117.0 128.080			HEATHROW Director (APP) 119.730		HEATHROW Tower 118.505 118.705		*Ground 121.905 121.705 121.855			
LOC ILL *109.5		Final Apch Crs 269°		D7.5 ILL 2500' (2423')		CAT IIIB, IIIA & II ILS Refer to Minimums		Apt Elev 83' Rwy 77'		
MISSED APCH: Climb STRAIGHT AHEAD, when passing 1080' or D0.0 ILL, whichever is later, climbing turn LEFT on track 147° to 2000'. When passing D6.0 LON climb without delay to 3000', then as directed. In event of radio failure see 11-6.										
Alt Set: hPa		Rwy Elev: 3 hPa		Trans level: By ATC				Trans alt: 6000'		
Special Aircrew & Acft Certification Required.										

MSA LON VOR

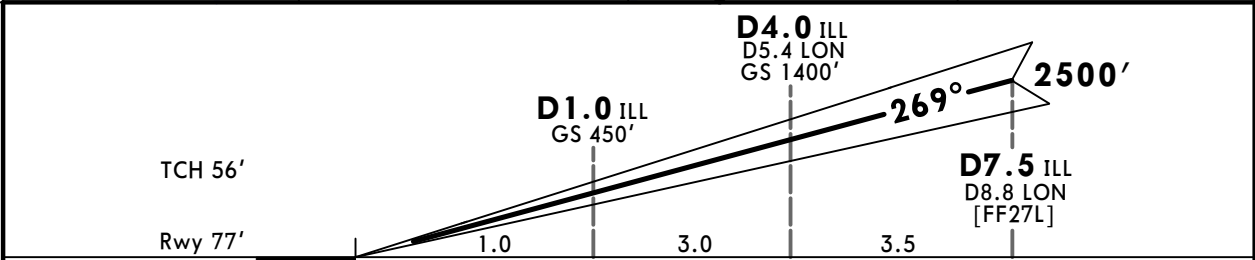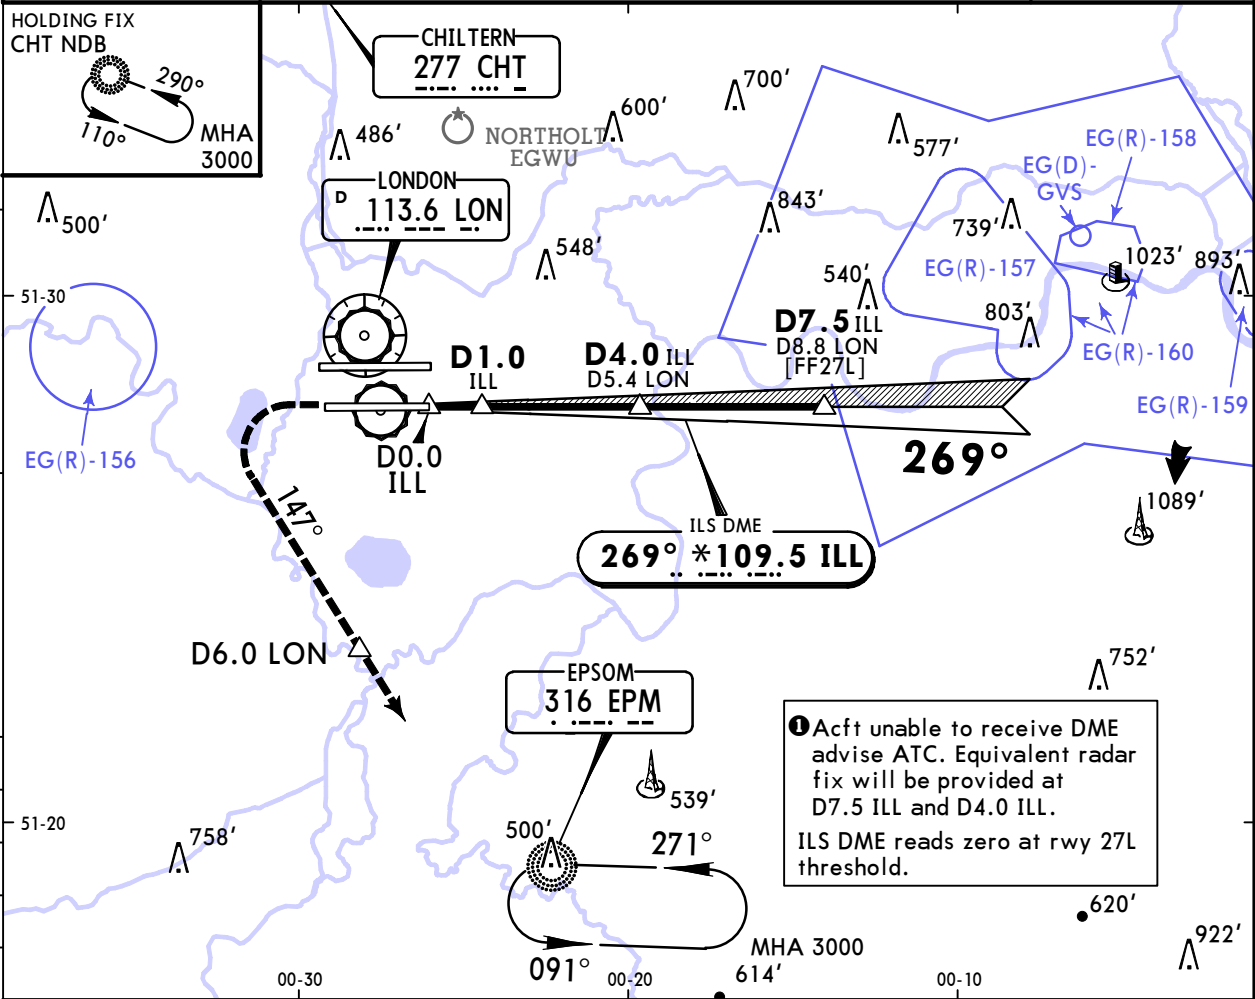


Gnd speed-Kts	70	90	100	120	140	160	HIALS-II PAPI	1080'	D0.0 ILL	147°
GS	3.00°	372	478	531	637	743		↑	↑	LT
								↑	↑	

Std/State		STRAIGHT-IN LANDING	
CAT IIIB ILS	CAT IIIA ILS	CAT II ILS	
	DH 50'	RA 102' DA(H) 177' (100')	
R75m	R200m	R300m	
CAT D without autoland: R350m.			

EGLL/LHR
HEATHROW

JEPPESSEN
21 JUN 24 (11-4)


LONDON, UK
ILS DME or LOC DME Rwy 27R


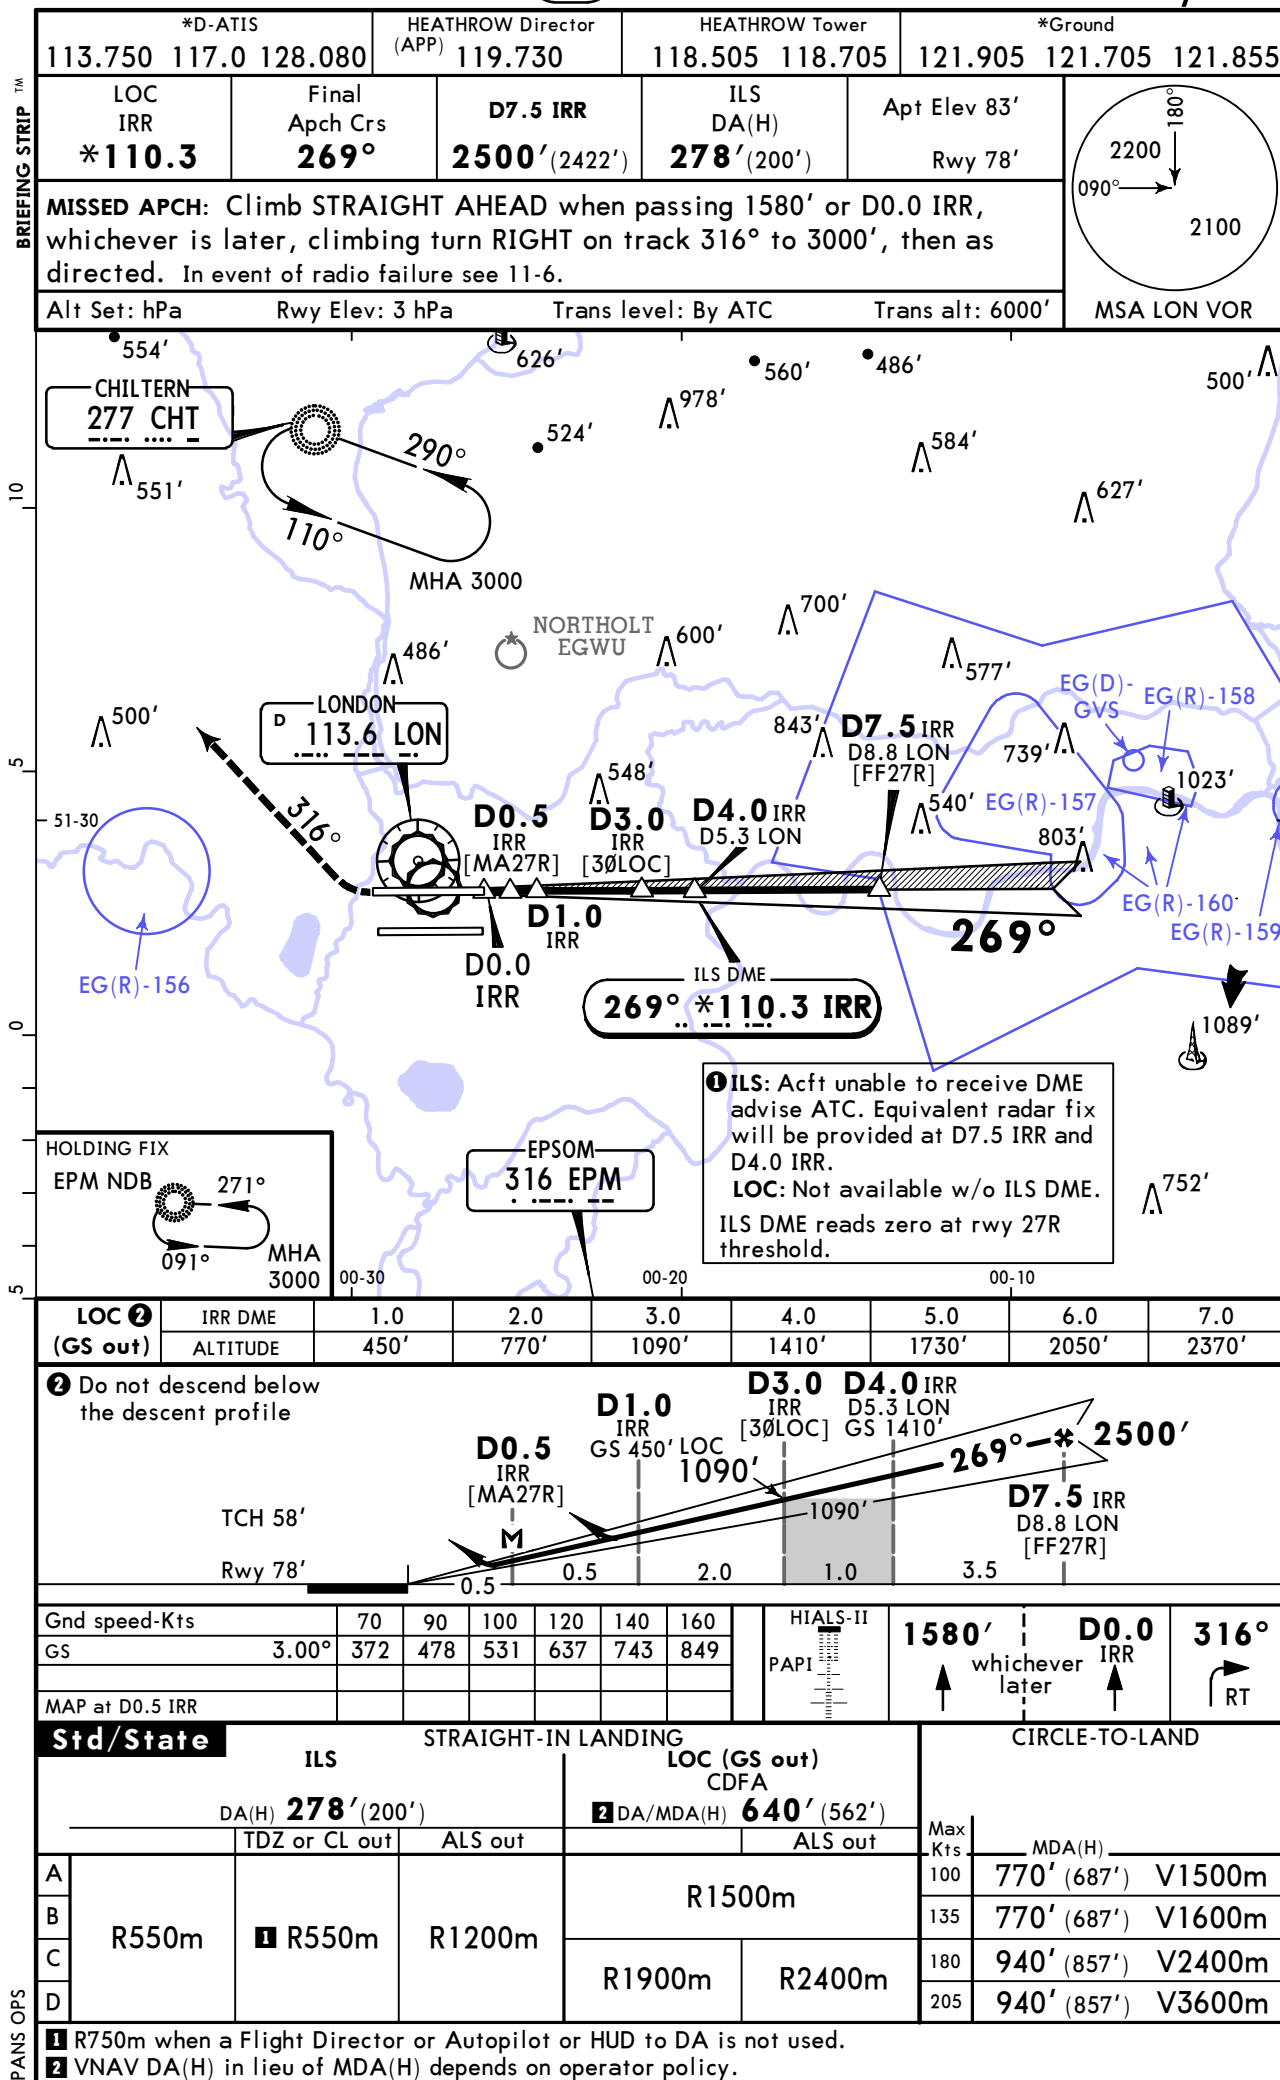


EGLL/LHR
HEATHROW

JEPPESSEN
21 JUN 24 (11-4A)

LONDON, UK
CAT II/III ILS DME Rwy 27R

*D-ATIS 113.750 117.0 128.080			HEATHROW Director (APP) 119.730		HEATHROW Tower 118.505 118.705		*Ground 121.905 121.705 121.855			
LOC IRR *110.3		Final Apch Crs 269°		D7.5 IRR 2500' (2422')		CAT IIIB, IIIA & II ILS Refer to Minimums		Apt Elev 83' Rwy 78'		
MISSED APCH: Climb STRAIGHT AHEAD when passing 1580' or D0.0 IRR, whichever is later, climbing turn RIGHT on track 316° to 3000', then as directed. In event of radio failure see 11-6.										
Alt Set: hPa		Rwy Elev: 3 hPa		Trans level: By ATC			Trans alt: 6000'			
Special Aircrew & Acft Certification Required.										
MSA LON VOR										

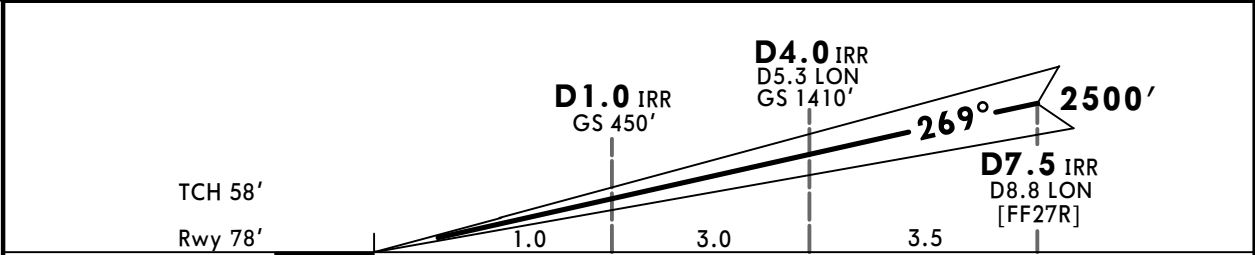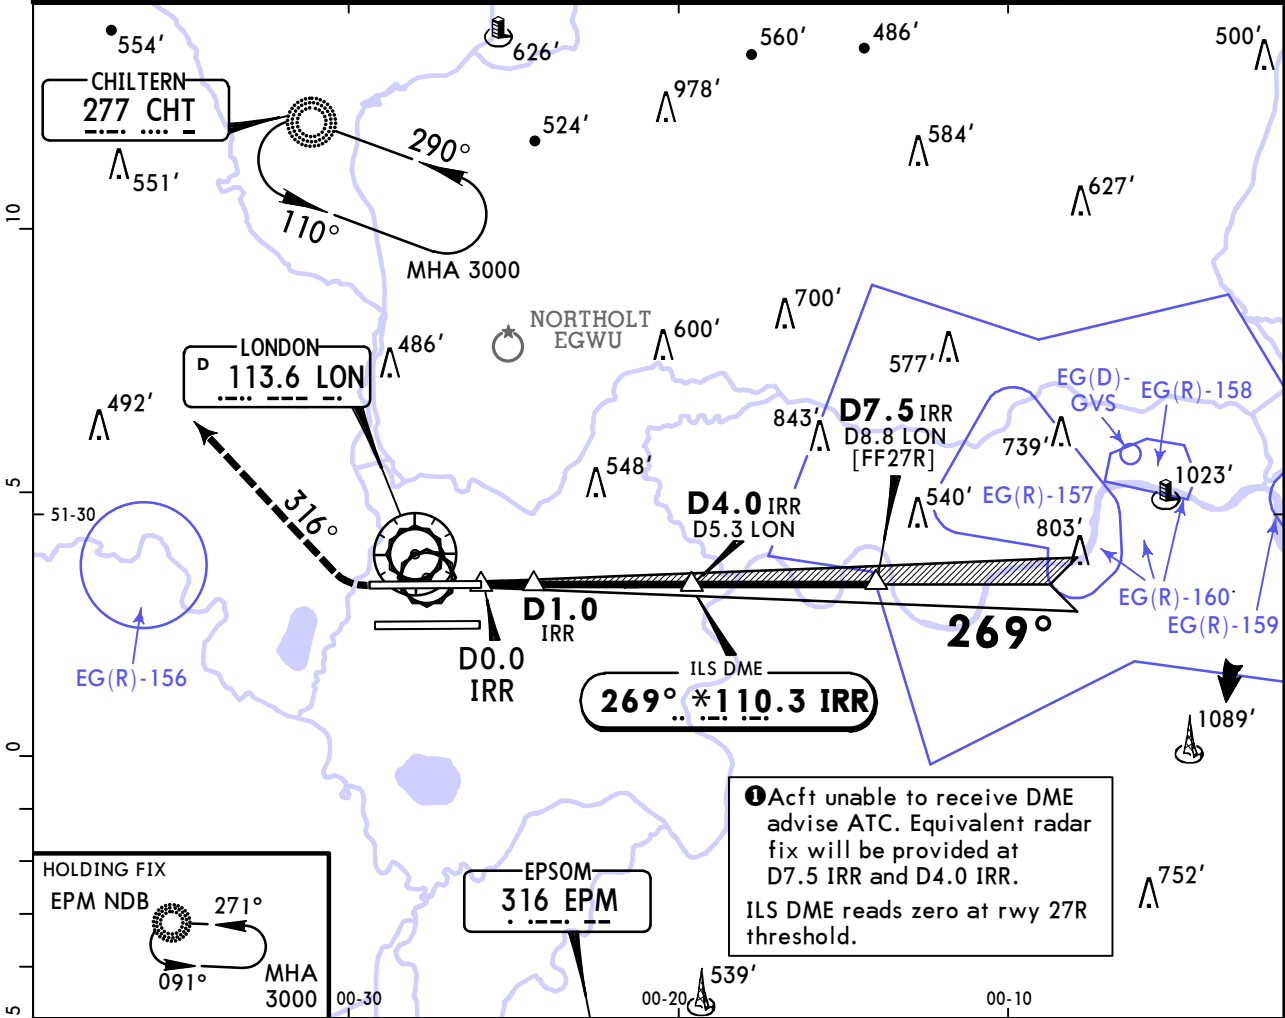

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II PAPI	1580' whichever later	D0.0 IRR	316° RT
GS	3.00°	372	478	531	637	743				

Std/State			STRAIGHT-IN LANDING		
CAT IIIB ILS		CAT IIIA ILS		CAT II ILS	
		DH 50'		RA 102'	
				DA(H) 178' (100')	
R75m		R200m		R300m	

CAT D without autoland: R350m.


EGLL/LHR

Apt Elev **83'**
JEPPESSEN

22 DEC 23 **(11-5)** Eff 28 Dec

LONDON, UK
HEATHROW

PROCEDURES TO BE USED IN THE EVENT OF RADIO FAILURE FOLLOWING A MISSED APPROACH

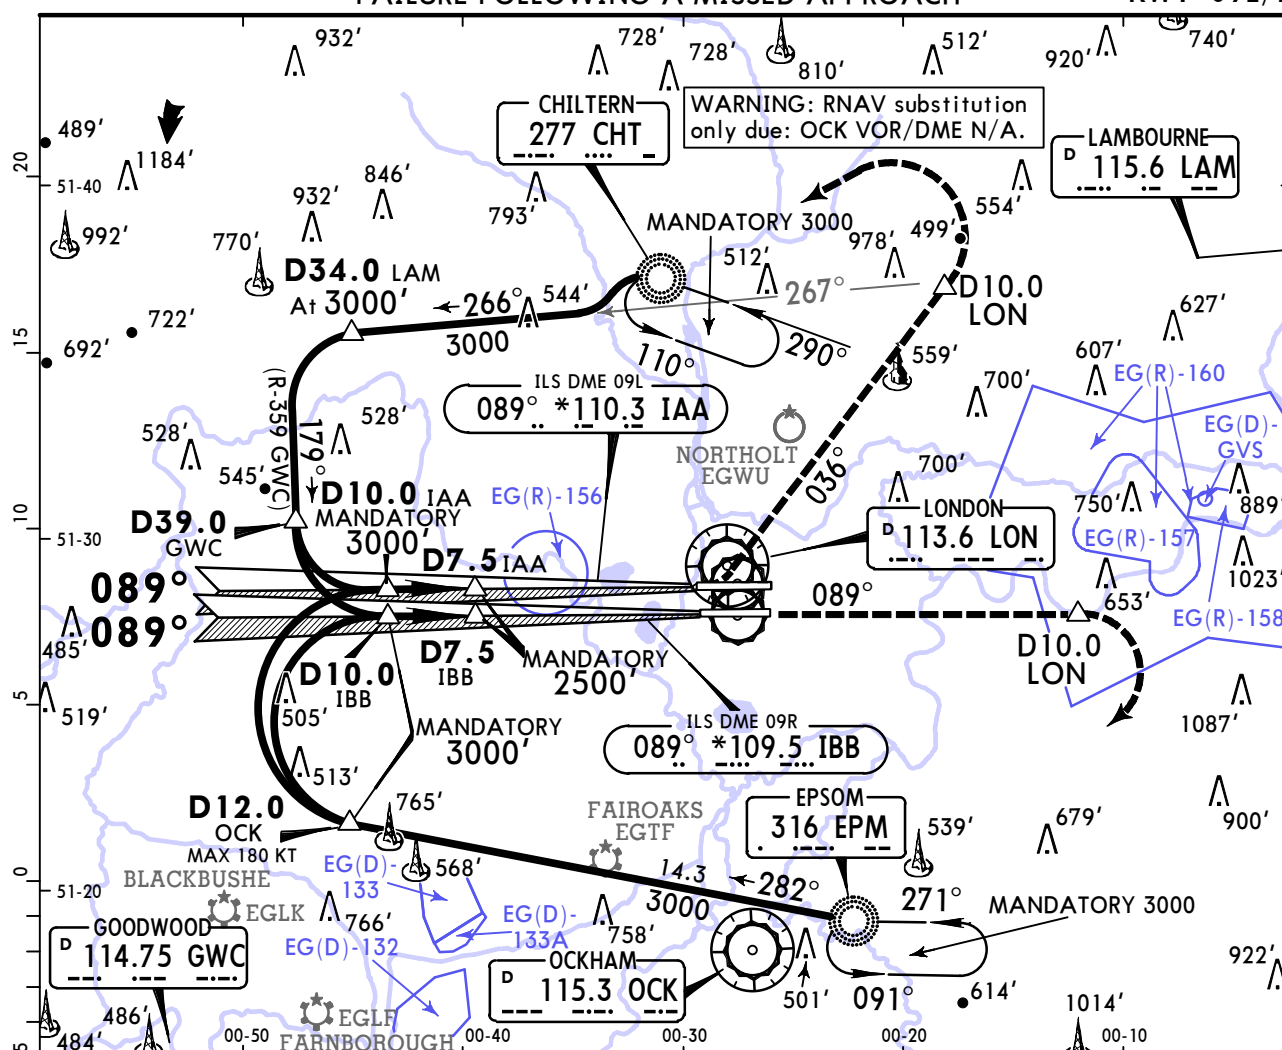RWY 09L/R


Holdings, initial and intermediate approach valid up to 220 KT.

VIA EPSOM NDB

MISSED APCH: In event of radio failure, on passing D10.0 LON turn RIGHT to EPM NDB at 3000', thence:

Rwy 09L: After holding leave EPM NDB on track 282° maintaining 3000'. At D12.0 OCK (MAX 180 KT) turn RIGHT to intercept ILS localizer course to be established at D10.0 IAA. After D10.0 IAA descend to 2500'. Continue approach as charted for rwy 09L.

Rwy 09R: After holding leave EPM NDB on track 282° maintaining 3000'. At D12.0 OCK (MAX 180 KT) turn RIGHT to intercept ILS localizer course to be established at D10.0 IBB. After D10.0 IBB descend to 2500'. Continue approach as charted for rwy 09R.

VIA CHILTERN NDB

MISSED APCH: In event of radio failure, on passing D10.0 LON proceed to CHT NDB at 3000', thence:

Rwy 09L: After holding leave CHT NDB on R-266 LAM maintaining 3000'. At D34.0 LAM turn LEFT to 179° (R-359 GWC). At D39.0 GWC turn LEFT to intercept ILS localizer course to be established at D10.0 IAA. After D10.0 IAA descend to 2500'. Continue approach as charted for rwy 09L.

Rwy 09R: After holding leave CHT NDB on R-266 LAM maintaining 3000'. At D34.0 LAM turn LEFT to 179° (R-359 GWC). At D39.0 GWC turn LEFT to intercept ILS localizer course to be established at D10.0 IBB. After D10.0 IBB descend to 2500'. Continue approach as charted for rwy 09R.

PANS OPS

CHANGES: Warning note added, holding altitudes, bearings.

© JEPPESSEN, 1998, 2023. ALL RIGHTS RESERVED.


EGLL/LHR

Apt Elev **83'**
JEPPESSEN

22 DEC 23 **11-6** Eff 28 Dec

LONDON, UK
HEATHROW

PROCEDURES TO BE USED IN THE EVENT OF RADIO FAILURE FOLLOWING A MISSED APPROACH

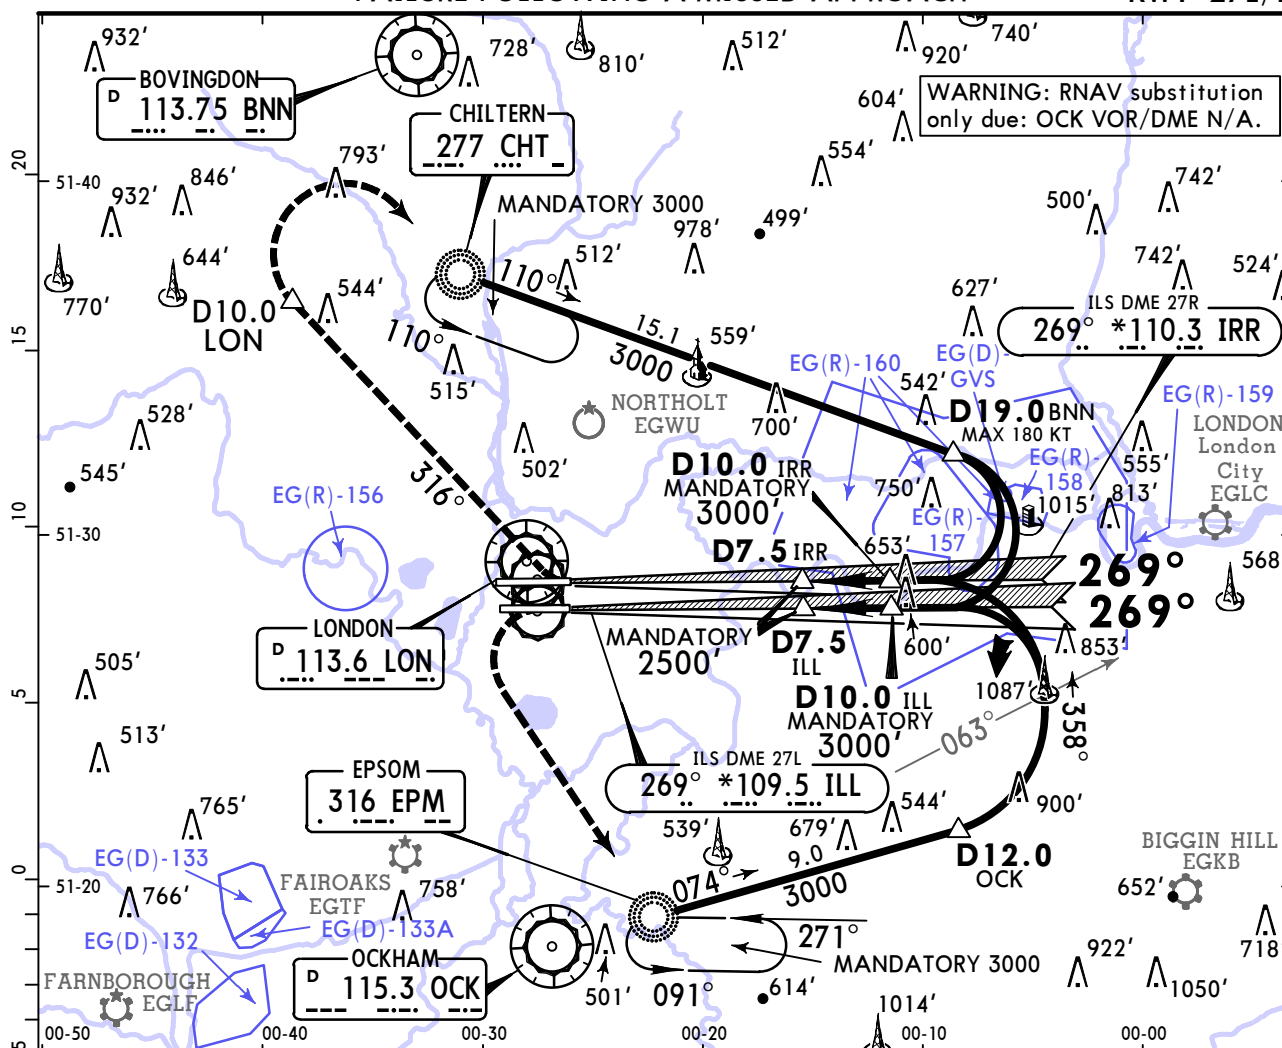RWY 27L/R


Holdings, initial and intermediate approach valid up to 220 KT.

VIA EPSOM NDB

MISSED APCH: In event of radio failure, on reaching 3000' proceed to EPM NDB at 3000', thence:

Rwy 27L: After holding leave EPM NDB on R-074 OCK maintaining 3000'. At D12.0 OCK turn LEFT onto track 358°. At R-063 OCK turn LEFT to intercept ILS localizer to be established at D10.0 ILL. After D10.0 ILL descend to 2500'. Continue approach as charted for rwy 27L.

Rwy 27R: After holding leave EPM NDB on R-074 OCK maintaining 3000'. At D12.0 OCK turn LEFT onto track 358°. At R-063 OCK turn LEFT to intercept ILS localizer to be established at D10.0 IRR. After D10.0 IRR descend to 2500'. Continue approach as charted for rwy 27R.

VIA CHILTERN NDB

MISSED APCH: In event of radio failure, on passing D10.0 LON turn RIGHT to CHT NDB at 3000', thence:

Rwy 27L: After holding leave CHT NDB on track 110° maintaining 3000'. At D19.0 BNN (MAX 180 KT) turn RIGHT to intercept ILS localizer to be established at D10.0 ILL. After D10.0 ILL descend to 2500'. Continue approach as charted for rwy 27L.

Rwy 27R: After holding leave CHT NDB on track 110° maintaining 3000'. At D19.0 BNN (MAX 180 KT) turn RIGHT to intercept ILS localizer to be established at D10.0 IRR. After D10.0 IRR descend to 2500'. Continue approach as charted for rwy 27R.


PANS OPS

EGLL/LHR
HEATHROW


JEPPESEN
21 JUN 24 (12-1)

LONDON, UK
RNP Rwy 09L

*D-ATIS			HEATHROW Director (APP)		HEATHROW Tower		*Ground		
113.750 117.0 128.080			119.730		118.505 118.705		121.905 121.705 121.855		
RNAV	Final Apch Crs 089°	L09LF 2500' (2421')		LNAV/VNAV DA(H) Refer to Minimums	Apt Elev 83' Rwy 79'		2300 MSA ARP		
MISSED APCH: Climb to 3000'. STRAIGHT AHEAD until passing 1580' or D0.0 IAA inbound, whichever is later, then turn LEFT onto 036° and as directed. In event of radio failure see 11-5.									
RNP Apch	Alt Set: hPa	Rwy Elev: 3 hPa		Trans level: By ATC		Trans alt: 6000'			
1. Pilots should request RNP approach on first contact with Director. 2. Acft will normally be radar vectored from holding/IAF. 3. ILS DME reads zero at rwy 09L thresh. 4. Minimum temperature -10°C. 5. PAPI angle is 3.00°.									

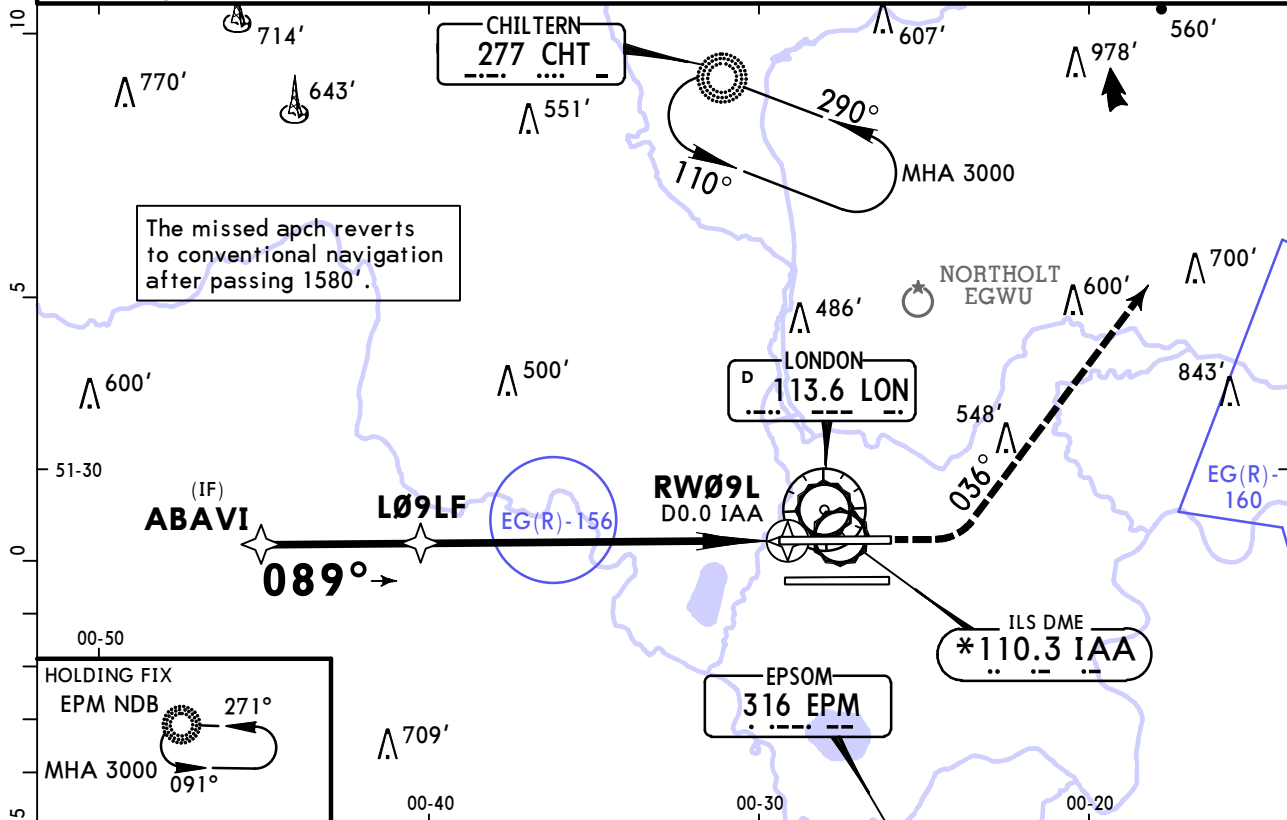

DIST to RW09L	6.0	5.0	4.0	3.0	2.0
ALTITUDE	2170'	1830'	1490'	1150'	810'

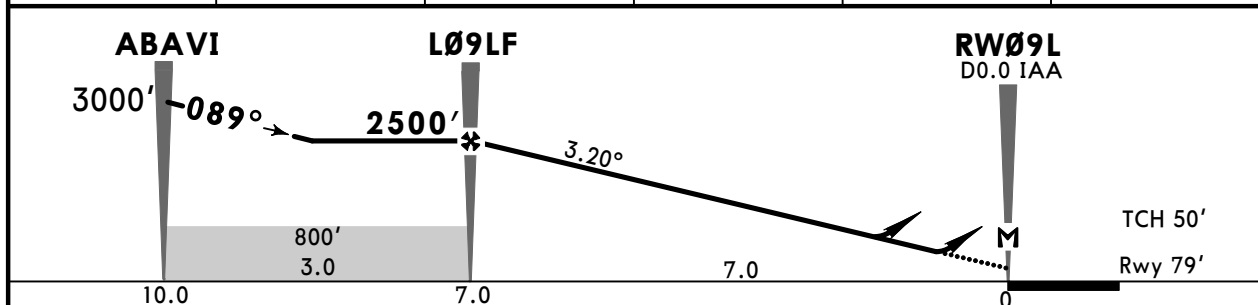

Gnd speed-Kts	70	90	100	120	140	160	 HIALS-II PAPI 3000' ↑
Glide Path Angle	3.20°	396	510	566	679	906	
MAP at RW09L/D0.0 IAA							


Std/State		STRAIGHT-IN LANDING				CIRCLE-TO-LAND		
LNAV/VNAV			LNAV					
DA(H) A: 450' (371') C: 470' (391')			CDFA					
B: 460' (381') D: 540' (461')			■ DA/MDA(H) 620' (541')					
			ALS out		ALS out		Max Kts	MDA(H)
A	R1000m	R1500m	R1500m			100	770' (687') V1500m	
B	R1100m					135	770' (687') V1600m	
C	R1500m	R1800m	R1800m R2400m			180	940' (857') V2400m	
D		R2200m				205	940' (857') V3600m	
■ VNAV DA(H) in lieu of MDA(H) depends on operator policy.								

EGLL/LHR
HEATHROW


JEPPESEN
21 JUN 24 (12-2)

LONDON, UK
RNP Rwy 09R

*D-ATIS 113.750 117.0 128.080			HEATHROW Director (APP) 119.730		HEATHROW Tower 118.505 118.705		*Ground 121.905 121.705 121.855			
RNAV		Final Apch Crs 089°		L09RF 2500' (2425')		LNAV/VNAV DA(H) Refer to Minimums		Apt Elev 83' Rwy 75'		2300 MSA ARP
MISSED APCH: Climb STRAIGHT AHEAD to 3000' and as directed.										
In event of radio failure see 11-5.										
RNP Apch	Alt Set: hPa		Rwy Elev: 3 hPa			Trans level: By ATC			Trans alt: 6000'	
1. Pilots should request RNP approach on first contact with Director. 2. Acft will normally be radar vectored from holding/IAF. 3. ILS DME reads zero at rwy 09R thresh. 4. Minimum temperature -10°C. 5. PAPI angle is 3.00°.										

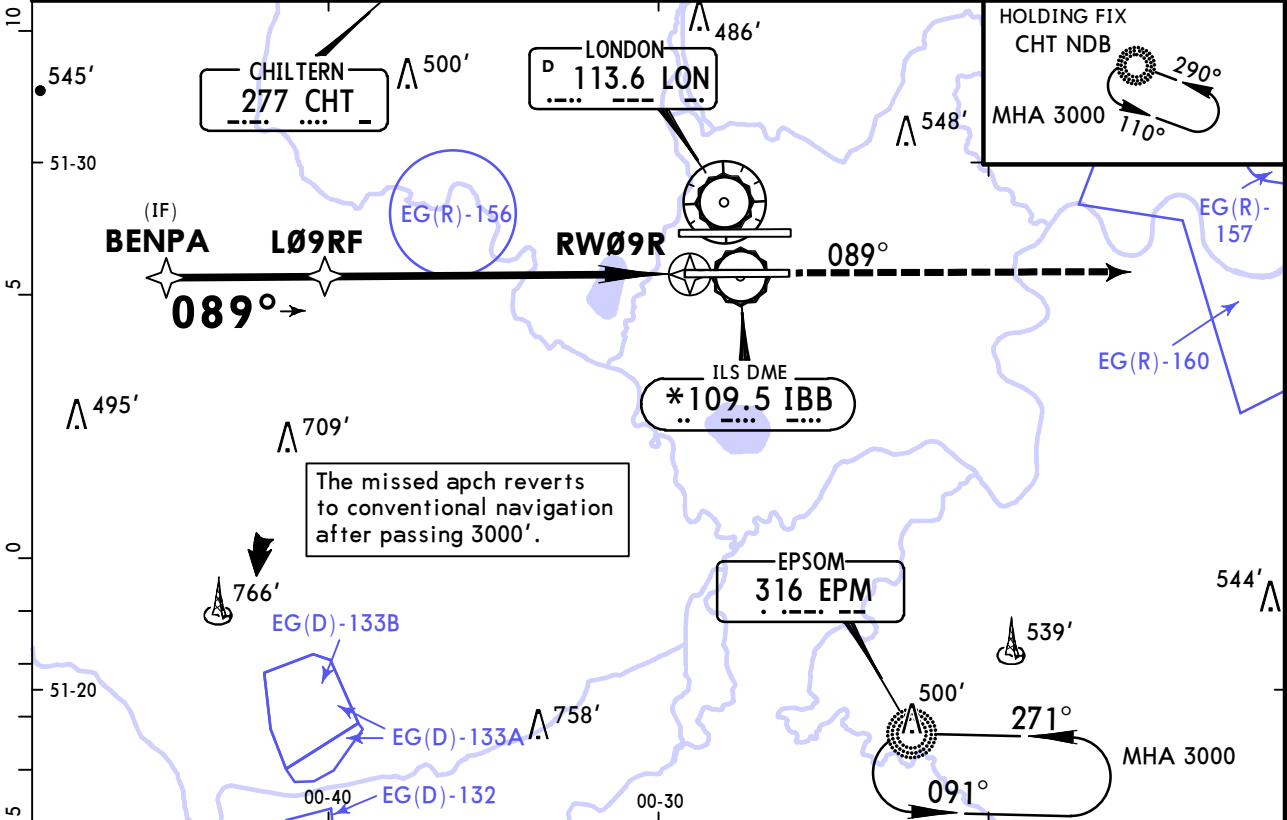

DIST to RW09R	6.0	5.0	4.0	3.0	2.0
ALTITUDE	2160'	1820'	1480'	1140'	800'

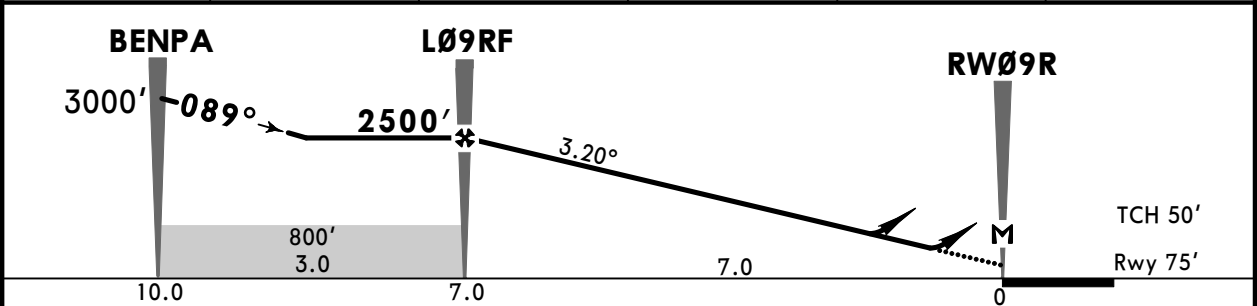

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II PAPI 3000'
Glide Path Angle 3.20°	396	510	566	679	793	906	
MAP at RW09R							

Std/State		STRAIGHT-IN LANDING				CIRCLE-TO-LAND		
LNAV/VNAV				LNAV				
DA(H) A: 400' (325') C: 430' (355') B: 410' (335') D: 540' (465')				CDFA DA/MDA(H) 620' (545')				
		ALS out				ALS out		Max Kts
A	R800m	R1500m	R1500m			100	MDA(H) 770' (687')	V1500m
B						135	770' (687')	V1600m
C	R900m	R1600m	R1800m	R2400m	180	940' (857')	V2400m	
D	R1500m	R2200m			205	940' (857')	V3600m	
1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.								

EGLL/LHR
HEATHROW

JEPPESEN
21 JUN 24 12-3

LONDON, UK
RNP Rwy 27L


*D-ATIS	HEATHROW Director (APP)	HEATHROW Tower	*Ground
113.750 117.0 128.080	(APP) 119.730	118.505 118.705	121.905 121.705 121.855

RNAV	Final Apch Crs 269°	L27LF 2500' (2423')	LNAV/VNAV DA(H) Refer to Minimums	Apch Elev 83' Rwy 77'	2300 MSA ARP
------	----------------------------------	--------------------------------------	--	--------------------------	------------------------------------


MISSED APCH: Climb to 2000'. STRAIGHT AHEAD until passing 1080' or D0.0 ILL inbound, whichever is later, then turn LEFT onto 147°. When passing D6.0 LON climb to 3000' without delay and as directed. In event of radio failure see 11-6.

RNP Apch	Alt Set: hPa	Rwy Elev: 3 hPa	Trans level: By ATC	Trans alt: 6000'
----------	--------------	-----------------	---------------------	------------------

1. Pilots should request RNP approach on first contact with Director. 2. Acft will normally be radar vectored from holding/IAF. 3. Pilots should not expect descent clearance below 4000' until 13 NM from touchdown. 4. ILS DME reads zero at rwy 27L threshold. 5. Minimum temperature -10°C. 6. PAPI angle is 3.00°.

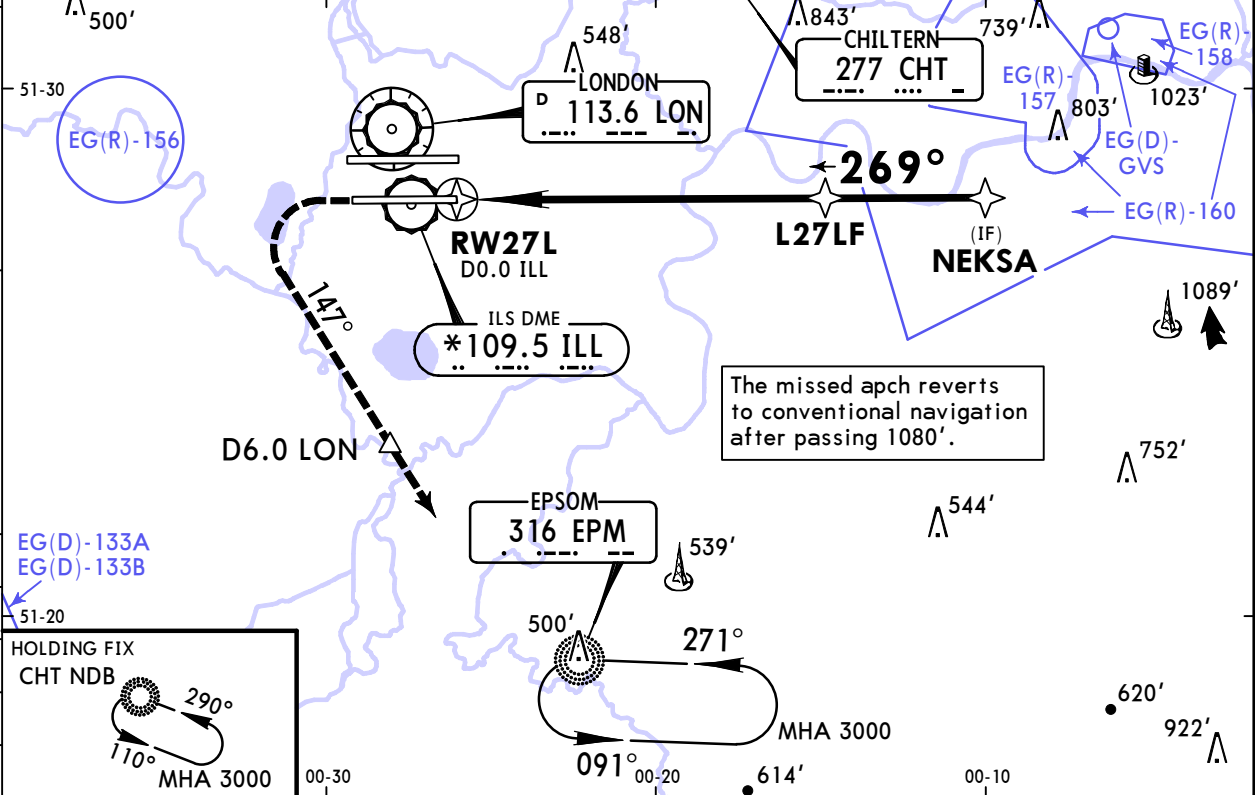

DIST to RW27L	2.0	3.0	4.0	5.0	6.0
ALTITUDE	810'	1150'	1490'	1830'	2170'

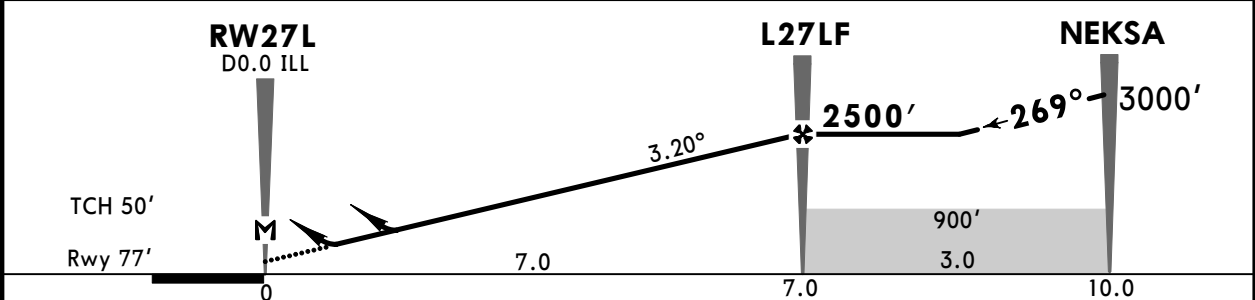

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II PAPI 2000'
Glide Path Angle 3.20°	396	510	566	679	793	906	
MAP at RW27L/D0.0 ILL							

Std/State				STRAIGHT-IN LANDING		CIRCLE-TO-LAND	
				LNAV/VNAV		LNAV CDFA	
				DA(H) A: 380' (303') C: 400' (323') B: 390' (313') D: 440' (363')		DA/MDA(H) 640' (563')	
				ALS out		ALS out	
A	R750m	R1400m	R1500m		Max Kts	MDA(H)	
B					100	770' (687')	V1500m
C	R800m	R1500m	R1900m		135	770' (687')	V1600m
D	R1000m	R1700m	R2400m		180	940' (857')	V2400m
					205	940' (857')	V3600m


1 With TDZ & CL & HUD: R700m.
2 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

EGLL/LHR
HEATHROW


JEPPESEN
21 JUN 24 12-4

LONDON, UK
RNP Rwy 27R

*D-ATIS			HEATHROW Director (APP)		HEATHROW Tower		*Ground			
113.750 117.0 128.080			119.730		118.505 118.705		121.905 121.705 121.855			
RNAV		Final Apch Crs 269°		L27RF 2500' (2422')		LNAV/VNAV DA(H) Refer to Minimums		Apt Elev 83' Rwy 78'		2300 MSA ARP
MISSED APCH: Climb to 3000'. STRAIGHT AHEAD until passing 1580' or D0.0 IRR inbound, whichever is later, then turn RIGHT onto 316° and as directed. In event of radio failure see 11-6.										
RNP Apch		Alt Set: hPa		Rwy Elev: 3 hPa		Trans level: By ATC		Trans alt: 6000'		
1. Pilots should request RNP approach on first contact with Director. 2. Acft will normally be radar vectored from holding/IAF . 3. Pilots should not expect descent clearance below 4000' until 13 NM from touchdown. 4. ILS DME reads zero at rwy 27R threshold. 5. Minimum temperature -10°C. 6. PAPI angle is 3.00°.										

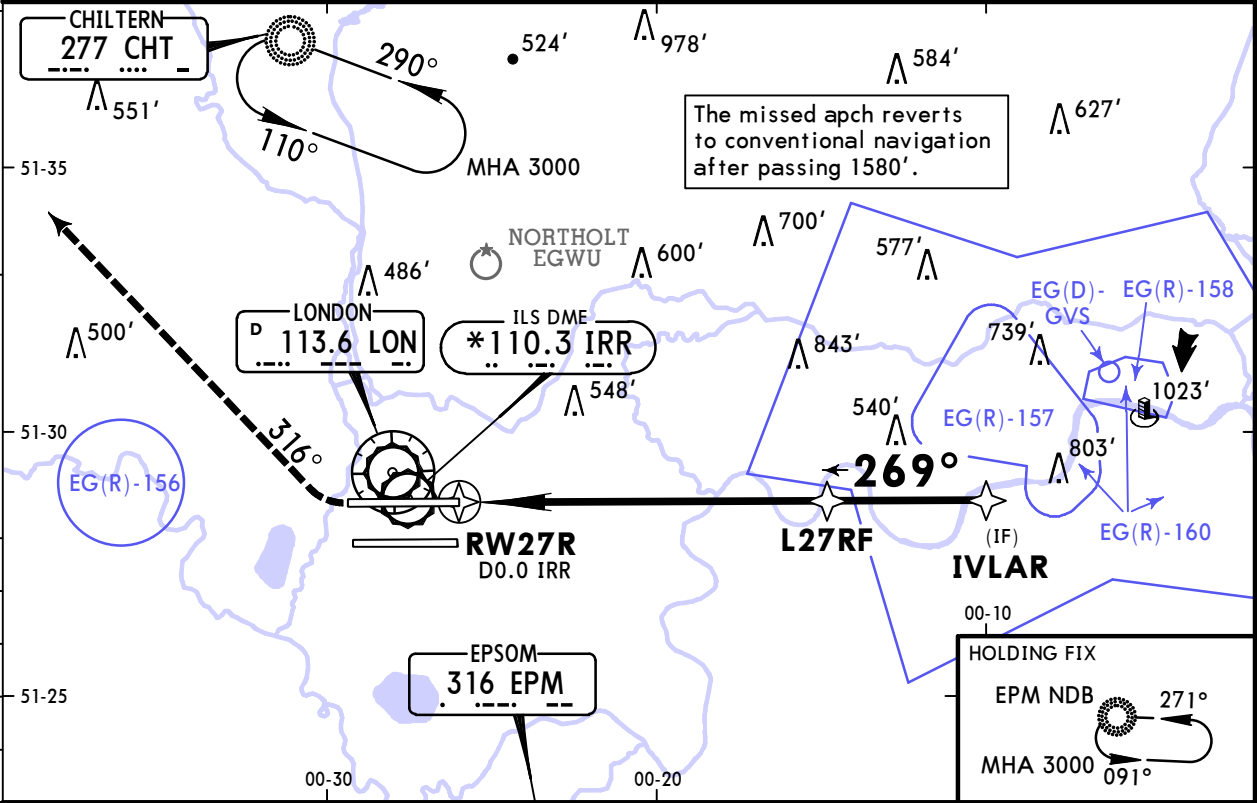

DIST to RW27R	2.0	3.0	4.0	5.0	6.0
ALTITUDE	810'	1150'	1490'	1830'	2170'

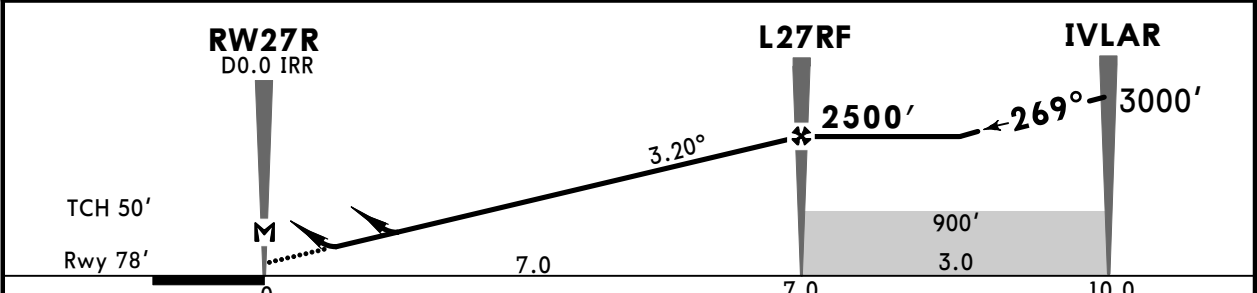

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II PAPI 3000'
Glide Path Angle	3.20°	396	510	566	679	906	
MAP at RW27R/D0.0 IRR							

Std/State				STRAIGHT-IN LANDING				CIRCLE-TO-LAND			
				LNAV/VNAV				LNAV CDFA			
				DA(H) A: 380' (302') C: 400' (322') B: 390' (312') D: 440' (362')				DA/MDA(H) 640' (562')			
				ALS out				ALS out			
A	R750m	R1400m	R1500m				Max Kts	MDA(H)			
B							100	770' (687')	V1500m		
C	R800m	R1500m					135	770' (687')	V1600m		
D	R1000m	R1700m					180	940' (857')	V2400m		
							205	940' (857')	V3600m		

1 With TDZ & CL & HUD: R700m.
2 VNAV DA(H) in lieu of MDA(H) depends on operator policy.